




Data Structures Chapter 2

1. Recurrence Relations
2. Discrete Math
- 3. Structure**
 - **Structure & Array**
 - Structure & Class
 - Problem Set - Clock

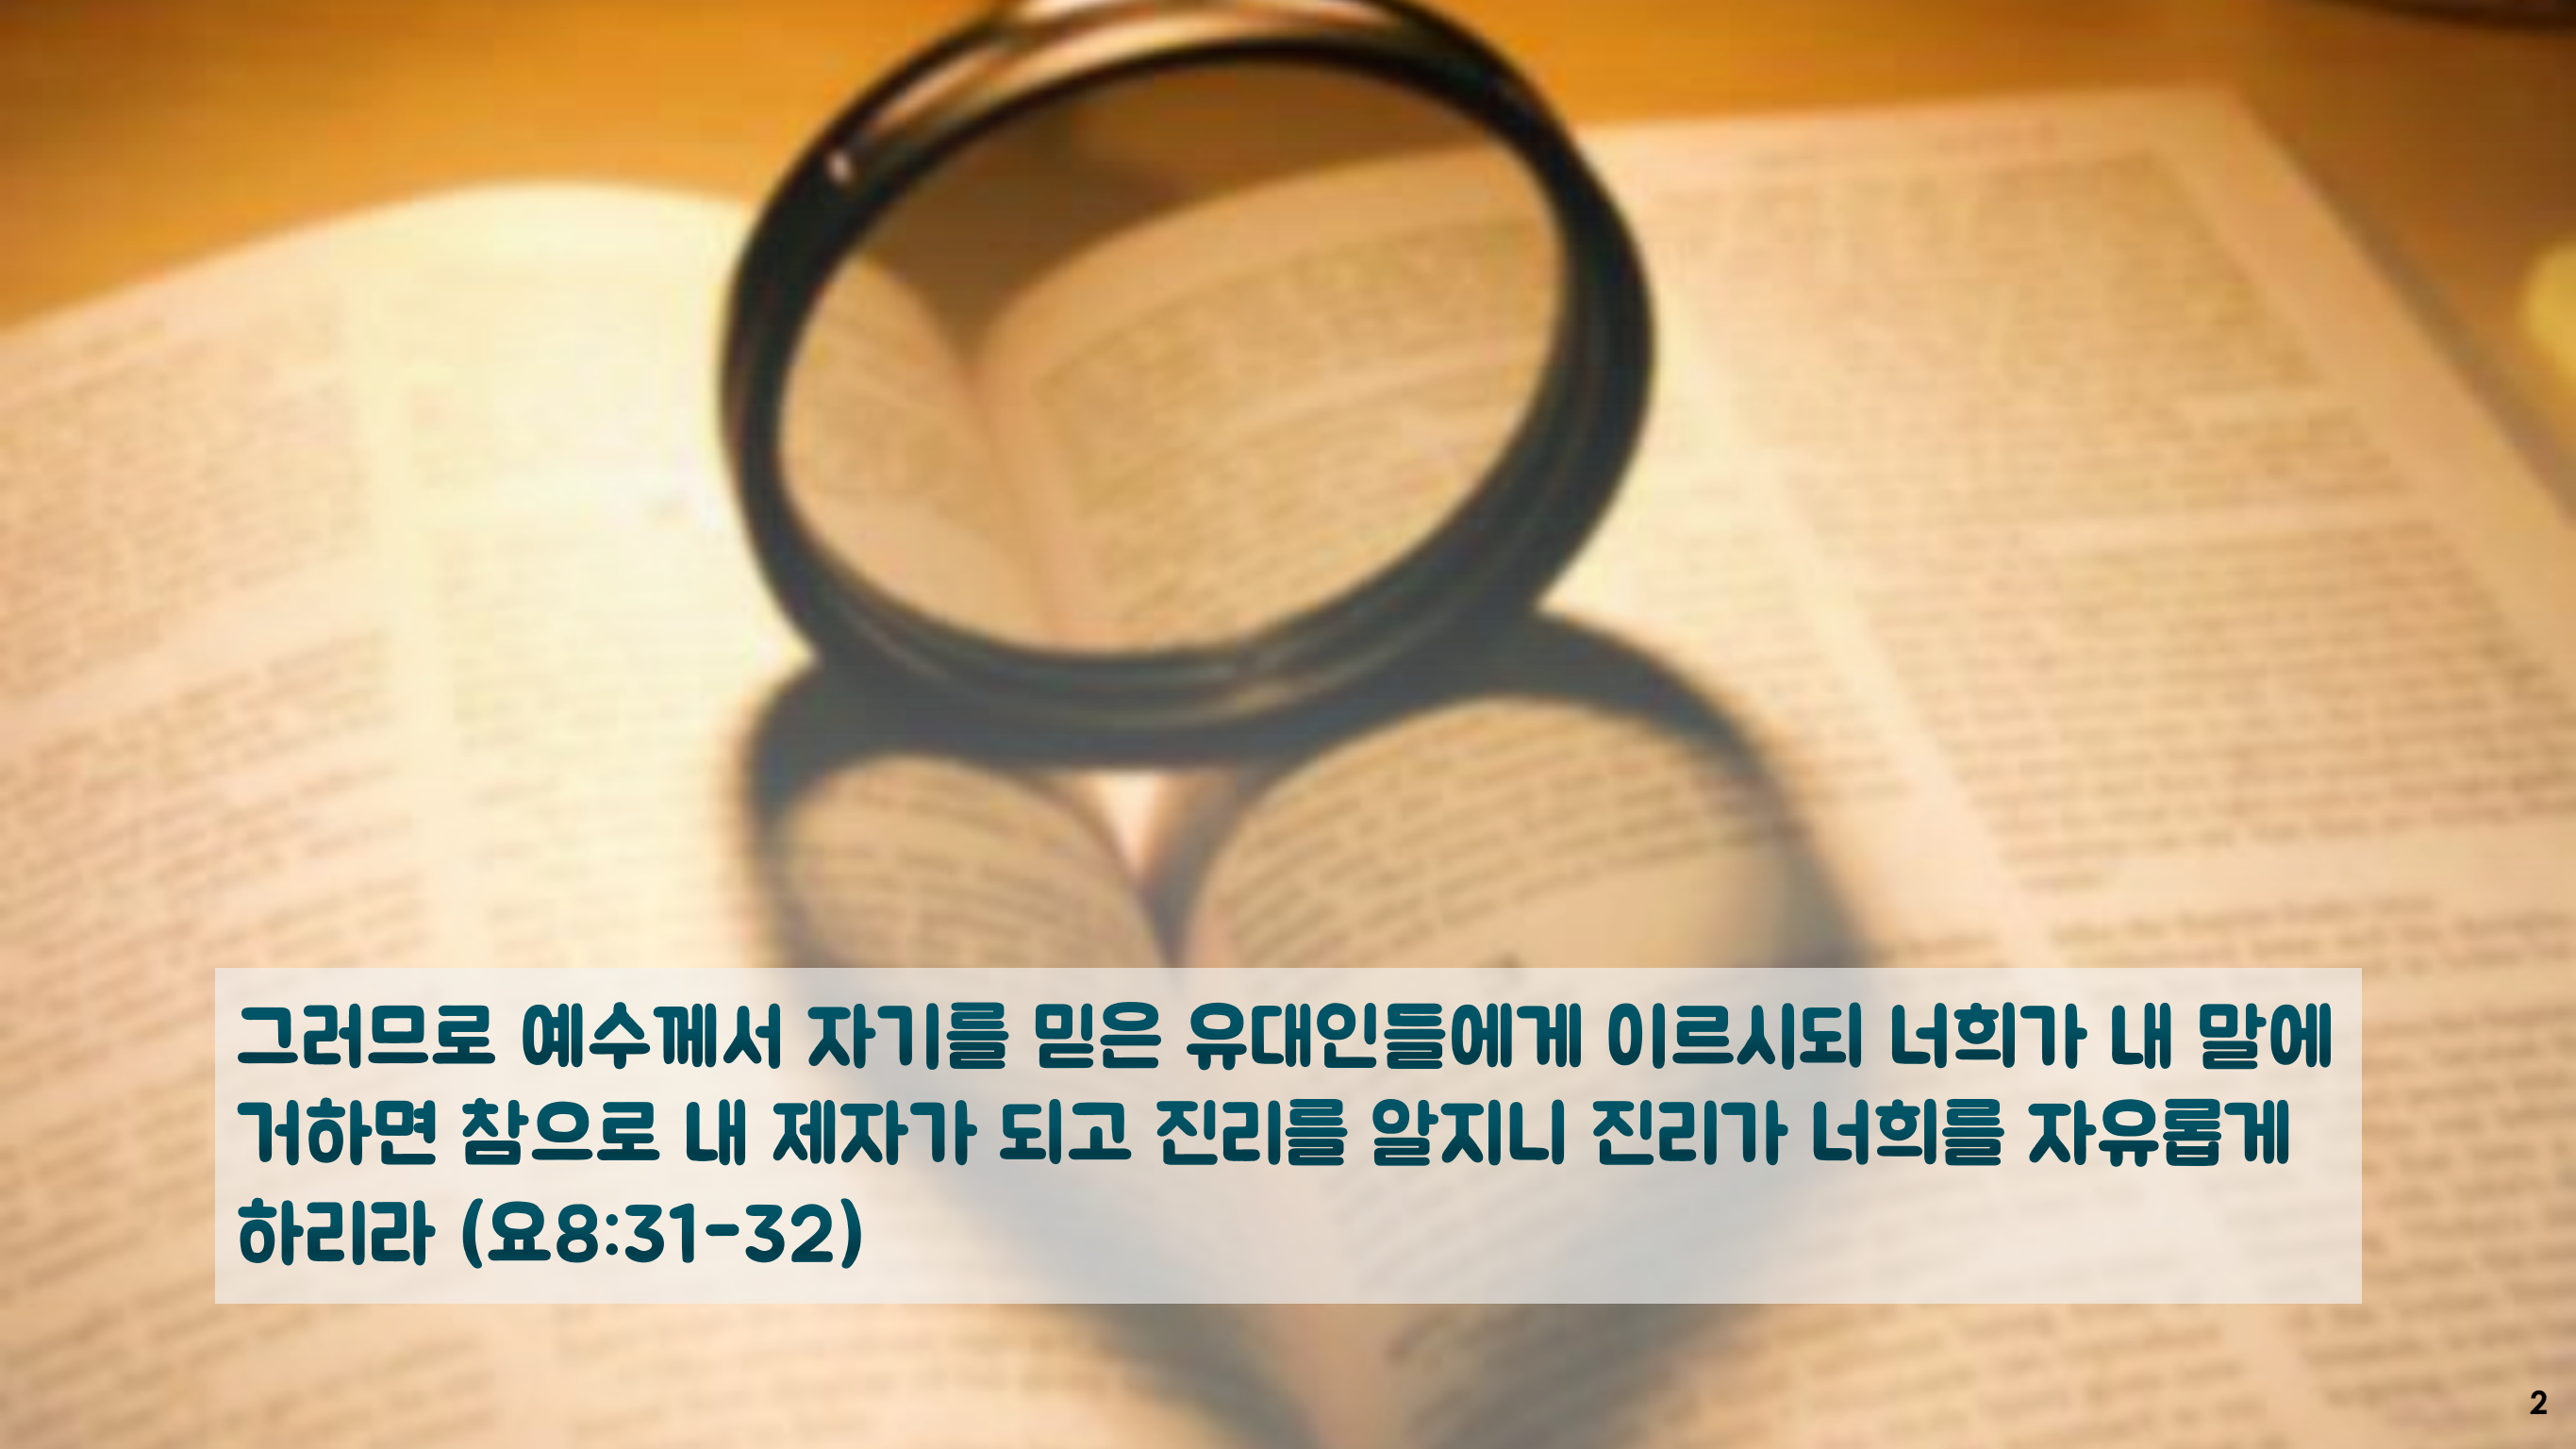

**그러므로 예수께서 자기를 믿은 유대인들에게 이르시되 너희가 내 말에
거하면 참으로 내 제자가 되고 진리를 알지니 진리가 너희를 자유롭게
하리라 (요8:31-32)**

Array

- Array is a collection of data of the same type.
- Why array?
 - Efficient random access (constant time) but inefficient insertion and deletion of elements.
 - Good locality of reference when iterating through - much faster than iterating through (say) a linked list of the same size, which tends to jump around in memory.
 - Consequently, arrays are most appropriate for storing a fixed amount of data which will be accessed in an unpredictable fashion

Array

- Array is a collection of data of the same type.
- Array in C/C++
 - **base address:**
It is the address of the first element of an array which is **&list[0]** or **list**.
 - **pointer arithmetic:**
(ptr + 1) references to the next element of array regardless of its type.
 - **dereferencing operator ***
***(ptr + i)** indicates contents of the **(ptr + i)** position of array.

Array

```
void main(void) {  
    double array[] = {0, 1, 2, 3, 4};  
    int n = sizeof(array) / sizeof(array[0]);  
    cout << sum(array, n) << endl;  
    cout << sumPointer(&array[0], n) << endl;  
}
```

equivalent

```
double sum(double a[], int n) {  
    double total = 0;  
  
    for (int i = 0; i < n; i++)  
        total += a[i];  
    return total;  
}
```

```
double sumPointer(double a[], int n) {  
    double total = 0;  
  
    for (int i = 0; i < n; i++, a++)  
        total += *a;  
    return total;  
}
```

```
double sumPointer(double a[], int n) {  
    double total = 0;  
  
    for (int i = 0; i < n; i++)  
        total +=   
    return total;  
}
```


Struct

- **Struct** is a handy way to organize data of the **different type**.
- Like **class** (actually the idea of class in OOP is derived from **struct**), provide encapsulation of data, it handles a group of data as a whole.
- The **struct** keyword defines a structure type followed by an identifier (name of the structure). Then inside the curly braces, you can declare one or more members of that structure.

C

```
struct Car{  
    int age;  
    char tag[32];  
};
```

```
struct Car one;
```

```
one.age = 21;  
strcpy(one.tag, "sky");
```

member access operator

C

C++

Struct

- The **typedef** is used to give a data type a new name. It is mostly done in order to make the code cleaner.
- Keyword **typedef** can be used to simplify syntax of a structure in C.
- In C++, you can do the same thing **without typedef** and more.

C

```
struct Car{  
    int age;  
    char tag[32];  
};  
  
struct Car one;  
one.age = 21;  
strcpy(one.tag, "sky");
```

C

```
typedef struct Car{  
    int age;  
    char tag[32];  
} Car;  
  
Car one;  
one.age = 21;  
strcpy(one.tag, "sky");
```

C++

```
struct Car{  
    int age;  
    string tag;  
};  
  
Car one;  
one.age = 21;  
one.tag = "sky";
```

member access operator

Using pointer with struct

```
struct Car{
    int    age;
    string tag;
};
Car  ur = {25, "cat"};
Car *my = (Car *)malloc(sizeof(Car));
(*my).tag = "sky";
(*my).age = 20;
```

C++

```
struct Car{
    int    age;
    string tag;
};
Car  ur = {25, "cat"};
Car *my = (Car *)malloc(sizeof(Car));
my->tag = "sky";
my->age = 20;
```

↑
member access operator

```
struct Car{
    int    age;
    string tag;
};
Car  ur = {25, "cat"};
Car *my = new Car {20, "sky"};
```

↑
struct
initialization

Passing a pointer to a function

```
struct Car{
    int    age;
    string tag;
};

bool older(Car *a, Car *b) {
    return a->age > b->age ;
};

int main() {
    Car  ur = {25, "cat"};
    Car *my = new Car {20, "sky"};
    cout << "ur age: " << ur.age << endl;
    cout << "my age: " << my->age << endl;
    cout << "ur older? " << older(_____) << endl;
    return 0;
}
```

C++

Passing a pointer to a function

```
struct Car{
    int    age;
    string tag;
};

bool older(Car *a, Car *b) {
    return a->age > b->age ;
};

int main() {
    Car  ur = {25, "cat"};
    Car *my = new Car {20, "sky"};
    cout << "ur age: " << ur.age << endl;
    cout << "my age: " << my->age << endl;
    cout << "ur older? " << older(&ur, my) << endl;
    return 0;
}
```

C++

Do you see a bug in the code above?

Passing a pointer to a function

```
struct Car{
    int    age;
    string tag;
};

bool older(Car *a, Car *b) {
    return a->age > b->age ;
};

int main() {
    Car  ur = {25, "cat"};
    Car *my = new Car {20, "sky"};
    cout << "ur age: " << ur.age << endl;
    cout << "my age: " << my->age << endl;
    cout << "ur older? " << older(&ur, my) << endl;
    delete my;
    return 0;
}
```

C++

Using using

C++

```
struct Car{
    int    age;
    string tag;
};

int main() {
    Car  ur = {25, "cat"};
    Car *my = new Car {20, "sky"};

    // copy my contents to ur
    ur = *my;
    delete my;
    return 0;
}
```

Let's go one more step!

- Redefine Car * using **using**.

Using using

C++

```
struct Car{
    int    age;
    string tag;
};

int main() {
    Car  ur = {25, "cat"};
    Car *my = new Car {20, "sky"};

    // copy my contents to ur
    ur = *my;
    delete my;
    return 0;
}
```

```
struct Car{
    int    age;
    string tag;
};
using pCar = Car *;
int main() {
    Car  ur = {25, "cat"};
    pCar my = new Car {20, "sky"};

    // copy my contents to ur
    ur = *my;
    delete my;
    return 0;
}
```

Let's go one more step!

- Redefine `Car *` using **using**.

Quiz: Rewrite the code using C++ reference

C++

```
struct Car{
    int    age;
    string tag;
};

bool older(Car *a, Car *b) {
    return a->age > b->age ;
};

int main() {
    Car  ur = {25, "cat"};
    Car *my = new Car {20, "sky"};
    cout << "ur age: " << ur.age << endl;
    cout << "my age: " << my->age << endl;
    cout << "ur older? " << older(&ur, my) << endl;
    delete my;
    return 0;
}
```

```
struct Car{
    int    age;
    string tag;
};

bool older(          ) {
    return _____;
};

int main() {
    Car  ur = {25, "cat"};
    Car  my = {20, "sky"};
    cout << "ur age: " << _____ << endl;
    cout << "my age: " << _____ << endl;
    cout << "ur older? " << older(_____) << endl;

    return 0;
}
```


Quiz: Copying a structure data type

C++

```
struct Car{
    int    age;
    string tag;
};

int main() {
    Car ur = {25, "cat"};
    Car *my = new Car {20, "sky"};

    // copy my contents to ur
    
    delete my;
}
```

Q: How do you copy **my** car to **ur** car?

- (1) `ur = my;`
- (2) `ur = &my;`
- (3) `*ur = my;`
- (4) `&ur = my;`
- (5) `ur = *my;`

A pair of glasses with a dark frame and light-colored lenses is resting on a piece of white paper. The background is a soft, out-of-focus yellow and orange gradient.

Data Structures

Chapter 2

1. Recurrence Relations
2. Discrete Math
- 3. Structure**
 - **Structure & Array**
 - Structure & Class
 - Problem Set - Clock