



Assignment 5: Create a private bucket in AWS. Upload a file and give necessary permission to check whether the file URL is working.


Step 1: Search for s3 and click on Buckets feature under S3 service.

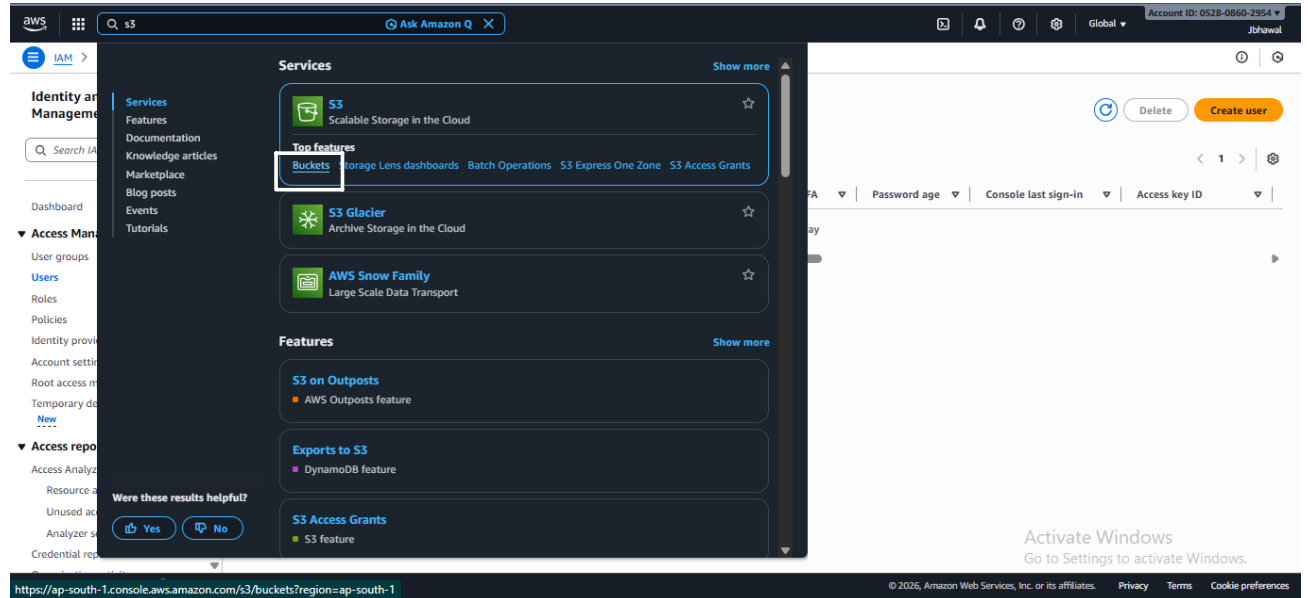

Step 2: Click the Create bucket button appearing on top right of General purpose bucket section.

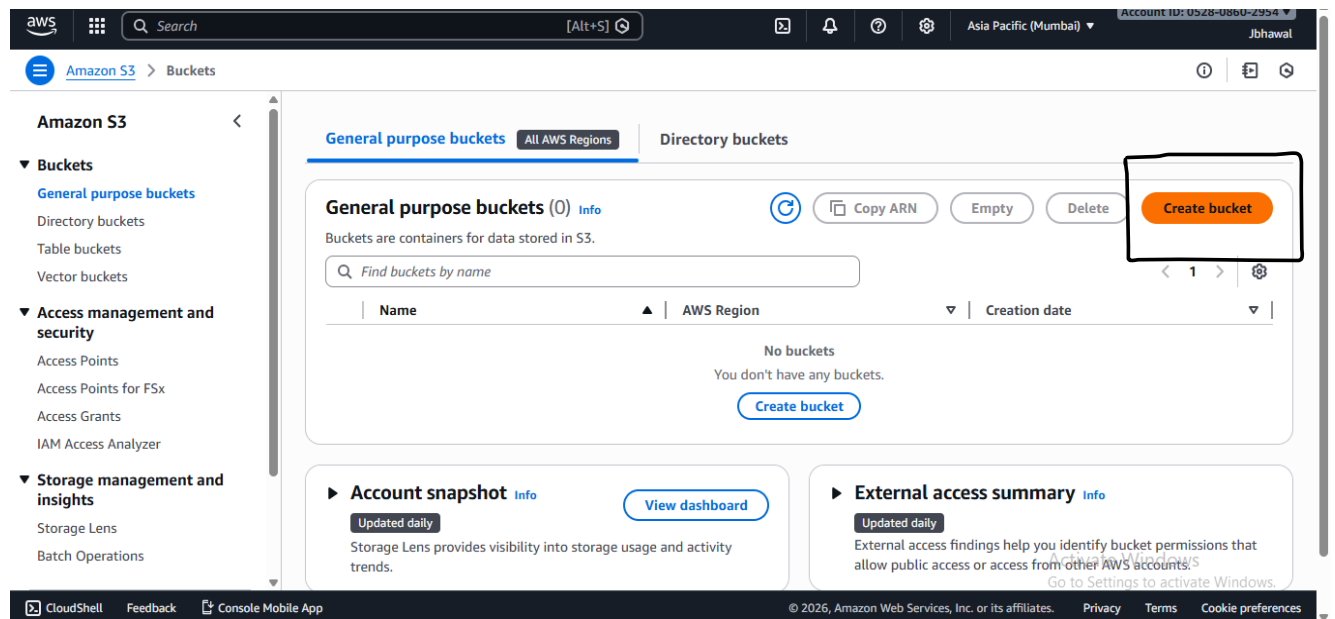

Step 3: Add a bucket name. Make sure the region is as per the final choice since it cannot be changed once created.

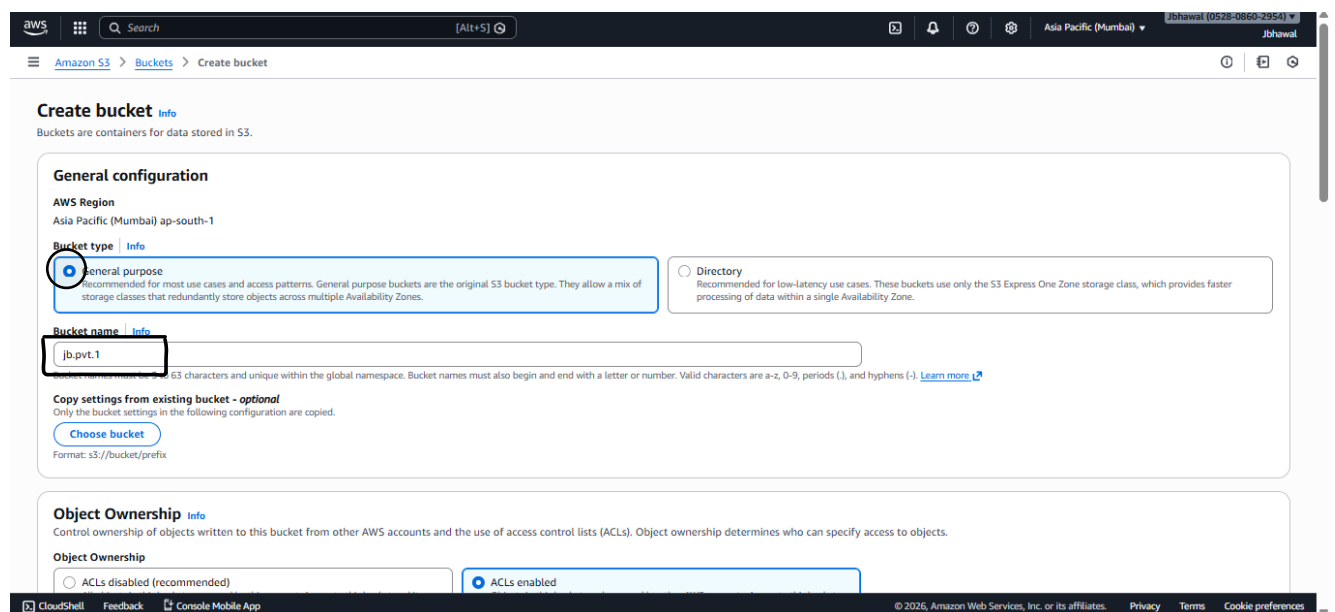

Step 4: Under Object Ownership section select ACLs enabled and check Bucket owner preferred as Object ownership.

The screenshot shows the 'Object Ownership' section of the 'Create bucket' page. It includes a warning about ACLs and two radio button options: 'ACLs disabled (recommended)' and 'ACLs enabled'. The 'ACLs enabled' option is selected and circled in blue. Below this, another set of radio buttons shows 'Bucket owner preferred' selected. A blue information box at the bottom states that a bucket policy must specify the 'bucket-owner-full-control' canned ACL if enforcing object ownership for new objects only.

Object Ownership [Info](#)
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☐ ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

⚠ We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

☒ Bucket owner preferred
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☐ Object writer
The object writer remains the object owner.

ℹ If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)

Block Public Access settings for this bucket

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 5: Make sure the “Block all public access” option is checked to create a private bucket.

The screenshot shows the 'Block Public Access settings for this bucket' section. The 'Block all public access' checkbox is checked and highlighted with a black box. Below it, four sub-settings are listed, all of which are also checked. The 'Bucket Versioning' section below shows 'Enable' selected. The 'Tags - optional' section is also visible.

Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ Block all public access
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

- ☒ Block public access to buckets and objects granted through new access control lists (ACLs)
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☒ Block public access to buckets and objects granted through any access control lists (ACLs)
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☒ Block public access to buckets and objects granted through new public bucket or access point policies
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☒ Block public and cross-account access to buckets and objects through any public bucket or access point policies
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☐ Disable

☒ Enable

Tags - optional
You can use bucket tags to analyze, manage and specify permissions for a bucket. [Learn more](#)

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 6: Under Default encryption section, keep the default selections (SSE-S3 and bucket key enabled) and then click on Create bucket button.

The screenshot shows the 'Default encryption' section. Under 'Encryption type', 'Server-side encryption with Amazon S3 managed keys (SSE-S3)' is selected. Under 'Bucket Key', 'Enable' is selected. A bracket on the left groups these two sections. At the bottom right, the 'Create bucket' button is highlighted with a red box.

Default encryption [Info](#)
Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the [Amazon S3 pricing page](#).

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable


► **Advanced settings**

ℹ After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Cancel Create bucket

Step 7: A green confirmation ribbon will appear on successful creation of the bucket. Furthermore, click on the new bucket just created.

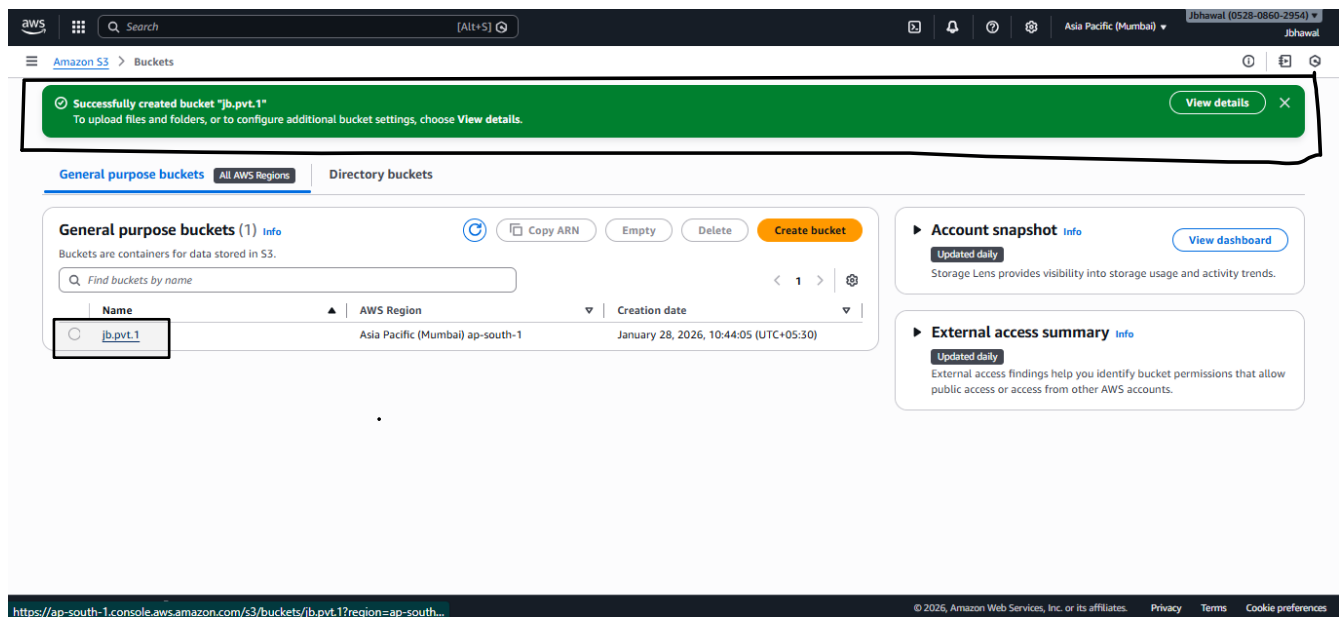

aws Search [Alt+S]

Amazon S3 > Buckets

Successfully created bucket "jb.pvt.1"
To upload files and folders, or to configure additional bucket settings, choose View details. View details

General purpose buckets All AWS Regions Directory buckets


General purpose buckets (1) Info
Buckets are containers for data stored in S3.
Find buckets by name
Name AWS Region Creation date
jb.pvt.1 Asia Pacific (Mumbai) ap-south-1 January 28, 2026, 10:44:05 (UTC+05:30)
Copy ARN Empty Delete Create bucket

Account snapshot Info
Updated daily
Storage Lens provides visibility into storage usage and activity trends. View dashboard

External access summary Info
Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

https://ap-south-1.console.aws.amazon.com/s3/buckets/jb.pvt.1?region=ap-south-1

Step 8: To upload a media, click on Upload button.

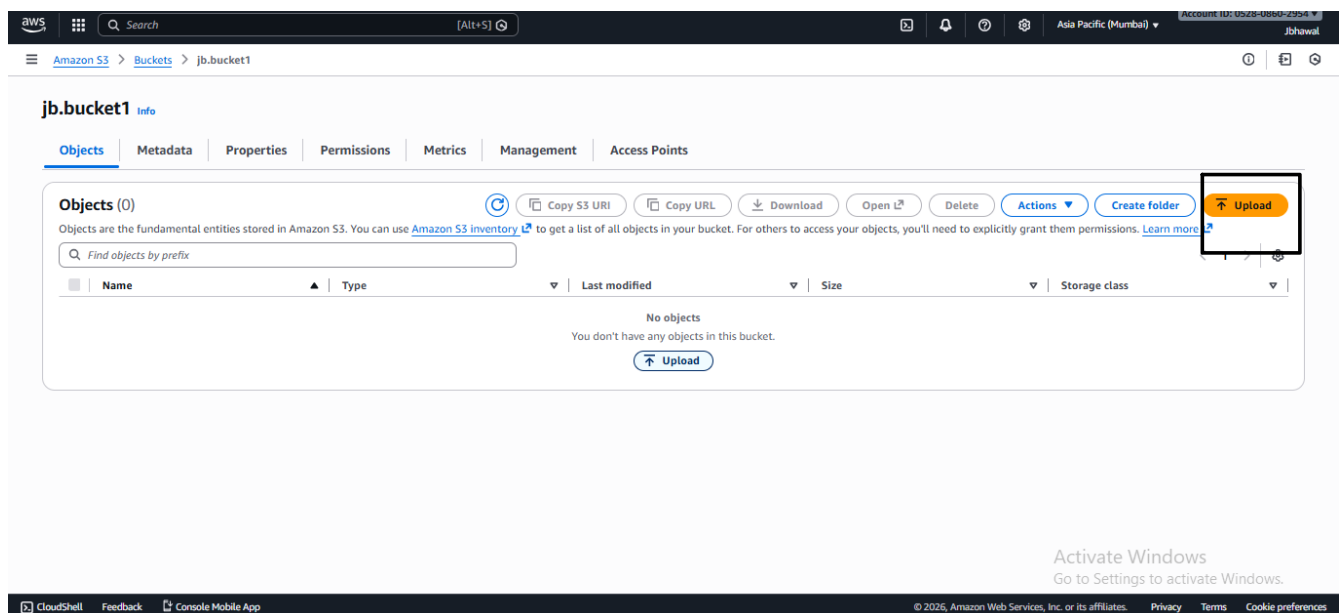

aws Search [Alt+S]


Amazon S3 > Buckets > jb.bucket1

jb.bucket1 Info
Objects
Metadata Properties Permissions Metrics Management Access Points

Objects (0)
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Name Type Last modified Size Storage class
No objects
You don't have any objects in this bucket.
Upload
Copy S3 URI Copy URL Download Open Delete Actions Create folder Upload

Activate Windows
Go to Settings to activate Windows.

Step 9: Click on Add file/folder to upload any kind of files/folders. Once the desired files/folders are uploaded they will be listed. On successful listing, click on Upload button.

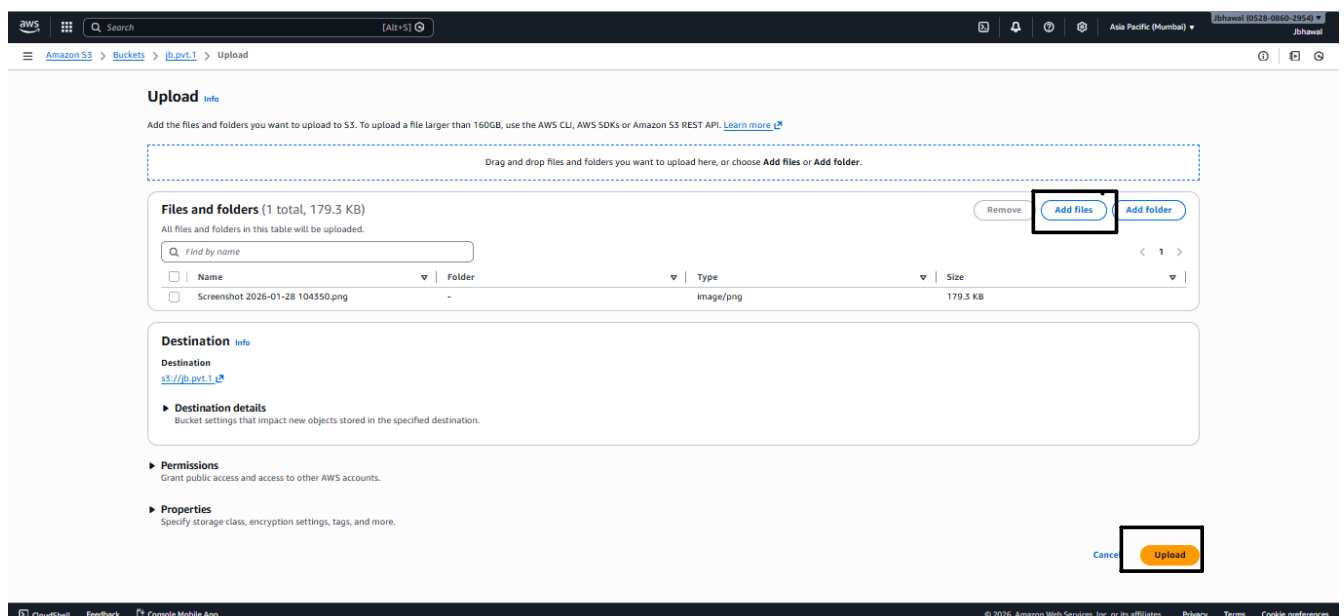

aws Search [Alt+S]

Amazon S3 > Buckets > jb.pvt.1 > Upload

Upload Info
Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. Learn more
Drag and drop files and folders you want to upload here, or choose Add files or Add folder.

Files and folders (1 total, 179.3 KB)
All files and folders in this table will be uploaded.
Find by name
Name Folder Type Size
Screenshot 2026-01-28 104350.png image/png 179.3 KB
Remove Add files Add folder

Destination Info
Destination
s3://jb.pvt.1
Destination details
Bucket settings that impact new objects stored in the specified destination.

Permissions
Grant public access and access to other AWS accounts.

Properties
Specify storage class, encryption settings, tags, and more.

Cancel Upload

Step 10: A green confirmation ribbon will appear marking successful upload. Click on Close to return to the bucket and then click on uploaded file name to view details of it.

The screenshot shows the Amazon S3 console interface. At the top, a green confirmation ribbon states "Upload succeeded" with a close button. Below this, the "Upload: status" section shows a summary of the upload: 1 file, 179.3 KB, 100.00% succeeded. The "Files and folders" tab is selected, showing a table with one file: "Screenshot 2026-01-28 104350.png". The file's status is "Succeeded". A red box highlights the file name in the table.


Step 11: Copy the object URL and paste it in incognito tab to view the file just uploaded. Since it was uploaded in a private bucket, we cannot see the contents.

The screenshot shows the details page for the file "Screenshot 2026-01-28 104350.png". The "Object overview" section displays various metadata: Owner, AWS Region (Asia Pacific (Mumbai) ap-south-1), Last modified (January 28, 2026, 10:44:58 UTC+05:30), Size (179.3 KB), Type (png), and Key. The "Object URL" is highlighted with a red box: <https://s3-ap-south-1.amazonaws.com/jb.pvt.1/Screenshot+2026-01-28+104350.png>.


The screenshot shows a web browser window with the address bar displaying the URL: <https://s3-ap-south-1.amazonaws.com/jb.pvt.1/Screenshot+2026-01-28+104350.png>. The browser is in Incognito mode. The page content shows an error message: "This XML file does not appear to have any style information associated with it. The document tree is shown below."

```
<?xml version="1.0"?>
<Error>
  <Code>AccessDenied</Code>
  <Message>Access Denied</Message>
  <RequestId>R00TDE2AKS1DT60</RequestId>
  <HostId>oZ3Rkd11L49rHdfSKwrj33LTQIU2oBKeTjN02tvBhRPHwy/cIHxsuDI/HHzcKaScDH+6d07KmyY=</HostId>
</Error>
```


Step 12: Go back to the file details page and click on Object actions dropdown. Then select Share with a presigned URL.

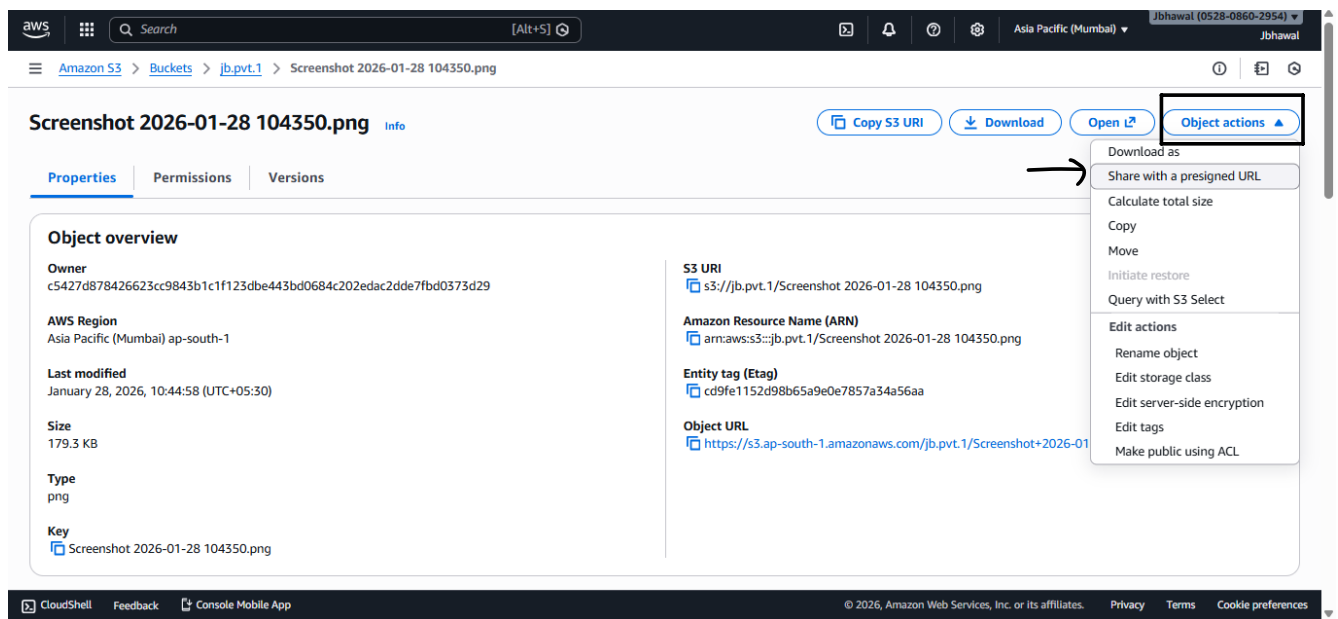


Step 13: Select Minutes for time interval and then set the timer to 2 minutes and click on Create presigned URL button.

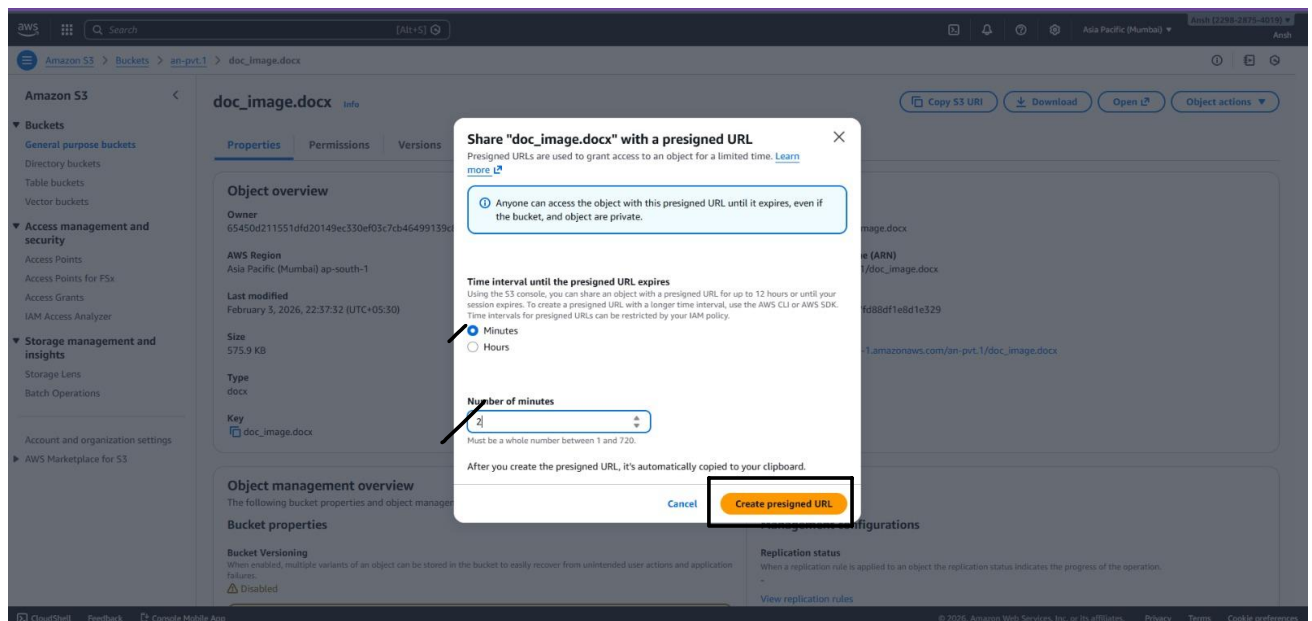


Step 14: A confirmation banner will appear. Click on the Copy presigned URL button appearing in it and paste it in Incognito mode again. This time the file will open.

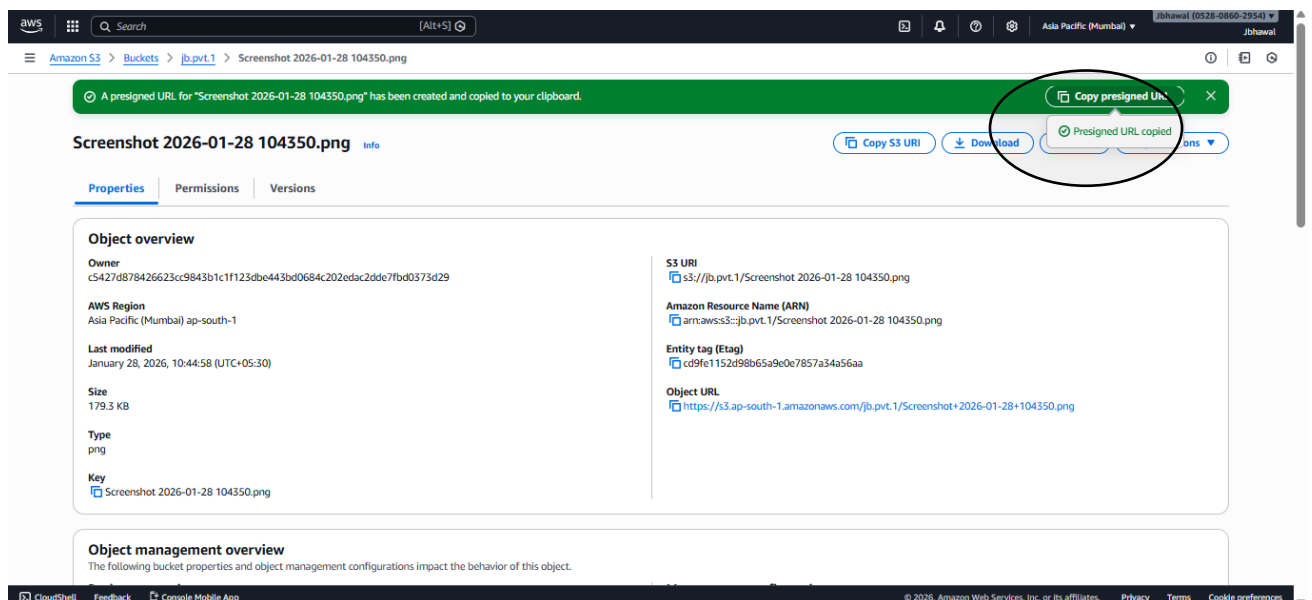



Assignment 6: Upload a static website on S3.

Step 1: Create a public bucket like usual where we will be uploading our static website.

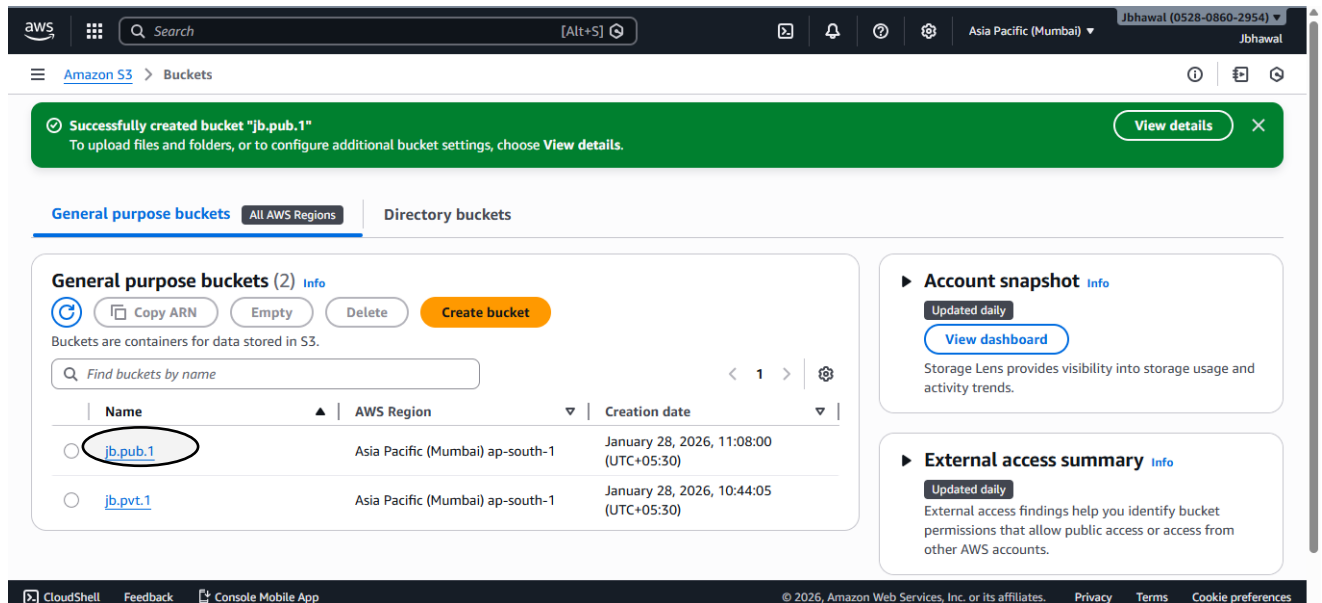

aws Search [Alt+S] Asia Pacific (Mumbai) Jbhawal (0528-0860-2954) Jbhawal

Amazon S3 > Buckets

Successfully created bucket "jb.pub.1"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

General purpose buckets **ALL AWS Regions** Directory buckets

General purpose buckets (2) Info
Copy ARN Empty Delete **Create bucket**
Buckets are containers for data stored in S3.

Find buckets by name


Name	AWS Region	Creation date
☒ jb.pub.1	Asia Pacific (Mumbai) ap-south-1	January 28, 2026, 11:08:00 (UTC+05:30)
☐ jb.pvt.1	Asia Pacific (Mumbai) ap-south-1	January 28, 2026, 10:44:05 (UTC+05:30)

Account snapshot Info
Updated daily
[View dashboard](#)
Storage Lens provides visibility into storage usage and activity trends.

External access summary Info
Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 2: Select the public bucket and scroll to the bottom of its Properties to find the Static website hosting section and click Edit.

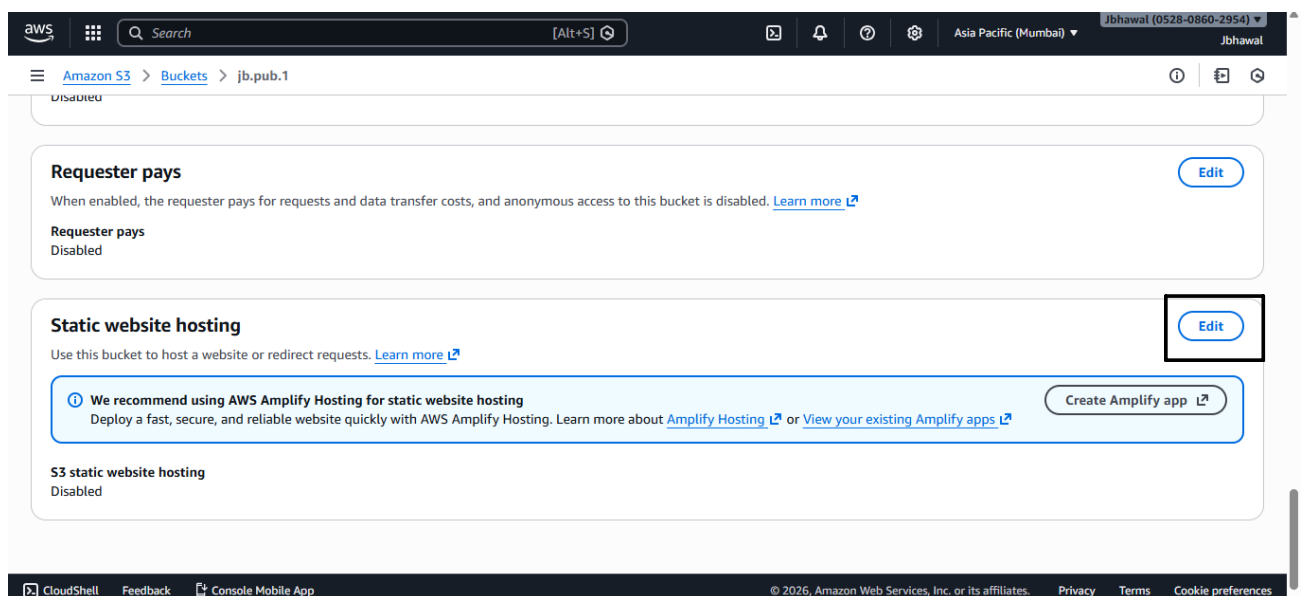

aws Search [Alt+S] Asia Pacific (Mumbai) Jbhawal (0528-0860-2954) Jbhawal

Amazon S3 > Buckets > [jb.pub.1](#)

Requester pays
When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)
Requester pays
Disabled [Edit](#)


Static website hosting
Use this bucket to host a website or redirect requests. [Learn more](#) [Edit](#)

We recommend using AWS Amplify Hosting for static website hosting
Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. [Learn more about Amplify Hosting](#) or [View your existing Amplify apps](#) [Create Amplify app](#)

S3 static website hosting
Disabled

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 3: Enable Static website hosting and Host a static website option under Hosting type. Then specify the Index document file name. Here we have index.html as it.

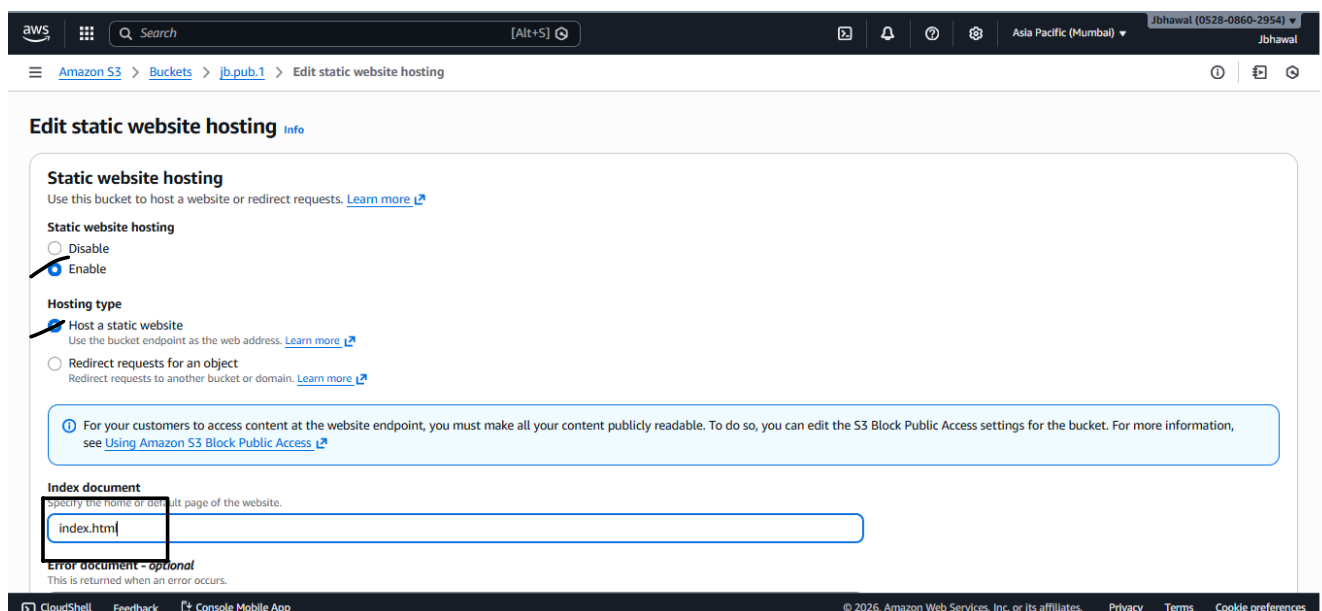

aws Search [Alt+S] Asia Pacific (Mumbai) Jbhawal (0528-0860-2954) Jbhawal

Amazon S3 > Buckets > [jb.pub.1](#) > Edit static website hosting

Edit static website hosting Info

Static website hosting
Use this bucket to host a website or redirect requests. [Learn more](#)

Static website hosting
☒ Disable
☒ **Enable**

Hosting type
☒ **Host a static website**
Use the bucket endpoint as the web address. [Learn more](#)
☐ Redirect requests for an object
Redirect requests to another bucket or domain. [Learn more](#)


For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see [Using Amazon S3 Block Public Access](#)

Index document
Specify the name of the default page of the website.


Error document - optional
This is returned when an error occurs.

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences


Step 4: Let the rest of the things be default and click on Save Changes.

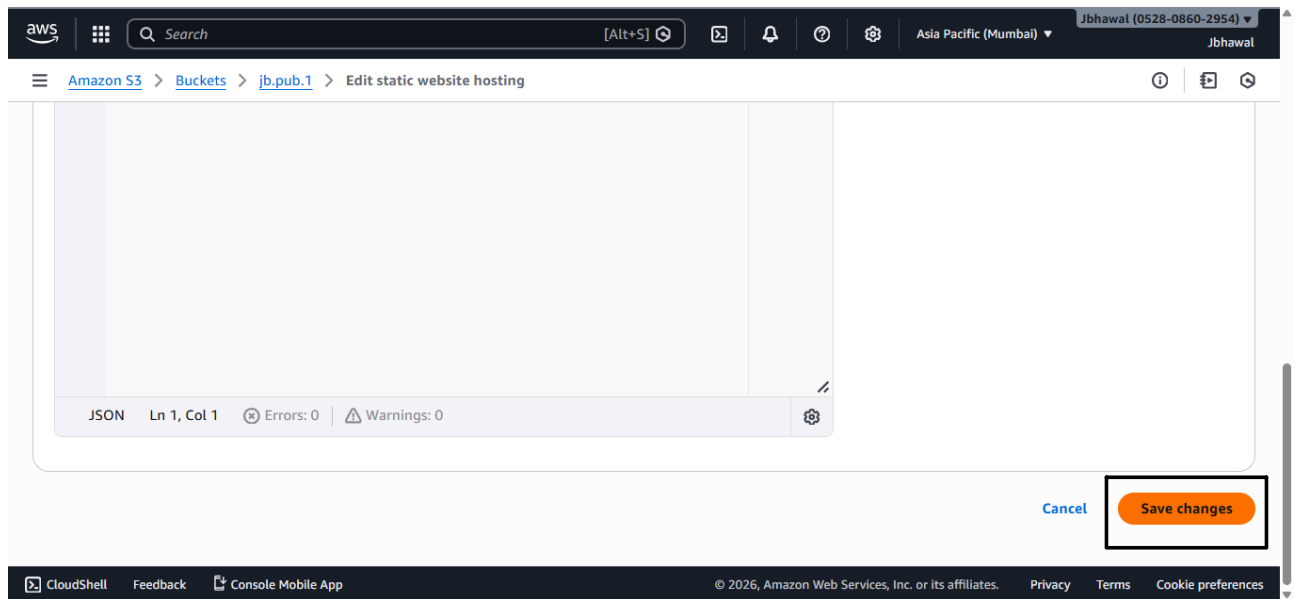

Step 5: The green confirmation banner marks successful static website hosting.

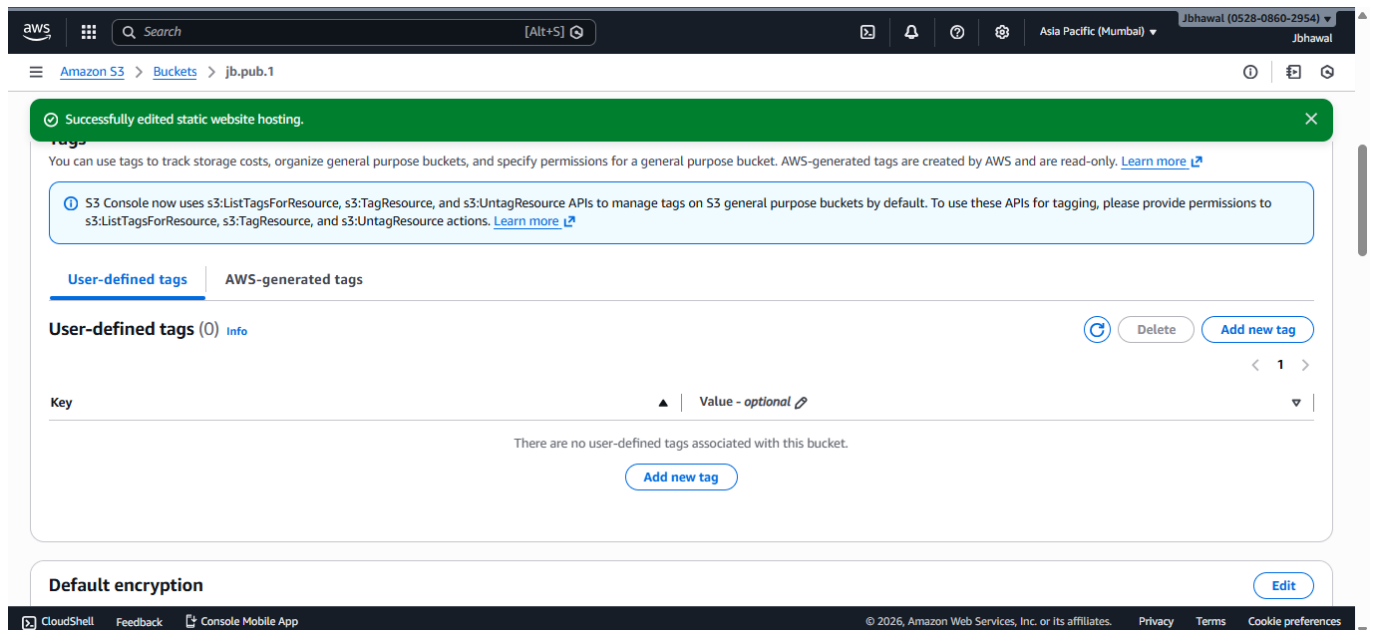

Step 6: Go to Upload section and upload the html files created for the static website. Click on Upload button next.

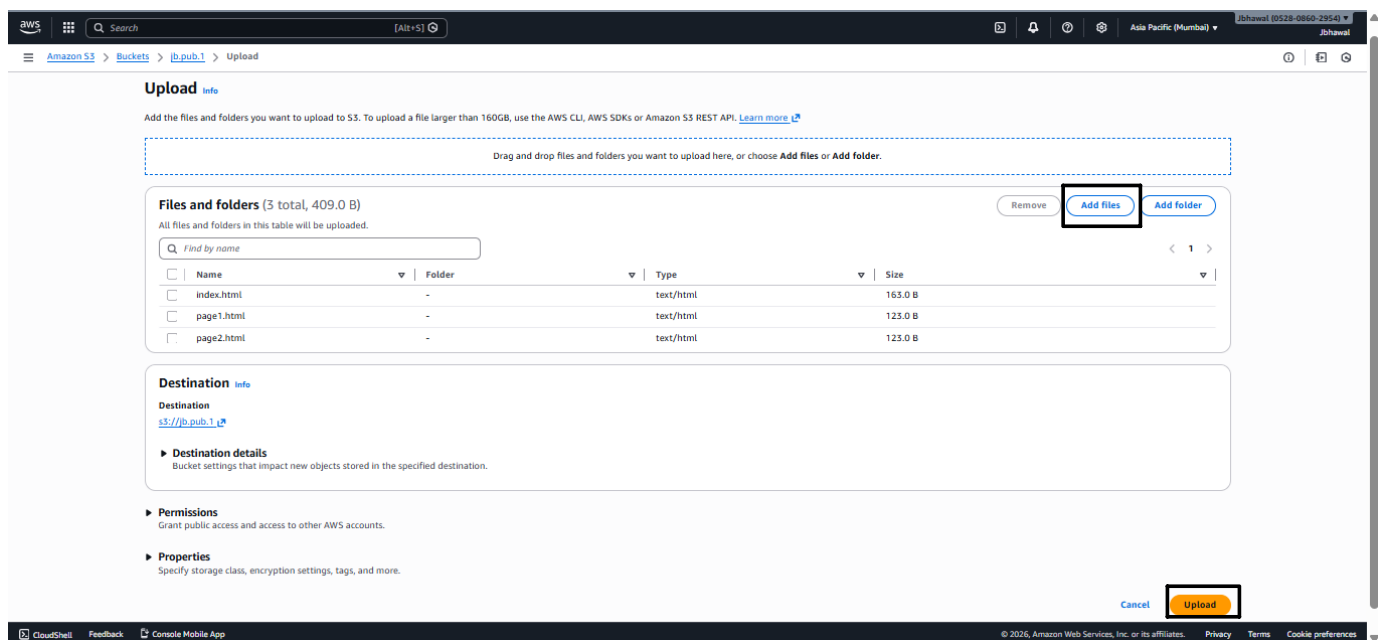

Step 7: Confirmation message will appear on successful upload. Click on Close button.

The screenshot shows the Amazon S3 console interface. At the top, a green banner displays the message "Upload succeeded" with a checkmark icon and a close button (X). Below the banner, the "Upload: status" section shows a summary of the upload: "Destination s3://jb.pub.1", "Succeeded 3 files, 409.0 B (100.00%)", and "Failed 0 files, 0 B (0%)". A "Close" button is located in the top right corner of the status section. Below the summary, the "Files and folders" section shows a table of the uploaded files:

Name	Folder	Type	Size	Status	Error
index.html	-	text/html	163.0 B	Succeeded	-
page1.html	-	text/html	123.0 B	Succeeded	-
page2.html	-	text/html	123.0 B	Succeeded	-

Step 8: Select all the files and click on the Actions dropdown button and click on the Make public using ACL option.

The screenshot shows the Amazon S3 console interface for the bucket "jb.pub.1". The "Objects" tab is selected, and a list of three objects is displayed: "index.html", "page1.html", and "page2.html". The "Actions" button is circled, and its dropdown menu is open, showing various options. The option "Make public using ACL" is highlighted with an arrow.


Step 9: A page like the following will appear. Click on Make public button.

The screenshot shows the "Make public" page in the Amazon S3 console. The page title is "Make public" with an "Info" link. Below the title, a message states: "The make public action enables public read access in the object access control list (ACL) settings. Learn more." A warning message is displayed: "When public read access is enabled and not blocked by Block Public Access settings, anyone in the world can access the specified objects." Below the warning, the "Specified objects" section shows a table of the objects to be made public:

Name	Type	Last modified	Size
index.html	html	January 28, 2026, 11:14:43 (UTC+05:30)	163.0 B
page1.html	html	January 28, 2026, 11:14:43 (UTC+05:30)	123.0 B
page2.html	html	January 28, 2026, 11:14:44 (UTC+05:30)	123.0 B

At the bottom right, there are two buttons: "Cancel" and "Make public".

Step 10: Confirmation banner indicates succesful public access. Click Close.

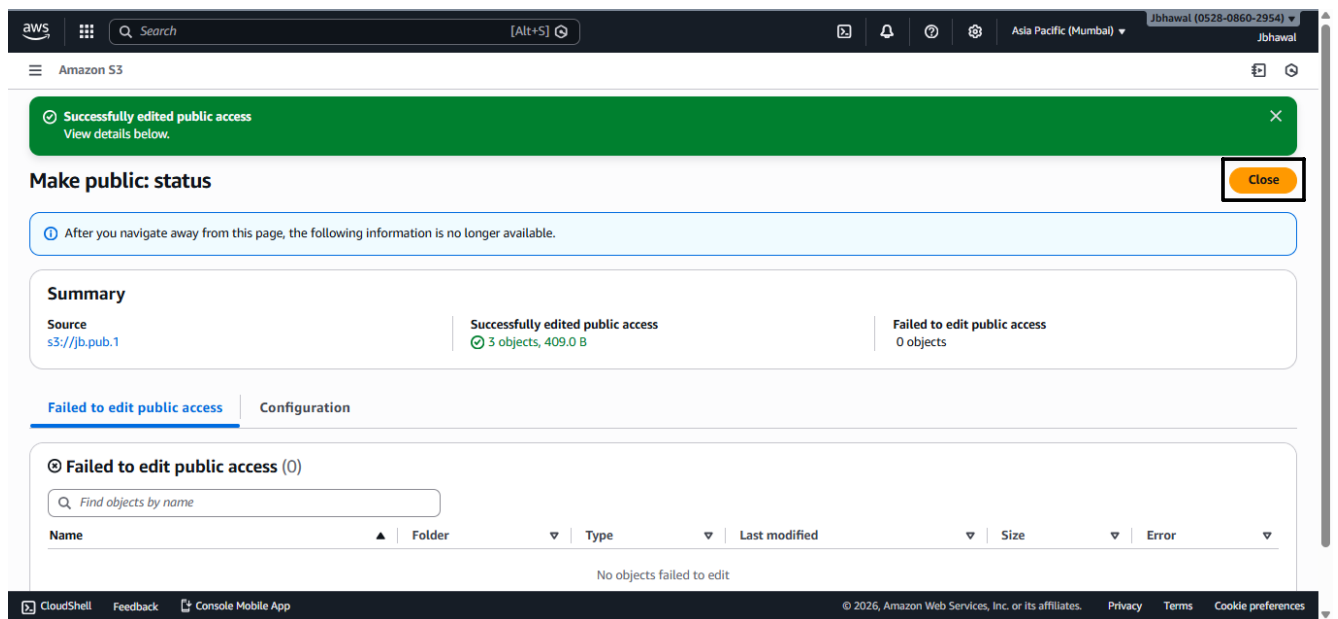

aws [Search] [Alt+S] Asia Pacific (Mumbai) Jbhawal (0528-0860-2954) Jbhawal

Amazon S3

Successfully edited public access
View details below. Close

Make public: status

After you navigate away from this page, the following information is no longer available.

Summary

Source	Successfully edited public access	Failed to edit public access
s3://jb.pub.1	3 objects, 409.0 B	0 objects

[Failed to edit public access](#) Configuration


Failed to edit public access (0)

Find objects by name

Name	Folder	Type	Last modified	Size	Error
No objects failed to edit					

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 11: Open index.html file.

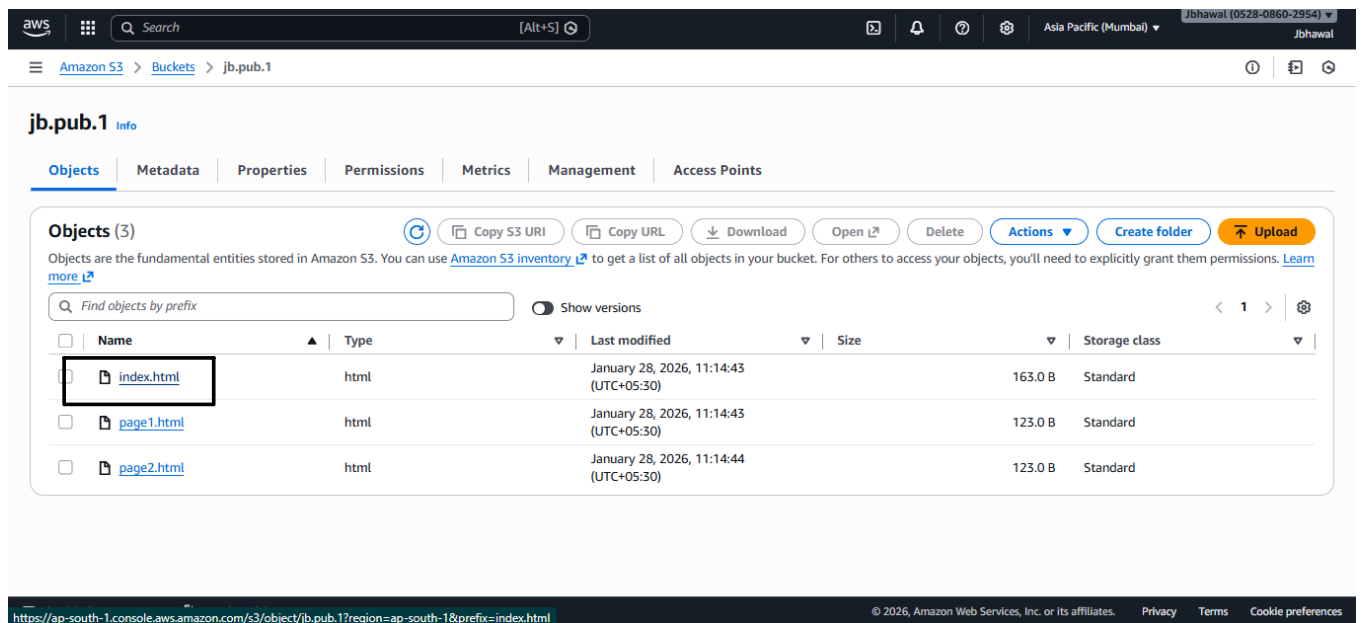

aws [Search] [Alt+S] Asia Pacific (Mumbai) Jbhawal (0528-0860-2954) Jbhawal

Amazon S3 > Buckets > jb.pub.1

jb.pub.1 info

Objects Metadata Properties Permissions Metrics Management Access Points

Objects (3) Copy S3 URI Copy URL Download Open Delete Actions Create folder Upload


Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix ☐ Show versions

☐	Name	Type	Last modified	Size	Storage class
☒	index.html	html	January 28, 2026, 11:14:43 (UTC+05:30)	163.0 B	Standard
☐	page1.html	html	January 28, 2026, 11:14:43 (UTC+05:30)	123.0 B	Standard
☐	page2.html	html	January 28, 2026, 11:14:44 (UTC+05:30)	123.0 B	Standard

<https://ap-south-1.console.aws.amazon.com/s3/object/jb.pub.1?region=ap-south-1&prefix=index.html> © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 12: Copy Object URL and paste it in new tab to see the website running.

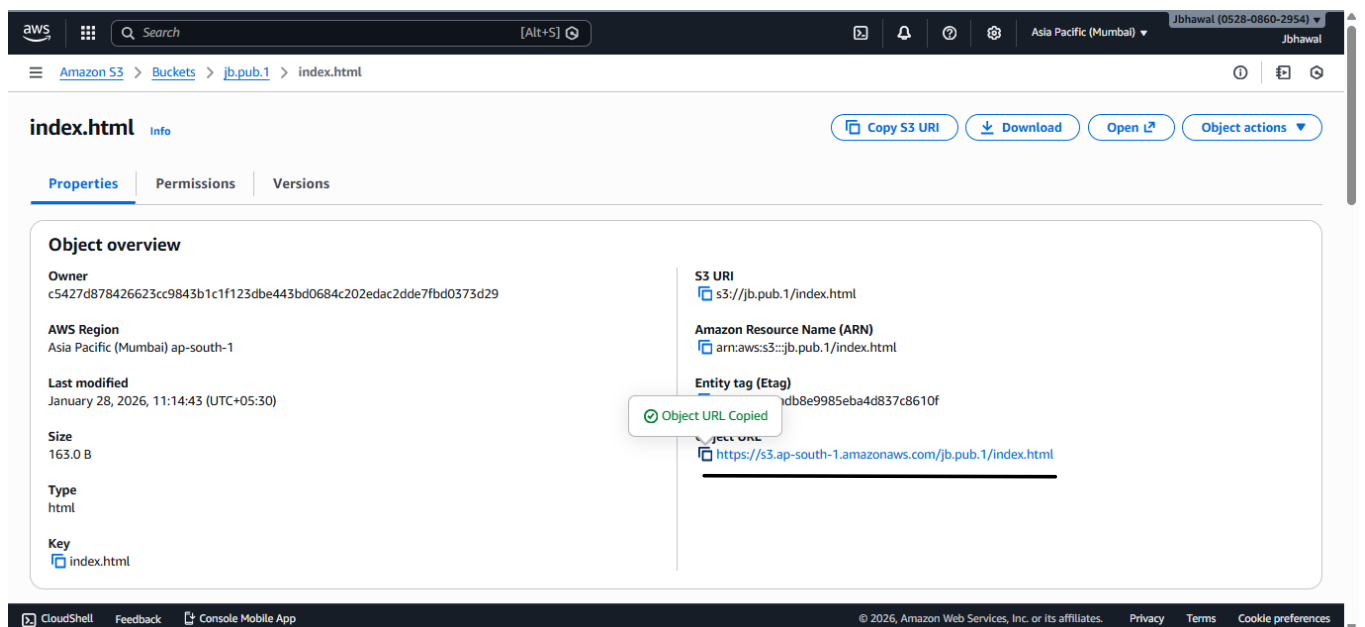

aws [Search] [Alt+S] Asia Pacific (Mumbai) Jbhawal (0528-0860-2954) Jbhawal

Amazon S3 > Buckets > jb.pub.1 > index.html

index.html info Copy S3 URI Download Open Object actions

Properties Permissions Versions

Object overview

Owner
c5427d87842623cc9843b1c1f123dbe443bd0684c202edac2dde7fbd0373d29

AWS Region
Asia Pacific (Mumbai) ap-south-1

Last modified
January 28, 2026, 11:14:43 (UTC+05:30)

Size
163.0 B

Type
html

Key
[index.html](#)

S3 URI
[s3://jb.pub.1/index.html](#)


Amazon Resource Name (ARN)
[arn:aws:s3::jb.pub.1/index.html](#)

Entity tag (Etag)
db8e9985eba4d837c8610f

Object URL Copied
<https://s3.ap-south-1.amazonaws.com/jb.pub.1/index.html>

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

The website running:




This is main page

[Previous page](#) [Next page](#)



This is next page

[Previous page](#)



This is previous page

[Next page](#)

