


Assignment 8: Deploy a project from a local machine to Github and vice versa.


Step 1: Open Git Bash in the newly created folder.

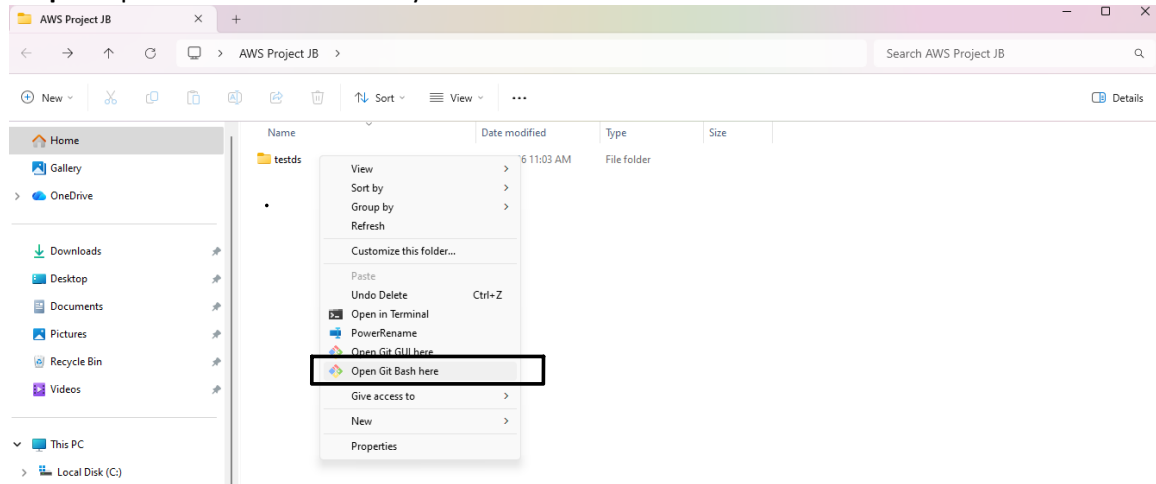


Step 2: Write the command to clone the git project.

```
Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB (master)
$ git clone https://github.com/moumita02314/testds.git
Cloning into 'testds'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 6 (delta 0), reused 6 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (6/6), done.
```


Step 3: Open control Panel and click on Users Account.

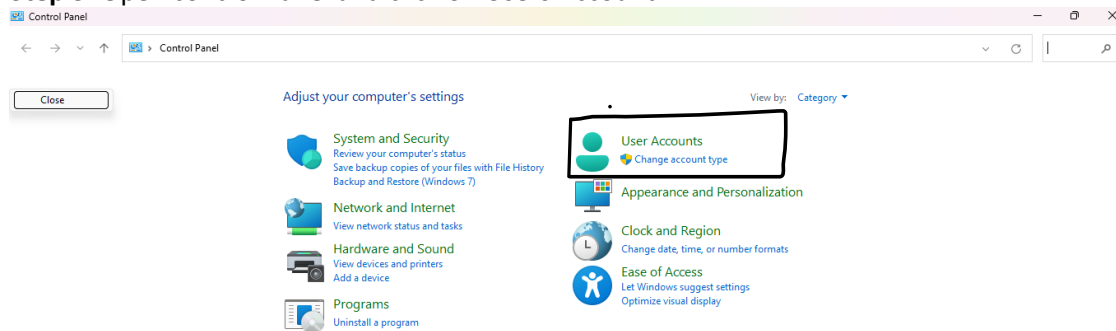


Step 4: Click on Credential manager.

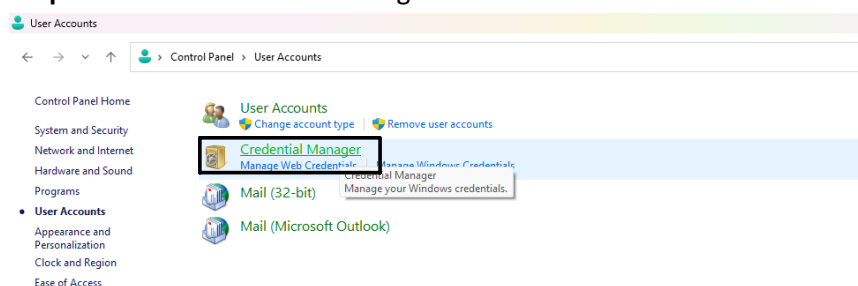


Step 5: Click on Windows credential and check if there is any credential for GitHub present under Generic credentials section. Remove if present, else there will be problem giving access.

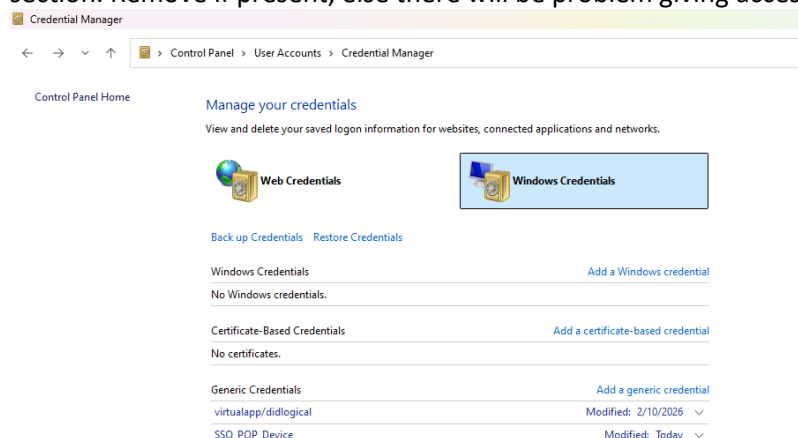


Step 6: Open the GitHub account. Go to Settings.

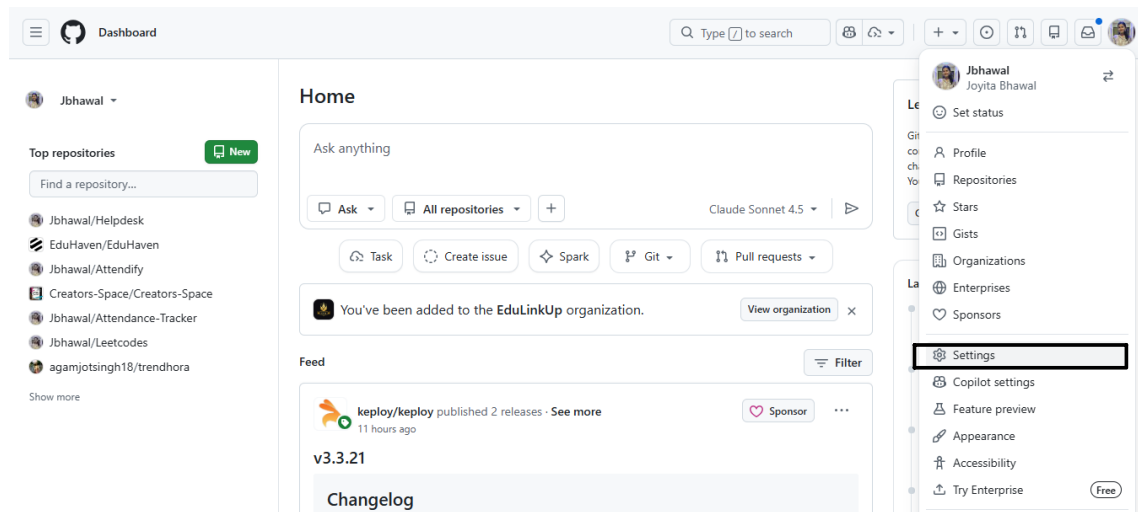


Step 7: Click on Developer Settings from the left pane.

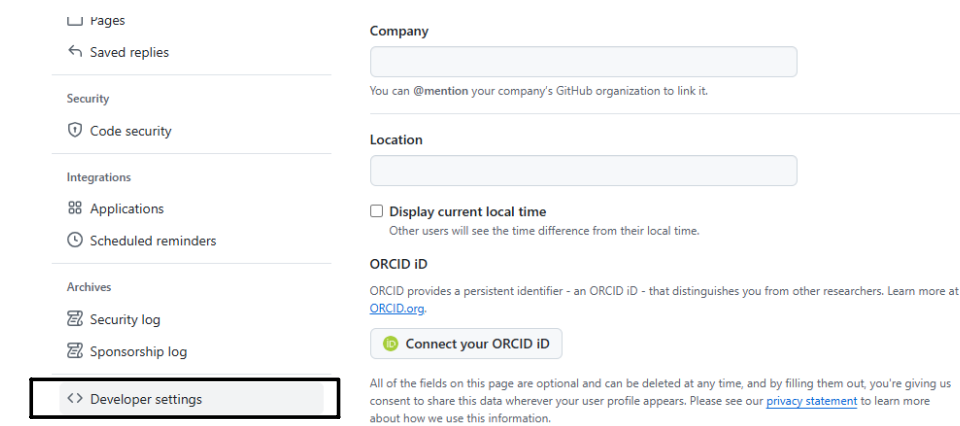

Step 8: Click the dropdown and select Tokens(classic).

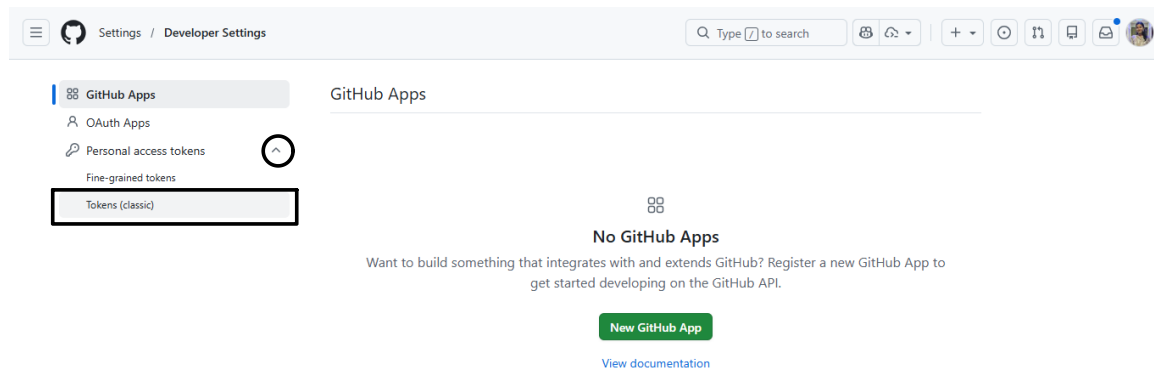

Step 9: Click on generate new token dropdown and then click on Generate new Token(classic).

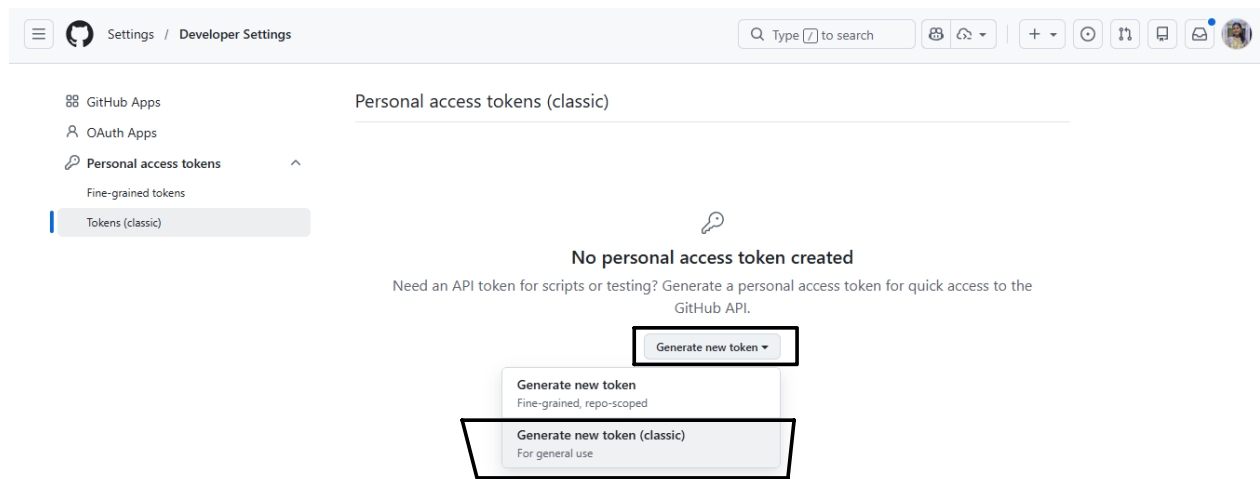

Step 10: Give a token name and set expiration to 90days.

Settings / Developer Settings

New personal access token (classic)

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Note

Token1Cllg

What's this token for?

Expiration

90 days (May 12, 2026)

The token will expire on the selected date.

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes.](#)

- ☒ **repo** Full control of private repositories
 - ☐ repo:status Access commit status
 - ☐ repo_deployment Access deployment status
 - ☐ public_repo Access public repositories
 - ☐ repo:invite Access repository invitations
 - ☐ security_events Read and write security events
- ☒ **workflow** Update GitHub Action workflows
- ☒ **write:packages** Upload packages to GitHub Package Registry
 - ☐ read:packages Download packages from GitHub Package Registry
- ☒ **delete:packages** Delete packages from GitHub Package Registry
- ☒ **admin:org** Full control of orgs and teams, read and write org projects
 - ☐ write:org Read and write org and team membership, read and write org projects
 - ☐ read:org Read org and team membership, read org projects
 - ☐ manage_runners:org Manage org runners and runner groups
- ☒ **admin:public_key** Full control of user public keys
 - ☐ write:public_key Write user public keys

Step 11: Select all the scopes present.

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes.](#)

- ☒ **repo** Full control of private repositories
 - ☐ repo:status Access commit status
 - ☐ repo_deployment Access deployment status
 - ☐ public_repo Access public repositories
 - ☐ repo:invite Access repository invitations
 - ☐ security_events Read and write security events
- ☒ **workflow** Update GitHub Action workflows
- ☒ **write:packages** Upload packages to GitHub Package Registry
 - ☐ read:packages Download packages from GitHub Package Registry
- ☒ **delete:packages** Delete packages from GitHub Package Registry
- ☒ **admin:org** Full control of orgs and teams, read and write org projects
 - ☐ write:org Read and write org and team membership, read and write org projects
 - ☐ read:org Read org and team membership, read org projects
 - ☐ manage_runners:org Manage org runners and runner groups
- ☒ **admin:public_key** Full control of user public keys
 - ☐ write:public_key Write user public keys

Step 12: Click on Generate token.

- ☒ **copilot** Full control of GitHub Copilot settings and seat assignments
 - ☐ manage_billing:copilot View and edit Copilot Business seat assignments
- ☒ **write:network_configurations** Write org hosted compute network configurations
 - ☐ read:network_configurations Read org hosted compute network configurations
- ☒ **project** Full control of projects
 - ☐ read:project Read access of projects
- ☒ **admin:gpg_key** Full control of public user GPG keys
 - ☐ write:gpg_key Write public user GPG keys
 - ☐ read:gpg_key Read public user GPG keys
- ☒ **admin:ssh_signing_key** Full control of public user SSH signing keys
 - ☐ write:ssh_signing_key Write public user SSH signing keys
 - ☐ read:ssh_signing_key Read public user SSH signing keys

Generate token Cancel

Step 13: Now to create a new repository in the profile, click on New from homepage.

Dashboard

Ask anything

Ask All repositories + Claude Sonnet 4.5

Task Create issue Spark Git Pull requests

You've been added to the EduLinkUp organization. View organization

Feed

keploy/keploy published 2 releases · See more 11 hours ago

v3.3.21

Changelog

Learn. Collaborate. Grow.

GitHub Education gives you the tools and community support to take on tech challenges and turn them into opportunities. Your future in tech starts here!

Go to GitHub Education

Latest from our changelog

- 15 hours ago Track additional Dependabot configuration changes in audit...
- Yesterday GPT-5.3-Codex is now generally available for GitHub Copilot
- 2 days ago GitHub Apps can now utilize public preview Enterprise Teams APIs v1...
- 4 days ago Fast mode for Claude Opus 4.6 is now in preview for GitHub Copilot

<https://github.com/new>

Step 14: Give a repo name.

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1 **General**

Owner * Jbhawal Repository name * Cllg Practice AWS

✓ Your new repository will be created as Cllg-Practice-AWS.
The repository name can only contain ASCII letters, digits, and the characters -, ., and _.

Great repository names are short and memorable. How about [silver-goggles](#)?

Description

0 / 350 characters

2 **Configuration**

Choose visibility * Public

Choose who can see and commit to this repository

Add README Off

Add license No license

Licenses explain how others can use your code. [About licenses](#)

3 **Jumpstart your project with Copilot (optional)**

Tell [Copilot coding agent](#) what you want to build in this repository. After creation, Copilot will open a pull request with generated files - such as a basic app, starter code, or other features you describe - then request your review when it's ready.


Prompt

Describe what you want Copilot to build


0 / 500 characters

Create repository

Step 16: Go to the folder cloned and remove the hidden .git folder if present.

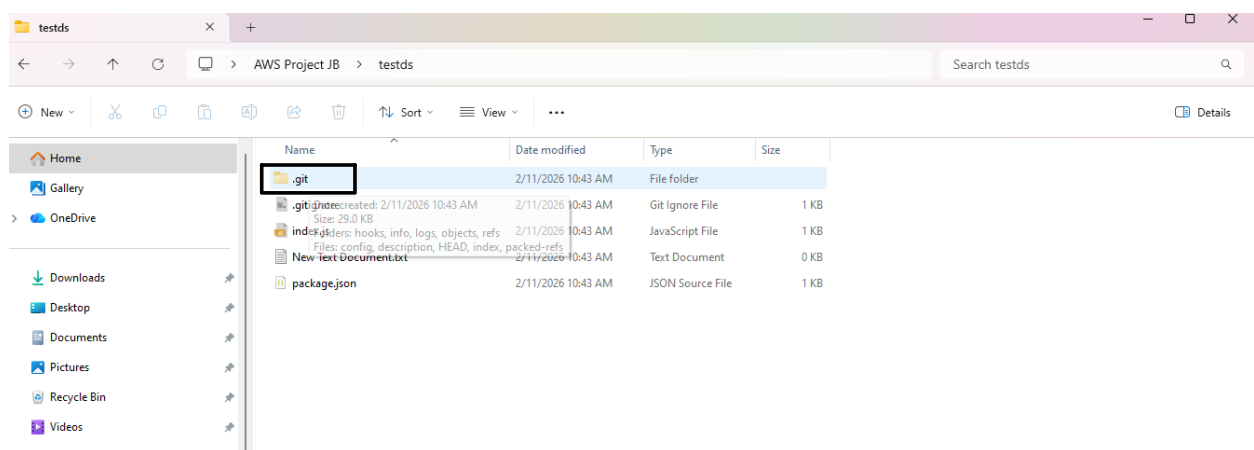

Step 17: Right click on the folder cloned and Open Git Bash.

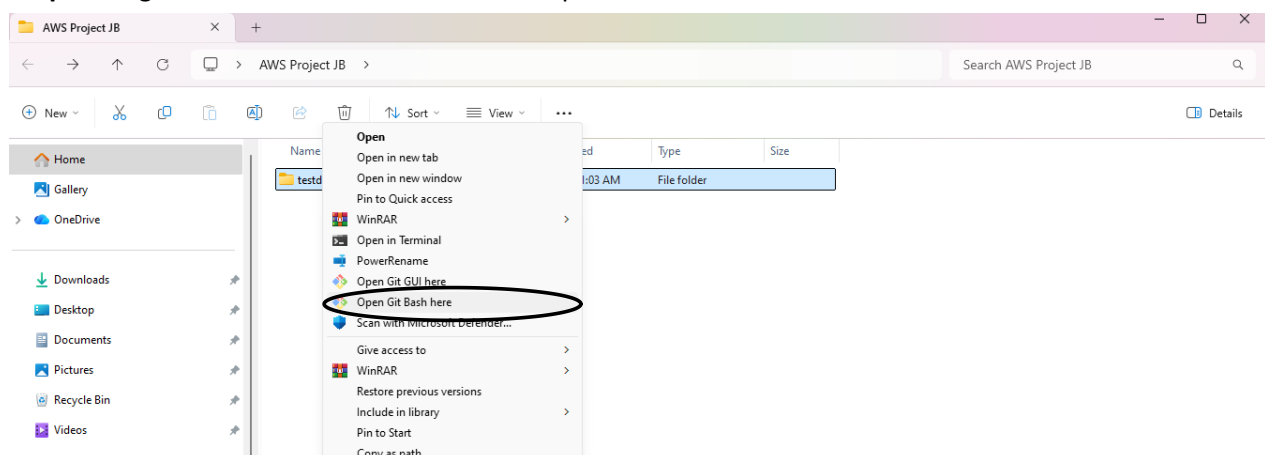

Step 18: Config the github with personal information as follow:

```
Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git config --global user.name "Jbhawal"

Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git config --global user.email "joyitabhawal@gmail.com"

Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git config --global --list
user.name=Jbhawal
user.email=joyitabhawal@gmail.com
```

Step 19: Write the following commands to push the project to the repo created:

git init - to initialise the Git repository
git add . - to add all the files present in the folder
git status - to see current status of the repo(tracked/ untracked files)
git commit -m "done" - Commit by entering a message
git remote add origin <https://github.com/Jbhawal/Cllg-Practice-AWS.git>
git push -u origin master - push the files into the repo

```
Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git init
Initialized empty Git repository in C:/Users/Admin/Desktop/AWS Project JB/testds/.git/

Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git add .

Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git status
On branch master

No commits yet


Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   .gitignore
    new file:   New Text Document.txt
    new file:   index.js
    new file:   package.json

Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git commit -m "done"
[master (root-commit) 23da41c] done
 4 files changed, 53 insertions(+)
 create mode 100644 .gitignore
 create mode 100644 New Text Document.txt
 create mode 100644 index.js
 create mode 100644 package.json

Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git remote add origin https://github.com/Jbhawal/Cllg-Practice-AWS.git

Admin@L2-066 MINGW64 ~/Desktop/AWS Project JB/testds (master)
$ git push -u origin master
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 12 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (6/6), 826 bytes | 826.00 KiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Jbhawal/Cllg-Practice-AWS.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
```

Step 20: Authentication will be asked. Enter the token previously created and then Sign in.

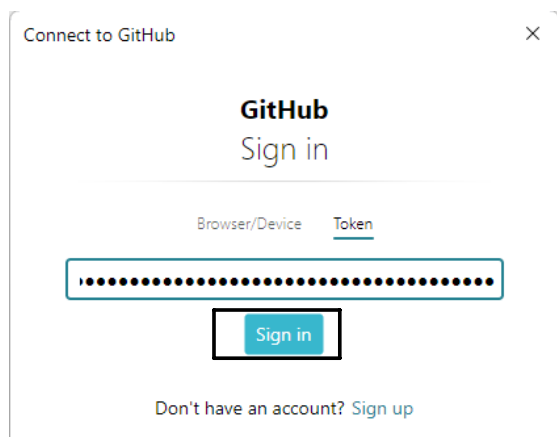A screenshot of the GitHub 'Connect to GitHub' dialog box. It features the GitHub logo and 'Sign in' text. Below this, there are two tabs: 'Browser/Device' and 'Token', with 'Token' being the active tab. A text input field is present with a masked password (dots). A blue 'Sign in' button is located below the input field. At the bottom, there is a link that says 'Don't have an account? Sign up'.

The project will be successfully pushed after this.