


Diagram

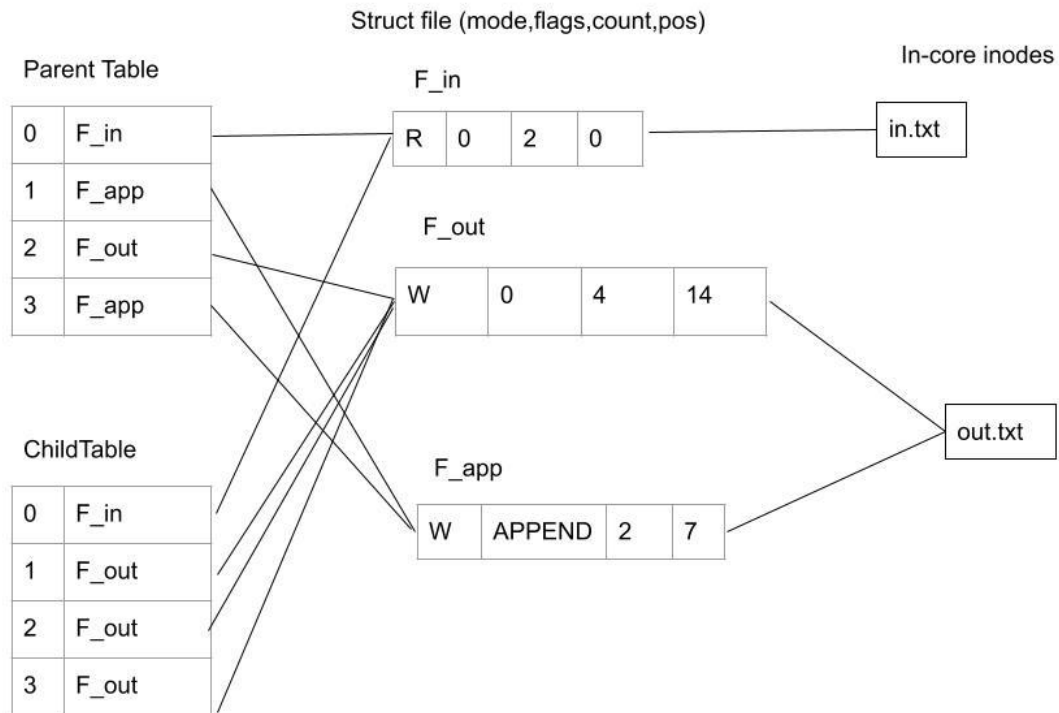

The content in out.txt is “1234ERRORERROR”. This is because write(1, “1234”, 4) first writes 1234 into out.txt. The parent process then appends ABC to the out.txt. However, FD 2 points to the original non appended file entry whose position is at 4. Thus, when the parent calls write(2, “Error”,5) the ABC is written over and the contents become 1234ERROR. The child shares the file position for FD 2 so the child also writes ERROR after 1234ERROR resulting in 1234ERRORERROR.