

C2W2_Assignment

March 8, 2021

1 Breast Cancer Prediction

In this exercise, you will train a neural network on the [Breast Cancer Dataset](#) to predict if the tumor is malignant or benign.

If you get stuck, we recommend that you review the ungraded labs for this week.

1.1 Imports

```
[1]: import tensorflow as tf
from tensorflow.keras.models import Model
from tensorflow.keras.layers import Dense, Input

import numpy as np
import matplotlib.pyplot as plt
import matplotlib.ticker as mticker
import pandas as pd
from sklearn.model_selection import train_test_split
from sklearn.metrics import confusion_matrix
import itertools
from tqdm import tqdm
import tensorflow_datasets as tfds

tf.get_logger().setLevel('ERROR')
```

1.2 Load and Preprocess the Dataset

We first download the dataset and create a data frame using pandas. We explicitly specify the column names because the CSV file does not have column headers.

```
[2]: DATASET_URL = "https://archive.ics.uci.edu/ml/machine-learning-databases/
    ↪breast-cancer-wisconsin/breast-cancer-wisconsin.data"
data_file = tf.keras.utils.get_file("breast_cancer.csv", DATASET_URL)
col_names = ["id", "clump_thickness", "un_cell_size", "un_cell_shape",
    ↪"marginal_adheshion", "single_eph_cell_size", "bare_nuclei",
    ↪"bland_chromatin", "normal_nucleoli", "mitoses", "class"]
```

```
df = pd.read_csv(data_file, names=col_names, header=None)
```

Downloading data from <https://archive.ics.uci.edu/ml/machine-learning-databases/breast-cancer-wisconsin/breast-cancer-wisconsin.data>
24576/19889 [=====] - 0s 4us/step

```
[3]: df.head()
```

```
[3]:
```

	id	clump_thickness	un_cell_size	un_cell_shape	marginal_adheshion	\
0	1000025	5	1	1	1	
1	1002945	5	4	4	5	
2	1015425	3	1	1	1	
3	1016277	6	8	8	1	
4	1017023	4	1	1	3	

	single_eph_cell_size	bare_nuclei	bland_chromatin	normal_nucleoli	\
0	2	1	3	1	
1	7	10	3	2	
2	2	2	3	1	
3	3	4	3	7	
4	2	1	3	1	

	mitoses	class
0	1	2
1	1	2
2	1	2
3	1	2
4	1	2

We have to do some preprocessing on the data. We first pop the id column since it is of no use for our problem at hand.

```
[4]: df.pop("id")
```

```
[4]:
```

0	1000025
1	1002945
2	1015425
3	1016277
4	1017023
...	
694	776715
695	841769
696	888820
697	897471
698	897471

Name: id, Length: 699, dtype: int64

Upon inspection of data, you can see that some values of the **bare__nuclei** column are unknown.


We drop the rows with these unknown values. We also convert the **bare_nuclei** column to numeric. This is required for training the model.

```
[5]: df = df[df["bare_nuclei"] != '?']  
df.bare_nuclei = pd.to_numeric(df.bare_nuclei)
```

We check the class distribution of the data. You can see that there are two classes, 2.0 and 4.0. According to the dataset: * **2.0 = benign** * **4.0 = malignant**

```
[6]: df['class'].hist(bins=20)
```

```
[6]: <matplotlib.axes._subplots.AxesSubplot at 0x7f756257dfd0>
```

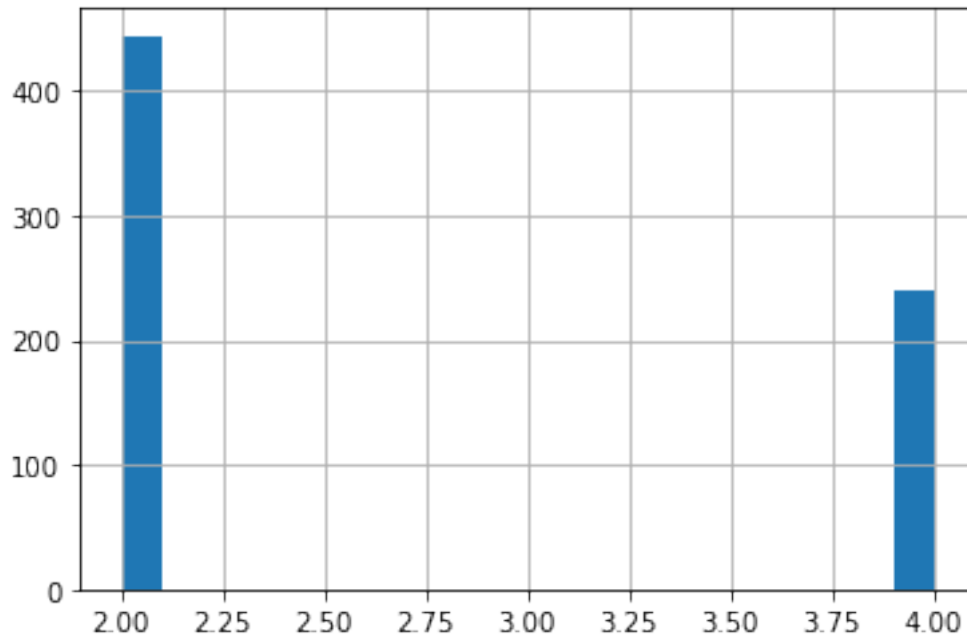

We are going to model this problem as a binary classification problem which detects whether the tumor is malignant or not. Hence, we change the dataset so that: * **benign(2.0) = 0** * **malignant(4.0) = 1**

```
[7]: df['class'] = np.where(df['class'] == 2, 0, 1)
```

We then split the dataset into training and testing sets. Since the number of samples is small, we will perform validation on the test set.

```
[8]: train, test = train_test_split(df, test_size = 0.2)
```

We get the statistics for training. We can look at statistics to get an idea about the distribution of plots. If you need more visualization, you can create additional data plots. We will also be using the mean and standard deviation from statistics for normalizing the data

```
[9]: train_stats = train.describe()
train_stats.pop('class')
train_stats = train_stats.transpose()
```

We pop the class column from the training and test sets to create train and test outputs.

```
[10]: train_Y = train.pop("class")
test_Y = test.pop("class")
```

Here we normalize the data by using the formula: $\mathbf{X} = (\mathbf{X} - \text{mean}(\mathbf{X})) / \text{StandardDeviation}(\mathbf{X})$

```
[11]: def norm(x):
return (x - train_stats['mean']) / train_stats['std']
```

```
[12]: norm_train_X = norm(train)
norm_test_X = norm(test)
```

We now create Tensorflow datasets for training and test sets to easily be able to build and manage an input pipeline for our model.

```
[13]: train_dataset = tf.data.Dataset.from_tensor_slices((norm_train_X.values,
↪train_Y.values))
test_dataset = tf.data.Dataset.from_tensor_slices((norm_test_X.values, test_Y.
↪values))
```

We shuffle and prepare a batched dataset to be used for training in our custom training loop.

```
[14]: batch_size = 32
train_dataset = train_dataset.shuffle(buffer_size=len(train)).batch(batch_size)
test_dataset = test_dataset.batch(batch_size=batch_size)
```

```
[15]: a = enumerate(train_dataset)

print(len(list(a)))
```

18

1.3 Define the Model

Now we will define the model. Here, we use the Keras Functional API to create a simple network of two `Dense` layers. We have modelled the problem as a binary classification problem and hence we add a single layer with sigmoid activation as the final layer of the model.

```
[16]: def base_model():
inputs = tf.keras.layers.Input(shape=(len(train.columns)))
```

```

x = tf.keras.layers.Dense(128, activation='relu')(inputs)
x = tf.keras.layers.Dense(64, activation='relu')(x)
outputs = tf.keras.layers.Dense(1, activation='sigmoid')(x)
model = tf.keras.Model(inputs=inputs, outputs=outputs)
return model

model = base_model()

```

1.4 Define Optimizer and Loss

We use RMSprop optimizer and binary crossentropy as our loss function.

```

[17]: optimizer = tf.keras.optimizers.RMSprop(learning_rate=0.001)
      loss_object = tf.keras.losses.BinaryCrossentropy()

```

1.5 Evaluate Untrained Model

We calculate the loss on the model before training begins.

```

[18]: outputs = model(norm_test_X.values)
      loss_value = loss_object(y_true=test_Y.values, y_pred=outputs)
      print("Loss before training %.4f" % loss_value.numpy())

```

Loss before training 0.6976


We also plot the confusion matrix to visualize the true outputs against the outputs predicted by the model.

```

[19]: def plot_confusion_matrix(y_true, y_pred, title='', labels=[0,1]):
      cm = confusion_matrix(y_true, y_pred)
      fig = plt.figure()
      ax = fig.add_subplot(111)
      cax = ax.matshow(cm)
      plt.title(title)
      fig.colorbar(cax)
      ax.set_xticklabels([''] + labels)
      ax.set_yticklabels([''] + labels)
      plt.xlabel('Predicted')
      plt.ylabel('True')
      fmt = 'd'
      thresh = cm.max() / 2.
      for i, j in itertools.product(range(cm.shape[0]), range(cm.shape[1])):
          plt.text(j, i, format(cm[i, j], fmt),
                   horizontalalignment="center",
                   color="black" if cm[i, j] > thresh else "white")
      plt.show()

```

```
[20]: plot_confusion_matrix(test_Y.values, tf.round(outputs), title='Confusion Matrix_
      ↪for Untrained Model')
```

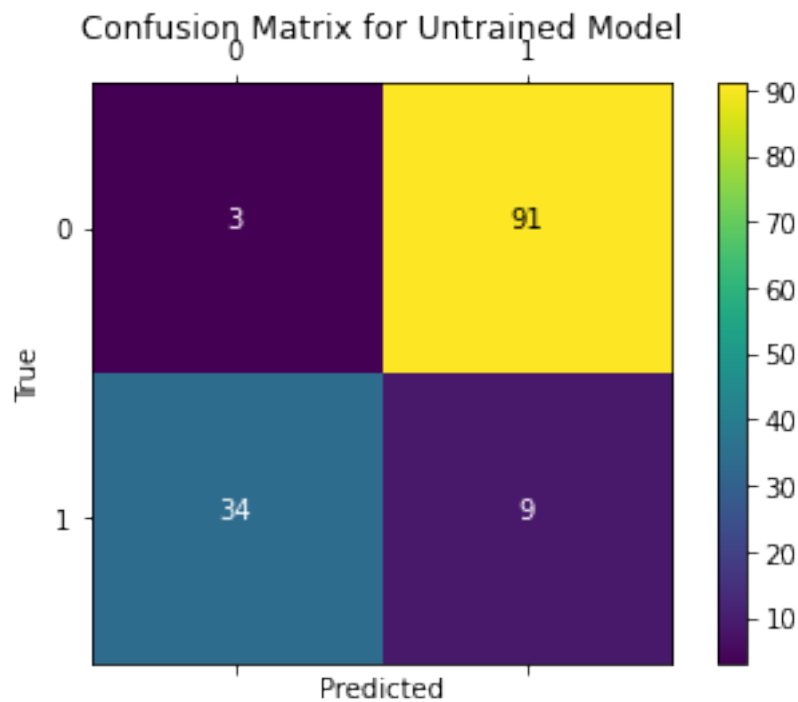

1.6 Define Metrics (Please complete this section)

1.6.1 Define Custom F1Score Metric

In this example, we will define a custom F1Score metric using the formula.

$$\text{F1 Score} = 2 * ((\text{precision} * \text{recall}) / (\text{precision} + \text{recall}))$$

$$\text{precision} = \text{true_positives} / (\text{true_positives} + \text{false_positives})$$

$$\text{recall} = \text{true_positives} / (\text{true_positives} + \text{false_negatives})$$

We use `confusion_matrix` defined in `tf.math` to calculate precision and recall.

Here you can see that we have subclassed `tf.keras.Metric` and implemented the three required methods `update_state`, `result` and `reset_states`.

1.6.2 Please complete the result() method:

```
[23]: class F1Score(tf.keras.metrics.Metric):

    def __init__(self, name='f1_score', **kwargs):
        '''initializes attributes of the class'''

        # call the parent class init
        super(F1Score, self).__init__(name=name, **kwargs)

        # Initialize Required variables
        # true positives
        self.tp = tf.Variable(0, dtype = 'int32')
        # false positives
        self.fp = tf.Variable(0, dtype = 'int32')
        # true negatives
        self.tn = tf.Variable(0, dtype = 'int32')
        # false negatives
        self.fn = tf.Variable(0, dtype = 'int32')

    def update_state(self, y_true, y_pred, sample_weight=None):
        '''
        Accumulates statistics for the metric

        Args:
            y_true: target values from the test data
            y_pred: predicted values by the model
        '''

        # Calulcate confusion matrix.
        conf_matrix = tf.math.confusion_matrix(y_true, y_pred, num_classes=2)

        # Update values of true positives, true negatives, false positives and
        ↪ false negatives from confusion matrix.
        self.tn.assign_add(conf_matrix[0][0])
        self.tp.assign_add(conf_matrix[1][1])
        self.fp.assign_add(conf_matrix[0][1])
        self.fn.assign_add(conf_matrix[1][0])

    def result(self):
        '''Computes and returns the metric value tensor.'''

        # Calculate precision
        if (self.tp + self.fp == 0):
            precision = 1.0
        else:
            precision = self.tp / (self.tp + self.fp)
```

```

        # Calculate recall
        if (self.tp + self.fn == 0):
            recall = 1.0
        else:
            recall = self.tp / (self.tp + self.fn)

        # Return F1 Score
        ### START CODE HERE ###
        f1_score = 2 * (precision * recall) / (precision + recall)
        ### END CODE HERE ###

        return f1_score

def reset_states(self):
    '''Resets all of the metric state variables.'''

    # The state of the metric will be reset at the start of each epoch.
    self.tp.assign(0)
    self.tn.assign(0)
    self.fp.assign(0)
    self.fn.assign(0)

```

[24]: *# Test Code:*

```

test_F1Score = F1Score()

test_F1Score.tp = tf.Variable(2, dtype = 'int32')
test_F1Score.fp = tf.Variable(5, dtype = 'int32')
test_F1Score.tn = tf.Variable(7, dtype = 'int32')
test_F1Score.fn = tf.Variable(9, dtype = 'int32')
test_F1Score.result()

```

[24]: <tf.Tensor: shape=(), dtype=float64, numpy=0.2222222222222222>

We initialize the separate metrics required for training and validation. In addition to our custom F1Score metric, we are also using BinaryAccuracy defined in `tf.keras.metrics`

```

[25]: train_f1score_metric = F1Score()
      val_f1score_metric = F1Score()

      train_acc_metric = tf.keras.metrics.BinaryAccuracy()
      val_acc_metric = tf.keras.metrics.BinaryAccuracy()

```


1.7 Apply Gradients (Please complete this section)

The core of training is using the model to calculate the logits on specific set of inputs and compute the loss(in this case **binary crossentropy**) by comparing the predicted outputs to the true outputs. We then update the trainable weights using the optimizer algorithm chosen. The optimizer algorithm requires our computed loss and partial derivatives of loss with respect to each of the trainable weights to make updates to the same.

We use gradient tape to calculate the gradients and then update the model trainable weights using the optimizer.

1.7.1 Please complete the following function:

```
[26]: def apply_gradient(optimizer, loss_object, model, x, y):  
    '''  
    applies the gradients to the trainable model weights  
  
    Args:  
        optimizer: optimizer to update model weights  
        loss_object: type of loss to measure during training  
        model: the model we are training  
        x: input data to the model  
        y: target values for each input  
    '''  
  
    with tf.GradientTape() as tape:  
        ### START CODE HERE ###  
        logits = model(x)  
        loss_value = loss_object(y_true = y, y_pred = logits)  
  
        gradients = tape.gradient(loss_value , model.trainable_weights)  
        optimizer.apply_gradients(zip(gradients, model.trainable_weights))  
        ### END CODE HERE ###  
  
    return logits, loss_value
```

```
[27]: # Test Code:  
  
test_model = tf.keras.models.load_model('./test_model')  
test_logits, test_loss = apply_gradient(optimizer, loss_object, test_model,   
    ↪ norm_test_X.values, test_Y.values)  
  
print(test_logits.numpy()[:8])  
print(test_loss.numpy())  
  
del test_model  
del test_logits
```

```
del test_loss
```

```
[[0.5347493 ]  
 [0.5510975 ]  
 [0.5684405 ]  
 [0.5423165 ]  
 [0.5510975 ]  
 [0.45011258]  
 [0.50300276]  
 [0.5015185 ]]  
0.7159175
```

1.8 Training Loop (Please complete this section)

This function performs training during one epoch. We run through all batches of training data in each epoch to make updates to trainable weights using our previous function. You can see that we also call `update_state` on our metrics to accumulate the value of our metrics.

We are displaying a progress bar to indicate completion of training in each epoch. Here we use `tqdm` for displaying the progress bar.

1.8.1 Please complete the following function:

```
[28]: def train_data_for_one_epoch(train_dataset, optimizer, loss_object, model,  
                                   train_acc_metric, train_f1score_metric,  
                                   verbose=True):  
    '''  
    Computes the loss then updates the weights and metrics for one epoch.  
  
    Args:  
        train_dataset: the training dataset  
        optimizer: optimizer to update model weights  
        loss_object: type of loss to measure during training  
        model: the model we are training  
        train_acc_metric: calculates how often predictions match labels  
        train_f1score_metric: custom metric we defined earlier  
    '''  
    losses = []  
  
    #Iterate through all batches of training data  
    for step, (x_batch_train, y_batch_train) in enumerate(train_dataset):  
  
        #Calculate loss and update trainable variables using optimizer  
        ### START CODE HERE ###  
        logits, loss_value = apply_gradient(optimizer, loss_object, model,  
        x_batch_train, y_batch_train)
```

```

        losses.append(loss_value)
        ### END CODE HERE ###

        #Round off logits to nearest integer and cast to integer for calculating
        metrics
        logits = tf.round(logits)
        logits = tf.cast(logits, 'int64')

        #Update the training metrics
        ### START CODE HERE ###
        train_acc_metric.update_state(y_batch_train, logits)
        train_f1score_metric.update_state(y_batch_train, logits)
        ### END CODE HERE ###

        #Update progress
        if verbose:
            print("Training loss for step %s: %.4f" % (int(step),
        float(loss_value)))

    return losses

```

```

[29]: # TEST CODE

test_model = tf.keras.models.load_model('./test_model')

test_losses = train_data_for_one_epoch(train_dataset, optimizer, loss_object,
    test_model,
                                     train_acc_metric, train_f1score_metric,
    verbose=False)

for test_loss in test_losses:
    print(test_loss.numpy())

del test_model
del test_losses

```

```

0.74298286
0.631032
0.53124547
0.50343037
0.432545
0.43424177
0.3545668
0.3984658
0.3078795
0.34828767
0.2609676

```

```
0.2647639
0.25531483
0.25107217
0.27602816
0.20951858
0.20440276
0.09701509
```

At the end of each epoch, we have to validate the model on the test dataset. The following function calculates the loss on test dataset and updates the states of the validation metrics.

```
[30]: def perform_validation():
    losses = []

    #Iterate through all batches of validation data.
    for x_val, y_val in test_dataset:

        #Calculate validation loss for current batch.
        val_logits = model(x_val)
        val_loss = loss_object(y_true=y_val, y_pred=val_logits)
        losses.append(val_loss)

        #Round off and cast outputs to either 0 or 1
        val_logits = tf.cast(tf.round(model(x_val)), 'int64')

        #Update validation metrics
        val_acc_metric.update_state(y_val, val_logits)
        val_f1score_metric.update_state(y_val, val_logits)

    return losses
```

Next we define the training loop that runs through the training samples repeatedly over a fixed number of epochs. Here we combine the functions we built earlier to establish the following flow: 1. Perform training over all batches of training data. 2. Get values of metrics. 3. Perform validation to calculate loss and update validation metrics on test data. 4. Reset the metrics at the end of epoch. 5. Display statistics at the end of each epoch.

Note : We also calculate the training and validation losses for the whole epoch at the end of the epoch.

```
[31]: # Iterate over epochs.
epochs = 5
epochs_val_losses, epochs_train_losses = [], []

for epoch in range(epochs):
    print('Start of epoch %d' % (epoch,))
    #Perform Training over all batches of train data
    losses_train = train_data_for_one_epoch(train_dataset, optimizer,
    ↪loss_object, model, train_acc_metric, train_f1score_metric)
```

```

# Get results from training metrics
train_acc = train_acc_metric.result()
train_f1score = train_f1score_metric.result()

#Perform validation on all batches of test data
losses_val = perform_validation()

# Get results from validation metrics
val_acc = val_acc_metric.result()
val_f1score = val_f1score_metric.result()

#Calculate training and validation losses for current epoch
losses_train_mean = np.mean(losses_train)
losses_val_mean = np.mean(losses_val)
epochs_val_losses.append(losses_val_mean)
epochs_train_losses.append(losses_train_mean)

print('\n Epoch %s: Train loss: %.4f  Validation Loss: %.4f, Train Accuracy:
→ %.4f, Validation Accuracy %.4f, Train F1 Score: %.4f, Validation F1 Score:
→%.4f' % (epoch, float(losses_train_mean), float(losses_val_mean),
→float(train_acc), float(val_acc), train_f1score, val_f1score))

#Reset states of all metrics
train_acc_metric.reset_states()
val_acc_metric.reset_states()
val_f1score_metric.reset_states()
train_f1score_metric.reset_states()

```

Start of epoch 0

```

Training loss for step 0: 0.7614
Training loss for step 1: 0.6440
Training loss for step 2: 0.5442
Training loss for step 3: 0.5025
Training loss for step 4: 0.4230
Training loss for step 5: 0.3847
Training loss for step 6: 0.4174
Training loss for step 7: 0.3690
Training loss for step 8: 0.2870
Training loss for step 9: 0.2277
Training loss for step 10: 0.2485
Training loss for step 11: 0.2061
Training loss for step 12: 0.1914
Training loss for step 13: 0.1988
Training loss for step 14: 0.2420
Training loss for step 15: 0.1631
Training loss for step 16: 0.1600

```

Training loss for step 17: 0.0815

Epoch 0: Train loss: 0.3362 Validation Loss: 0.1444, Train Accuracy: 0.9175,
Validation Accuracy 0.9812, Train F1 Score: 0.8857, Validation F1 Score: 0.9647
Start of epoch 1

Training loss for step 0: 0.0970
Training loss for step 1: 0.0988
Training loss for step 2: 0.3255
Training loss for step 3: 0.1773
Training loss for step 4: 0.0853
Training loss for step 5: 0.1277
Training loss for step 6: 0.1070
Training loss for step 7: 0.1566
Training loss for step 8: 0.1059
Training loss for step 9: 0.0638
Training loss for step 10: 0.0989
Training loss for step 11: 0.2120
Training loss for step 12: 0.0882
Training loss for step 13: 0.1531
Training loss for step 14: 0.1423
Training loss for step 15: 0.0647
Training loss for step 16: 0.0612
Training loss for step 17: 0.0775

Epoch 1: Train loss: 0.1246 Validation Loss: 0.0643, Train Accuracy: 0.9705,
Validation Accuracy 0.9812, Train F1 Score: 0.9572, Validation F1 Score: 0.9647
Start of epoch 2

Training loss for step 0: 0.1498
Training loss for step 1: 0.0331
Training loss for step 2: 0.0548
Training loss for step 3: 0.0723
Training loss for step 4: 0.1151
Training loss for step 5: 0.0848
Training loss for step 6: 0.0174
Training loss for step 7: 0.1397
Training loss for step 8: 0.0882
Training loss for step 9: 0.1357
Training loss for step 10: 0.1951
Training loss for step 11: 0.0207
Training loss for step 12: 0.0574
Training loss for step 13: 0.1380
Training loss for step 14: 0.0493
Training loss for step 15: 0.0357
Training loss for step 16: 0.1399
Training loss for step 17: 0.0174

Epoch 2: Train loss: 0.0858 Validation Loss: 0.0512, Train Accuracy: 0.9722,
Validation Accuracy 0.9750, Train F1 Score: 0.9596, Validation F1 Score: 0.9524

Start of epoch 3

Training loss for step 0: 0.1266
Training loss for step 1: 0.1213
Training loss for step 2: 0.0598
Training loss for step 3: 0.0707
Training loss for step 4: 0.0679
Training loss for step 5: 0.0304
Training loss for step 6: 0.0208
Training loss for step 7: 0.0178
Training loss for step 8: 0.1368
Training loss for step 9: 0.1594
Training loss for step 10: 0.0221
Training loss for step 11: 0.2186
Training loss for step 12: 0.0860
Training loss for step 13: 0.0489
Training loss for step 14: 0.0300
Training loss for step 15: 0.0424
Training loss for step 16: 0.0833
Training loss for step 17: 0.0138

Epoch 3: Train loss: 0.0754 Validation Loss: 0.0469, Train Accuracy: 0.9740,
Validation Accuracy 0.9750, Train F1 Score: 0.9620, Validation F1 Score: 0.9524

Start of epoch 4

Training loss for step 0: 0.0714
Training loss for step 1: 0.0960
Training loss for step 2: 0.0246
Training loss for step 3: 0.0298
Training loss for step 4: 0.0570
Training loss for step 5: 0.0138
Training loss for step 6: 0.0156
Training loss for step 7: 0.0750
Training loss for step 8: 0.1725
Training loss for step 9: 0.0133
Training loss for step 10: 0.1965
Training loss for step 11: 0.1907
Training loss for step 12: 0.1736
Training loss for step 13: 0.0206
Training loss for step 14: 0.0514
Training loss for step 15: 0.0393
Training loss for step 16: 0.0202
Training loss for step 17: 0.2521


Epoch 4: Train loss: 0.0841 Validation Loss: 0.0484, Train Accuracy: 0.9757,
Validation Accuracy 0.9750, Train F1 Score: 0.9646, Validation F1 Score: 0.9524

1.9 Evaluate the Model

1.9.1 Plots for Evaluation


We plot the progress of loss as training proceeds over number of epochs.

```
[32]: def plot_metrics(train_metric, val_metric, metric_name, title, ylim=5):  
    plt.title(title)  
    plt.ylim(0,ylim)  
    plt.gca().xaxis.set_major_locator(mticker.MultipleLocator(1))  
    plt.plot(train_metric,color='blue',label=metric_name)  
    plt.plot(val_metric,color='green',label='val_' + metric_name)  
  
plot_metrics(epochs_train_losses, epochs_val_losses, "Loss", "Loss", ylim=1.0)
```

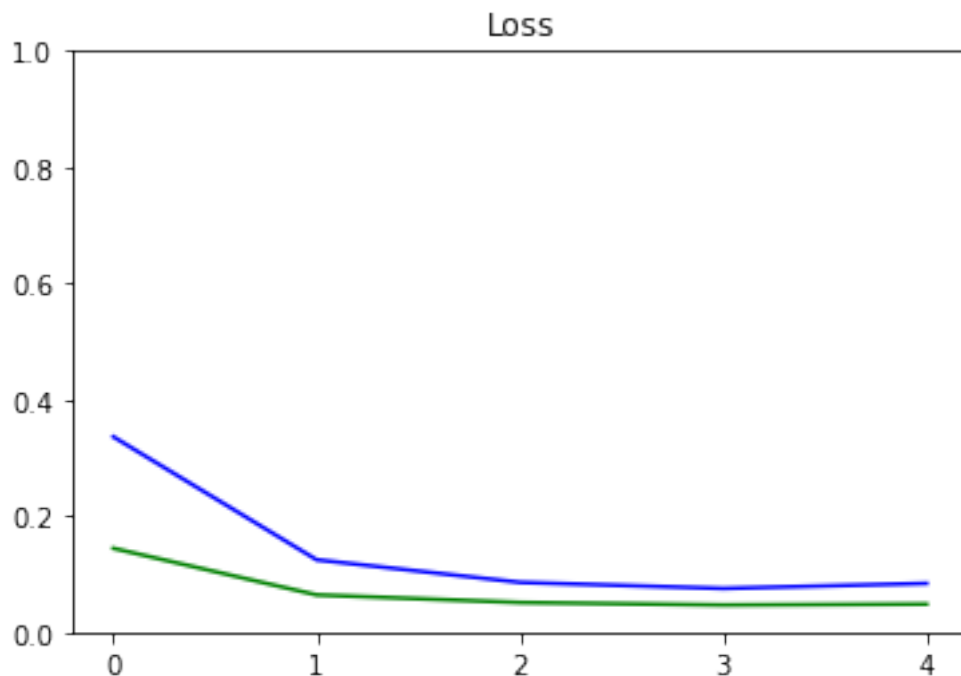

We plot the confusion matrix to visualize the true values against the values predicted by the model.

```
[33]: test_outputs = model(norm_test_X.values)  
plot_confusion_matrix(test_Y.values, tf.round(test_outputs), title='Confusion_  
↪Matrix for Untrained Model')
```

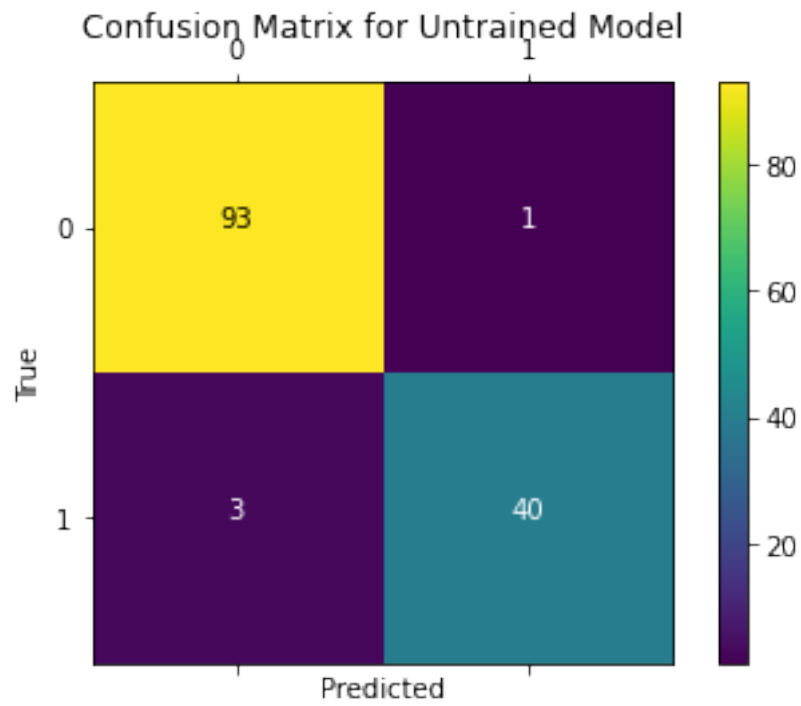[]: