No.13

4/9/2025

IMPLEMENT YOUR OWN PING PROGRAM

AIM:

To implement a simple ping program in Java to check whether a host is reachable and calculate the response time

ALGORITHM:

1. Read the hostname or IP address from the user.
2. Get the IP address using Inet address.
3. Send a ping request using isReachable()
4. Record the start and end time.
5. Calculate the response time.
6. Display whether the host is reachable.

PROGRAM:

```
import java.net.InetAddress;
import java.util.Scanner;

public class Myping {

    public static void main (String[] args){

        Scanner sc = new Scanner (System.in);

        System.out.print (" Enter hostname in IP address");

        String host = sc.nextLine();

    try {

        InetAddress address = InetAddress.getByName(host);
```

OUTPUT:

Enter hostname or IP address : google.com


pinging 142.250.183.14

Reply from 142.250.183.14 : time = 32ms

Reply from 142.250.183.14 : time = 29 ms

Reply from 142.250.183.14 : time = 31 ms

Reply from 142.250.183.14 : time = 30ms

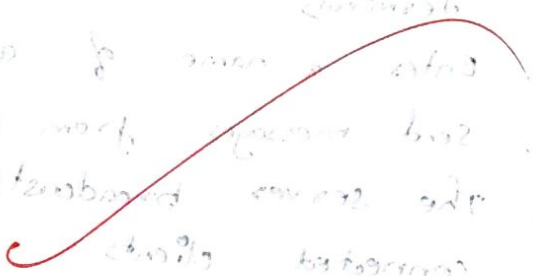

```
System.out.println("pinging" + address.getHostAddress());
for (int i=1; i<=1; i++){
    long start = System.currentTimeMillis();
    boolean reachable = address.isReachable(3000);
    long end = System.currentTimeMillis();
    long time = end - start;
    if (reachable){
        System.out.println("Reply from" + address.getHost
                Address() + " time=" + time + "ms");}
    else{
        System.out.println("Request timed out.");}
    Thread.sleep(1000);
  }
}
catch (Exception e){
    System.out.println("Error:" + e.getMessage());
}
sc.close();
  }
}
```

RESULT:

Thus, a simple Ping Program was successfully implemented in Java to check host reachability and measure response time.