

**Name:S.Jeevan kumar**

**EmployeeInfoTable:**

EmpID	EmpFname	EmpLname	Department	Project	Address	DOB	Gender
1	Sanjay	Mehra	HR	P1	Hyderabad(HYD)	01/12/1976	M
2	Ananya	Mishra	Admin	P2	Delhi(DEL)	02/05/1968	F
3	Rohan	Diwan	Account	P3	Mumbai(BOM)	01/01/1980	M
4	Sonia	Kulkarni	HR	P1	Hyderabad(HYD)	02/05/1992	F
5	Ankit	Kapoor	Admin	P2	Delhi(DEL)	03/07/1994	M

**EmployeePositionTable:**

EmpID	EmpPosition	DateOfJoining	Salary
1	Manager	01/05/2022	500000
2	Executive	02/05/2022	75000
3	Manager	01/05/2022	90000
2	Lead	02/05/2022	85000
1	Executive	01/05/2022	300000

➤ create table EmployeeInfo(EmpID int primary key, EmpFname varchar(30), EmpLname varchar(30), Department varchar(30),Project varchar(30), Address varchar(30), DOB datetime,Gender char(1) check(Gender='M' or Gender='F'));

- ❖ insert into EmployeeInfovalues(1, 'Sanjay', 'mehra', 'HR','P1', 'Hyderabad(HYD)', '1976-12-01', 'M');
- ❖ insertintoEmployeeInfovalues(2,'Ananya','Mishra','Admin','P2','Delhi(DEL)', '1968-05-02','F');
- ❖ insertintoEmployeeInfovalues(3,'Rohan','Diwan','Account','P3','Mumbai(BOM)', '1980-01-01', 'M');
- ❖ insert into EmployeeInfovalues(4, 'Sonia', 'kulkarni', 'HR','P1', 'Hyderabad(HYD)', '1992-05-02', 'F');
- ❖ insertintoEmployeeInfovalues(5,'Ankit','Kapoor','Admin','P2','Delhi(DEL)', '1994-07-03', 'M');

➤ create table EmployeePosition(EmpID int, EmpPositionvarchar(30), DOJ datetime,salaryfloat);

- ❖ insert into employeepositionvalues(1, 'manager', '2022-05-01',500000);
- ❖ insert into employeepositionvalues(2, 'executive', '2022-05-02',75000);
- ❖ insert into employeepositionvalues(3, 'manager', '2022-05-01',90000);
- ❖ insert into employeepositionvalues(2, 'lead', '2022-05-02',85000);
- ❖ insert into employeepositionvalues(1, 'executive', '2022-05-01',300000);

```
mysql> use lab8;
Database changed
mysql> create table EmployeeInfo(EmpID int primary key, EmpFname varchar(30), EmpLname varchar(30), Department varchar(30), Project varchar(30), Address varchar(30), DOB datetime, Gender char(1) check (Gender='M' or Gender='F'));
Query OK, 0 rows affected (0.04 sec)

mysql> insert into EmployeeInfo values(1, 'Sanjay', 'mehra', 'HR', 'P1', 'Hyderabad(HYD)', '1976-12-01', 'M');
Query OK, 1 row affected (0.01 sec)

mysql> insert into EmployeeInfo values(2, 'Ananya', 'mishra', 'Admin', 'P2', 'Delhi(DEL)', '1968-05-02', 'F');
Query OK, 1 row affected (0.00 sec)

mysql> insert into EmployeeInfo values(3, 'Rohan', 'Diwan', 'Account', 'P3', 'Mumbai(BOM)', '1980-01-01', 'M');
Query OK, 1 row affected (0.01 sec)

mysql> insert into EmployeeInfo values(4, 'Sonia', 'kulkarni', 'HR', 'P1', 'Hyderabad(HYD)', '1992-05-02', 'F');
Query OK, 1 row affected (0.01 sec)

mysql> insert into EmployeeInfo values(5, 'Ankit', 'Kapoor', 'Admin', 'P2', 'Delhi(DEL)', '1994-07-03', 'M');
Query OK, 1 row affected (0.01 sec)

mysql> select * from employeeinfo;
+-----+-----+-----+-----+-----+-----+-----+-----+
| EmpID | EmpFname | EmpLname | Department | Project | Address | DOB | Gender |
+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | Sanjay | mehra | HR | P1 | Hyderabad(HYD) | 1976-12-01 00:00:00 | M |
| 2 | Ananya | mishra | Admin | P2 | Delhi(DEL) | 1968-05-02 00:00:00 | F |
| 3 | Rohan | Diwan | Account | P3 | Mumbai(BOM) | 1980-01-01 00:00:00 | M |
| 4 | Sonia | kulkarni | HR | P1 | Hyderabad(HYD) | 1992-05-02 00:00:00 | F |
| 5 | Ankit | Kapoor | Admin | P2 | Delhi(DEL) | 1994-07-03 00:00:00 | M |
+-----+-----+-----+-----+-----+-----+-----+-----+
5 rows in set (0.00 sec)
```

```
mysql> create table EmployeePosition(EmpID int, EmpPosition varchar(30), DOJ datetime, salary float);
Query OK, 0 rows affected (0.04 sec)

mysql> insert int employeeposition(1, 'manager', '2022-05-01', 500000);
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right usage of int employeeposition(1, 'manager', '2022-05-01', 500000)' at line 1
mysql>
mysql>
mysql> insert into employeeposition values(1, 'manager', '2022-05-01', 500000);
Query OK, 1 row affected (0.01 sec)

mysql> insert into employeeposition values(2, 'executive', '2022-05-02', 75000);
Query OK, 1 row affected (0.01 sec)

mysql> insert into employeeposition values(3, 'manager', '2022-05-01', 90000);
Query OK, 1 row affected (0.01 sec)

mysql> insert into employeeposition values(2, 'lead', '2022-05-02', 85000);
Query OK, 1 row affected (0.01 sec)

mysql> insert into employeeposition values(1, 'executive', '2022-05-01', 300000);
Query OK, 1 row affected (0.00 sec)

mysql> select * from employeeposition;
+-----+-----+-----+-----+
| EmpID | EmpPosition | DOJ | salary |
+-----+-----+-----+-----+
| 1 | manager | 2022-05-01 00:00:00 | 500000 |
| 2 | executive | 2022-05-02 00:00:00 | 75000 |
| 3 | manager | 2022-05-01 00:00:00 | 90000 |
| 2 | lead | 2022-05-02 00:00:00 | 85000 |
| 1 | executive | 2022-05-01 00:00:00 | 300000 |
+-----+-----+-----+-----+
5 rows in set (0.00 sec)
```

**Q1. Write a query to fetch the EmpFname from the EmployeeInfo table in the uppercase and use the ALIAS name as EmpName.**

Ans: `SELECT UPPER(EMPNAME) AS EMPNAME FROM EMPLOYEEINFO;`

```
mysql> SELECT UPPER(EMPNAME) AS EMPNAME FROM EMPLOYEEINFO;
+-----+
| EMPNAME |
+-----+
| SANJAY  |
| ANANYA  |
| ROHAN   |
| SONIA   |
| ANKIT   |
+-----+
5 rows in set (0.00 sec)
```

**Q2. Write a query to fetch the number of employees working in the department 'HR'.**

Ans: `SELECT COUNT(*) FROM EMPLOYEEINFO WHERE DEPARTMENT = 'HR';`

```
mysql> SELECT COUNT(*) FROM EMPLOYEEINFO WHERE DEPARTMENT = 'HR';
+-----+
| COUNT(*) |
+-----+
|         2 |
+-----+
1 row in set (0.00 sec)

mysql>
mysql>
```

**Q3. Write a query to get the current date.**

Ans: `SELECT CURRENT_DATE AS CurrentDate;`

```
mysql> SELECT CURRENT_DATE AS CurrentDate;
+-----+
| CurrentDate |
+-----+
| 2023-07-27  |
+-----+
1 row in set (0.00 sec)

mysql> SELECT SUBSTRING(EMPLNAME, 1, 4) FROM EMPLOYEEINFO;
```

**Q4. Write a query to retrieve the first four characters of EmpLname from theEmployeeInfo table.**

Ans:SELECTSUBSTRING(EMPLNAME,1,4)FROMEMPLOYEEINFO;

```
mysql> SELECT SUBSTRING(EMPLNAME, 1, 4) FROM EMPLOYEEINFO;
+-----+
| SUBSTRING(EMPLNAME, 1, 4) |
+-----+
| mehr                      |
| mish                      |
| Diwa                      |
| kulk                      |
| Kapo                      |
+-----+
5 rows in set (0.00 sec)
```

**Q5. Write a query to fetch only the place name(string before brackets) from theAddress column of EmployeeInfotable.**

Ans:SELECTLEFT(Address,LOCATE('(',Address)-1) ASPlaceName FROMEmployeeInfo;

```
mysql> SELECT LEFT(Address, LOCATE('(', Address) - 1) AS PlaceName FROM EmployeeInfo;
+-----+
| PlaceName |
+-----+
| Hyderabad |
| Delhi     |
| Mumbai    |
| Hyderabad |
| Delhi     |
+-----+
5 rows in set (0.00 sec)
```

**Q6. Write a query to create a new table which consists of data and structurecopiedfromtheother table.**

- ❖ CREATETABLEEMPLOYEE\_INFOLIKEEMPLOYEEINFO;
- ❖ INSERTINTOEMPLOYEE\_INFOSELECT\*FROM EMPLOYEEINFO;

```
mysql> CREATE TABLE EMPLOYEE_INFO LIKE EMPLOYEEINFO;
Query OK, 0 rows affected (0.03 sec)

mysql> DESC EMPLOYEE_INFO;
+-----+-----+-----+-----+-----+-----+
| Field | Type | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| EmpID | int | NO | PRI | NULL | |
| EmpFname | varchar(30) | YES | | NULL | |
| EmpLname | varchar(30) | YES | | NULL | |
| Department | varchar(30) | YES | | NULL | |
| Project | varchar(30) | YES | | NULL | |
| Address | varchar(30) | YES | | NULL | |
| DOB | datetime | YES | | NULL | |
| Gender | char(1) | YES | | NULL | |
+-----+-----+-----+-----+-----+-----+
8 rows in set (0.00 sec)

mysql> INSERT INTO EMPLOYEE_INFO SELECT * FROM EMPLOYEEINFO;
Query OK, 5 rows affected (0.01 sec)
Records: 5 Duplicates: 0 Warnings: 0

mysql> SELECT * FROM EMPLOYEE_INFO;
+-----+-----+-----+-----+-----+-----+-----+
| EmpID | EmpFname | EmpLname | Department | Project | Address | DOB | Gender |
+-----+-----+-----+-----+-----+-----+-----+
| 1 | Sanjay | mehra | HR | P1 | Hyderabad(HYD) | 1976-12-01 00:00:00 | M |
| 2 | Ananya | mishra | Admin | P2 | Delhi(DEI) | 1968-05-02 00:00:00 | F |
| 3 | Rohan | Diwan | Account | P3 | Mumbai(BOM) | 1980-01-01 00:00:00 | M |
| 4 | Sonia | kulkarni | HR | P1 | Hyderabad(HYD) | 1992-05-02 00:00:00 | F |
| 5 | Ankit | Kapoor | Admin | P2 | Delhi(DEI) | 1994-07-03 00:00:00 | M |
+-----+-----+-----+-----+-----+-----+-----+
5 rows in set (0.00 sec)

mysql> |
```

**Q7. Write a query to find all the employees whose salary is between 50000 to 100000.**

Ans: SELECT \* FROM EMPLOYEEPOSITION WHERE SALARY BETWEEN '50000' AND '100000';

```
mysql> SELECT * FROM EMPLOYEEPOSITION WHERE SALARY BETWEEN '50000' AND '100000';
+-----+-----+-----+-----+
| EmpID | EmpPosition | DOJ | salary |
+-----+-----+-----+-----+
| 2 | executive | 2022-05-02 00:00:00 | 75000 |
| 3 | manager | 2022-05-01 00:00:00 | 90000 |
| 2 | lead | 2022-05-02 00:00:00 | 85000 |
+-----+-----+-----+-----+
3 rows in set (0.00 sec)
```

**Q8. Write a query to find the names of employees that begin with 'S'**

Ans: SELECT \* FROM EMPLOYEEINFO WHERE EMPFNAME LIKE 'S%';

```
mysql> SELECT * FROM EMPLOYEEINFO WHERE EMPFNAME LIKE 'S%';
+-----+-----+-----+-----+-----+-----+-----+
| EmpID | EmpFname | EmpLname | Department | Project | Address | DOB | Gender |
+-----+-----+-----+-----+-----+-----+-----+
| 1 | Sanjay | mehra | HR | P1 | Hyderabad(HYD) | 1976-12-01 00:00:00 | M |
| 4 | Sonia | kulkarni | HR | P1 | Hyderabad(HYD) | 1992-05-02 00:00:00 | F |
+-----+-----+-----+-----+-----+-----+-----+
2 rows in set (0.00 sec)
```

**Q9. Write a query to fetch top N records.**

Ans: `SELECT EmpID, EmpFname, EmpLname, Department FROM EmployeeInfo LIMIT 5;`

```
mysql> SELECT EmpID, EmpFname, EmpLname, Department FROM EmployeeInfo LIMIT 5;
+-----+-----+-----+-----+
| EmpID | EmpFname | EmpLname | Department |
+-----+-----+-----+-----+
| 1     | Sanjay   | mehra    | HR          |
| 2     | Ananya   | mishra   | Admin       |
| 3     | Rohan    | Diwan    | Account     |
| 4     | Sonia    | kulkarni | HR          |
| 5     | Ankit    | Kapoor   | Admin       |
+-----+-----+-----+-----+
5 rows in set (0.00 sec)
```

**Q10. Write a query to retrieve the EmpFname and EmpLname in a single column as "FullName". The first name and the last name must be separated with space.**

Ans: `SELECT CONCAT(EmpFname, ' ', EmpLname) AS FullName FROM EmployeeInfo;`

```
mysql> SELECT CONCAT(EmpFname, ' ', EmpLname) AS FullName FROM EmployeeInfo;
+-----+
| FullName |
+-----+
| Sanjay mehra |
| Ananya mishra |
| Rohan Diwan |
| Sonia kulkarni |
| Ankit Kapoor |
+-----+
5 rows in set (0.00 sec)
```

**Q11. To Find second and Third Highest salary in a table?**

	ID	SALARY	NAME	DEPT_ID
1	1	34000	ANURAG	UI DEVELOPERS
2	2	33000	harsh	BACKEND DEVELOPERS
3	3	36000	SUMIT	BACKEND DEVELOPERS
4	4	36000	RUHI	UI DEVELOPERS
5	5	37000	KAE	UI DEVELOPERS

## Example:

Ans: `SELECT SALARY FROM (SELECT SALARY, DENSE_RANK() OVER (ORDER BY SALARY DESC) AS SALARYRANK FROM EMPLOYEEPOSITION) AS RANKSALARIES WHERE SALARYRANK IN (2, 3);`

```
5 rows in set (0.00 sec)

mysql> SELECT Salary FROM (SELECT Salary, DENSE_RANK() OVER (ORDER BY Salary DESC) AS SalaryRank FROM EmployeePosition) AS RankedSalaries WHERE SalaryRank IN (2, 3);
+-----+
| Salary |
+-----+
| 300000 |
| 90000  |
+-----+
2 rows in set (0.00 sec)

mysql> CREATE TABLE EMPLOYEE_INFO LIKE EMPLOYEEINFO;
Query OK, 0 rows affected (0.03 sec)

mysql> DESC EMPLOYEE_INFO;
```

## Q12. Explain with example Unique Key, Primary Key, Foreign Key?

Ans: In relational databases, unique key, primary key, and foreign key are important concepts that help ensure data integrity and define relationships between tables. Let's explain each of them with examples:

### 1. Unique Key:

- Unique Constraint may have a NULL value.
- Each table can have more than one Unique Constraint.
- By default, Unique key is a unique non-clustered index.
- Unique Constraint can not be related with another table's as a Foreign Key.

**Example:** Consider a table named "Employees" with the following columns: EmployeeID, Email, and PhoneNumber. If we want to make sure that each employee has a unique email address and phone number, we can define the Email and PhoneNumber columns as unique keys. This means that no two employees can have the same email or phone number, but they can have the same EmployeeID.

### 2. Primary Key:

- Primary key cannot have a NULL value.
- Each table can have only one primary key.
- By default, Primary key is clustered index, and the data in database table is physically organized in the sequence of clustered index.
- Primary key can be related to another table's as a Foreign Key.
- We can generate ID automatically with the help of Auto Increment field. Primary key supports Auto Increment value.
- We can define Primary key constraint on temporary table and table variable.
- We can't delete primary key value from the parent table which is used as a foreign key in child table. To delete we first need to delete that primary key value from the child table.

**Example:** Let's continue with the "Employees" table example. Here, the EmployeeID column could be set as the primary key. It will ensure that each employee has a unique



ueID, and no NULL values are allowed in this column. The primary key will act as a unique identifier for each employee.

### 3. Foreign Key:

- Foreign key is a field in the table that is Primary key in another table.
- Foreign key can accept multiple null value.
- Foreign key do not automatically create an index, clustered or non-clustered. You can manually create an index on foreign key.
- We can have more than one foreign key in a table.
- There are actual advantages to having a foreign key be supported with a clustered index, but you get only one per table. What's the advantage? If you are selecting the parent plus all child records, you want the child records next to each other. This is easy to accomplish using a clustered index.
- Having a null foreign key is usually a bad idea instead of NULL referred to as "orphan record".
- We can't define foreign key constraint on temporary table or table variable.
- We can delete the foreign key value from the child table even though that refers to the primary key of the parent table

**Example:** Now, consider a new table called "Tasks," which includes columns TaskID, TaskName, and AssignedTo. In the "AssignedTo" column, we want to specify which employee is assigned to each task. To establish this relationship, we can set the "AssignedTo" column as a foreign key, referencing the "EmployeeID" column from the "Employees" table. This ensures that the value in the "AssignedTo" column must exist in the "EmployeeID" column of the "Employees" table, preventing the assignment of tasks to non-existing employees.

## Primary key:


### Primary Key

Table:

Primary Key  
↑

Roll No.	Name	Age	Gpa
1	Aryan	21	3
2	Sachin	25	4
3	Prince	20	2.5
4	Anuj	21	3.5

## Foreign key:

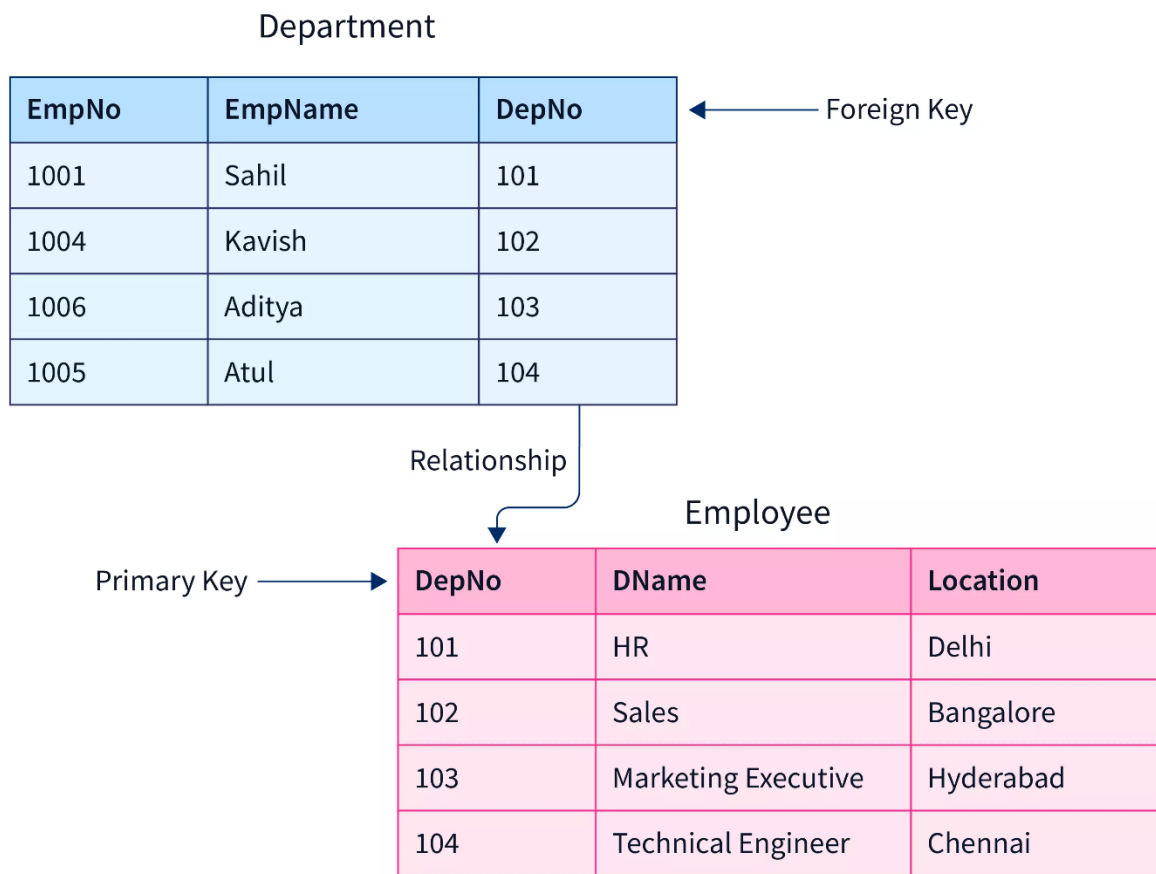

**Unique key:**

## **Student**

<b>Roll_no</b>	<b>Name</b>	<b>Class</b>	<b>Phone_no</b>
1	Andrew	5	9854672256
2	Andrew	6	9955512456
3	Augusto	5	

**Primary Key(No  
NULL value)**

**Unique key(Can have NULL  
value)**