


EXPERIMENT-7


TITLE: Configure OSPF routing Protocol


AIM: To configure OSPF Routing Protocol

TOPOLOGY:

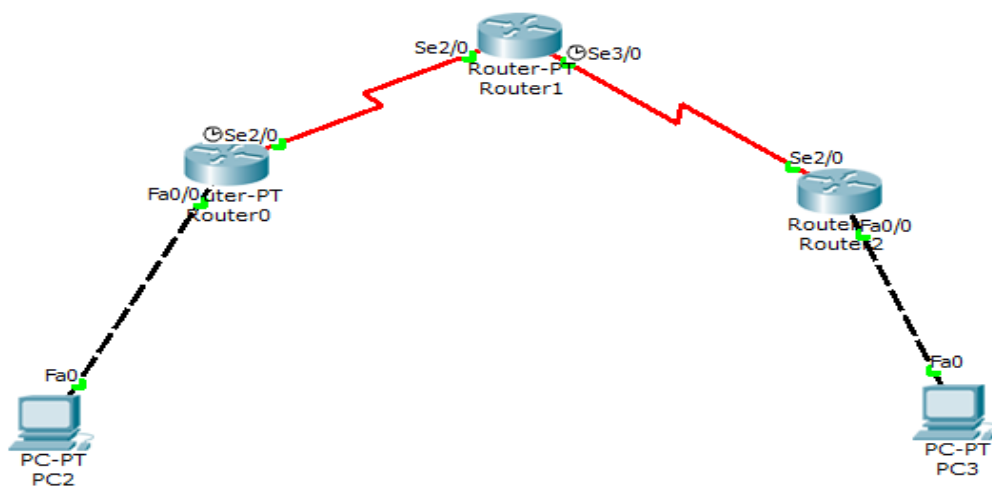

When a simple PDU is sent:

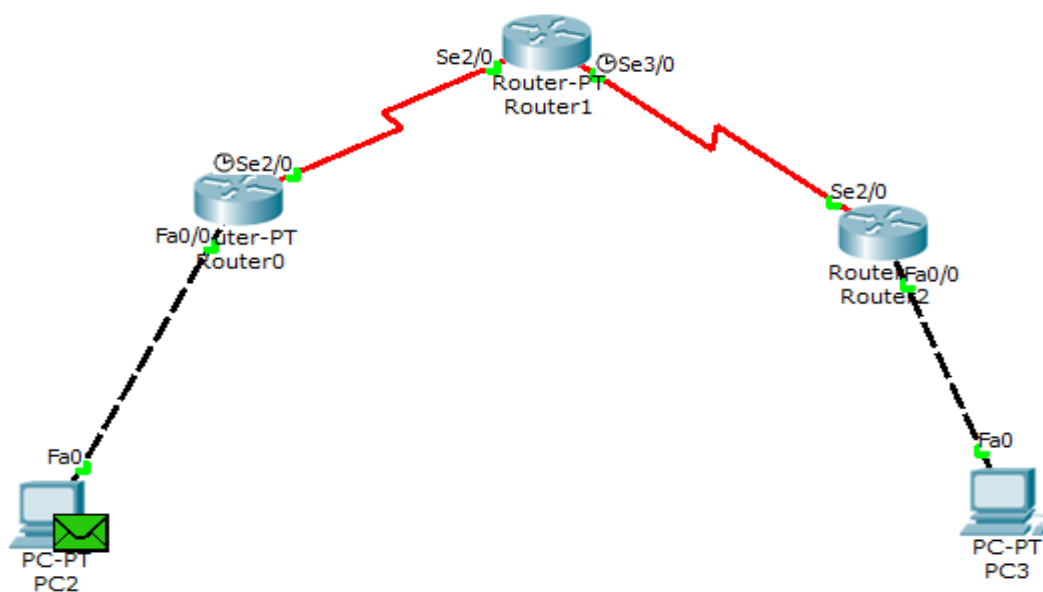

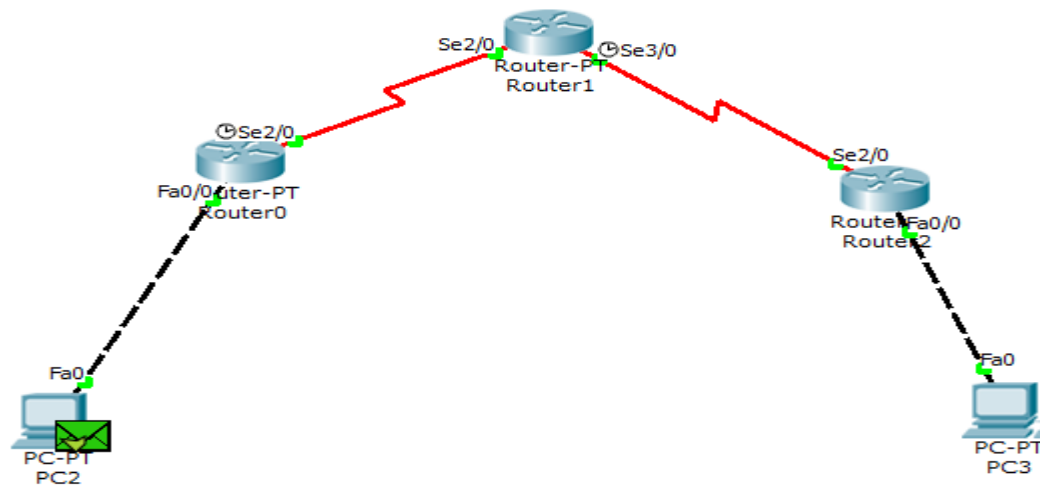

Ping Results (in CMD):

```
PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=9ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 9ms, Average = 3ms
```