# Computer Vision Face Detection Lab - Student Notebook

In this lab, you will use Amazon Rekognition to perform a facial detection of a known face.

The high-level steps you will perform in this lab are:

- 1. Create a collection.
- 2. Upload an image of a face that you want to detect to the Amazon SageMaker notebook.
- 3. Add the image to the collection.
- 4. View the bounding box that was created for the image.
- 5. List the faces in the collection.
- 6. Use the collection to find a face.
- 7. View the bounding box of the face that was found.
- 8. Delete the collection.

#### Importing Python packages

Start by importing the Python packages that you need.

In the following code:

- matplotlib provides plotting functions
- skimage represents scikit-image, which provides several useful image manipulation tools
- boto3 represents the AWS SDK for Python (Boto3), which is the Python library for AWS
- numpy represents NumPy, which is a library for manipulating data
- PIL represents the Python Imaging Library, which contains a set of tools for drawing images

```
In [1]: from skimage import io
   from skimage.transform import rescale
   from matplotlib import pyplot as plt
```

```
import boto3
import numpy as np
from PIL import Image, ImageDraw, ImageColor, ImageOps
```

#### Task 1: Creating a collection

In this task, you create a collection in Amazon Rekognition.

You only need to run this step once.


#### Task 2: Uploading an image to search

Use the provided sample image, which is named *mum.jpg*, and upload it to this notebook.

Then, look at the image by running the cell.

```
In [3]: filename = "mum.jpg"
faceimage = io.imread(filename)
plt.imshow(faceimage)
```

Out[3]: <matplotlib.image.AxesImage at 0x7f46ea21cbe0>

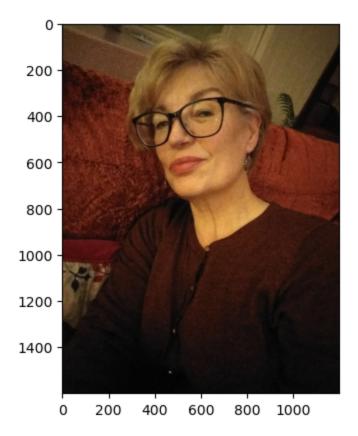

Make sure that the image size is less than  $4096 \times 4096$  pixels. If the image is larger than this size, then you must resize it by using the following code:

```
faceimage = rescale(faceimage, 0.50, mode='constant')
```

**Note:** The numeric value represents the factor to scale by. A value of 0.5 will scale the image to 50 percent of the original.

When the image is resized, save the file.

```
io.imsave(filename, faceimage)
```

**Tip:** You must copy the code into a code cell and run it.

#### Task 3: Adding the image to the collection

Add the image to the collection that you created earlier.

```
print('Results for ' + filename)
print('Faces indexed:')
for faceRecord in response['FaceRecords']:
     print(' Face ID: ' + faceRecord['Face']['FaceId'])
     print(' Location: {}'.format(faceRecord['Face']['BoundingBox']))
print('Faces not indexed:')
for unindexedFace in response['UnindexedFaces']:
    print(' Location: {}'.format(unindexedFace['FaceDetail']['BoundingBox'])
    print(' Reasons:')
    for reason in unindexedFace['Reasons']:
        print(' ' + reason)
Results for mum.jpg
Faces indexed:
 Face ID: 37b6d87b-3ea1-4304-b04f-165d60262e7a
 Location: {'Width': 0.3483645021915436, 'Height': 0.35312092304229736, 'L
eft': 0.30951350927352905, 'Top': 0.11020112037658691}
Faces not indexed:
```

## Task 4: Viewing the bounding box for the detected face

If a face was found, the results should include the location of the face that was detected. Examine the bounding box on the image.

To do this, use the PIL library, which you imported earlier in this lab. By extracting the BoundingBox, you can draw a set of lines around the image.


```
In [5]: img = Image.open(filename)
imgWidth, imgHeight = img.size

draw = ImageDraw.Draw(img)
for faceRecord in response['FaceRecords']:
    box = faceRecord['Face']['BoundingBox']
    left = imgWidth * box['Left']
    top = imgHeight * box['Top']
    width = imgWidth * box['Width']
    height = imgHeight * box['Height']

    points = ((left,top),(left+width,top),(left+width,top+height),(left,top+draw.line(points,fill='#00d400', width=15)

plt.imshow(img)
```

Out[5]: <matplotlib.image.AxesImage at 0x7f46ea0f1420>

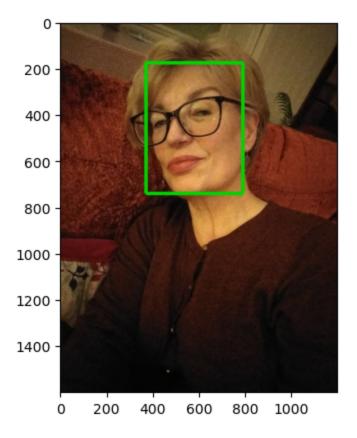

Task 5: Listing faces in the collection

Examine the image that you have in the collection.

```
In [6]:
        maxResults=2
        faces count=0
        tokens=True
        response=client.list_faces(CollectionId=collection_id,
                                    MaxResults=maxResults)
        print('Faces in collection ' + collection_id)
        while tokens:
            faces=response['Faces']
            for face in faces:
                print (face)
                faces_count+=1
            if 'NextToken' in response:
                nextToken=response['NextToken']
                response=client.list_faces(CollectionId=collection_id,
                                            NextToken=nextToken, MaxResults=maxResults
            else:
                tokens=False
```

Faces in collection Collection {'FaceId': '37b6d87b-3ea1-4304-b04f-165d60262e7a', 'BoundingBox': {'Width': 0.34836500883102417, 'Height': 0.3531210124492645, 'Left': 0.30951398611068 726, 'Top': 0.11020100116729736}, 'ImageId': '59d87d59-b733-306a-94e8-0670b 0a8dcdd', 'ExternalImageId': 'mum.jpg', 'Confidence': 99.99430084228516, 'IndexFacesModelVersion': '7.0'}


#### Task 6: Finding a face by using the collection

In this step, you will use the collection to detect a face in an image.

Use the provided sample image that's named target.jpg and upload it to this notebook.

```
In [7]: targetfilename = "target.jpg"
    targetimage = Image.open(targetfilename)
    plt.imshow(targetimage)
```

Out[7]: <matplotlib.image.AxesImage at 0x7f46ea1b08e0>

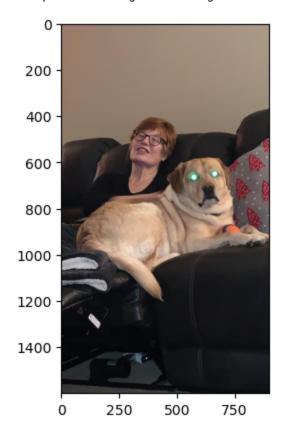

Next, call the search\_faces\_by\_image operation and see if you get a match.

```
MaxFaces=maxFaces)

faceMatches=response2['FaceMatches']
print ('Matching faces')
for match in faceMatches:
    print ('FaceId:' + match['Face']['FaceId'])
    print ('Similarity: ' + "{:.2f}".format(match['Similarity']) + "%")
    print ('ExternalImageId: ' + match['Face']['ExternalImageId'])
    print
```

Matching faces FaceId:37b6d87b-3ea1-4304-b04f-165d60262e7a Similarity: 99.91% ExternalImageId: mum.jpg

### Task 7: Drawing a bounding box around the discovered face

Draw a bounding box around the discovered face.


```
In [9]: imgWidth, imgHeight = targetimage.size

draw = ImageDraw.Draw(targetimage)

box = response2['SearchedFaceBoundingBox']
    left = imgWidth * box['Left']
    top = imgHeight * box['Top']
    width = imgWidth * box['Width']
    height = imgHeight * box['Height']

points = ((left,top),(left+width,top),(left+width,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height),(left,top+height)
```

Out[9]: <matplotlib.image.AxesImage at 0x7f46e860b3d0>

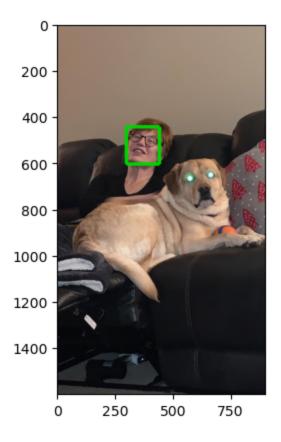

Task 8: Deleting the collection

When you are finished, delete the collection. To do this, run the following code.

```
In [10]: print('Attempting to delete collection ' + collection_id)
    status_code=0
    try:
        response=client.delete_collection(CollectionId=collection_id)
        status_code=response['StatusCode']
        print('All done!')
        print(status_code)

except ClientError as e:
        if e.response['Error']['Code'] == 'ResourceNotFoundException':
            print ('The collection ' + collection_id + ' was not found ')
        else:
            print ('Error other than Not Found occurred: ' + e.response['Error']
        status_code=e.response['ResponseMetadata']['HTTPStatusCode']
Attempting to delete collection Collection
```

### Congratulations!

You have completed this lab, and you can now end the lab by following the lab guide instructions.

All done!

200

In []: