

1. WORKING OF CNN ARCHITECTURE TO CLASSIFY IMAGES

EX.N0 : 1	WORKING OF CNN ARCHITECTURE TO CLASSIFY IMAGES
<u>DATE : 21/01/2025</u>	

AIM:

To implement and demonstrate a Convolutional Neural Network (CNN) for image classification using the CIFAR-10 dataset in TensorFlow and Keras.

ALGORITHM:

- Step 1: Import necessary libraries.
- Step 2: Load and pre-process the CIFAR-10 dataset.
- Step 3: Build the CNN model using Keras Sequential API.
- Step 4: Compile the model with appropriate loss function and optimizer.
- Step 5: Train the model on the training dataset.
- Step 6: Evaluate the model on the test dataset.
- Step 7: Visualize a few predictions to validate performance.

PROGRAM:


```
import tensorflow as tf
from tensorflow.keras import layers, models
import matplotlib.pyplot as plt
from tensorflow.keras.datasets import cifar10
import numpy as np
(x_train, y_train), (x_test, y_test) = cifar10.load_data()
x_train = x_train.astype('float32') / 255.0
```

```

x_test = x_test.astype('float32') / 255.0
model = models.Sequential([
    layers.Conv2D(32, (3, 3), activation='relu', input_shape=(32, 32, 3)),
    layers.MaxPooling2D((2, 2)),
    layers.Conv2D(64, (3, 3), activation='relu'),
    layers.MaxPooling2D((2, 2)),
    layers.Conv2D(64, (3, 3), activation='relu'),
    layers.Flatten(),
    layers.Dense(64, activation='relu'),
    layers.Dense(10, activation='softmax')
])
model.compile(optimizer='adam',
              loss='sparse_categorical_crossentropy',
              metrics=['accuracy'])
history = model.fit(x_train, y_train, epochs=10, batch_size=64,
                    validation_data=(x_test, y_test))
test_loss, test_acc = model.evaluate(x_test, y_test, verbose=2)
print(f'\nTest accuracy: {test_acc:.4f}')
class_names = ['airplane', 'automobile', 'bird', 'cat', 'deer',
               'dog', 'frog', 'horse', 'ship', 'truck']
predictions = model.predict(x_test)
plt.figure(figsize=(10,5))
for i in range(5):
    plt.subplot(1, 5, i+1)
    plt.xticks([])
    plt.yticks([])
    plt.grid(False)
    plt.imshow(x_test[i])
    pred_label = class_names[np.argmax(predictions[i])]
    true_label = class_names[y_test[i][0]]
    plt.xlabel(f'Pred: {pred_label}\nTrue: {true_label}')
plt.tight_layout()
plt.show()

```

OUTPUT:

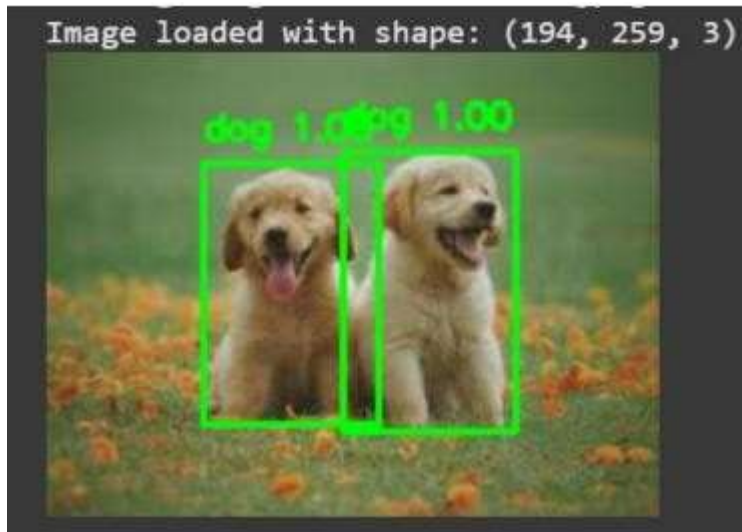

RESULT:

Thus, to implement and demonstrate a Convolutional Neural Network (CNN) for image classification using the CIFAR-10 dataset in TensorFlow and Keras.