


Assignment #7
CS3860

We are going to create a simple text-based adventure game. The premise of the game is that you are a 4-year old boy who is looking for their security blanket (blankie). The obstacle is a dark room. It's getting late and it is time for bed, so you need to find your blankie. Here is a map of the house.

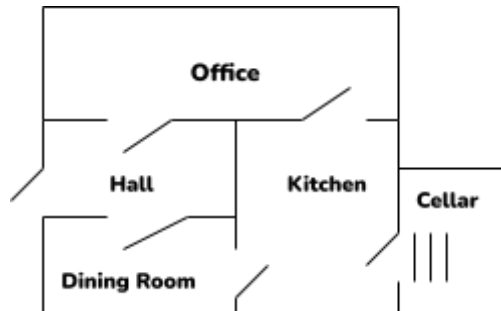

Start by defining a predicate *room/1* that is true when its argument is one of the rooms given above. Now define a predicate *location/2* that tells us the location of things. Place the following items in the given rooms/locations :

- Place broccoli, crackers and an apple in the kitchen.
- place a desk and a computer in the office.
- place the washing machine in the cellar.
- place a flashlight in the desk
- place the blankie in the washing machine.

Define a predicate *door/2* that is true if a door exists between two rooms. This predicate has one shortcoming : *door(office,hall)* is a different fact from *door(hall,office)* . Address this by creating a predicate *connect/2* that is true if a connection between rooms exists. This will use the *door/2* predicate.

Write a predicate *list_things/1* that will list items in a place. You will need to use extra-logical predicates such as *format/2* , *nl/0* and *tab/1*. Follow this with the definition of a predicate *look_in/2* that will tell you what items are located in a certain place.

Write a predicate *list_connections/1* that lists the rooms to which the argument (a room) is connected to. For example *lists_connections(office)*. should return hall and kitchen.

Write a predicate *can_go/1* that will return true if you can go to a room from the room you are currently in. The predicate *here/1* tells you where you are (see below)

Finally, add the following predicates to complete the preliminary design :

1. a predicate *edible/1* that is true if something is considered edible (to a 4-year old).
2. a predicate *tastes_yucky/1* that is true if something is NOT edible
3. a couple of ground clauses, *turned_off(flashlight)* and *here(kitchen)* that initialize certain states.