

http://127.0.0.1:5500/P12\_Front-end-master/employee-list.html





Values are estimated and may vary. The <u>performance score is calculated</u> directly from these metrics. <u>See calculator.</u>

▲ 0-49 50-89 90-100



METRICS Expand view

First Contentful Paint

0.5 s

Cumulative Layout Shift


0 ms

O

Cumulative Layout Shift

Speed Index

0.5 s



	Current Employees	Curre	nt Employees		Current Employees		Current Employees		Current Employees		Current Employees		Current Employees		Current Employees
i ii vinnin		Sam is winasia.		then is no sain.		Sun IS winnin.		San II v asia.		Ger ii v sain.		See 6 vision		Sam (G. w) makes	
re Sure 1 Lee Sure 1			ment   Date of Bods   Daves	Fire Name 1 Lant Name 1 No	ethin   Department   Department   Department	Fire Power* Last Power!	Not Set   Squrterel   Set of Strik   Note	Fire Power* Last Power!	Norther   Department   Edited State   North	Fire Name 1 Lot Name		Fire Name 1 Lot Name 1		Fire Power* Last Power!	Nati Bate   Department   Bate of Blefs
	Min	No.			Sale.		Min		Min		No.		Sales		Min
	Mo	Sales			Sales		Me		Mo		Sales		Sales		Mo
ming I to I of I mates	See	Starring I to 2 of 2 motion	State	Sharring I to 2 of 2 months	Res	Starring I to 2 of 2 maters	Stem	Starring I to 2 of 2 maters	Steam	Starring I to 2 of 2 months	Rese	Starring I to 2 of 2 motion.	None	Starring I to 2 of 2 maters	Steam

Show audits relevant to: All FCP LCP TBT CLS

### DIAGNOSTICS

▲ Eliminate render-blocking resources — Potential savings of 290 ms

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. Learn how to eliminate render-blocking resources. FCP LCP

# ✓ Show 3rd-party resources (3)

URL	Transfer Size	Potential Savings
Google CDN Cdn	30.9 KiB	300 ms
3.5.1/jquery.min.js (ajax.googleapis.com)	30.9 KiB	300 ms
datatables.net	30.2 KiB	290 ms
js/jquery.dataTables.min.js (cdn.datatables.net)	27.9 KiB	80 ms
css/jquery.dataTables.min.css (cdn.datatables.net)	2.3 KiB	210 ms
127.0.0.1 1st Party	1.0 KiB	80 ms
/P12_Front-end-master/employee-list.js (127.0.0.1)	1.0 KiB	80 ms

▲ Page prevented back/forward cache restoration — 1 failure reason

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. <u>Learn more about the bfcache</u>

Failure reason	Failure type
Pages with WebSocket cannot enter back/forward cache.	Pending browser support

about:blank 2/22

Failure reason

Failure type


/P12\_Front-end-master/employee-list.html (127.0.0.1)

▲ Does not have a <meta name="viewport"> tag with width or initial-scale No `<meta name="viewport">` tag found

A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag.

Avoid large layout shifts — 1 layout shift found

These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to windowing. Learn how to improve CLS CLS

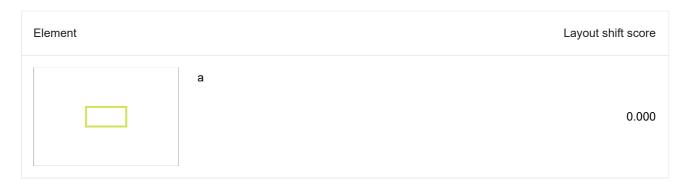

O Avoid chaining critical requests — 5 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. Learn how to avoid chaining critical requests.

Maximum critical path latency: 71.512 ms

Initial Navigation

/P12\_Front-end-master/employee-list.html (127.0.0.1)

...css/jquery.dataTables.min.css (cdn.datatables.net) - 31.152 ms, 2.27 KiB

/P12\_Front-end-master/app.css (127.0.0.1) - 3.067 ms, 0.65 KiB

...3.5.1/jquery.min.js (ajax.googleapis.com) - 52.023 ms, 30.91 KiB

...js/jquery.dataTables.min.js (cdn.datatables.net) - 31.467 ms, 27.94 KiB

/P12\_Front-end-master/employee-list.js (127.0.0.1) - 2.884 ms, 1.00 KiB

Minimize third-party usage — Third-party code blocked the main thread for 0 ms


Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. <u>Learn how to minimize third-party impact</u>. TBT

about:blank 3/22

Third-Party	Transfer Size	Main-Thread Blocking Time
datatables.net	32 KiB	0 ms
js/jquery.dataTables.min.js (cdn.datatables.net)	28 KiB	0 ms
css/jquery.dataTables.min.css (cdn.datatables.net)	2 KiB	0 ms
images/sort_both.png (cdn.datatables.net)	1 KiB	0 ms
images/sort_asc.png (cdn.datatables.net)	1 KiB	0 ms
Google CDN Cdn	31 KiB	0 ms
3.5.1/jquery.min.js (ajax.googleapis.com)	31 KiB	0 ms

0	Largest Contentful Paint element	_	480	ms
---	----------------------------------	---	-----	----

This is the largest contentful element painted within the viewport. <u>Learn more about the Largest Contentful Paint element</u> [LCP]

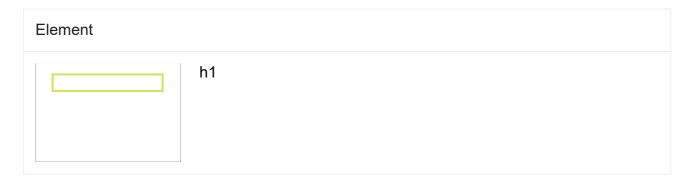

Phase	% of LCP	Timing
TTFB	25%	120 ms
Load Delay	0%	0 ms
Load Time	0%	0 ms
Render Delay	75%	360 ms

More information about the performance of your application. These numbers don't <u>directly affect</u> the Performance score.

PASSED AUDITS (31)
Hide

Properly size images

Serve images that are appropriately-sized to save cellular data and improve load time. <u>Learn how to size images</u>. <u>FCP</u> <u>[LCP]</u>

about:blank 4/22

Defer offscreen images	^
Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. Learn how to defer offscreen images. FCP LCP	
Minify CSS	^
Minifying CSS files can reduce network payload sizes. <u>Learn how to minify CSS</u> . <u>FCP</u> <u>LCP</u>	
Minify JavaScript	^
Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. FCP LCP	
Reduce unused CSS	^
Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed network activity. Learn how to reduce unused CSS. FCP [LCP]	by
Reduce unused JavaScript	^
Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network act Learn how to reduce unused JavaScript. FCP LCP	ivity.
Efficiently encode images	^
Optimized images load faster and consume less cellular data. <u>Learn how to efficiently encode images</u> . <u>FCP</u> <u>LCP</u>	
Serve images in next-gen formats	^
Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. <u>Learn more about modern image formats</u> . <u>FCP</u> <u>LCP</u>	S
Enable text compression	^
Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. <u>Learn</u> more about text compression. FCP LCP	
Preconnect to required origins	^
Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party original Learn how to preconnect to required origins. [LCP] FCP	gins.
Initial server response time was short — Root document took 0 ms	^
Keep the server response time for the main document short because all other requests depend on it. Learn more about	the

about:blank 5/22

Time to First Byte metric. FCP LCP

**URL** Time Spent 127.0.0.1 1st Party 0 ms /P12\_Front-end-master/employee-list.html (127.0.0.1) 0 ms Avoid multiple page redirects Redirects introduce additional delays before the page can be loaded. Learn how to avoid page redirects. [CP] FCP] Use HTTP/2 HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. Learn more about HTTP/2. [CCP] FCP Use video formats for animated content Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. Learn more about efficient video formats FCP LCP Remove duplicate modules in JavaScript bundles Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP Avoid serving legacy JavaScript to modern browsers Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. Learn how to serve modern JavaScript FCP (LCP) Preload Largest Contentful Paint image If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. Learn more about preloading LCP elements. [LCP] Avoids enormous network payloads — Total size was 67 KiB Large network payloads cost users real money and are highly correlated with long load times. Learn how to reduce payload sizes. Show 3rd-party resources (5)

about:blank 6/22


URL	Transfer Size
datatables.net	31.5 KiB
js/jquery.dataTables.min.js (cdn.datatables.net)	27.9 KiB
css/jquery.dataTables.min.css (cdn.datatables.net)	2.3 KiB
images/sort_both.png (cdn.datatables.net)	0.7 KiB
images/sort_asc.png (cdn.datatables.net)	0.6 KiB
Google CDN Cdn	30.9 KiB
3.5.1/jquery.min.js (ajax.googleapis.com)	30.9 KiB
127.0.0.1	4.1 KiB
/P12_Front-end-master/employee-list.html (127.0.0.1)	2.5 KiB
/P12_Front-end-master/employee-list.js (127.0.0.1)	1.0 KiB
/P12_Front-end-master/app.css (127.0.0.1)	0.6 KiB

Uses efficient cache policy on static assets — 0 resources found

A long cache lifetime can speed up repeat visits to your page. Learn more about efficient cache policies.

Avoids an excessive DOM size — 54 elements

A large DOM will increase memory usage, cause longer <u>style calculations</u>, and produce costly <u>layout reflows</u>. <u>Learn how to avoid an excessive DOM size</u>. (TBT)

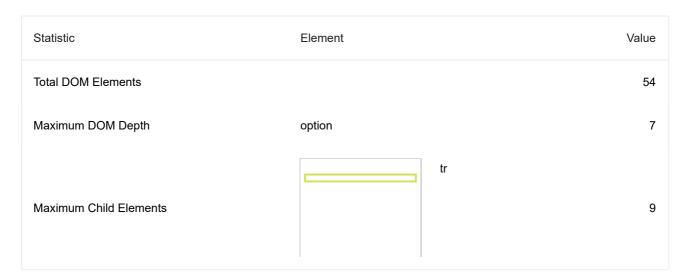

about:blank 7/22

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <u>Learn more about User Timing marks</u>.

JavaScript execution time

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. TBT

Minimizes main-thread work — 0.1 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to minimize main-thread work (TBT)

Category	Time Spent
Script Evaluation	35 ms
Other	27 ms
Style & Layout	20 ms
Parse HTML & CSS	5 ms
Script Parsing & Compilation	3 ms
Rendering	2 ms

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. <u>Learn more about font-display</u>.

Lazy load third-party resources with facades

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. <u>Learn how to defer third-parties with a facade</u>. (TBT)

Largest Contentful Paint image was not lazily loaded

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. <u>Learn more about optimal lazy loading</u>. <u>LCP</u>

Uses passive listeners to improve scrolling performance

about:blank 8/22

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. <u>Learn more about adopting passive event listeners</u>.

Avoids document.write()

For users on slow connections, external scripts dynamically injected via document.write() can delay page load by tens of seconds. <u>Learn how to avoid document.write()</u>.

Avoid long main-thread tasks

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. <u>Learn how to avoid long main-thread tasks</u> [TBT]

Avoid non-composited animations

Animations which are not composited can be janky and increase CLS. Learn how to avoid non-composited animations CLS

Image elements have explicit width and height

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <u>Learn how to set image</u> <u>dimensions (CLS)</u>



# Accessibility

These checks highlight opportunities to improve the accessibility of your web app. Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so manual testing is also encouraged.

# INTERNATIONALIZATION AND LOCALIZATION

▲ <html> element does not have a [lang] attribute

If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.

about:blank 9/22

Failing Elements				
	html			

These are opportunities to improve the interpretation of your content by users in different locales.	
ADDITIONAL ITEMS TO MANUALLY CHECK (10)	Hide
Interactive controls are keyboard focusable	^
Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn how to make custom controls focusable</u> .	<u>i</u>
Interactive elements indicate their purpose and state	^
Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints.	<b>,</b>
The page has a logical tab order	^
Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <u>Learn more about logical tab ordering.</u>	<u>t</u>
Visual order on the page follows DOM order	^
DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more about DOM and visual ordering</u> .	<u>al</u>
User focus is not accidentally trapped in a region	^
A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus	traps.
The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. <u>Learn how to direct focus to necontent</u> .	<u>9W</u>
HTML5 landmark elements are used to improve navigation	^
Landmark elements ( <main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technical more about landmark elements.</nav></main>	nology.
Officerean content is hidden from assistive technology	

about:blank 10/22

Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.

Custom controls have associated labels Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels. Custom controls have ARIA roles Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls. These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility review. PASSED AUDITS (22) Hide [aria-\*] attributes match their roles Each ARIA role supports a specific subset of aria-\* attributes. Mismatching these invalidates the aria-\* attributes. Learn how to match ARIA attributes to their roles. [aria-hidden="true"] is not present on the document <body> Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body. [role]s have all required [aria-\*] attributes Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes. Elements with an ARIA [role] that require children to contain a specific [role] have all required children. Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements. [role]s are contained by their required parent element Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element. [aria-\*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.

about:blank 11/22

[aria-\*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes. ARIA attributes are used as specified for the element's role Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes. Elements use only permitted ARIA attributes Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles. [role] values are valid ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles. Background and foreground colors have a sufficient contrast ratio Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast. Document has a <title> element The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles. Form elements have associated labels Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more about form element labels. Links have a discernible name Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible. Select elements have associated label elements. Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the select element. No element has a [tabindex] value greater than 0

about:blank 12/22

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. <u>Learn more about the tabindex attribute</u>.

Touch targets have sufficient size and spacing.

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. <u>Learn more about touch targets</u>.

Cells in a element that use the [headers] attribute refer to table cells within the same table.

Screen readers have features to make navigating tables easier. Ensuring cells using the [headers] attribute only refer to other cells in the same table may improve the experience for screen reader users. <u>Learn more about the headers</u> <u>attribute</u>.

Heading elements appear in a sequentially-descending order

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. <u>Learn more about heading order</u>.

Uses ARIA roles only on compatible elements

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. <u>Learn more about ARIA roles</u>.

Deprecated ARIA roles were not used

Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles.

Tables have different content in the summary attribute and <caption>.

The summary attribute should describe the table structure, while <caption> should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption.

Hide

NOT APPLICABLE (34)

[accesskey] values are unique

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. <u>Learn more about access keys</u>.

button, link, and menuitem elements have accessible names

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to make command elements more accessible</u>.

about:blank 13/22

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible.  O [aria-hidden="true"] elements do not contain focusable descendents  Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.
Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available
ARIA input fields have accessible names
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more about input field labels</u> .
ARIA meter elements have accessible names
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name meter elements</u> .
ARIA progressbar elements have accessible names
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to label progressbar elements</u> .
<ul> <li>Elements with the role=text attribute do not have focusable descendents.</li> </ul>
Adding role=text around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. Learn more about the role=text attribute.
ARIA toggle fields have accessible names
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more about toggle fields</u> .
<ul> <li>ARIA tooltip elements have accessible names</li> </ul>
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name tooltip elements</u> .
ARIA treeitem elements have accessible names
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements.

about:blank 14/22

Buttons have an accessible name	^
When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. <u>Learn how to make buttons more accessible</u> .	)
The page contains a heading, skip link, or landmark region	^
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. <u>Learn more about bypass</u> <u>blocks</u> .	
<dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</td><td>^</td></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly.</td><td><u>)</u></td></tr><tr><td>O Definition list items are wrapped in <dl> elements</td><td>^</td></tr><tr><td>Definition list items (<dt> and <dd>) must be wrapped in a parent <dl> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly.</td><td>,</td></tr><tr><td>O ARIA IDs are unique</td><td>^</td></tr><tr><td>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <u>Learn</u> how to fix duplicate ARIA IDs.</td><td></td></tr><tr><td>O No form fields have multiple labels</td><td>^</td></tr><tr><td>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. <u>Learn how to use form labels</u>.</td><td>er</td></tr><tr><td><frame> Or <iframe> elements have a title</td><td>^</td></tr><tr><td>Screen reader users rely on frame titles to describe the contents of frames. <u>Learn more about frame titles</u>.</td><td></td></tr><tr><td><html> element has a valid value for its [lang] attribute</td><td>^</td></tr><tr><td>Specifying a valid <u>BCP 47 language</u> helps screen readers announce text properly. <u>Learn how to use the lang attribute</u>.</td><td></td></tr><tr><td></td><td>^</td></tr><tr><td>If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly Learn more about the lang attribute.</td><td><b>y</b>.</td></tr><tr><td>Image elements have [alt] attributes</td><td>^</td></tr></tbody></table></script></dd></dt></dl>	

about:blank 15/22

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.

Image elements do not have [alt] attributes that are redundant text. Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the alt attribute. Input buttons have discernible text. Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons. <input type="image"> elements have [alt] text When an image is being used as an <input> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text. Links are distinguishable without relying on color. Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable. Lists contain only elements and script supporting elements (<script> and <template>). Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure. List items () are contained within , or <menu> parent elements Screen readers require list items (<1i>) to be contained within a parent , or <menu> to be announced properly. Learn more about proper list structure. The document does not use <meta http-equiv="refresh"> Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag. [user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less 0 than 5. Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a

about:blank 16/22

web page. Learn more about the viewport meta tag.

Cobjects elements have alternate text

Screen readers cannot translate non-text content. Adding alternate text to <objects elements helps screen readers convey meaning to users. Learn more about alt text for object elements.

Skip links are focusable.

Including a skip link can help users skip to the main content to save time. Learn more about skip links.

<p>
<a href="text-align: red;">this elements and elements with [role="columnheader"/"rowheader"] have data cells they describe.</a>

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers.

[lang] attributes have a valid value

Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn how to use the lang attribute.



When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more about

# **Best Practices**

# **USER EXPERIENCE**

video captions.

▲ Does not have a <meta name="viewport"> tag with width or initial-scale No `<meta name="viewport"> tag found

A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents <u>a 300 millisecond delay</u> to user input. <u>Learn more about using the viewport meta tag</u>.

#### **BROWSER COMPATIBILITY**

Page lacks the HTML doctype, thus triggering quirks-mode Document must contain a doctype

Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration.

about:blank 17/22

#### TRUST AND SAFETY

0	Enguro	CCD	io	effective	against	VCC	attacka
$\circ$	Ensure	CSP	15	enective	agamst	ASS	allacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. <u>Learn how to use</u> a <u>CSP to prevent XSS</u>

Description	Directive	Severity
No CSP found in enforcement mode		High

# Use a strong HSTS policy

Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. <u>Learn more about using a strong HSTS policy.</u>

Description	Directive	Severity
No HSTS header found		High

## Ensure proper origin isolation with COOP

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as popups. Learn more about deploying the COOP header.

Description	Directive	Severity
No COOP header found		High

# Mitigate clickjacking with XFO or CSP

The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. <u>Learn more about mitigating clickjacking</u>.

Description	Severity
No frame control policy found	High

#### **GENERAL**

about:blank 18/22

**Detected JavaScript libraries** All front-end JavaScript libraries detected on the page. Learn more about this JavaScript library detection diagnostic audit. Name Version jQuery 3.5.1 PASSED AUDITS (12) Hide **Uses HTTPS** All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more about HTTPS. Avoids deprecated APIs Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs. Avoids third-party cookies Chrome is moving towards a new experience that allows users to choose to browse without third-party cookies. Learn more about third-party cookies. Allows users to paste into input fields Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields. Avoids requesting the geolocation permission on page load Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission. Avoids requesting the notification permission on page load Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications. Displays images with correct aspect ratio Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio.

about:blank 19/22

Serves images with appropriate resolution

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. <u>Learn how to provide responsive images</u>.

Properly defines charset

A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. <u>Learn more about declaring the character encoding</u>.

No browser errors logged to the console

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. <u>Learn more about this errors in console diagnostic audit</u>

No issues in the Issues panel in Chrome Devtools

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Page has valid source maps

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. <u>Learn more about source maps</u>.

NOT APPLICABLE (2)

Redirects HTTP traffic to HTTPS

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. Learn more.

Document uses legible font sizes

Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to have >60% of page text ≥12px. <u>Learn more about legible font sizes</u>.

80

SEC

about:blank 20/22

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on <a href="Core Web Vitals">Core Web Vitals</a>. Learn more about Google Search Essentials.

about crawler directives.

CONTENT BEST PRACTICES	
▲ Document does not have a meta description	^
Meta descriptions may be included in search results to concisely summarize page content. <u>Learn more about the medescription</u> .	<u>:ta</u>
Format your HTML in a way that enables crawlers to better understand your app's content.	
CRAWLING AND INDEXING	
▲ Links are not crawlable	^
Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor element to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable	s links
Uncrawlable Link	
a.paginate_button.current	
To appear in search results, crawlers need access to your app.	
ADDITIONAL ITEMS TO MANUALLY CHECK (1)	Hide
O Structured data is valid	^
Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. <u>Learn more about Structured Data.</u>	
Run these additional validators on your site to check additional SEO best practices.	
PASSED AUDITS (5)	Hide
Page isn't blocked from indexing	^
Search engines are unable to include your pages in search results if they don't have permission to crawl them. <u>Learn</u>	n more

about:blank 21/22

Document has a	a <title> element&lt;/th&gt;&lt;th&gt;&lt;/th&gt;&lt;th&gt;&lt;/th&gt;&lt;th&gt;^&lt;/th&gt;&lt;/tr&gt;&lt;tr&gt;&lt;th&gt;&lt;/th&gt;&lt;th&gt;een reader users an overvie&lt;br&gt;o their search. &lt;u&gt;Learn more al&lt;/u&gt;&lt;/th&gt;&lt;th&gt;&lt;/th&gt;&lt;th&gt;users rely on it heavily to determine if a&lt;/th&gt;&lt;th&gt;&lt;/th&gt;&lt;/tr&gt;&lt;tr&gt;&lt;th&gt;Page has succe&lt;/th&gt;&lt;th&gt;essful HTTP status code&lt;/th&gt;&lt;th&gt;&lt;/th&gt;&lt;th&gt;&lt;/th&gt;&lt;th&gt;^&lt;/th&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;Pages with unsuc&lt;/td&gt;&lt;td&gt;cessful HTTP status codes n&lt;/td&gt;&lt;td&gt;nay not be indexed properly. &lt;u&gt;Lear&lt;/u&gt;ı&lt;/td&gt;&lt;td&gt;n more about HTTP status codes.&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;Links have desc&lt;/td&gt;&lt;td&gt;criptive text&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;^&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;Descriptive link te&lt;/td&gt;&lt;td&gt;xt helps search engines und&lt;/td&gt;&lt;td&gt;erstand your content. &lt;u&gt;Learn how t&lt;/u&gt;&lt;/td&gt;&lt;td&gt;o make links more accessible.&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;Document has a&lt;/td&gt;&lt;td&gt;a valid hreflang&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;^&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;hreflang links tell s&lt;/td&gt;&lt;td&gt;-&lt;/td&gt;&lt;td&gt;of a page they should list in searc&lt;/td&gt;&lt;td&gt;ch results for a given language or region.&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;NOT APPLICABLE (&lt;/td&gt;&lt;td&gt;•&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;Hide&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;o robots.txt is valid&lt;/td&gt;&lt;td&gt;d&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;^&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;ile is malformed, crawlers ma&lt;br&gt;ore about robots.txt.&lt;/td&gt;&lt;td&gt;ay not be able to understand how y&lt;/td&gt;&lt;td&gt;you want your website to be crawled or&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;Image elements&lt;/td&gt;&lt;td&gt;s have [alt] attributes&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;^&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;ents should aim for short, desore about the alt attribute.&lt;/td&gt;&lt;td&gt;scriptive alternate text. Decorative&lt;/td&gt;&lt;td&gt;elements can be ignored with an empty&lt;/td&gt;&lt;td&gt;alt&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;&lt;ul&gt;&lt;li&gt;Document has a&lt;/li&gt;&lt;/ul&gt;&lt;/td&gt;&lt;td&gt;a valid rel=canonical&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;^&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;Canonical links su&lt;/td&gt;&lt;td&gt;uggest which URL to show in&lt;/td&gt;&lt;td&gt;search results. &lt;u&gt;Learn more about&lt;/u&gt;&lt;/td&gt;&lt;td&gt;canonical links.&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;Captured a&lt;/td&gt;&lt;td&gt;at Apr 26, 2025, 2:19&lt;/td&gt;&lt;td&gt;Emulated Desktop with&lt;/td&gt;&lt;td&gt;Single page session&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;AM GMT+2&lt;/td&gt;&lt;td&gt;2&lt;/td&gt;&lt;td&gt;Lighthouse 12.4.0&lt;/td&gt;&lt;td&gt;_&lt;/td&gt;&lt;td&gt;&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;Initial page&lt;/td&gt;&lt;td&gt;load&lt;/td&gt;&lt;td&gt;Custom throttling&lt;/td&gt;&lt;td&gt;Using Chromium 135.0.0.0 windevtools&lt;/td&gt;&lt;td&gt;th&lt;/td&gt;&lt;/tr&gt;&lt;/tbody&gt;&lt;/table&gt;</title>			

Generated by **Lighthouse** 12.4.0 | File an issue

about:blank 22/22