

GTKTerm

Generated by Doxygen 1.9.4



<b>1 GTKTerm: The source code architecture</b>	<b>1</b>
1.1 General description	1
1.2 Objects	1
1.2.1 GtkTerm	2
1.2.1.1 Members	2
1.2.1.2 Signals	2
1.2.1.3 Main functions	2
1.2.2 GtkTermWindow	2
1.2.2.1 Members	2
1.2.2.2 Signals	2
1.2.2.3 Main functions	2
1.2.3 GtkTermTerminal	2
1.2.3.1 Members	2
1.2.3.2 Signals	2
1.2.3.3 Main functions	2
1.2.4 GtkTermConfiguration	2
1.2.4.1 Members	3
1.2.4.2 Signals	3
1.2.4.3 Main functions	3
1.2.5 GtkTermSerialPort	3
1.2.5.1 Members	3
1.2.5.2 Signals	3
1.2.5.3 Main functions	3
1.2.6 GtkTermBuffer	3
1.2.6.1 Members	3
1.2.6.2 Signals	3
1.2.6.3 Main functions	3
1.3 Resources	3
<b>2 Todo List</b>	<b>5</b>
<b>3 Class Index</b>	<b>7</b>
3.1 Class List	7
<b>4 File Index</b>	<b>9</b>
4.1 File List	9
<b>5 Class Documentation</b>	<b>11</b>
5.1 _GtkTerm Struct Reference	11
5.1.1 Detailed Description	12
5.1.2 Member Data Documentation	12
5.1.2.1 action_group	12
5.1.2.2 config	12
5.1.2.3 g_config_group	12

5.1.2.4 g_port_group . . . . .	12
5.1.2.5 g_term_group . . . . .	13
5.1.2.6 parent_instance . . . . .	13
5.1.2.7 section . . . . .	13
5.2 _GtkTermBuffer Struct Reference . . . . .	13
5.2.1 Member Data Documentation . . . . .	13
5.2.1.1 parent_instance . . . . .	13
5.3 _GtkTermBufferClass Struct Reference . . . . .	14
5.3.1 Member Data Documentation . . . . .	14
5.3.1.1 parent_class . . . . .	14
5.4 _GtkTermConfiguration Struct Reference . . . . .	14
5.4.1 Member Data Documentation . . . . .	14
5.4.1.1 parent_instance . . . . .	14
5.5 _GtkTermConfigurationClass Struct Reference . . . . .	14
5.5.1 Member Data Documentation . . . . .	15
5.5.1.1 parent_class . . . . .	15
5.6 _GtkTermSerialPort Struct Reference . . . . .	15
5.6.1 Member Data Documentation . . . . .	15
5.6.1.1 parent_instance . . . . .	15
5.7 _GtkTermSerialPortClass Struct Reference . . . . .	15
5.7.1 Member Data Documentation . . . . .	15
5.7.1.1 parent_class . . . . .	16
5.8 _GtkTermTerminal Struct Reference . . . . .	16
5.8.1 Member Data Documentation . . . . .	16
5.8.1.1 vte_object . . . . .	16
5.9 _GtkTermTerminalClass Struct Reference . . . . .	16
5.9.1 Member Data Documentation . . . . .	16
5.9.1.1 vte_class . . . . .	16
5.10 _GtkTermWindow Struct Reference . . . . .	17
5.10.1 Detailed Description . . . . .	17
5.10.2 Member Data Documentation . . . . .	17
5.10.2.1 action_group . . . . .	18
5.10.2.2 fullscreen . . . . .	18
5.10.2.3 height . . . . .	18
5.10.2.4 infobar . . . . .	18
5.10.2.5 maximized . . . . .	19
5.10.2.6 menubutton . . . . .	19
5.10.2.7 message . . . . .	19
5.10.2.8 parent_instance . . . . .	19
5.10.2.9 scrolled_window . . . . .	19
5.10.2.10 search_bar . . . . .	20
5.10.2.11 status_config . . . . .	20

5.10.2.12 status_config_message . . . . .	20
5.10.2.13 status_message . . . . .	20
5.10.2.14 status_serial_signal . . . . .	20
5.10.2.15 statusbox . . . . .	20
5.10.2.16 terminal_window . . . . .	21
5.10.2.17 toolmenu . . . . .	21
5.10.2.18 width . . . . .	21
5.11 GtkTermBufferPrivate Struct Reference . . . . .	21
5.11.1 Member Data Documentation . . . . .	22
5.11.1.1 buffer . . . . .	22
5.11.1.2 config_error . . . . .	22
5.11.1.3 config_status . . . . .	22
5.11.1.4 cr_received . . . . .	23
5.11.1.5 error . . . . .	23
5.11.1.6 lf_received . . . . .	23
5.11.1.7 need_to_write_timestamp . . . . .	23
5.11.1.8 serial_port . . . . .	23
5.11.1.9 tail . . . . .	24
5.11.1.10 term_conf . . . . .	24
5.11.1.11 terminal . . . . .	24
5.12 GtkTermConfigurationPrivate Struct Reference . . . . .	24
5.12.1 Member Data Documentation . . . . .	24
5.12.1.1 config_error . . . . .	25
5.12.1.2 config_file . . . . .	25
5.12.1.3 config_is_dirty . . . . .	25
5.12.1.4 config_status . . . . .	25
5.12.1.5 key_file . . . . .	26
5.13 GtkTermSerialPortPrivate Struct Reference . . . . .	26
5.13.1 Member Data Documentation . . . . .	27
5.13.1.1 cancellable . . . . .	27
5.13.1.2 control_signal_timeout . . . . .	27
5.13.1.3 control_signals . . . . .	27
5.13.1.4 input_stream . . . . .	27
5.13.1.5 output_stream . . . . .	28
5.13.1.6 port_conf . . . . .	28
5.13.1.7 port_error . . . . .	28
5.13.1.8 port_fd . . . . .	28
5.13.1.9 port_status . . . . .	28
5.13.1.10 port_termios . . . . .	29
5.13.1.11 udev_client . . . . .	29
5.14 GtkTermTerminalPrivate Struct Reference . . . . .	29
5.14.1 Member Data Documentation . . . . .	30

5.14.1.1 app	30
5.14.1.2 macros	30
5.14.1.3 main_window	30
5.14.1.4 port_conf	30
5.14.1.5 section	31
5.14.1.6 serial_port	31
5.14.1.7 term_buffer	31
5.14.1.8 term_conf	31
5.14.1.9 view_mode	31
5.15 macro_t Struct Reference	32
5.15.1 Detailed Description	32
5.15.2 Member Data Documentation	32
5.15.2.1 action	32
5.15.2.2 closure	32
5.15.2.3 shortcut	32
5.16 port_config_t Struct Reference	33
5.16.1 Detailed Description	33
5.16.2 Member Data Documentation	33
5.16.2.1 baudrate	33
5.16.2.2 bits	33
5.16.2.3 disable_port_lock	34
5.16.2.4 flow_control	34
5.16.2.5 parity	34
5.16.2.6 port	34
5.16.2.7 rs485_rts_time_after_transmit	34
5.16.2.8 rs485_rts_time_before_transmit	35
5.16.2.9 stopbits	35
5.17 term_config_t Struct Reference	35
5.17.1 Detailed Description	36
5.17.2 Member Data Documentation	36
5.17.2.1 auto_cr	36
5.17.2.2 auto_if	36
5.17.2.3 background_color	36
5.17.2.4 block_cursor	36
5.17.2.5 char_queue	37
5.17.2.6 columns	37
5.17.2.7 delay	37
5.17.2.8 echo	37
5.17.2.9 font	38
5.17.2.10 foreground_color	38
5.17.2.11 rows	38
5.17.2.12 scrollbar	38

5.17.2.13 show_cursor . . . . .	39
5.17.2.14 timestamp . . . . .	39
5.17.2.15 visual_bell . . . . .	39
<b>6 File Documentation</b>	<b>41</b>
6.1 README_source.md File Reference . . . . .	41
6.2 gtkterm.c File Reference . . . . .	41
6.2.1 Function Documentation . . . . .	42
6.2.1.1 gtkterm_activate() . . . . .	42
6.2.1.2 gtkterm_class_init() . . . . .	43
6.2.1.3 gtkterm_init() . . . . .	43
6.2.1.4 gtkterm_startup() . . . . .	44
6.2.1.5 main() . . . . .	45
6.2.1.6 on_gtkterm_quit() . . . . .	45
6.2.2 Variable Documentation . . . . .	45
6.2.2.1 gtkterm_entries . . . . .	45
6.2.2.2 gtkterm_signals . . . . .	46
6.3 gtkterm.h File Reference . . . . .	46
6.3.1 Macro Definition Documentation . . . . .	47
6.3.1.1 GTKTERM_TYPE_APP . . . . .	47
6.3.2 Typedef Documentation . . . . .	47
6.3.2.1 GtkTerm . . . . .	47
6.3.3 Enumeration Type Documentation . . . . .	47
6.3.3.1 anonymous enum . . . . .	47
6.3.4 Variable Documentation . . . . .	48
6.3.4.1 gtkterm_signals . . . . .	48
6.4 gtkterm.h . . . . .	48
6.5 gtkterm_buffer.c File Reference . . . . .	49
6.5.1 Macro Definition Documentation . . . . .	51
6.5.1.1 TIMESTAMP_SIZE . . . . .	51
6.5.2 Enumeration Type Documentation . . . . .	51
6.5.2.1 anonymous enum . . . . .	51
6.5.3 Function Documentation . . . . .	51
6.5.3.1 gtkterm_buffer_add_data() . . . . .	51
6.5.3.2 gtkterm_buffer_class_init() . . . . .	53
6.5.3.3 gtkterm_buffer_constructed() . . . . .	53
6.5.3.4 gtkterm_buffer_dispose() . . . . .	54
6.5.3.5 gtkterm_buffer_finalize() . . . . .	55
6.5.3.6 gtkterm_buffer_get_error() . . . . .	55
6.5.3.7 gtkterm_buffer_get_status() . . . . .	56
6.5.3.8 gtkterm_buffer_init() . . . . .	56
6.5.3.9 gtkterm_buffer_new() . . . . .	56

6.5.3.10 gkterm_buffer_repage()	57
6.5.3.11 gkterm_buffer_set_property()	57
6.5.3.12 gkterm_buffer_set_status()	58
6.5.3.13 insert_timestamp()	59
6.5.4 Variable Documentation	59
6.5.4.1 gkterm_buffer_properties	59
6.6 gkterm_buffer.h File Reference	60
6.6.1 Macro Definition Documentation	60
6.6.1.1 GTKTERM_BUFFER_H	60
6.6.1.2 GTKTERM_TYPE_BUFFER	61
6.6.2 Typedef Documentation	61
6.6.2.1 GtkTermBuffer	61
6.6.3 Enumeration Type Documentation	61
6.6.3.1 GtkTermBufferState	61
6.6.4 Function Documentation	61
6.6.4.1 gkterm_buffer_get_error()	61
6.6.4.2 gkterm_buffer_get_status()	62
6.6.4.3 gkterm_buffer_new()	62
6.7 gkterm_buffer.h	63
6.8 gkterm_cmdline.c File Reference	63
6.8.1 Function Documentation	64
6.8.1.1 gkterm_add_cmdline_options()	64
6.8.1.2 on_list_config()	65
6.8.1.3 on_print_section()	65
6.8.1.4 on_remove_config()	66
6.8.1.5 on_save_section()	67
6.8.1.6 on_use_config()	68
6.8.2 Variable Documentation	68
6.8.2.1 gkterm_config_options	68
6.8.2.2 gkterm_port_options	69
6.8.2.3 gkterm_term_options	69
6.9 gkterm_cmdline.h File Reference	70
6.9.1 Function Documentation	70
6.9.1.1 gkterm_add_cmdline_options()	70
6.10 gkterm_cmdline.h	71
6.11 gkterm_configuration.c File Reference	71
6.11.1 Function Documentation	73
6.11.1.1 check_keyfile()	73
6.11.1.2 gkterm_configuration_check_configuration_file()	74
6.11.1.3 gkterm_configuration_class_constructed()	75
6.11.1.4 gkterm_configuration_class_init()	76
6.11.1.5 gkterm_configuration_copy_section()	77



6.11.1.6 gtkterm_configuration_default_configuration()	78
6.11.1.7 gtkterm_configuration_finalize()	79
6.11.1.8 gtkterm_configuration_get_error()	79
6.11.1.9 gtkterm_configuration_get_status()	80
6.11.1.10 gtkterm_configuration_init()	80
6.11.1.11 gtkterm_configuration_list_config()	81
6.11.1.12 gtkterm_configuration_load_keyfile()	82
6.11.1.13 gtkterm_configuration_load_serial_config()	83
6.11.1.14 gtkterm_configuration_load_terminal_config()	83
6.11.1.15 gtkterm_configuration_print_section()	84
6.11.1.16 gtkterm_configuration_remove_section()	85
6.11.1.17 gtkterm_configuration_save_keyfile()	86
6.11.1.18 gtkterm_configuration_set_config_file()	87
6.11.1.19 gtkterm_configuration_set_status()	88
6.11.1.20 gtkterm_configuration_validate()	89
6.11.1.21 on_set_config_options()	90
6.11.1.22 set_color()	91
6.11.2 Variable Documentation	92
6.11.2.1 GtkTermCLIShortOption	92
6.11.2.2 GtkTermConfigurationItems	92
6.12 gtkterm_configuration.h File Reference	92
6.12.1 Macro Definition Documentation	94
6.12.1.1 GTKTERM_TYPE_CONFIGURATION	94
6.12.2 Typedef Documentation	94
6.12.2.1 GtkTermConfiguration	94
6.12.3 Enumeration Type Documentation	94
6.12.3.1 anonymous enum	94
6.12.3.2 GtkTermConfigurationState	95
6.12.4 Function Documentation	96
6.12.4.1 gtkterm_configuration_get_error()	96
6.12.4.2 gtkterm_configuration_get_status()	97
6.12.4.3 gtkterm_configuration_new()	98
6.12.4.4 on_set_config_options()	98
6.12.5 Variable Documentation	99
6.12.5.1 GtkTermConfigurationItems	99
6.13 gtkterm_configuration.h	100
6.14 gtkterm_defaults.h File Reference	101
6.14.1 Macro Definition Documentation	102
6.14.1.1 ASCII_VIEW	102
6.14.1.2 BUFFER_LENGTH	102
6.14.1.3 BUFFER_SIZE	102
6.14.1.4 CONF_ITEM_LENGTH	102

6.14.1.5 CONFIGURATION_FILENAME . . . . .	102
6.14.1.6 DEFAULT_BAUDRATE . . . . .	102
6.14.1.7 DEFAULT_BITS . . . . .	103
6.14.1.8 DEFAULT_CHAR . . . . .	103
6.14.1.9 DEFAULT_DELAY . . . . .	103
6.14.1.10 DEFAULT_DELAY_RS485 . . . . .	103
6.14.1.11 DEFAULT_ECHO . . . . .	103
6.14.1.12 DEFAULT_FLOW . . . . .	103
6.14.1.13 DEFAULT_FONT . . . . .	103
6.14.1.14 DEFAULT_PARITY . . . . .	104
6.14.1.15 DEFAULT_PORT . . . . .	104
6.14.1.16 DEFAULT_SCROLLBACK . . . . .	104
6.14.1.17 DEFAULT_SECTION . . . . .	104
6.14.1.18 DEFAULT_STOPBITS . . . . .	104
6.14.1.19 DEFAULT_STRING_LEN . . . . .	104
6.14.1.20 DEFAULT_VISUAL_BELL . . . . .	104
6.14.1.21 GTKTERM_MESSAGE_LENGTH . . . . .	105
6.14.1.22 GTKTERM_SERIAL_PORT_RECEIVE_BUFFER_SIZE . . . . .	105
6.14.1.23 GTKTERM_SERIAL_PORT_TRANSMIT_BUFFER_SIZE . . . . .	105
6.14.1.24 HEXADECIMAL_VIEW . . . . .	105
6.14.1.25 LINE_FEED . . . . .	105
6.14.1.26 MAX_SECTION_LENGTH . . . . .	105
6.14.1.27 POLL_DELAY . . . . .	105
6.15 gtkterm_defaults.h . . . . .	106
6.16 gtkterm_serial_port.c File Reference . . . . .	106
6.16.1 Macro Definition Documentation . . . . .	108
6.16.1.1 GTKTERM_SERIAL_PORT_CONTROL_POLL_DELAY . . . . .	108
6.16.2 Enumeration Type Documentation . . . . .	109
6.16.2.1 anonymous enum . . . . .	109
6.16.3 Function Documentation . . . . .	109
6.16.3.1 gtkterm_serial_port_class_constructed() . . . . .	109
6.16.3.2 gtkterm_serial_port_class_init() . . . . .	110
6.16.3.3 gtkterm_serial_port_close() . . . . .	110
6.16.3.4 gtkterm_serial_port_config() . . . . .	112
6.16.3.5 gtkterm_serial_port_control_signals_read() . . . . .	112
6.16.3.6 gtkterm_serial_port_device_monitor() . . . . .	113
6.16.3.7 gtkterm_serial_port_event_udev() . . . . .	114
6.16.3.8 gtkterm_serial_port_finalize() . . . . .	114
6.16.3.9 gtkterm_serial_port_get_error() . . . . .	115
6.16.3.10 gtkterm_serial_port_get_property() . . . . .	116
6.16.3.11 gtkterm_serial_port_get_signals() . . . . .	117
6.16.3.12 gtkterm_serial_port_get_status() . . . . .	117

6.16.3.13	<a href="#">gtkterm_serial_port_get_string()</a>	118
6.16.3.14	<a href="#">gtkterm_serial_port_handle()</a>	118
6.16.3.15	<a href="#">gtkterm_serial_port_handle_usr1()</a>	119
6.16.3.16	<a href="#">gtkterm_serial_port_handle_usr2()</a>	120
6.16.3.17	<a href="#">gtkterm_serial_port_init()</a>	121
6.16.3.18	<a href="#">gtkterm_serial_port_lock()</a>	121
6.16.3.19	<a href="#">gtkterm_serial_port_new()</a>	122
6.16.3.20	<a href="#">gtkterm_serial_port_open()</a>	123
6.16.3.21	<a href="#">gtkterm_serial_port_read_signals()</a>	124
6.16.3.22	<a href="#">gtkterm_serial_port_serial_data_received()</a>	125
6.16.3.23	<a href="#">gtkterm_serial_port_serial_data_transmit()</a>	126
6.16.3.24	<a href="#">gtkterm_serial_port_set()</a>	127
6.16.3.25	<a href="#">gtkterm_serial_port_set_property()</a>	128
6.16.3.26	<a href="#">gtkterm_serial_port_set_signals()</a>	129
6.16.3.27	<a href="#">gtkterm_serial_port_set_status()</a>	130
6.16.3.28	<a href="#">gtkterm_serial_port_unlock()</a>	130
6.16.4	Variable Documentation	131
6.16.4.1	<a href="#">gtkterm_serial_port_properties</a>	131
6.16.4.2	<a href="#">GtkTermSerialPortStateString</a>	131
6.17	<a href="#">gtkterm_serial_port.h</a> File Reference	132
6.17.1	Macro Definition Documentation	133
6.17.1.1	<a href="#">GTKTERM_TYPE_SERIAL_PORT</a>	133
6.17.2	Typedef Documentation	133
6.17.2.1	<a href="#">GtkTermSerialPort</a>	133
6.17.3	Enumeration Type Documentation	133
6.17.3.1	<a href="#">GtkTermSerialPortFlowControl</a>	133
6.17.3.2	<a href="#">GtkTermSerialPortParity</a>	133
6.17.3.3	<a href="#">GtkTermSerialPortState</a>	134
6.17.3.4	<a href="#">GtkTermSerialPortStatus</a>	134
6.17.4	Function Documentation	134
6.17.4.1	<a href="#">gtkterm_serial_port_get_error()</a>	134
6.17.4.2	<a href="#">gtkterm_serial_port_get_signals()</a>	135
6.17.4.3	<a href="#">gtkterm_serial_port_get_status()</a>	135
6.17.4.4	<a href="#">gtkterm_serial_port_get_string()</a>	136
6.17.4.5	<a href="#">gtkterm_serial_port_new()</a>	137
6.17.5	Variable Documentation	137
6.17.5.1	<a href="#">GtkTermSerialPortStateString</a>	137
6.18	<a href="#">gtkterm_serial_port.h</a>	137
6.19	<a href="#">gtkterm_terminal.c</a> File Reference	138
6.19.1	Enumeration Type Documentation	140
6.19.1.1	anonymous enum	140
6.19.1.2	<a href="#">GtkTermTerminalView</a>	140

6.19.2 Function Documentation	141
6.19.2.1 gtkterm_terminal_buffer_updated()	141
6.19.2.2 gtkterm_terminal_class_init()	142
6.19.2.3 gtkterm_terminal_constructed()	142
6.19.2.4 gtkterm_terminal_dispose()	144
6.19.2.5 gtkterm_terminal_init()	144
6.19.2.6 gtkterm_terminal_new()	145
6.19.2.7 gtkterm_terminal_port_signals_changed()	146
6.19.2.8 gtkterm_terminal_port_status_changed()	146
6.19.2.9 gtkterm_terminal_set_property()	147
6.19.2.10 gtkterm_terminal_view_ascii() [1/2]	148
6.19.2.11 gtkterm_terminal_view_ascii() [2/2]	148
6.19.2.12 gtkterm_terminal_view_hex() [1/2]	149
6.19.2.13 gtkterm_terminal_view_hex() [2/2]	149
6.19.2.14 gtkterm_terminal_vte_data_received()	149
6.19.3 Variable Documentation	150
6.19.3.1 gtkterm_terminal_properties	150
6.20 gtkterm_terminal.h File Reference	151
6.20.1 Macro Definition Documentation	151
6.20.1.1 GTKTERM_TYPE_TERMINAL	152
6.20.2 Typedef Documentation	152
6.20.2.1 GtkTermTerminal	152
6.20.3 Function Documentation	152
6.20.3.1 gtkterm_terminal_new()	152
6.21 gtkterm_terminal.h	153
6.22 gtkterm_window.c File Reference	153
6.22.1 Macro Definition Documentation	155
6.22.1.1 SERIAL_SIGNALS	155
6.22.2 Function Documentation	155
6.22.2.1 clicked_cb()	156
6.22.2.2 config_status_bar()	156
6.22.2.3 create_window()	157
6.22.2.4 gtkterm_show_infobar()	157
6.22.2.5 gtkterm_window_class_init()	158
6.22.2.6 gtkterm_window_constructed()	158
6.22.2.7 gtkterm_window_dispose()	159
6.22.2.8 gtkterm_window_init()	160
6.22.2.9 gtkterm_window_load_state()	161
6.22.2.10 gtkterm_window_realize()	161
6.22.2.11 gtkterm_window_set_signals()	162
6.22.2.12 gtkterm_window_size_allocate()	163
6.22.2.13 gtkterm_window_store_state()	163

6.22.2.14	<a href="#">gtkterm_window_unrealize()</a>	164
6.22.2.15	<a href="#">gtkterm_window_update_statusbar()</a>	165
6.22.2.16	<a href="#">on_gtkterm_about()</a>	166
6.22.2.17	<a href="#">on_gtkterm_send_raw()</a>	166
6.22.2.18	<a href="#">on_gtkterm_toggle_dark()</a>	166
6.22.2.19	<a href="#">on_gtkterm_toggle_radio()</a>	167
6.22.2.20	<a href="#">on_gtkterm_toggle_radio_state()</a>	167
6.22.2.21	<a href="#">on_gtkterm_toggle_state()</a>	167
6.22.2.22	<a href="#">open_response_cb()</a>	168
6.22.2.23	<a href="#">set_window_title()</a>	168
6.22.2.24	<a href="#">surface_state_changed()</a>	169
6.22.2.25	<a href="#">update_statusbar()</a>	169
6.22.3	Variable Documentation	170
6.22.3.1	<a href="#">gtkterm_window_entries</a>	170
6.22.3.2	<a href="#">serial_signal</a>	170
6.22.3.3	<a href="#">signal_flags</a>	170
6.22.3.4	<a href="#">win_entries</a>	170
6.23	<a href="#">gtkterm_window.h</a> File Reference	171
6.23.1	Macro Definition Documentation	171
6.23.1.1	<a href="#">GTKTERM_TYPE_GTKTERM_WINDOW</a>	172
6.23.2	Typedef Documentation	172
6.23.2.1	<a href="#">GtkTermWindow</a>	172
6.23.3	Function Documentation	172
6.23.3.1	<a href="#">create_window()</a>	172
6.23.3.2	<a href="#">gtkterm_show_infobar()</a>	173
6.24	<a href="#">gtkterm_window.h</a>	173
6.25	<a href="#">macros.c</a> File Reference	173
6.25.1	Enumeration Type Documentation	174
6.25.1.1	<a href="#">anonymous enum</a>	174
6.25.2	Function Documentation	175
6.25.2.1	<a href="#">convert_macros_to_string()</a>	175
6.25.2.2	<a href="#">convert_string_to_macros()</a>	175
6.25.2.3	<a href="#">get_shortcuts()</a>	176
6.25.2.4	<a href="#">macro_count()</a>	176
6.25.2.5	<a href="#">macros_destroy()</a>	176
6.25.2.6	<a href="#">remove_shortcuts()</a>	177
6.25.3	Variable Documentation	177
6.25.3.1	<a href="#">macros</a>	177
6.25.3.2	<a href="#">nr_of_macros</a>	177
6.26	<a href="#">macros.h</a> File Reference	178
6.26.1	Function Documentation	178
6.26.1.1	<a href="#">add_shortcuts()</a>	178

6.26.1.2 <a href="#">convert_macros_to_string()</a> . . . . .	179
6.26.1.3 <a href="#">convert_string_to_macros()</a> . . . . .	179
6.26.1.4 <a href="#">get_shortcuts()</a> . . . . .	179
6.26.1.5 <a href="#">macro_count()</a> . . . . .	180
6.26.1.6 <a href="#">remove_shortcuts()</a> . . . . .	180
6.26.2 Variable Documentation . . . . .	180
6.26.2.1 <a href="#">macros</a> . . . . .	181
6.27 <a href="#">macros.h</a> . . . . .	181
<b>Index</b>	<b>183</b>

# Chapter 1

## GTKTerm: The source code architecture

This file describes the architecture of GTKTerm. GtkTerm has several objects and uses signals to communicate between these objects.

One of the subgoals is not to use any global variables but exchange data by the use of signals. For that only the array of signals is a global variable.

Use of GTKTerm/GtkTerm/gtkterm naming schema: In this document several ways of Upper/Lowercase combinations of GTKTerm is used:

- GTKTerm: The name of the application
- GtkTerm: The first part of the name of the object in the source code. For example: GtkTermWindow.
- gtk\_term: The first part of the function of an object in the source code. For example: gtkterm\_window\_init

### 1.1 General description

GTKTerm is build with the GTK4 framework. It uses GObject and communicates (mostly) through signals.

GTKTerm is the main application object. It is a holder for the keyfile. The commandline interfaces uses the application object framework to handle all commandline options. The options are connected to the relevant GObject by signals. Almost all objects have a 'public' and 'private' part. However the 'public' part is not globally known (except for GtkTerm application object).

The core of the application is the terminal. This is a VTE object and handles all communication to and from the serial port. The terminal window holds the configuration of the terminal window and the serial ports. The configuraton is copied from the GtkTerm application which holds the keyfile. It is copied back to the keyfile if it is saved. For now the GtkTerm application has just one terminal window. The architecture of GTKTerm is able to support multiple terminal windows in future releases.

### 1.2 Objects

This part lists an overview of all objects used in GTKTerm. For details about implementation please use the GTKTERM.pdf which is a Doxygen generated overview of the GTKTerm source code.

## 1.2.1 GtkTerm

GtkTerm is the main GtkApplication object for GTKTerm. It starts the `gtkterm_window` and handles the cmdline interface (CLI). Options given at the CLI are directly stored into the in memory keyfile. This in memory keyfile is the base for the configuration of the terminal windows. Getting configuration for the terminal window is done by signals for the [section] needed.

### 1.2.1.1 Members

### 1.2.1.2 Signals

### 1.2.1.3 Main functions

## 1.2.2 GtkTermWindow

GtkTermWindow is the main application window for GtkTerm. It creates all widgets and does the handling for the statusbar.

### 1.2.2.1 Members

### 1.2.2.2 Signals

### 1.2.2.3 Main functions

## 1.2.3 GtkTermTerminal

The terminal window in which all serial communication is shown. It is an VTE object and hold the configuration for the terminal and serial port. Each terminal window (just 1 for now) has only one serial interface which it connects to. It has 2 USR signals for communication from scripts. The terminal communicates (transmit/receive) with the serial port through the GtkTermBuffer.

### 1.2.3.1 Members

### 1.2.3.2 Signals

### 1.2.3.3 Main functions

## 1.2.4 GtkTermConfiguration

GtkTerm does all operation on the keyfile. It loads, saves the file and removes, checks sections. It also copies the section configuration info the configuration for the terminal.



#### 1.2.4.1 Members

#### 1.2.4.2 Signals

#### 1.2.4.3 Main functions

### 1.2.5 GtkTermSerialPort

The Serial port object which does all communication to the serial port. It configures the port based on the port\_conf from terminal. It has an in- and output stream to communicate with the serial device.

#### 1.2.5.1 Members

#### 1.2.5.2 Signals

#### 1.2.5.3 Main functions

### 1.2.6 GtkTermBuffer

The buffer is the interface between the serial port and the terminal. The buffer receives the data from the serial port and 'translates' it to ASCII or HEX. It gets notified from the serial port when nieuw data is recieved. After conversion and markup (CR/LF Timestamps) it notifies the terminal which can feed it to the vte.

#### 1.2.6.1 Members

#### 1.2.6.2 Signals

#### 1.2.6.3 Main functions

## 1.3 Resources

For the migration to gtk4 several links were used:

- <https://docs.gtk.org/gobject/tutorial.html>
- <https://docs.gtk.org/gobject/concepts.html>
- <https://docs.gtk.org/glib/>
- <https://toshiocp.github.io/Gtk4-tutorial/index.html>
- <https://blogs.gnome.org/mcatanzaro/2022/07/27/common-glib-programming-errors/>

The gtk room on IRC was a big support when asking questions.

Also special thanks to Jens Georg. Sellerie (an earlier fork of GTKTerm) was used as inspiration to solve some problems.



## Chapter 2

# Todo List

**Member `create_window`** (`GApplication *`, `GtkTermWindow *`)

remove and set it with properties.

**Member `gtkterm_activate`** (`GApplication *app`)

embed `create_window` in the `gtkapplication` window

**Member `gtkterm_buffer_add_data`** (`GObject *object`, `gpointer data`, `gpointer user_data`)

Make buffer also work with greater datastrings to make the above work.

**Member `gtkterm_config_options`** []

Update `gtkterm.1`.

**Member `gtkterm_serial_port_serial_data_received`** (`GObject *source`, `GAsyncResult *res`, `gpointer user_data`)

send to terminal window and show in infobar

**Member `gtkterm_terminal_constructed`** (`GObject *object`)

: convert to notify on message

: make configurable from the config file

**Member `gtkterm_terminal_port_status_changed`** (`GObject *object`, `GParamSpec *pspec`, `gpointer user_data`)

convert to notify signal on message...

**Member `gtkterm_window_init`** (`GtkTermWindow *window`)

: Rename it

**Member `GtkTermConfigurationItems`** [[`CONF_ITEM_LENGTH`]

Add the short option.

**Member `GtkTermTerminalPrivate::macros`**

convert macros -> object

**Member `on_gtkterm_quit`** (`GSimpleAction *action`, `GVariant *parameter`, `gpointer user_data`)

: Should be part of the `Gtkterm` application struct

**Member `on_gtkterm_send_raw`** (`GSimpleAction *action`, `GVariant *parameter`, `gpointer user_data`)

rewrite for `GTKTerm`

**Member `on_gtkterm_toggle_radio`** (`GSimpleAction *action`, `GVariant *parameter`, `gpointer user_data`)

rewrite for `GTKTerm`

**Member `on_gtkterm_toggle_state`** (`GSimpleAction *`, `GVariant *`, `gpointer`)

rewrite for `GTKTerm`

Member `open_response_cb` (GtkNativeDialog \*dialog, int response\_id, gpointer user\_data)

rewrite for gtkterm

Member `term_config_t::char_queue`

This is not possible, so remove?

## Chapter 3

# Class Index

### 3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">_GtkTerm</a>	
The main GtkTerm application class	11
<a href="#">_GtkTermBuffer</a>	13
<a href="#">_GtkTermBufferClass</a>	14
<a href="#">_GtkTermConfiguration</a>	14
<a href="#">_GtkTermConfigurationClass</a>	14
<a href="#">_GtkTermSerialPort</a>	15
<a href="#">_GtkTermSerialPortClass</a>	15
<a href="#">_GtkTermTerminal</a>	16
<a href="#">_GtkTermTerminalClass</a>	16
<a href="#">_GtkTermWindow</a>	
MainWindow specific variables here	17
<a href="#">GtkTermBufferPrivate</a>	21
<a href="#">GtkTermConfigurationPrivate</a>	24
<a href="#">GtkTermSerialPortPrivate</a>	26
<a href="#">GtkTermTerminalPrivate</a>	29
<a href="#">macro_t</a>	
Define macro structure type	32
<a href="#">port_config_t</a>	
The typedef for the serial configuration	33
<a href="#">term_config_t</a>	
The typedef for the terminal configuration	35



## Chapter 4

# File Index

### 4.1 File List

Here is a list of all files with brief descriptions:

<a href="#">gtkterm.c</a>	41
<a href="#">gtkterm.h</a>	46
<a href="#">gtkterm_buffer.c</a>	49
<a href="#">gtkterm_buffer.h</a>	60
<a href="#">gtkterm_cmdline.c</a>	63
<a href="#">gtkterm_cmdline.h</a>	70
<a href="#">gtkterm_configuration.c</a>	71
<a href="#">gtkterm_configuration.h</a>	92
<a href="#">gtkterm_defaults.h</a>	101
<a href="#">gtkterm_serial_port.c</a>	106
<a href="#">gtkterm_serial_port.h</a>	132
<a href="#">gtkterm_terminal.c</a>	138
<a href="#">gtkterm_terminal.h</a>	151
<a href="#">gtkterm_window.c</a>	153
<a href="#">gtkterm_window.h</a>	171
<a href="#">macros.c</a>	173
<a href="#">macros.h</a>	178





## Chapter 5


# Class Documentation

### 5.1 `_GtkTerm` Struct Reference

The main `GtkTerm` application class.

```
#include <gtkterm.h>
```

Collaboration diagram for `_GtkTerm`:

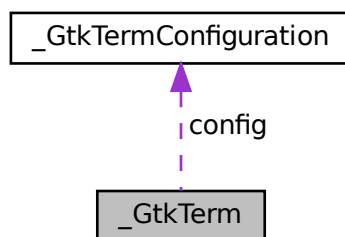

#### Public Attributes

- `GtkApplication` `parent_instance`
- `GOptionGroup` \* `g_term_group`
- `GOptionGroup` \* `g_port_group`
- `GOptionGroup` \* `g_config_group`
- `GActionGroup` \* `action_group`  
*App action group.*
- `GtkTermConfiguration` \* `config`  
*The Key file with the configurations.*
- `char` \* `section`  
*The section provided from the cli.*

### 5.1.1 Detailed Description

The main GtkTerm application class.

All application specific variables are defined here.

### 5.1.2 Member Data Documentation

#### 5.1.2.1 action\_group

```
GActionGroup* _GtkTerm::action_group
```

App action group.

Referenced by [gtkterm\\_init\(\)](#).

#### 5.1.2.2 config

```
GtkTermConfiguration* _GtkTerm::config
```

The Key file with the configurations.

Referenced by [gtkterm\\_init\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

#### 5.1.2.3 g\_config\_group

```
GOptionGroup* _GtkTerm::g_config_group
```

Referenced by [gtkterm\\_add\\_cmdline\\_options\(\)](#), and [on\\_gtkterm\\_quit\(\)](#).

#### 5.1.2.4 g\_port\_group

```
GOptionGroup* _GtkTerm::g_port_group
```

Referenced by [gtkterm\\_add\\_cmdline\\_options\(\)](#), and [on\\_gtkterm\\_quit\(\)](#).

#### 5.1.2.5 g\_term\_group

GOptionGroup\* \_GtkTerm::g\_term\_group

Referenced by [gtkterm\\_add\\_cmdline\\_options\(\)](#), and [on\\_gtkterm\\_quit\(\)](#).

#### 5.1.2.6 parent\_instance

GtkApplication \_GtkTerm::parent\_instance

#### 5.1.2.7 section

char\* \_GtkTerm::section

The section provided from the cli.

Referenced by [gtkterm\\_init\(\)](#), and [on\\_gtkterm\\_quit\(\)](#).

The documentation for this struct was generated from the following file:

- [gtkterm.h](#)

## 5.2 \_GtkTermBuffer Struct Reference

### Public Attributes

- GObject [parent\\_instance](#)

### 5.2.1 Member Data Documentation

#### 5.2.1.1 parent\_instance

GObject \_GtkTermBuffer::parent\_instance

The documentation for this struct was generated from the following file:

- [gtkterm\\_buffer.c](#)

## 5.3 `_GtkTermBufferClass` Struct Reference

### Public Attributes

- GObjectClass [parent\\_class](#)

### 5.3.1 Member Data Documentation

#### 5.3.1.1 `parent_class`

`GObjectClass _GtkTermBufferClass::parent_class`

The documentation for this struct was generated from the following file:

- [gtkterm\\_buffer.c](#)

## 5.4 `_GtkTermConfiguration` Struct Reference

### Public Attributes

- GObject [parent\\_instance](#)

### 5.4.1 Member Data Documentation

#### 5.4.1.1 `parent_instance`

`GObject _GtkTermConfiguration::parent_instance`

The documentation for this struct was generated from the following file:

- [gtkterm\\_configuration.c](#)

## 5.5 `_GtkTermConfigurationClass` Struct Reference

### Public Attributes

- GObjectClass [parent\\_class](#)

## 5.5.1 Member Data Documentation

### 5.5.1.1 parent\_class

GObjectClass \_GtkTermConfigurationClass::parent\_class

The documentation for this struct was generated from the following file:

- [gtkterm\\_configuration.c](#)

## 5.6 \_GtkTermSerialPort Struct Reference

### Public Attributes

- GObject [parent\\_instance](#)

## 5.6.1 Member Data Documentation

### 5.6.1.1 parent\_instance

GObject \_GtkTermSerialPort::parent\_instance

The documentation for this struct was generated from the following file:

- [gtkterm\\_serial\\_port.c](#)

## 5.7 \_GtkTermSerialPortClass Struct Reference

### Public Attributes

- GObjectClass [parent\\_class](#)

## 5.7.1 Member Data Documentation

### 5.7.1.1 parent\_class

GObjectClass \_GtkTermSerialPortClass::parent\_class

The documentation for this struct was generated from the following file:

- [gtkterm\\_serial\\_port.c](#)

## 5.8 \_GtkTermTerminal Struct Reference

### Public Attributes

- VteTerminal [vte\\_object](#)

### 5.8.1 Member Data Documentation

#### 5.8.1.1 vte\_object

VteTerminal \_GtkTermTerminal::vte\_object

The actual terminal object

The documentation for this struct was generated from the following file:

- [gtkterm\\_terminal.c](#)

## 5.9 \_GtkTermTerminalClass Struct Reference

### Public Attributes

- VteTerminalClass [vte\\_class](#)

### 5.9.1 Member Data Documentation

#### 5.9.1.1 vte\_class

VteTerminalClass \_GtkTermTerminalClass::vte\_class


The documentation for this struct was generated from the following file:

- [gtkterm\\_terminal.c](#)

## 5.10 \_GtkTermWindow Struct Reference

MainWindow specific variables here.

Collaboration diagram for \_GtkTermWindow:

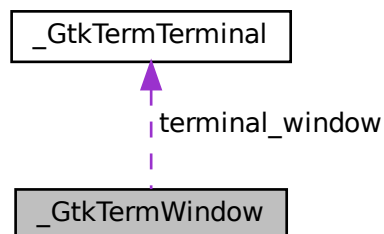

### Public Attributes

- GtkApplicationWindow `parent_instance`
- GtkWidget \* `message`
- GtkWidget \* `infobar`
- GtkBox \* `statusbox`
- GtkBox \* `status_config`
- GtkWidget \* `menubutton`
- GMenuModel \* `toolmenu`
- GtkScrolledWindow \* `scrolled_window`
- `GtkTermTerminal` \* `terminal_window`
- GtkWidget \* `search_bar`
- GActionGroup \* `action_group`
- GtkWidget \* `status_config_message` [3]
- GtkWidget \* `status_serial_signal` [SERIAL\_SIGNALS]
- GtkWidget \* `status_message`
- int `width`
- int `height`
- bool `maximized`
- bool `fullscreen`

### 5.10.1 Detailed Description

MainWindow specific variables here.

### 5.10.2 Member Data Documentation

### 5.10.2.1 `action_group`

`GActionGroup* _GtkTermWindow::action_group`

Window action group

Referenced by [gtkterm\\_window\\_init\(\)](#).

### 5.10.2.2 `fullscreen`

`bool _GtkTermWindow::fullscreen`

Window maximized?

Referenced by [gtkterm\\_window\\_constructed\(\)](#), [gtkterm\\_window\\_init\(\)](#), [gtkterm\\_window\\_load\\_state\(\)](#), [gtkterm\\_window\\_size\\_allocate\(\)](#), [gtkterm\\_window\\_store\\_state\(\)](#), and [surface\\_state\\_changed\(\)](#).

### 5.10.2.3 `height`

`int _GtkTermWindow::height`

Window height

Referenced by [gtkterm\\_window\\_constructed\(\)](#), [gtkterm\\_window\\_init\(\)](#), [gtkterm\\_window\\_load\\_state\(\)](#), [gtkterm\\_window\\_size\\_allocate\(\)](#), and [gtkterm\\_window\\_store\\_state\(\)](#).

### 5.10.2.4 `infobar`

`GtkWidget* _GtkTermWindow::infobar`

Infobar

Referenced by [clicked\\_cb\(\)](#), and [gtkterm\\_show\\_infobar\(\)](#).



### 5.10.2.5 maximized

bool \_GtkTermWindow::maximized

Window minimized?

Referenced by [gtkterm\\_window\\_constructed\(\)](#), [gtkterm\\_window\\_init\(\)](#), [gtkterm\\_window\\_load\\_state\(\)](#), [gtkterm\\_window\\_size\\_allocate\(\)](#), [gtkterm\\_window\\_store\\_state\(\)](#), and [surface\\_state\\_changed\(\)](#).

### 5.10.2.6 menubutton

GtkWidget\* \_GtkTermWindow::menubutton

Toolbar

Referenced by [gtkterm\\_window\\_init\(\)](#).

### 5.10.2.7 message

GtkWidget\* \_GtkTermWindow::message

Message for the infobar

Referenced by [gtkterm\\_show\\_infobar\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

### 5.10.2.8 parent\_instance

GtkApplicationWindow \_GtkTermWindow::parent\_instance

### 5.10.2.9 scrolled\_window

GtkScrolledWindow\* \_GtkTermWindow::scrolled\_window

Make the terminal window scrolled

Referenced by [create\\_window\(\)](#).

#### 5.10.2.10 search\_bar

GtkWidget\* \_GtkTermWindow::search\_bar

Searchbar

#### 5.10.2.11 status\_config

GtkBox\* \_GtkTermWindow::status\_config

Displays the actual used configuration

Referenced by [config\\_status\\_bar\(\)](#).

#### 5.10.2.12 status\_config\_message

GtkWidget\* \_GtkTermWindow::status\_config\_message[3]

Referenced by [config\\_status\\_bar\(\)](#), and [update\\_statusbar\(\)](#).

#### 5.10.2.13 status\_message

GtkWidget\* \_GtkTermWindow::status\_message

#### 5.10.2.14 status\_serial\_signal

GtkWidget\* \_GtkTermWindow::status\_serial\_signal[[SERIAL\\_SIGNALS](#)]

Referenced by [config\\_status\\_bar\(\)](#), and [gtkterm\\_window\\_set\\_signals\(\)](#).

#### 5.10.2.15 statusbox

GtkBox\* \_GtkTermWindow::statusbox

Box for statusbar messages

Referenced by [config\\_status\\_bar\(\)](#).

### 5.10.2.16 terminal\_window

```
GtkTermTerminal* _GtkTermWindow::terminal_window
```

The terminal window

Referenced by [create\\_window\(\)](#).

### 5.10.2.17 toolmenu

```
GMenuModel* _GtkTermWindow::toolmenu
```

Menu

Referenced by [gtkterm\\_window\\_init\(\)](#).

### 5.10.2.18 width

```
int _GtkTermWindow::width
```

Window width


Referenced by [gtkterm\\_window\\_constructed\(\)](#), [gtkterm\\_window\\_init\(\)](#), [gtkterm\\_window\\_load\\_state\(\)](#), [gtkterm\\_window\\_size\\_allocate\(\)](#) and [gtkterm\\_window\\_store\\_state\(\)](#).

The documentation for this struct was generated from the following file:

- [gtkterm\\_window.c](#)

## 5.11 GtkTermBufferPrivate Struct Reference

Collaboration diagram for GtkTermBufferPrivate:

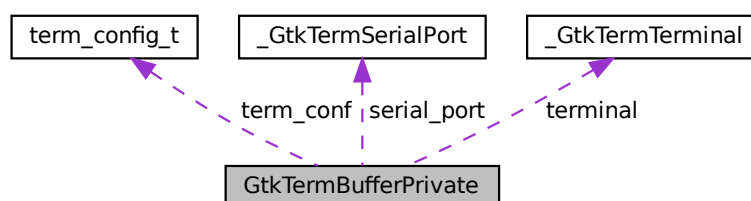

## Public Attributes

- char \* [buffer](#)
- uint32\_t [tail](#)
- [term\\_config\\_t](#) \* [term\\_conf](#)
- bool [lf\\_received](#)
- bool [cr\\_received](#)
- bool [need\\_to\\_write\\_timestamp](#)
- GError \* [config\\_error](#)
- [GtkTermConfigurationState](#) [config\\_status](#)
- [GtkTermSerialPort](#) \* [serial\\_port](#)
- [GtkTermTerminal](#) \* [terminal](#)
- GError \* [error](#)

### 5.11.1 Member Data Documentation

#### 5.11.1.1 [buffer](#)

```
char* GtkTermBufferPrivate::buffer
```

The actual buffer

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), [gtkterm\\_buffer\\_finalize\(\)](#), [gtkterm\\_buffer\\_init\(\)](#), and [gtkterm\\_buffer\\_repage\(\)](#).

#### 5.11.1.2 [config\\_error](#)

```
GError* GtkTermBufferPrivate::config_error
```

Error of the last file operation

Referenced by [gtkterm\\_buffer\\_get\\_error\(\)](#), and [gtkterm\\_buffer\\_set\\_status\(\)](#).

#### 5.11.1.3 [config\\_status](#)

```
GtkTermConfigurationState GtkTermBufferPrivate::config_status
```

Status when operating the buffer

Referenced by [gtkterm\\_buffer\\_get\\_status\(\)](#), and [gtkterm\\_buffer\\_set\\_status\(\)](#).

#### 5.11.1.4 cr\_received

```
bool GtkTermBufferPrivate::cr_received
```

Reminder if we have a CR received

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), and [gtkterm\\_buffer\\_init\(\)](#).

#### 5.11.1.5 error

```
GError* GtkTermBufferPrivate::error
```

#### 5.11.1.6 lf\_received

```
bool GtkTermBufferPrivate::lf_received
```

Reminder if we have a LF received

Referenced by [gtkterm\\_buffer\\_init\(\)](#).

#### 5.11.1.7 need\_to\_write\_timestamp

```
bool GtkTermBufferPrivate::need_to_write_timestamp
```

Reminder we need to write the timestamp (after a CR)

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), and [gtkterm\\_buffer\\_init\(\)](#).

#### 5.11.1.8 serial\_port

```
GtkTermSerialPort* GtkTermBufferPrivate::serial_port
```

For connecting to the serial-data-received signals

Referenced by [gtkterm\\_buffer\\_constructed\(\)](#), [gtkterm\\_buffer\\_dispose\(\)](#), and [gtkterm\\_buffer\\_set\\_property\(\)](#).

#### 5.11.1.9 tail

```
uint32_t GtkTermBufferPrivate::tail
```

The tail of the buffer

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), [gtkterm\\_buffer\\_init\(\)](#), and [gtkterm\\_buffer\\_repage\(\)](#).

#### 5.11.1.10 term\_conf

```
term_config_t* GtkTermBufferPrivate::term_conf
```

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), [gtkterm\\_buffer\\_dispose\(\)](#), and [gtkterm\\_buffer\\_set\\_property\(\)](#).

#### 5.11.1.11 terminal

```
GtkTermTerminal* GtkTermBufferPrivate::terminal
```

For connecting to the vte-data-received signals

Referenced by [gtkterm\\_buffer\\_constructed\(\)](#), [gtkterm\\_buffer\\_dispose\(\)](#), and [gtkterm\\_buffer\\_set\\_property\(\)](#).

The documentation for this struct was generated from the following file:

- [gtkterm\\_buffer.c](#)

## 5.12 GtkTermConfigurationPrivate Struct Reference

### Public Attributes

- GKeyFile \* [key\\_file](#)
- GFile \* [config\\_file](#)
- GError \* [config\\_error](#)
- [GtkTermConfigurationState](#) [config\\_status](#)
- bool [config\\_is\\_dirty](#)

### 5.12.1 Member Data Documentation

### 5.12.1.1 config\_error

GError\* GtkTermConfigurationPrivate::config\_error

Error of the last file operation

Referenced by [gtkterm\\_configuration\\_finalize\(\)](#), [gtkterm\\_configuration\\_get\\_error\(\)](#), [gtkterm\\_configuration\\_init\(\)](#), and [gtkterm\\_configuration\\_set\\_status\(\)](#).

### 5.12.1.2 config\_file

GFile\* GtkTermConfigurationPrivate::config\_file

The config file

Referenced by [gtkterm\\_configuration\\_check\\_configuration\\_file\(\)](#), [gtkterm\\_configuration\\_init\(\)](#), [gtkterm\\_configuration\\_load\\_keyfile\(\)](#), [gtkterm\\_configuration\\_save\\_keyfile\(\)](#), and [gtkterm\\_configuration\\_set\\_config\\_file\(\)](#).

### 5.12.1.3 config\_is\_dirty

bool GtkTermConfigurationPrivate::config\_is\_dirty

If changes are made but not yet saved

Referenced by [check\\_keyfile\(\)](#), [gtkterm\\_configuration\\_init\(\)](#), [gtkterm\\_configuration\\_save\\_keyfile\(\)](#), and [on\\_set\\_config\\_options\(\)](#).

### 5.12.1.4 config\_status

GtkTermConfigurationState GtkTermConfigurationPrivate::config\_status

Status when operating configfiles

Referenced by [gtkterm\\_configuration\\_get\\_status\(\)](#), and [gtkterm\\_configuration\\_set\\_status\(\)](#).

### 5.12.1.5 key\_file

GKeyFile\* GtkTermConfigurationPrivate::key\_file

The memory loaded keyfile


Referenced by [check\\_keyfile\(\)](#), [gtkterm\\_configuration\\_check\\_configuration\\_file\(\)](#), [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_default\\_configuration\(\)](#), [gtkterm\\_configuration\\_init\(\)](#), [gtkterm\\_configuration\\_list\\_config\(\)](#), [gtkterm\\_configuration\\_load\\_keyfile\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), [gtkterm\\_configuration\\_print\\_section\(\)](#), [gtkterm\\_configuration\\_remove\\_section\(\)](#), [gtkterm\\_configuration\\_save\\_keyfile\(\)](#), [gtkterm\\_configuration\\_validate\(\)](#), and [on\\_set\\_config\\_options\(\)](#).

The documentation for this struct was generated from the following file:

- [gtkterm\\_configuration.c](#)

## 5.13 GtkTermSerialPortPrivate Struct Reference

Collaboration diagram for GtkTermSerialPortPrivate:

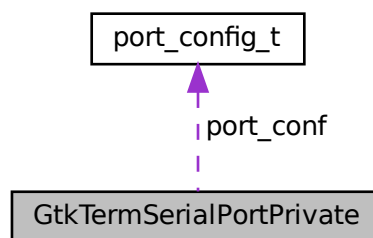

### Public Attributes

- GUdevClient \* [udev\\_client](#)
- [port\\_config\\_t](#) \* [port\\_conf](#)
- struct termios [port\\_termios](#)
- GOutputStream \* [output\\_stream](#)
- GInputStream \* [input\\_stream](#)
- GCancellable \* [cancellable](#)
- unsigned int [control\\_signal\\_timeout](#)
- int [port\\_fd](#)
- int [control\\_signals](#)
- [GtkTermSerialPortState](#) [port\\_status](#)
- GError \* [port\\_error](#)



## 5.13.1 Member Data Documentation

### 5.13.1.1 cancellable

`GCancelable* GtkTermSerialPortPrivate::cancellable`

Allowing canceling async operation (reading port)

Referenced by [gtkterm\\_serial\\_port\\_close\(\)](#), [gtkterm\\_serial\\_port\\_open\(\)](#), [gtkterm\\_serial\\_port\\_serial\\_data\\_received\(\)](#), and [gtkterm\\_serial\\_port\\_serial\\_data\\_transmit\(\)](#).

### 5.13.1.2 control\_signal\_timeout

`unsigned int GtkTermSerialPortPrivate::control_signal_timeout`

Interval to check/update serial control signals

Referenced by [gtkterm\\_serial\\_port\\_close\(\)](#), and [gtkterm\\_serial\\_port\\_open\(\)](#).

### 5.13.1.3 control\_signals

`int GtkTermSerialPortPrivate::control_signals`

The last serial signals (updated from the timeout)

Referenced by [gtkterm\\_serial\\_port\\_control\\_signals\\_read\(\)](#), [gtkterm\\_serial\\_port\\_get\\_property\(\)](#), [gtkterm\\_serial\\_port\\_get\\_signals\(\)](#), and [gtkterm\\_serial\\_port\\_init\(\)](#).

### 5.13.1.4 input\_stream

`GInputStream* GtkTermSerialPortPrivate::input_stream`

The incomming stream from the device

Referenced by [gtkterm\\_serial\\_port\\_close\(\)](#), [gtkterm\\_serial\\_port\\_open\(\)](#), and [gtkterm\\_serial\\_port\\_serial\\_data\\_received\(\)](#).

#### 5.13.1.5 output\_stream

`GOutputStream* GtkTermSerialPortPrivate::output_stream`

The outgoing stream to the device

Referenced by [gtkterm\\_serial\\_port\\_close\(\)](#), [gtkterm\\_serial\\_port\\_open\(\)](#), and [gtkterm\\_serial\\_port\\_serial\\_data\\_transmit\(\)](#).

#### 5.13.1.6 port\_conf

`port_config_t* GtkTermSerialPortPrivate::port_conf`

The configuration for the serial port

Referenced by [gtkterm\\_serial\\_port\\_config\(\)](#), [gtkterm\\_serial\\_port\\_device\\_monitor\(\)](#), [gtkterm\\_serial\\_port\\_event\\_udev\(\)](#), [gtkterm\\_serial\\_port\\_get\\_string\(\)](#), [gtkterm\\_serial\\_port\\_lock\(\)](#), [gtkterm\\_serial\\_port\\_open\(\)](#), [gtkterm\\_serial\\_port\\_read\\_signals\(\)](#), [gtkterm\\_serial\\_port\\_serial\\_data\\_transmit\(\)](#), [gtkterm\\_serial\\_port\\_set\\_property\(\)](#), and [gtkterm\\_serial\\_port\\_unlock\(\)](#).

#### 5.13.1.7 port\_error

`GError* GtkTermSerialPortPrivate::port_error`

Referenced by [gtkterm\\_serial\\_port\\_finalize\(\)](#), [gtkterm\\_serial\\_port\\_get\\_error\(\)](#), and [gtkterm\\_serial\\_port\\_set\\_status\(\)](#).

#### 5.13.1.8 port\_fd

`int GtkTermSerialPortPrivate::port_fd`

The port file descriptor

Referenced by [gtkterm\\_serial\\_port\\_close\(\)](#), [gtkterm\\_serial\\_port\\_config\(\)](#), [gtkterm\\_serial\\_port\\_get\\_string\(\)](#), [gtkterm\\_serial\\_port\\_init\(\)](#), [gtkterm\\_serial\\_port\\_lock\(\)](#), [gtkterm\\_serial\\_port\\_open\(\)](#), [gtkterm\\_serial\\_port\\_read\\_signals\(\)](#), [gtkterm\\_serial\\_port\\_serial\\_data\\_transmit\(\)](#), [gtkterm\\_serial\\_port\\_set\\_signals\(\)](#), and [gtkterm\\_serial\\_port\\_unlock\(\)](#).

#### 5.13.1.9 port\_status

`GtkTermSerialPortState GtkTermSerialPortPrivate::port_status`

State of the serial port

Referenced by [gtkterm\\_serial\\_port\\_get\\_property\(\)](#), [gtkterm\\_serial\\_port\\_get\\_status\(\)](#), and [gtkterm\\_serial\\_port\\_set\\_status\(\)](#).

## 5.13.1.10 port\_termios

```
struct termios GtkTermSerialPortPrivate::port_termios
```

Saved port termios configuration for this port

Referenced by [gtkterm\\_serial\\_port\\_close\(\)](#), and [gtkterm\\_serial\\_port\\_open\(\)](#).

## 5.13.1.11 udev\_client

```
GUdevClient* GtkTermSerialPortPrivate::udev_client
```

The udev client for monitoring the device status


Referenced by [gtkterm\\_serial\\_port\\_device\\_monitor\(\)](#).

The documentation for this struct was generated from the following file:

- [gtkterm\\_serial\\_port.c](#)

## 5.14 GtkTermTerminalPrivate Struct Reference

Collaboration diagram for GtkTermTerminalPrivate:

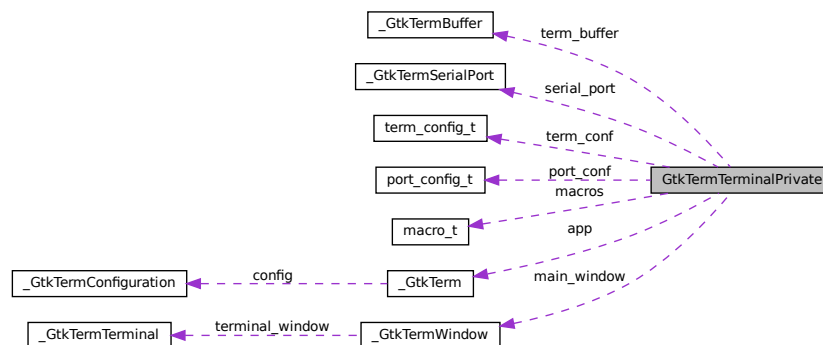

## Public Attributes

- `GtkTermBuffer` \* `term_buffer`
- `GtkTermSerialPort` \* `serial_port`
- `term_config_t` \* `term_conf`
- `port_config_t` \* `port_conf`
- `macro_t` \* `macros`
- `GtkTermTerminalView` `view_mode`
- `char` \* `section`
- `GtkTerm` \* `app`
- `GtkTermWindow` \* `main_window`

## 5.14.1 Member Data Documentation

### 5.14.1.1 app

`GtkTerm*` `GtkTermTerminalPrivate::app`

Pointer to the app for getting [section] and keyfile

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), and [gtkterm\\_terminal\\_set\\_property\(\)](#).

### 5.14.1.2 macros

`macro_t*` `GtkTermTerminalPrivate::macros`

**Todo** convert macros -> object

### 5.14.1.3 main\_window

`GtkTermWindow*` `GtkTermTerminalPrivate::main_window`

Pointer to the main window for updating the statusbar on changes

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), [gtkterm\\_terminal\\_port\\_signals\\_changed\(\)](#), [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#), and [gtkterm\\_terminal\\_set\\_property\(\)](#).

### 5.14.1.4 port\_conf

`port_config_t*` `GtkTermTerminalPrivate::port_conf`

Port configuration used in this terminal

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), and [gtkterm\\_terminal\\_dispose\(\)](#).

#### 5.14.1.5 section

```
char* GtkTermTerminalPrivate::section
```

Section used in this terminal for configuration from config file

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), [gtkterm\\_terminal\\_dispose\(\)](#), [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#), and [gtkterm\\_terminal\\_set\\_property\(\)](#).

#### 5.14.1.6 serial\_port

```
GtkTermSerialPort* GtkTermTerminalPrivate::serial_port
```

The active serial port for this terminal

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#), and [gtkterm\\_terminal\\_vte\\_data\\_received\(\)](#).

#### 5.14.1.7 term\_buffer

```
GtkTermBuffer* GtkTermTerminalPrivate::term_buffer
```

Terminal buffer for serial port and terminal

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

#### 5.14.1.8 term\_conf

```
term_config_t* GtkTermTerminalPrivate::term_conf
```

The configuration loaded from the keyfile

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), [gtkterm\\_terminal\\_dispose\(\)](#), and [gtkterm\\_terminal\\_vte\\_data\\_received\(\)](#).

#### 5.14.1.9 view\_mode

```
GtkTermTerminalView GtkTermTerminalPrivate::view_mode
```

Referenced by [gtkterm\\_terminal\\_buffer\\_updated\(\)](#), and [gtkterm\\_terminal\\_init\(\)](#).

The documentation for this struct was generated from the following file:

- [gtkterm\\_terminal.c](#)

## 5.15 macro\_t Struct Reference

Define macro structure type.

```
#include <macros.h>
```

### Public Attributes

- char \* [shortcut](#)  
*Shortcut of the macro.*
- char \* [action](#)  
*Command to perform.*
- GClosure \* [closure](#)

### 5.15.1 Detailed Description

Define macro structure type.

todo: Migrate to GObject

### 5.15.2 Member Data Documentation

#### 5.15.2.1 action

```
char* macro_t::action
```

Command to perform.

Referenced by [convert\\_macros\\_to\\_string\(\)](#), and [convert\\_string\\_to\\_macros\(\)](#).

#### 5.15.2.2 closure

```
GClosure* macro_t::closure
```

#### 5.15.2.3 shortcut

```
char* macro_t::shortcut
```

Shortcut of the macro.

Referenced by [convert\\_macros\\_to\\_string\(\)](#), and [convert\\_string\\_to\\_macros\(\)](#).

The documentation for this struct was generated from the following file:

- [macros.h](#)

## 5.16 port\_config\_t Struct Reference

The typedef for the serial configuration.

```
#include <gtkterm_serial_port.h>
```

### Public Attributes

- char \* [port](#)
- long int [baudrate](#)
- int [bits](#)
- int [stopbits](#)
- [GtkTermSerialPortParity](#) [parity](#)
- [GtkTermSerialPortFlowControl](#) [flow\\_control](#)
- int [rs485\\_rts\\_time\\_before\\_transmit](#)
- int [rs485\\_rts\\_time\\_after\\_transmit](#)
- bool [disable\\_port\\_lock](#)

### 5.16.1 Detailed Description

The typedef for the serial configuration.

### 5.16.2 Member Data Documentation

#### 5.16.2.1 baudrate

```
long int port_config_t::baudrate
```

300 - 600 - 1200 - ... - 2000000

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_serial\\_port\\_config\(\)](#), and [gtkterm\\_serial\\_port\\_get\\_string\(\)](#).

#### 5.16.2.2 bits

```
int port_config_t::bits
```

5 - 6 - 7 - 8

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_serial\\_port\\_config\(\)](#), and [gtkterm\\_serial\\_port\\_get\\_string\(\)](#).

### 5.16.2.3 disable\_port\_lock

```
bool port_config_t::disable_port_lock
```

Lock the serial port to one terminal (can cause garbage if no)

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_serial\\_port\\_lock\(\)](#), and [gtkterm\\_serial\\_port\\_unlock\(\)](#).

### 5.16.2.4 flow\_control

```
GtkTermSerialPortFlowControl port_config_t::flow_control
```

0 : None, 1 : Xon/Xoff, 2 : RTS/CTS, 3 : RS485halfduplex

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_serial\\_port\\_config\(\)](#), [gtkterm\\_serial\\_port\\_read\\_signals\(\)](#), and [gtkterm\\_serial\\_port\\_serial\\_data\\_transmit\(\)](#).

### 5.16.2.5 parity

```
GtkTermSerialPortParity port_config_t::parity
```

0 : None, 1 : Odd, 2 : Even

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_serial\\_port\\_config\(\)](#), and [gtkterm\\_serial\\_port\\_get\\_string\(\)](#).

### 5.16.2.6 port

```
char* port_config_t::port
```

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_serial\\_port\\_device\\_monitor\(\)](#), [gtkterm\\_serial\\_port\\_event\\_udev\(\)](#), [gtkterm\\_serial\\_port\\_get\\_string\(\)](#), [gtkterm\\_serial\\_port\\_lock\(\)](#), and [gtkterm\\_serial\\_port\\_open\(\)](#).

### 5.16.2.7 rs485\_rts\_time\_after\_transmit

```
int port_config_t::rs485_rts_time_after_transmit
```

Waiting time between end of transmit and RTS on

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), and [gtkterm\\_serial\\_port\\_serial\\_data\\_transmit\(\)](#).



### 5.16.2.8 `rs485_rts_time_before_transmit`

```
int port_config_t::rs485_rts_time_before_transmit
```

Waiting time between RTS on and start to transmit

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), and [gtkterm\\_serial\\_port\\_serial\\_data](#)

### 5.16.2.9 `stopbits`

```
int port_config_t::stopbits
```

1 - 2

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_serial\\_port\\_config\(\)](#), and [gtkterm\\_serial\\_port\\_get\\_string\(\)](#).

The documentation for this struct was generated from the following file:

- [gtkterm\\_serial\\_port.h](#)

## 5.17 `term_config_t` Struct Reference

The typedef for the terminal configuration.

```
#include <gtkterm_terminal.h>
```

### Public Attributes

- bool [block\\_cursor](#)
- bool [show\\_cursor](#)
- char [char\\_queue](#)
- bool [echo](#)
- bool [auto\\_lf](#)
- bool [auto\\_cr](#)
- bool [timestamp](#)
- int [delay](#)
- int [rows](#)
- int [columns](#)
- int [scrollback](#)
- bool [visual\\_bell](#)
- GdkRGBA [foreground\\_color](#)
- GdkRGBA [background\\_color](#)
- PangoFontDescription \* [font](#)

### 5.17.1 Detailed Description

The typedef for the terminal configuration.

### 5.17.2 Member Data Documentation

#### 5.17.2.1 auto\_cr

```
bool term_config_t::auto_cr
```

auto line feed

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), [gtkterm\\_configuration\\_copy\\_section\(\)](#), and [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#).

#### 5.17.2.2 auto\_lf

```
bool term_config_t::auto_lf
```

local echo

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), [gtkterm\\_configuration\\_copy\\_section\(\)](#), and [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#).

#### 5.17.2.3 background\_color

```
GdkRGBA term_config_t::background_color
```

Terminal Background color

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

#### 5.17.2.4 block\_cursor

```
bool term_config_t::block_cursor
```

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

### 5.17.2.5 `char_queue`

```
char term_config_t::char_queue
```

Show cursor in window.

**Todo** This is not possible, so remove?

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), and [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#).

### 5.17.2.6 `columns`

```
int term_config_t::columns
```

Number of rows in terminal

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

### 5.17.2.7 `delay`

```
int term_config_t::delay
```

Show timestamp in output

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), and [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#).

### 5.17.2.8 `echo`

```
bool term_config_t::echo
```

character in queue

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_vte\\_data\\_received\(\)](#).

### 5.17.2.9 font

```
PangoFontDescription* term_config_t::font
```

Terminal Foreground color

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

### 5.17.2.10 foreground\_color

```
GdkRGBA term_config_t::foreground_color
```

Visual bell

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

### 5.17.2.11 rows

```
int term_config_t::rows
```

end of char delay: in ms

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

### 5.17.2.12 scrollbar

```
int term_config_t::scrollback
```

Number of cols in terminal

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

### 5.17.2.13 `show_cursor`

```
bool term_config_t::show_cursor
```

Show a block shape cursor

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), and [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#).

### 5.17.2.14 `timestamp`

```
bool term_config_t::timestamp
```

auto return

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), [gtkterm\\_configuration\\_copy\\_section\(\)](#), and [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#).

### 5.17.2.15 `visual_bell`

```
bool term_config_t::visual_bell
```

Number of scrollback lines

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), and [gtkterm\\_terminal\\_constructed\(\)](#).

The documentation for this struct was generated from the following file:

- [gtkterm\\_terminal.h](#)



## Chapter 6


# File Documentation

### 6.1 README\_source.md File Reference

### 6.2 gtkterm.c File Reference

```
#include <gtk/gtk.h>
#include <vte/vte.h>
#include <glib/glib.h>
#include <glib/gprintf.h>
#include "config.h"
#include "gtkterm_defaults.h"
#include "gtkterm.h"
#include "gtkterm_window.h"
#include "gtkterm_terminal.h"
#include "gtkterm_cmdline.h"
#include "gtkterm_serial_port.h"
```

Include dependency graph for gtkterm.c:

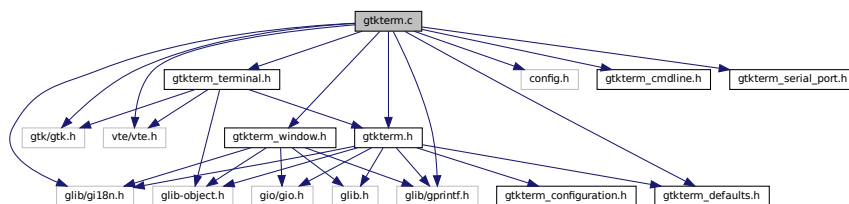

## Functions

- static void [on\\_gtkterm\\_quit](#) (GSimpleAction \*action, GVariant \*parameter, gpointer user\_data)  
*Quit the application.*
- static void [gtkterm\\_startup](#) (GApplication \*app)  
*Startup the application.*
- static void [gtkterm\\_activate](#) (GApplication \*app)  
*Activates the application.*

- static void [gtkterm\\_init](#) ([GtkTerm](#) \*app)  
*The initialization of the application.*
- static void [gtkterm\\_class\\_init](#) ([GtkTermClass](#) \*class)  
*Initializing the application class.*
- int [main](#) (int argc, char \*argv[])  
*The main function.*

## Variables

- unsigned int [gtkterm\\_signals](#) [[LAST\\_GTKTERM\\_SIGNAL](#)]
- static [GActionEntry](#) [gtkterm\\_entries](#) []

## 6.2.1 Function Documentation

### 6.2.1.1 [gtkterm\\_activate\(\)](#)

```
static void gtkterm_activate (  
    GApplication * app ) [static]
```

Activates the application.

Create the main window. The actual creation of the terminal will be done in the [GtkTermWindow](#) file.


#### Parameters

<i>app</i>	The application
------------	-----------------

**Todo** embed [create\\_window](#) in the [gtkapplication](#) window

Referenced by [gtkterm\\_class\\_init\(\)](#).

Here is the call graph for this function:





Here is the caller graph for this function:



### 6.2.1.2 gtkterm\_class\_init()

```
static void gtkterm_class_init (  
    GtkTermClass * class ) [static]
```


Initializing the application class.

Setting the signals and callback functions

#### Parameters

<i>class</i>	The application class
--------------	-----------------------

Here is the call graph for this function:



### 6.2.1.3 gtkterm\_init()

```
static void gtkterm_init (  
    GtkTerm * app ) [static]
```

The initialization of the application.


Setting the cli options and initialize the application variables

**Parameters**

<i>app</i>	The application
------------	-----------------

Set an action group for the app entries.

Initialize the config file and set the section to [default]Here is the call graph for this function:

**6.2.1.4 gtkterm\_startup()**

```
static void gtkterm_startup (  
    GApplication * app ) [static]
```

Startup the application.

Initiaze the builder and add menu resources to the application

**Parameters**

<i>app</i>	The application
------------	-----------------

Referenced by [gtkterm\\_class\\_init\(\)](#).

Here is the caller graph for this function:



### 6.2.1.5 main()

```
int main (
    int argc,
    char * argv[] )
```

The main function.

#### Parameters

<i>argc</i>	Number of cli arguments
<i>argv</i>	The cli arguments

### 6.2.1.6 on\_gtkterm\_quit()

```
static void on_gtkterm_quit (
    GSimpleAction * action,
    GVariant * parameter,
    gpointer user_data ) [static]
```

Quit the application.

Is a callback function from the menubar and cleans up all memory, windows etc.

#### Parameters

<i>action</i>	Not used.
<i>parameter</i>	Not used.
<i>user_data</i>	The application we want to quit

Clean up memory

**Todo** : Should be part of the Gtkterm application struct

## 6.2.2 Variable Documentation

### 6.2.2.1 gtkterm\_entries

```
GActionEntry gtkterm_entries[] [static]
```

#### Initial value:

```
= {
    { "quit", on_gtkterm_quit, NULL, NULL, NULL },
}
```

Referenced by [gtkterm\\_init\(\)](#).

### 6.2.2.2 gtkterm\_signals

```
unsigned int gtkterm_signals[LAST\_GTKTERM\_SIGNAL]
```


The gtkterm signals available

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), [gtkterm\\_buffer\\_class\\_init\(\)](#), [gtkterm\\_class\\_init\(\)](#), [gtkterm\\_serial\\_port\\_class\\_constructed\(\)](#), [gtkterm\\_serial\\_port\\_serial\\_data\\_received\(\)](#), [gtkterm\\_terminal\\_class\\_init\(\)](#), [gtkterm\\_terminal\\_constructed\(\)](#), [gtkterm\\_terminal\\_port\\_signals\\_changed\(\)](#), [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#), [gtkterm\\_terminal\\_vte\\_data\\_received\(\)](#), [gtkterm\\_window\\_class\\_init\(\)](#), [on\\_list\\_config\(\)](#), [on\\_print\\_section\(\)](#), [on\\_remove\\_config\(\)](#), and [on\\_save\\_section\(\)](#).


## 6.3 gtkterm.h File Reference

```
#include <gio/gio.h>
#include <glib-object.h>
#include <glib.h>
#include <glib/gi18n.h>
#include <glib/gprintf.h>
#include "gtkterm_defaults.h"
#include "gtkterm_configuration.h"
```

Include dependency graph for gtkterm.h:

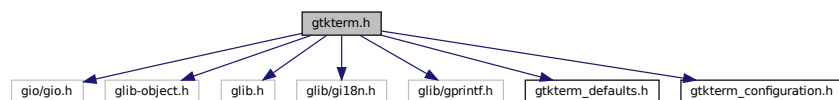

This graph shows which files directly or indirectly include this file:

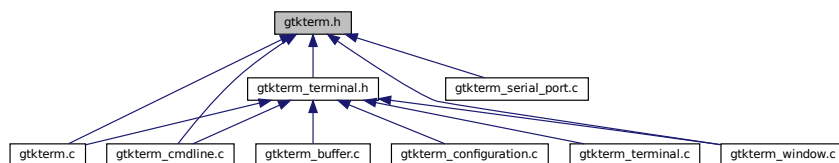

## Classes

- [struct `\_GtkTerm`](#)

*The main GtkTerm application class.*

## Macros

- [#define `GTKTERM\_TYPE\_APP`](#) [gtkterm\\_get\\_type\(\)](#)

## Typedefs

- typedef struct [\\_GtkTerm](#) [GtkTerm](#)

## Enumerations

- enum {  
[SIGNAL\\_GTKTERM\\_LOAD\\_CONFIG](#) , [SIGNAL\\_GTKTERM\\_SAVE\\_CONFIG](#) , [SIGNAL\\_GTKTERM\\_LIST\\_CONFIG](#)  
, [SIGNAL\\_GTKTERM\\_REMOVE\\_SECTION](#) ,  
[SIGNAL\\_GTKTERM\\_PRINT\\_SECTION](#) , [SIGNAL\\_GTKTERM\\_COPY\\_SECTION](#) , [SIGNAL\\_GTKTERM\\_CONFIG\\_TERMINAL](#)  
, [SIGNAL\\_GTKTERM\\_CONFIG\\_SERIAL](#) ,  
[SIGNAL\\_GTKTERM\\_CONFIG\\_CHECK\\_FILE](#) , [SIGNAL\\_GTKTERM\\_TERMINAL\\_CHANGED](#) , [SIGNAL\\_GTKTERM\\_SERIAL](#)  
, [SIGNAL\\_GTKTERM\\_VTE\\_DATA\\_RECEIVED](#) ,  
[SIGNAL\\_GTKTERM\\_SERIAL\\_DATA\\_RECEIVED](#) , [SIGNAL\\_GTKTERM\\_SERIAL\\_DATA\\_TRANSMIT](#) ,  
[SIGNAL\\_GTKTERM\\_SERIAL\\_SIGNALS\\_CHANGED](#) , [SIGNAL\\_GTKTERM\\_BUFFER\\_UPDATED](#) ,  
[LAST\\_GTKTERM\\_SIGNAL](#) }

## Variables

- unsigned int [gtkterm\\_signals](#) []

## 6.3.1 Macro Definition Documentation

### 6.3.1.1 GTKTERM\_TYPE\_APP

```
#define GTKTERM_TYPE_APP gtkterm_get_type()
```

## 6.3.2 Typedef Documentation

### 6.3.2.1 GtkTerm

```
typedef struct \_GtkTerm GtkTerm
```

## 6.3.3 Enumeration Type Documentation

### 6.3.3.1 anonymous enum

```
anonymous enum
```

The signals which are defined

## Enumerator

SIGNAL_GTKTERM_LOAD_CONFIG	
SIGNAL_GTKTERM_SAVE_CONFIG	
SIGNAL_GTKTERM_LIST_CONFIG	
SIGNAL_GTKTERM_REMOVE_SECTION	
SIGNAL_GTKTERM_PRINT_SECTION	
SIGNAL_GTKTERM_COPY_SECTION	
SIGNAL_GTKTERM_CONFIG_TERMINAL	
SIGNAL_GTKTERM_CONFIG_SERIAL	
SIGNAL_GTKTERM_CONFIG_CHECK_FILE	
SIGNAL_GTKTERM_TERMINAL_CHANGED	
SIGNAL_GTKTERM_SERIAL_CONNECT	
SIGNAL_GTKTERM_VTE_DATA_RECEIVED	
SIGNAL_GTKTERM_SERIAL_DATA_RECEIVED	
SIGNAL_GTKTERM_SERIAL_DATA_TRANSMIT	
SIGNAL_GTKTERM_SERIAL_SIGNALS_CHANGED	
SIGNAL_GTKTERM_BUFFER_UPDATED	
LAST_GTKTERM_SIGNAL	

## 6.3.4 Variable Documentation

### 6.3.4.1 gtkterm\_signals

```
unsigned int gtkterm_signals[] [extern]
```

The gtkterm signals available

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#), [gtkterm\\_buffer\\_class\\_init\(\)](#), [gtkterm\\_class\\_init\(\)](#), [gtkterm\\_serial\\_port\\_class\\_constructed\(\)](#), [gtkterm\\_serial\\_port\\_serial\\_data\\_received\(\)](#), [gtkterm\\_terminal\\_class\\_init\(\)](#), [gtkterm\\_terminal\\_constructed\(\)](#), [gtkterm\\_terminal\\_port\\_signals\\_changed\(\)](#), [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#), [gtkterm\\_terminal\\_vte\\_data\\_received\(\)](#), [gtkterm\\_window\\_class\\_init\(\)](#), [on\\_list\\_config\(\)](#), [on\\_print\\_section\(\)](#), [on\\_remove\\_config\(\)](#), and [on\\_save\\_section\(\)](#).

## 6.4 gtkterm.h

[Go to the documentation of this file.](#)

```

1
2 #ifndef GTKTERM_H
3 #define GTKTERM_H
4
5 #include <gio/gio.h>
6 #include <glib-object.h>
7 #include <glib.h>
8 #include <glib/gi18n.h>
9 #include <glib/gprintf.h>
10
11 #include "gtkterm_defaults.h"
12 #include "gtkterm_configuration.h"
13
14 enum {
15     SIGNAL_GTKTERM_LOAD_CONFIG,
16     SIGNAL_GTKTERM_SAVE_CONFIG,

```

```

18     SIGNAL_GTKTERM_LIST_CONFIG,
19     SIGNAL_GTKTERM_REMOVE_SECTION,
20     SIGNAL_GTKTERM_PRINT_SECTION,
21     SIGNAL_GTKTERM_COPY_SECTION,
22     SIGNAL_GTKTERM_CONFIG_TERMINAL,
23     SIGNAL_GTKTERM_CONFIG_SERIAL,
24     SIGNAL_GTKTERM_CONFIG_CHECK_FILE,
25     SIGNAL_GTKTERM_TERMINAL_CHANGED,
26     SIGNAL_GTKTERM_SERIAL_CONNECT,
27     SIGNAL_GTKTERM_VTE_DATA_RECEIVED,
28     SIGNAL_GTKTERM_SERIAL_DATA_RECEIVED,
29     SIGNAL_GTKTERM_SERIAL_DATA_TRANSMIT,
30     SIGNAL_GTKTERM_SERIAL_SIGNALS_CHANGED,
31     SIGNAL_GTKTERM_BUFFER_UPDATED,
32     LAST_GTKTERM_SIGNAL
33 };
34
35 extern unsigned int gtkterm_signals[];
36
37 G_BEGIN_DECLS
38
44 struct _GtkTerm {
45
46     GtkApplication parent_instance;
47
48     GOptionGroup *g_term_group;
49     GOptionGroup *g_port_group;
50     GOptionGroup *g_config_group;
51
52     GActionGroup *action_group;
53
54     GtkTermConfiguration *config;
55     char *section;
56 };
57
58 #define GTKTERM_TYPE_APP gtkterm_get_type()
59 G_DECLARE_FINAL_TYPE (GtkTerm, gtkterm, GTKTERM, APP, GtkApplication)
60 typedef struct _GtkTerm GtkTerm;
61
62 G_END_DECLS
63
64 #endif // GTKTERM_H

```


## 6.5 gtkterm\_buffer.c File Reference

```

#include <gtk/gtk.h>
#include <glib.h>
#include <termios.h>
#include <fcntl.h>
#include <stdio.h>
#include <unistd.h>
#include <config.h>
#include <glib/glib.h>
#include "gtkterm_window.h"
#include "gtkterm_defaults.h"
#include "gtkterm_terminal.h"
#include "gtkterm_serial_port.h"
#include "gtkterm_buffer.h"

```

Include dependency graph for gtkterm\_buffer.c:

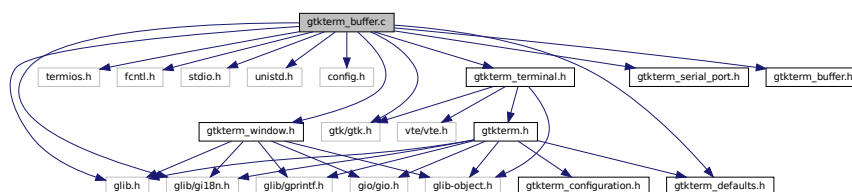

## Classes

- struct [GtkTermBufferPrivate](#)
- struct [\\_GtkTermBuffer](#)
- struct [\\_GtkTermBufferClass](#)

## Macros

- `#define` [TIMESTAMP\\_SIZE](#) 50

## Enumerations

- enum {  
[PROP\\_0](#) , [PROP\\_SERIAL\\_PORT](#) , [PROP\\_TERMINAL](#) , [PROP\\_TERM\\_CONF](#) ,  
[N\\_PROPS](#) }

## Functions

- static [GtkTermBufferState](#) [gtkterm\\_buffer\\_add\\_data](#) (GObject \*object, gpointer data, gpointer user\_data)  
*New data is available to add to the buffer.*
- [GtkTermBufferState](#) [gtkterm\\_buffer\\_set\\_status](#) ([GtkTermBuffer](#) \*self, [GtkTermBufferState](#) status, GError \*error)  
*Sets the status and error of the last operation.*
- unsigned int [insert\\_timestamp](#) (char \*buffer)  
*Add a timestamp to the buffer.*
- void [gtkterm\\_buffer\\_repage](#) ([GtkTermBuffer](#) \*self)  
*Repage the buffer to make room for new data.*
- [GtkTermBuffer](#) \* [gtkterm\\_buffer\\_new](#) ([GtkTermSerialPort](#) \*serial\_port, [GtkTermTerminal](#) \*terminal, [term\\_config\\_t](#) \*term\_conf)  
*Create a new buffer object.*
- static void [gtkterm\\_buffer\\_finalize](#) (GObject \*object)  
*Finalizing the buffer class.*
- static void [gtkterm\\_buffer\\_constructed](#) (GObject \*object)  
*Constructs the buffer.*
- static void [gtkterm\\_buffer\\_dispose](#) (GObject \*object)  
*Called when destroying the buffer.*
- static void [gtkterm\\_buffer\\_set\\_property](#) (GObject \*object, unsigned int prop\_id, const GValue \*value, GParamSpec \*pspec)  
*Set the property of the GtkTermBuffer structure.*
- static void [gtkterm\\_buffer\\_class\\_init](#) ([GtkTermBufferClass](#) \*class)  
*Initializing the buffer class.*
- static void [gtkterm\\_buffer\\_init](#) ([GtkTermBuffer](#) \*self)  
*Initialize the buffer with size BUFFER\_SIZE.*
- [GtkTermBufferState](#) [gtkterm\\_buffer\\_get\\_status](#) ([GtkTermBuffer](#) \*self)  
*Return the latest status condition for the buffer operation.*
- GError \* [gtkterm\\_buffer\\_get\\_error](#) ([GtkTermBuffer](#) \*self)  
*Return the latest error for the buffer operation.*



## Variables

- static GParamSpec \* [gtkterm\\_buffer\\_properties](#) [N\_PROPS] = {NULL}

## 6.5.1 Macro Definition Documentation

### 6.5.1.1 TIMESTAMP\_SIZE

```
#define TIMESTAMP_SIZE 50
```

## 6.5.2 Enumeration Type Documentation

### 6.5.2.1 anonymous enum

anonymous enum

Enumerator

PROP_0	
PROP_SERIAL_PORT	
PROP_TERMINAL	
PROP_TERM_CONF	
N_PROPS	

## 6.5.3 Function Documentation

### 6.5.3.1 gtkterm\_buffer\_add\_data()

```
static GtkTermBufferState gtkterm_buffer_add_data (
    GObject * object,
    gpointer data,
    gpointer user_data ) [static]
```

New data is available to add to the buffer.

The buffer will signal the terminal new data is available.

## Parameters

<i>object</i>	Not used.
<i>data</i>	The new byte-string of data for the buffer.
<i>user_data</i>	The buffer.

< Indicates from where to send data to the terminal

(When incoming size is larger than buffer, then just print the last BUFFER\_SIZE characters and ignore all other at begin of buffer) In theory the str\_size (8k) cannot be larger then the buffer size (128k)

**Todo** Make buffer also work with greater datastrings to make tbe above work.

When incoming size is larger than free space in the buffer then repage the buffer which will move the head. We use 2x the str\_size to

If the auto CR or LF mode on, read the buffer to add LF before CR

If the previous character was a CR too, insert a newline

If we receive a normal char, and the previous one was a CR insert a newline

If we have timestamps configured and it is time to print one, print it

< remember until we have a new character to print

< Copy the string character to the buffer

< Increment for each stored character


If we are growing out of the buffer, then repage

We dont need any timestamps or LF/CR so just copy the string into the buffer


Send new data to the terminal

Referenced by [gtkterm\\_buffer\\_constructed\(\)](#).

Here is the call graph for this function:

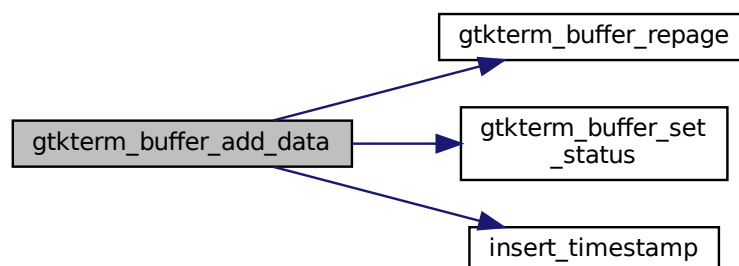

Here is the caller graph for this function:



### 6.5.3.2 gtkterm\_buffer\_class\_init()

```
static void gtkterm_buffer_class_init (
    GtkTermBufferClass * class ) [static]
```


Initializing the buffer class.

Setting the properties and callback functions

#### Parameters

<i>class</i>	The buffer port class
--------------	-----------------------

Parameters to hand over at creation of the object We need the section to load the config from the keyfile. Here is the call graph for this function:

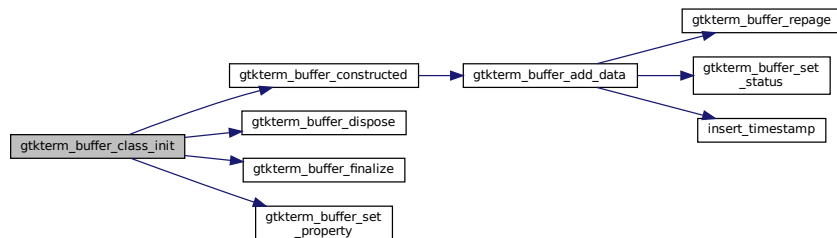

### 6.5.3.3 gtkterm\_buffer\_constructed()

```
static void gtkterm_buffer_constructed (
    GObject * object ) [static]
```

Constructs the buffer.

Setup signals etc.


**Parameters**

<i>object</i>	The buffer object we are constructing.
---------------	--

Connect to data received signals from vte and serial

Referenced by [gtkterm\\_buffer\\_class\\_init\(\)](#).

Here is the call graph for this function:

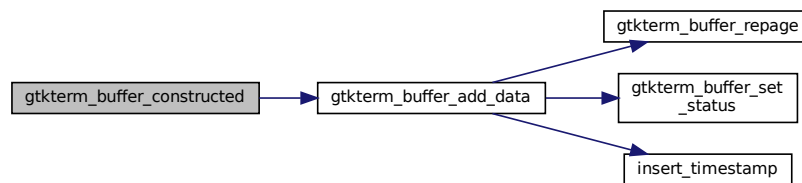

Here is the caller graph for this function:

**6.5.3.4 gtkterm\_buffer\_dispose()**

```
static void gtkterm_buffer_dispose (
    GObject * object ) [static]
```

Called when destroying the buffer.


This is used to clean up and freeing the variables in the buffer structure.

**Parameters**

<i>object</i>	The object.
---------------	-------------

Referenced by [gtkterm\\_buffer\\_class\\_init\(\)](#).

Here is the caller graph for this function:



#### 6.5.3.5 `gtkterm_buffer_finalize()`

```
static void gtkterm_buffer_finalize (  
    GObject * object ) [static]
```

Finalizing the buffer class.


Clears the pointer of the buffer.

##### Parameters

<i>object</i>	The object which is finalized
---------------	-------------------------------

Referenced by [gtkterm\\_buffer\\_class\\_init\(\)](#).

Here is the caller graph for this function:



#### 6.5.3.6 `gtkterm_buffer_get_error()`

```
GError * gtkterm_buffer_get_error (  
    GtkTermBuffer * self )
```

Return the latest error for the buffer operation.

**Parameters**

<i>self</i>	The configuration for which the get the status for.
-------------	---

**Returns**

The latest error.

**6.5.3.7 gtkterm\_buffer\_get\_status()**

```
GtkTermBufferState gtkterm_buffer_get_status (
    GtkTermBuffer * self )
```

Return the latest status condiation for the buffer operation.

**Parameters**

<i>self</i>	The configuration for which the get the status for.
-------------	---

**Returns**

The latest status.

**6.5.3.8 gtkterm\_buffer\_init()**

```
static void gtkterm_buffer_init (
    GtkTermBuffer * self ) [static]
```

Initialize the buffer with size BUFFER\_SIZE.

**Parameters**

<i>self</i>	The buffer we are initializing.
-------------	---------------------------------

**6.5.3.9 gtkterm\_buffer\_new()**

```
GtkTermBuffer * gtkterm_buffer_new (
    GtkTermSerialPort * serial_port,
    GtkTermTerminal * terminal,
    term_config_t * term_conf )
```


Create a new buffer object.

**Returns**

The buffer object.

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

Here is the caller graph for this function:

**6.5.3.10 gtkterm\_buffer\_repage()**


```
void gtkterm_buffer_repage (
    GtkTermBuffer * self )
```

Repage the buffer to make room for new data.

When repaging the buffer is moved 2 pages up. The head is always placed after a CR to make sure we start with a new string.

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#).

Here is the caller graph for this function:

**6.5.3.11 gtkterm\_buffer\_set\_property()**

```
static void gtkterm_buffer_set_property (
    GObject * object,
    unsigned int prop_id,
    const GValue * value,
    GParamSpec * pspec ) [static]
```

Set the property of the GtkTermBuffer structure.


This is used to initialize the variables when creating a new buffer

**Parameters**

<i>object</i>	The object.
<i>prop↔ _id</i>	The id of the property to set.
<i>value</i>	The value for the property
<i>pspec</i>	Metadata for property setting.

Referenced by [gtkterm\\_buffer\\_class\\_init\(\)](#).

Here is the caller graph for this function:

**6.5.3.12 gtkterm\_buffer\_set\_status()**

```

GtkTermBufferState gtkterm_buffer_set_status (
    GtkTermBuffer * self,
    GtkTermBufferState status,
    GError * error )
  
```

Sets the status and error of the last operation.

**Parameters**

<i>self</i>	The configuration for which the get the status for.
<i>status</i>	The status to be set.
<i>error</i>	The error message (can be NULL)

**Returns**


The latest status.

If there is a previous error, clear it

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#).



Here is the caller graph for this function:



### 6.5.3.13 insert\_timestamp()

```
unsigned int insert_timestamp (
    char * buffer )
```

Add a timestamp to the buffer.

Assumes that buffer always has space for timestamp (TIMESTAMP\_SIZE)

#### Parameters


<i>buffer</i>	Points to location where timestamp will be inserted.
---------------	--

#### Returns

unsigned int Length of the timestamp added.

Referenced by [gtkterm\\_buffer\\_add\\_data\(\)](#).

Here is the caller graph for this function:



## 6.5.4 Variable Documentation


### 6.5.4.1 gtkterm\_buffer\_properties

```
GParamSpec* gtkterm_buffer_properties[N_PROPS] = {NULL} [static]
```

Referenced by [gtkterm\\_buffer\\_class\\_init\(\)](#).

## 6.6 gtkterm\_buffer.h File Reference

This graph shows which files directly or indirectly include this file:

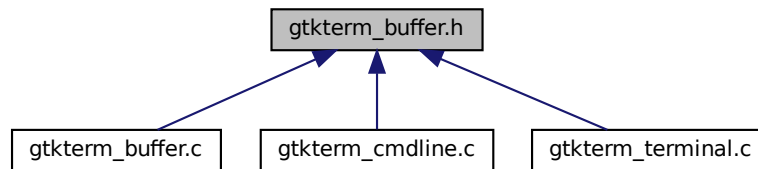

### Macros

- `#define` [GTKTERM\\_BUFFER\\_H](#)
- `#define` [GTKTERM\\_TYPE\\_BUFFER](#) `gtkterm_buffer_get_type()`

### Typedefs

- `typedef struct` [\\_GtkTermBuffer](#) `GtkTermBuffer`

### Enumerations

- `enum` [GtkTermBufferState](#) { [GTKTERM\\_BUFFER\\_SUCCESS](#) , [GTKTERM\\_BUFFER\\_NOT\\_INITIALIZED](#) , [GTKTERM\\_BUFFER\\_OVERFLOW](#) , [GTKTERM\\_BUFFER\\_LAST](#) }
- Enum buffer\_error id.*

### Functions

- `GtkTermBuffer *` [gtkterm\\_buffer\\_new](#) (`GtkTermSerialPort *`, `GtkTermTerminal *`, `term_config_t *`)  
*Create a new buffer object.*
- `G_END_DECLS` [GtkTermBufferState](#) [gtkterm\\_buffer\\_get\\_status](#) (`GtkTermBuffer *`)  
*Return the latest status condition for the buffer operation.*
- `GError *` [gtkterm\\_buffer\\_get\\_error](#) (`GtkTermBuffer *`)  
*Return the latest error for the buffer operation.*

## 6.6.1 Macro Definition Documentation

### 6.6.1.1 GTKTERM\_BUFFER\_H

```
#define GTKTERM_BUFFER_H
```

### 6.6.1.2 GTKTERM\_TYPE\_BUFFER

```
#define GTKTERM_TYPE_BUFFER gtkterm_buffer_get_type ()
```

## 6.6.2 Typedef Documentation

### 6.6.2.1 GtkTermBuffer

```
typedef struct _GtkTermBuffer GtkTermBuffer
```

## 6.6.3 Enumeration Type Documentation

### 6.6.3.1 GtkTermBufferState

```
enum GtkTermBufferState
```

Enum buffer\_error id.

Many of the gtk\_buffer functions return an error id.

Enumerator

GTKTERM_BUFFER_SUCCESS	
GTKTERM_BUFFER_NOT_INITIALIZED	
GTKTERM_BUFFER_OVERFLOW	
GTKTERM_BUFFER_LAST	

## 6.6.4 Function Documentation

### 6.6.4.1 gtkterm\_buffer\_get\_error()

```
GError * gtkterm_buffer_get_error (  
    GtkTermBuffer * self )
```

Return the latest error for the buffer operation.

**Parameters**

<i>self</i>	The configuration for which the get the status for.
-------------	---

**Returns**

The latest error.

**6.6.4.2 gkterm\_buffer\_get\_status()**

```
G_END_DECLS GtkTermBufferState gkterm_buffer_get_status (
    GtkTermBuffer * self )
```

Return the latest status condiation for the buffer operation.

**Parameters**

<i>self</i>	The configuration for which the get the status for.
-------------	---

**Returns**

The latest status.

**6.6.4.3 gkterm\_buffer\_new()**

```
GtkTermBuffer * gkterm_buffer_new (
    GtkTermSerialPort * serial_port,
    GtkTermTerminal * terminal,
    term_config_t * term_conf )
```


Create a new buffer object.

**Returns**

The buffer object.

Referenced by [gkterm\\_terminal\\_constructed\(\)](#).

Here is the caller graph for this function:



## 6.7 gtkterm\_buffer.h

[Go to the documentation of this file.](#)

```

1 #ifndef GTKTERM_BUFFER_H
2 #define GTKTERM_BUFFER_H
3
10 typedef enum {
11     GTKTERM_BUFFER_SUCCESS,
12     GTKTERM_BUFFER_NOT_INITIALIZED,
13     GTKTERM_BUFFER_OVERFLOW,
14     GTKTERM_BUFFER_LAST
15 } GtkTermBufferState;
16
17
18 G_BEGIN_DECLS
19
20 #define GTKTERM_TYPE_BUFFER gtkterm_buffer_get_type ()
21 G_DECLARE_FINAL_TYPE (GtkTermBuffer, gtkterm_buffer, GTKTERM, BUFFER, GObject)
22 typedef struct _GtkTermBuffer GtkTermBuffer;
23
24 GtkTermBuffer *gtkterm_buffer_new (GtkTermSerialPort *, GtkTermTerminal *, term_config_t *);
25
26 G_END_DECLS
27
28 GtkTermBufferState gtkterm_buffer_get_status (GtkTermBuffer *);
29 GError *gtkterm_buffer_get_error (GtkTermBuffer*);
30
31 #endif // GTKTERM_BUFFER_H

```


## 6.8 gtkterm\_cmdline.c File Reference

```

#include <glib.h>
#include <glib/glib.h>
#include <gtk/gtk.h>
#include <glib/gprintf.h>
#include <config.h>
#include "gtkterm_defaults.h"
#include "gtkterm.h"
#include "gtkterm_window.h"
#include "gtkterm_terminal.h"
#include "gtkterm_serial_port.h"
#include "gtkterm_buffer.h"
#include "gtkterm_configuration.h"
#include "gtkterm_cmdline.h"

```

Include dependency graph for gtkterm\_cmdline.c:

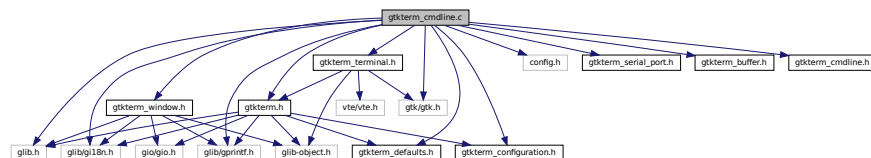

## Functions

- static bool [on\\_remove\\_config](#) (const char \*name, const char \*value, gpointer data, GError \*\*error)  
*Removes a configuration sections.*
- static bool [on\\_save\\_section](#) (const char \*name, const char \*value, gpointer data, GError \*\*error)  
*Saves a configuration sections.*

- static bool [on\\_print\\_section](#) (const char \*name, const char \*value, gpointer data, GError \*\*error)  
*Prints a configuration sections.*
- static bool [on\\_list\\_config](#) (const char \*name, const char \*value, gpointer data, GError \*\*error)  
*List all configurations.*
- static bool [on\\_use\\_config](#) (const char \*name, const char \*value, gpointer data, GError \*\*error)  
*Sets the use of a configuration section.*
- void [gtkterm\\_add\\_cmdline\\_options](#) (GtkTerm \*app)  
*Add the commandline options.*

## Variables

- static GOptionEntry [gtkterm\\_config\\_options](#) []  
*GOptionEntry mappings.*
- static GOptionEntry [gtkterm\\_term\\_options](#) []  
*Longname CLI options.*
- static GOptionEntry [gtkterm\\_port\\_options](#) []

## 6.8.1 Function Documentation

### 6.8.1.1 [gtkterm\\_add\\_cmdline\\_options\(\)](#)

```
void gtkterm_add_cmdline_options (
    GtkTerm * app )
```

Add the commandline options.

Commandline options are grouped. So each group is created. Each group has app as parameter passed through the callback.


#### Parameters

<i>app</i>	The application
------------	-----------------

Pass app as data to the new created group

Referenced by [gtkterm\\_init\(\)](#).

Here is the caller graph for this function:



### 6.8.1.2 on\_list\_config()

```
static bool on_list_config (  
    const char * name,  
    const char * value,  
    gpointer data,  
    GError ** error ) [static]
```

List all configurations.

The function emits a signal which is connected to list all configurations. After printing, the `g_application_quit` is called for exiting the application (we only want to list the configs, not to start up GTKTerm)


#### Parameters

<i>name</i>	Not used.
<i>value</i>	Not used.
<i>data</i>	The application app.
<i>error</i>	Error (not used).

#### Returns

true on success (we will not get there).

Signal to list the configurations and dump it to the cliHere is the call graph for this function:



### 6.8.1.3 on\_print\_section()

```
static bool on_print_section (  
    const char * name,  
    const char * value,  
    gpointer data,  
    GError ** error ) [static]
```

Prints a configuration section.

The function emits a signal which is connected to the config print function. After printing, the `g_application_quit` is called for exiting the application (we only want to print the section, not to start up GTKTerm)


**Parameters**

<i>name</i>	Not used.
<i>value</i>	The section we want to print.
<i>data</i>	The application app.
<i>error</i>	Error (not used).

**Returns**

true on succes (we will not get there).

Signal to load the configuration and dump it to the cliHere is the call graph for this function:

**6.8.1.4 on\_remove\_config()**

```

static bool on_remove_config (
    const char * name,
    const char * value,
    gpointer data,
    GError ** error ) [static]
  
```

Removes a configuration sections.

The functions emits a signal which is connected to the config remove function. After removing, the g\_application\_↔\_quit is called for exiting the application (we only want to remove the section, not to start up GTKTerm).

**Parameters**


<i>name</i>	Not used.
<i>value</i>	The section we want to remove.
<i>data</i>	The application app.
<i>error</i>	Error (not used).

**Returns**

true on succes (we will not get there).



Signal to load the configuration and dump it to the cliHere is the call graph for this function:



#### 6.8.1.5 on\_save\_section()

```
static bool on_save_section (  
    const char * name,  
    const char * value,  
    gpointer data,  
    GError ** error ) [static]
```

Saves a configuration sections.

The functions emits a signal which is connected to the config save function. After saving, the `g_application_quit` is called for exiting the application (we only want to save the section, not to start up `GTKTerm`). If we want to save cli options we have to put the save option as last parameter.


##### Parameters

<i>name</i>	Not used.
<i>value</i>	The section we want to save.
<i>data</i>	The application app.
<i>error</i>	Error (not used).

##### Returns

true on succes (we will not get there).

Signal to save the configuration and dump it to the cliHere is the call graph for this function:



### 6.8.1.6 on\_use\_config()

```
static bool on_use_config (
    const char * name,
    const char * value,
    gpointer data,
    GError ** error ) [static]
```

Sets the use of a configuration section.

This is used as input for config options or starting GTKTerm with the section active.

#### Parameters

<i>name</i>	Not used.
<i>value</i>	The section we want to use.
<i>data</i>	The application app.
<i>error</i>	Error (not used).

#### Returns

true on succes (continues startup). False if the configurationname is too long.

## 6.8.2 Variable Documentation

### 6.8.2.1 gtkterm\_config\_options

```
GOptionEntry gtkterm_config_options[] [static]
```

#### Initial value:

```
= {
    {"show_config", 'V', 0, G_OPTION_ARG_CALLBACK, on_print_section, N_("Show configuration"),
     "[configuration]"},
    {"save_config", 'S', G_OPTION_FLAG_NO_ARG, G_OPTION_ARG_CALLBACK, on_save_section, N_("Save
configuration"), NULL},
    {"remove_config", 'R', 0, G_OPTION_ARG_CALLBACK, on_remove_config, N_("Remove configuration"),
     "[configuration]"},
    {"use_config", 'U', 0, G_OPTION_ARG_CALLBACK, on_use_config, N_("Use configuration (must be first
argument)"), "[configuration]"},
    {"list_config", 'L', G_OPTION_FLAG_NO_ARG, G_OPTION_ARG_CALLBACK, on_list_config, N_("List all
configurations"), NULL},
    {NULL}
}
```

GOptionEntry mappings.

We use callback in GOptionEntry. So we can directly put them in the Terminal configuration instead of handing over a pointer from the config.

**Todo** Update gtkterm.1.

Referenced by [gtkterm\\_add\\_cmdline\\_options\(\)](#).

### 6.8.2.2 gtkterm\_port\_options

GOptionEntry gtkterm\_port\_options[] [static]

Initial value:

```
= {
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_PARITY], 'a', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Parity(default = none)"), "<odd|even|none>"},
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_BITS], 'b', 0, G_OPTION_ARG_CALLBACK, on_set_config_options,
   N_("Number of bits (default 8)"), "<7|8> "},
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_PORT], 'p', 0, G_OPTION_ARG_CALLBACK, on_set_config_options,
   N_("Serial port device (default /dev/ttyS0)"), "[device]"},
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_BAUDRATE], 's', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Serial port baudrate(default 9600bps)"), "[baudrate]"},
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_STOPBITS], 't', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Number of stopbits (default 1)"), "<1|2>"},
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_FLOW_CONTROL], 'w', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Flow control (default none)"), "<Xon|RTS|RS485|none>"},
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_RS485_RTS_TIME_BEFORE_TX], 'x', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("For RS485, time in ms before transmit with RTS on"), "[ms]"},
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_RS485_RTS_TIME_AFTER_TX], 'y', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("For RS485, time in ms after transmit with RTS on"), "[ms]"},
  {GtkTermConfigurationItems[CONF_ITEM_SERIAL_DISABLE_PORT_LOCK], 'l', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Disable lock serial port "), "<on|off>"},
  {NULL}
}
```

Referenced by [gtkterm\\_add\\_cmdline\\_options\(\)](#).

### 6.8.2.3 gtkterm\_term\_options

GOptionEntry gtkterm\_term\_options[] [static]

Initial value:


```
= {
  {GtkTermConfigurationItems[CONF_ITEM_TERM_WAIT_DELAY], 'd', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("End of line delay in ms (default none)"), "<ms>"},
  {GtkTermConfigurationItems[CONF_ITEM_TERM_ECHO], 'e', 0, G_OPTION_ARG_CALLBACK, on_set_config_options,
   N_("Local echo"), "<on|off>"},
  {GtkTermConfigurationItems[CONF_ITEM_TERM_RAW_FILENAME], 'f', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Default file to send (default none)"), "<filename>"},
  {GtkTermConfigurationItems[CONF_ITEM_TERM_WAIT_CHAR], 'r', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Wait for a special char at end of line (default none)"), "<character in HEX>"},
  {GtkTermConfigurationItems[CONF_ITEM_TERM_ROWS], 'o', 0, G_OPTION_ARG_CALLBACK, on_set_config_options,
   N_("Terminal rows (default 25)"), "<rows>"},
  {GtkTermConfigurationItems[CONF_ITEM_TERM_COLS], 'c', 0, G_OPTION_ARG_CALLBACK, on_set_config_options,
   N_("Terminal cols (default 80)"), "<cols>"},
  {GtkTermConfigurationItems[CONF_ITEM_TERM_AUTO_CR], 'g', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Auto LF (default on)"), "<on|off>"},
  {GtkTermConfigurationItems[CONF_ITEM_TERM_AUTO_LF], 'h', 0, G_OPTION_ARG_CALLBACK,
   on_set_config_options, N_("Auto CR (default on)"), "<on|off>"},
  {NULL}
}
```

Longname CLI options.

Referenced by [gtkterm\\_add\\_cmdline\\_options\(\)](#).

## 6.9 gtkterm\_cmdline.h File Reference

This graph shows which files directly or indirectly include this file:

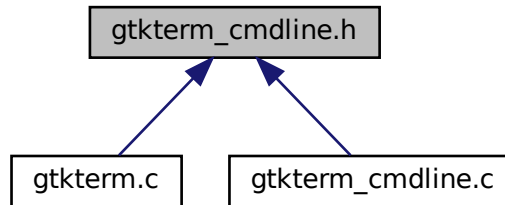

### Functions

- void [gtkterm\\_add\\_cmdline\\_options](#) ([GtkTerm](#) \*app)  
*Add the commandline options.*

### 6.9.1 Function Documentation

#### 6.9.1.1 gtkterm\_add\_cmdline\_options()

```
void gtkterm_add_cmdline_options (  
    GtkTerm * app )
```

Add the commandline options.

Commandline options are grouped. So each group is created. Each group has app as parameter passed through the callback.


#### Parameters

<i>app</i>	The application
------------	-----------------

Pass app as data to the new created group

Referenced by [gtkterm\\_init\(\)](#).

Here is the caller graph for this function:



## 6.10 gtkterm\_cmdline.h

[Go to the documentation of this file.](#)

```

1 /*****
2  * gtkterm_cmdline.h
3  * -----
4  *          GTKTerm Software
5  *          (c) Julien Schmitt
6  *
7  * -----
8  *
9  * Purpose
10 /*      Reads the command line
11 /*      - Header file -
12 /*
13 /*      ChangeLog
14 /*      - 2.0 : migrated to GTK4
15 /*      - 0.98 : file creation by Julien
16 /*
17 /*****
18
19 #ifndef GTKTERM_CMDLINE_H
20 #define GTKTERM_CMDLINE_H
21
22 void gtkterm_add_cmdline_options (GtkTerm *app);
23
24 #endif // GTKTERM_CMDLINE_H
  
```


## 6.11 gtkterm\_configuration.c File Reference

```

#include <stdio.h>
#include <stdbool.h>
#include <sys/stat.h>
#include <glib.h>
#include <glib/gi18n.h>
#include <glib/gprintf.h>
#include <glib-object.h>
#include <gtk/gtk.h>
#include <gio/gio.h>
#include <pango/pango-font.h>
#include "config.h"
#include "gtkterm_defaults.h"
#include "gtkterm_window.h"
#include "gtkterm_serial_port.h"
#include "gtkterm_terminal.h"
#include "gtkterm_configuration.h"
  
```

```
#include "macros.h"
```

Include dependency graph for gkterm\_configuration.c:

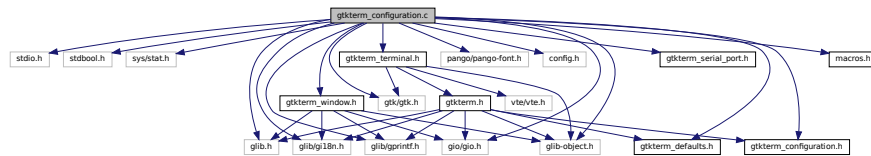

## Classes

- struct [GtkTermConfigurationPrivate](#)
- struct [\\_GtkTermConfiguration](#)
- struct [\\_GtkTermConfigurationClass](#)

## Functions

- static int [gkterm\\_configuration\\_load\\_keyfile](#) ([GtkTermConfiguration](#) \*, gpointer)
 

*Callback functions for signals.*
- static int [gkterm\\_configuration\\_save\\_keyfile](#) ([GtkTermConfiguration](#) \*self, gpointer user\_data)
 

*Save the in momeory keyfile to file).*
- static int [gkterm\\_configuration\\_list\\_config](#) ([GtkTermConfiguration](#) \*self, gpointer user\_data)
 

*Lists all sections in the keyfile.*
- static int [gkterm\\_configuration\\_print\\_section](#) ([GtkTermConfiguration](#) \*self, gpointer data, gpointer user\_data)
 

*Print the section to CLI.*
- static int [gkterm\\_configuration\\_remove\\_section](#) ([GtkTermConfiguration](#) \*self, gpointer data, gpointer user\_data)
 

*Remove a section from the GKeyFile.*
- static int [gkterm\\_configuration\\_set\\_config\\_file](#) ([GtkTermConfiguration](#) \*self, gpointer user\_data)
 

*Check if the file exists in the old/new location.*
- static [term\\_config\\_t](#) \* [gkterm\\_configuration\\_load\\_terminal\\_config](#) ([GtkTermConfiguration](#) \*self, gpointer data, gpointer user\_data)
 

*Load the terminal configuration from keyfile.*
- static [port\\_config\\_t](#) \* [gkterm\\_configuration\\_load\\_serial\\_config](#) ([GtkTermConfiguration](#) \*self, gpointer data, gpointer user\_data)
 

*Load the portconfiguration from keyfile.*
- static int [gkterm\\_configuration\\_copy\\_section](#) ([GtkTermConfiguration](#) \*self, gpointer sect, gpointer pc, gpointer tc, gpointer user\_data)
 

*Copy the active configuration into [section] of the Key file.*
- static void [set\\_color](#) (GdkRGBA \*, float, float, float, float)
 

*Functions for internal use only.*
- static [GtkTermConfigurationState](#) [gkterm\\_configuration\\_check\\_configuration\\_file](#) ([GtkTermConfiguration](#) \*self)
 

*Check if the configuration file exists on disk.*
- void [gkterm\\_configuration\\_default\\_configuration](#) ([GtkTermConfiguration](#) \*self, char \*section)
 

*Create a new configuration with defaults.*
- [GtkTermConfigurationState](#) [gkterm\\_configuration\\_validate](#) ([GtkTermConfiguration](#) \*self, char \*section)
 

*validate the configuration, given by the section.*

- `GtkTermConfigurationState gtkterm_configuration_set_status` (`GtkTermConfiguration *self`, `GtkTermConfigurationState status`, `GError *error`)  
*Sets the status and error of the last operation.*
- static void `gtkterm_configuration_finalize` (`GObject *object`)  
*Remote all pointers when removing the object.*
- static void `gtkterm_configuration_class_constructed` (`GObject *object`)  
*Connect callback functions to signals.*
- static void `gtkterm_configuration_class_init` (`GtkTermConfigurationClass *class`)  
*Initialize the class functions.*
- static void `gtkterm_configuration_init` (`GtkTermConfiguration *self`)  
*Initialize the class members.*
- `GtkTermConfigurationState check_keyfile` (`GtkTermConfiguration *self`, `char *section`)  
*Check if the keyfile is loaded into memory.*
- `GtkTermConfigurationState on_set_config_options` (`const char *name`, `const char *value`, `gpointer data`, `GError **error`)  
*Set the config option in the keyfile.*
- `GtkTermConfigurationState gtkterm_configuration_get_status` (`GtkTermConfiguration *self`)  
*Return the latest status condiation for the file operation.*
- `GError * gtkterm_configuration_get_error` (`GtkTermConfiguration *self`)  
*Return the latest error for the file operation.*

## Variables

- const char `GtkTermConfigurationItems` `[]`[`CONF_ITEM_LENGTH`]  
*Configuration options.*
- const char `GtkTermCLIShortOption` `[]`[`CONF_ITEM_LENGTH`]

## 6.11.1 Function Documentation

### 6.11.1.1 check\_keyfile()

```
GtkTermConfigurationState check_keyfile (
    GtkTermConfiguration * self,
    char * section )
```

Check if the keyfile is loaded into memory.

Loads the keyfile and checks if the section we want to access, exists.

#### Parameters

<i>self</i>	The configuration for which the get the status for.
<i>section</i>	The section we want the configuration to read from

**Returns**

: The status of this operation

Load keyfile if it is not loaded yet


Check if the [section] exists in the key file.

we did not find the section so we create it


Set the dirty flag

Referenced by [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), [gtkterm\\_configuration\\_print\\_section\(\)](#), [gtkterm\\_configuration\\_remove\\_section\(\)](#), and [on\\_set\\_config\\_options\(\)](#).

Here is the call graph for this function:

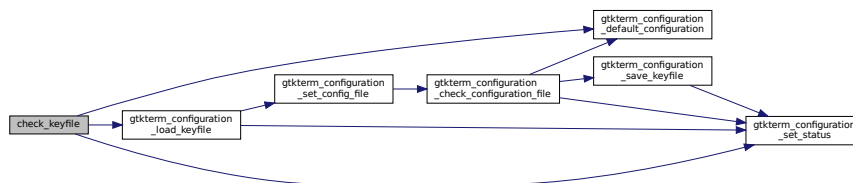

Here is the caller graph for this function:

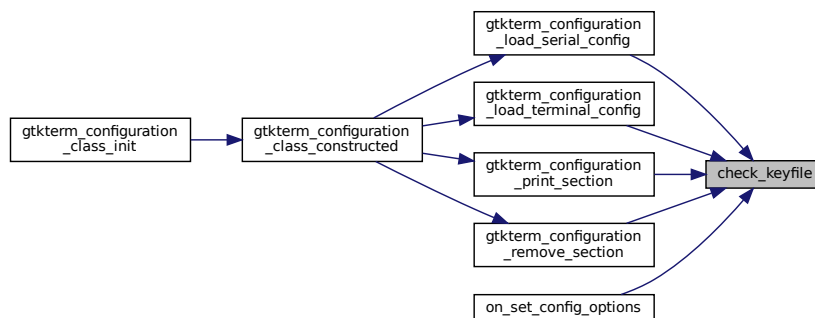

### 6.11.1.2 `gtkterm_configuration_check_configuration_file()`

```
static GtkTermConfigurationState gtkterm_configuration_check_configuration_file (
    GtkTermConfiguration * self ) [static]
```

Check if the configuration file exists on disk.

If not it creates a new default one and save it to disk.



## Parameters

<i>self</i>	The configuration class.
-------------	--------------------------

## Returns


The result of the operation

is configuration file present if not, create it, with the [default] section


And save the keyfile

Referenced by [gtkterm\\_configuration\\_set\\_config\\_file\(\)](#).

Here is the call graph for this function:

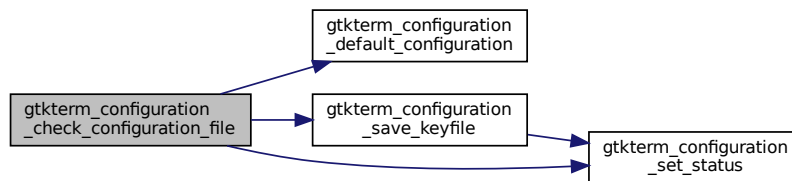

Here is the caller graph for this function:

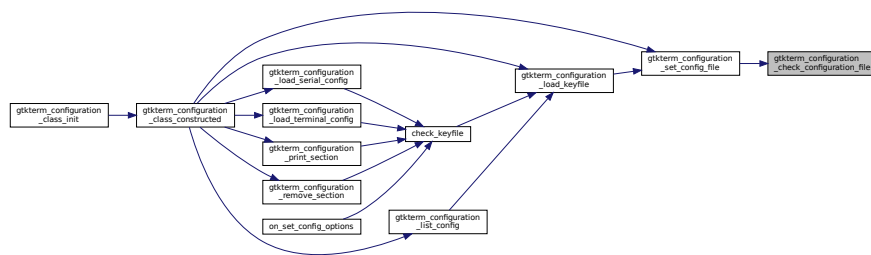

## 6.11.1.3 gtkterm\_configuration\_class\_constructed()

```
static void gtkterm_configuration_class_constructed (
    GObject * object ) [static]
```

Connect callback functions to signals.


The callback functions performs the operation on the keyfile or configuration.

## Parameters


<i>object</i>	The configuration class object.
---------------	---------------------------------

Referenced by [gtkterm\\_configuration\\_class\\_init\(\)](#).

Here is the call graph for this function:

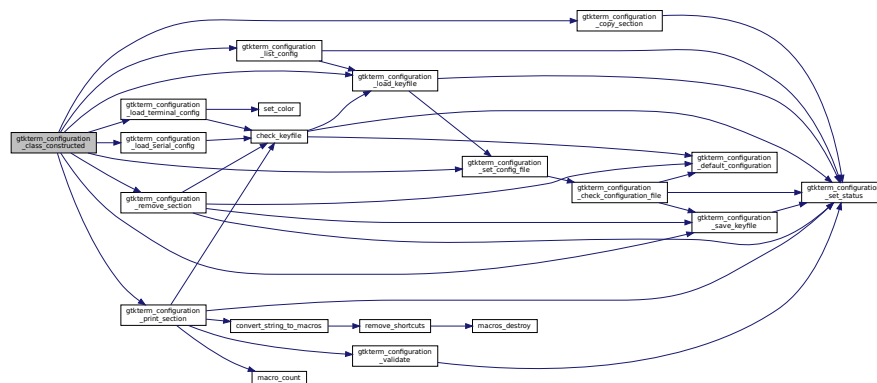

Here is the caller graph for this function:



#### 6.11.1.4 gtkterm\_configuration\_class\_init()

```
static void gtkterm_configuration_class_init (
    GtkTermConfigurationClass * class ) [static]
```

Initialize the class functions.


Nothing special to do here.

## Parameters


<i>class</i>	The configuration.
--------------	--------------------



Here is the call graph for this function:



Here is the caller graph for this function:



### 6.11.1.6 gtkterm\_configuration\_default\_configuration()

```

void gtkterm_configuration_default_configuration (
    GtkTermConfiguration * self,
    char * section )
  
```


Create a new configuration with defaults.

#### Parameters

<i>self</i>	The configuration class.
<i>section</i>	The section we want to get the config for.

Referenced by [check\\_keyfile\(\)](#), [gtkterm\\_configuration\\_check\\_configuration\\_file\(\)](#), and [gtkterm\\_configuration\\_remove\\_section\(\)](#).

Here is the caller graph for this function:

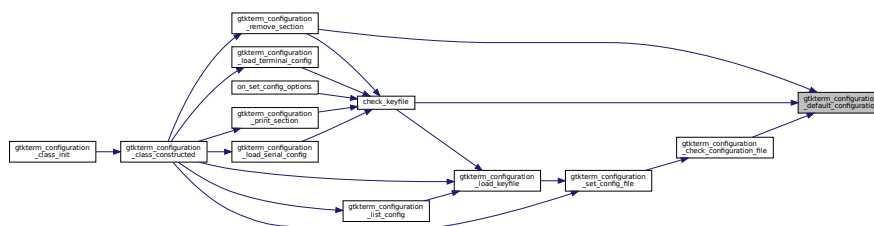

### 6.11.1.7 `gtkterm_configuration_finalize()`

```
static void gtkterm_configuration_finalize (
    GObject * object ) [static]
```


Remote all pointers when removing the object.

#### Parameters

<i>object</i>	The pointer to the configuration object.
---------------	--

Referenced by [gtkterm\\_configuration\\_class\\_init\(\)](#).

Here is the caller graph for this function:



### 6.11.1.8 `gtkterm_configuration_get_error()`

```
GError * gtkterm_configuration_get_error (
    GtkTermConfiguration * self )
```

Return the latest error for the file operation.

#### Parameters


<i>self</i>	The configuration for which the get the status for.
-------------	---

#### Returns

The latest error.

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), [on\\_list\\_config\(\)](#), [on\\_print\\_section\(\)](#), [on\\_remove\\_config\(\)](#), and [on\\_save\\_section\(\)](#).

Here is the caller graph for this function:

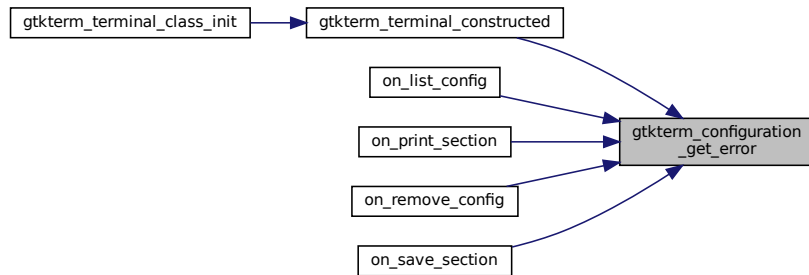

#### 6.11.1.9 `gtkterm_configuration_get_status()`

```

GtkTermConfigurationState gtkterm_configuration_get_status (
    GtkTermConfiguration * self )
  
```

Return the latest status condiation for the file operation.

##### Parameters


<i>self</i>	The configuration for which the get the status for.
-------------	---

##### Returns

The latest status.

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

Here is the caller graph for this function:



#### 6.11.1.10 `gtkterm_configuration_init()`

```

static void gtkterm_configuration_init (
    GtkTermConfiguration * self ) [static]
  
```

Initialize the class members.

## Parameters

<i>self</i>	the configuration.
-------------	--------------------

Initialize to NULL so we can detect if it is loaded.

6.11.1.11 `gtkterm_configuration_list_config()`

```
static int gtkterm_configuration_list_config (
    GtkTermConfiguration * self,
    gpointer user_data ) [static]
```

Lists all sections in the keyfile.

## Parameters


<i>self</i>	The configuration class.
<i>user_data</i>	Not used.

## Returns


The result of the operation.

Referenced by [gtkterm\\_configuration\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

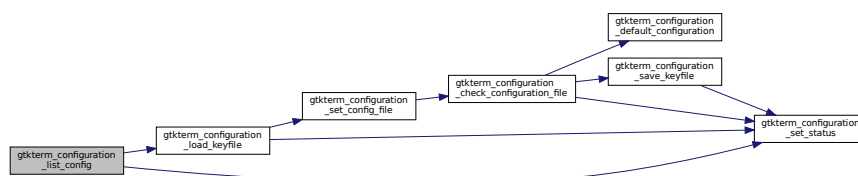

Here is the caller graph for this function:



### 6.11.1.12 gtkterm\_configuration\_load\_keyfile()

```
static int gtkterm_configuration_load_keyfile (
    GtkTermConfiguration * self,
    gpointer user_data ) [static]
```

Callback functions for signals.

Load the key file into memory.

The keyfile with all sections are loaded into memory. It is in raw format. All on/off etc are not translated yet.

#### Parameters


<i>self</i>	The configuration class.
<i>user_data</i>	Not used.

#### Returns


The result of the operation.

Referenced by [check\\_keyfile\(\)](#), [gtkterm\\_configuration\\_class\\_constructed\(\)](#), and [gtkterm\\_configuration\\_list\\_config\(\)](#).

Here is the call graph for this function:

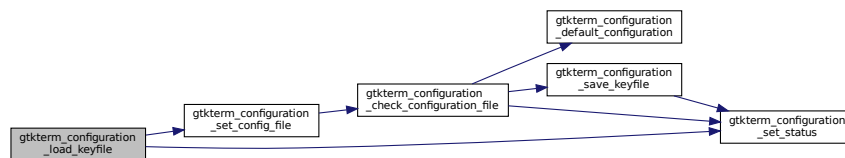

Here is the caller graph for this function:

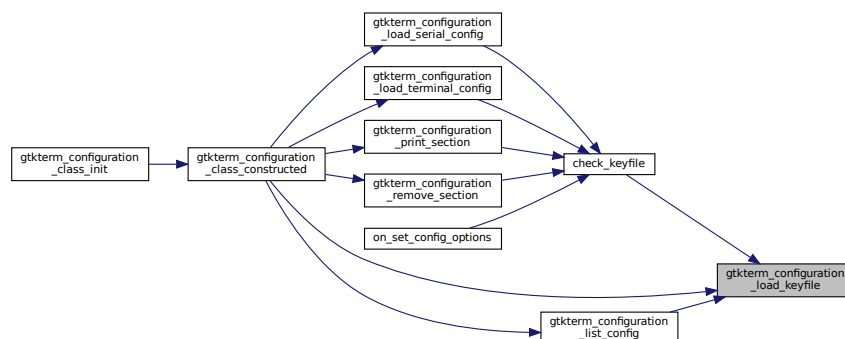



### 6.11.1.13 gtkterm\_configuration\_load\_serial\_config()

```
static port_config_t * gtkterm_configuration_load_serial_config (
    GtkTermConfiguration * self,
    gpointer data,
    gpointer user_data ) [static]
```

Load the portconfiguration from keyfile.

Load the port configuration from [section] into the term config. If it does not exists it creates one from the defaults

#### Parameters


<i>self</i>	The configuration class.
<i>data</i>	The section we want to get the config from.
<i>user_data</i>	Not used.

#### Returns


The port configuration which ends up as the last param in the signal. NULL on error.

Referenced by [gtkterm\\_configuration\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

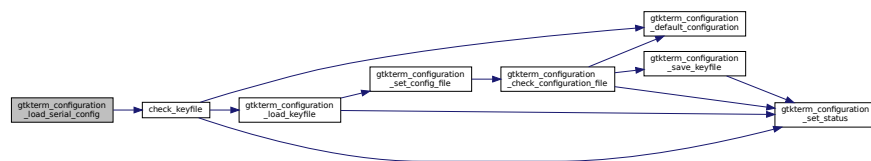

Here is the caller graph for this function:



### 6.11.1.14 gtkterm\_configuration\_load\_terminal\_config()

```
static term_config_t * gtkterm_configuration_load_terminal_config (
    GtkTermConfiguration * self,
    gpointer data,
    gpointer user_data ) [static]
```

Load the terminal configuration from keyfile.

Load the terminal configuration from [section] into the term config. If it does not exists it creates one from the defaults

## Parameters

<i>self</i>	The configuration class.
<i>data</i>	The section we want to get the config from.
<i>user_data</i>	Not used.


## Returns

The terminal configuration which ends up as the last param in the signal. NULL on error.


The Font is a Pango structure. This only can be added to a terminal So we have to convert it.

Referenced by [gtkterm\\_configuration\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

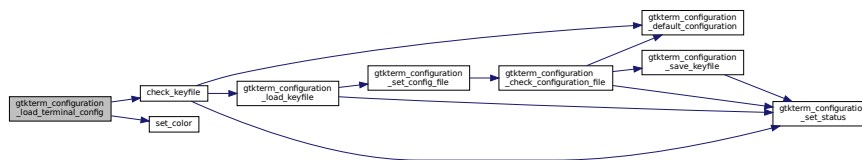

Here is the caller graph for this function:



### 6.11.1.15 gtkterm\_configuration\_print\_section()

```

static int gtkterm_configuration_print_section (
    GtkTermConfiguration * self,
    gpointer data,
    gpointer user_data ) [static]

```

Print the section to CLI.

## Parameters

<i>self</i>	The configuration class.
<i>data</i>	Pointer to the section we want to show
<i>user_data</i>	Not used.

**Returns**

The result of the operation.

Print the serial port items

Print the terminal items


Convert the stringlist to macros. Existing shortcuts will be deleted from convert\_string\_to\_macros

... and the macro's


Inverse the return due to the handling return value of the callback

Referenced by [gtkterm\\_configuration\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

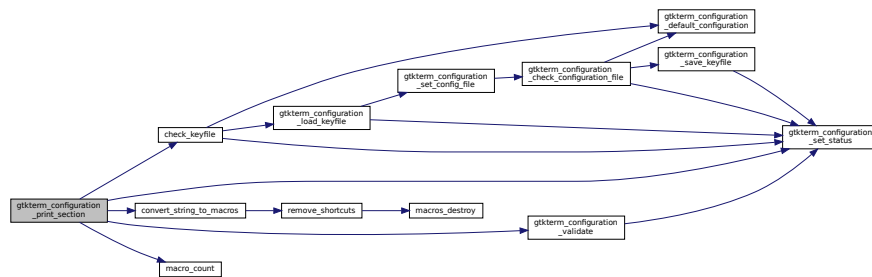

Here is the caller graph for this function:

**6.11.1.16 gtkterm\_configuration\_remove\_section()**

```

static int gtkterm_configuration_remove_section (
    GtkTermConfiguration * self,
    gpointer data,
    gpointer user_data ) [static]
  
```

Remove a section from the GKeyFile.

If it is the active section then switch back to default. If it is the default section then create a new 'default' default section

**Parameters**

<i>self</i>	The configuration class.
<i>data</i>	Pointer to the section we want to remove.
<i>user_data</i>	Not used.

**Returns**


The result of the operation.

If we remove the DEFAULT\_SECTION then create a new one


Remove the group from GKeyFile

Referenced by [gtkterm\\_configuration\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

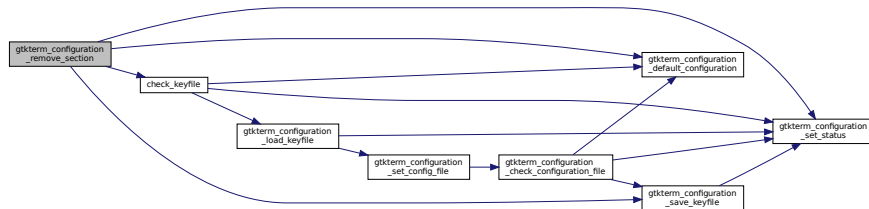

Here is the caller graph for this function:

**6.11.1.17 gtkterm\_configuration\_save\_keyfile()**

```

static int gtkterm_configuration_save_keyfile (
    GtkTermConfiguration * self,
    gpointer user_data ) [static]

```

Save the in momeory keyfile to file).

The keyfile with all sections saved to file

## Parameters

<i>self</i>	The configuration class.
<i>user_data</i>	Not used.


## Returns

The result of the operation.


Reset the dirty flag now we saved the keyfile

Referenced by [gtkterm\\_configuration\\_check\\_configuration\\_file\(\)](#), [gtkterm\\_configuration\\_class\\_constructed\(\)](#), and [gtkterm\\_configuration\\_remove\\_section\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:

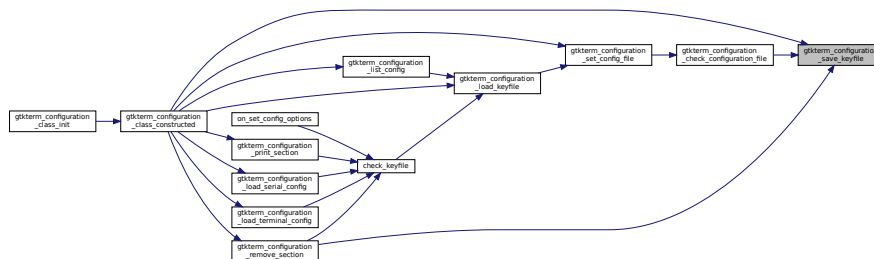

## 6.11.1.18 gtkterm\_configuration\_set\_config\_file()

```
static int gtkterm_configuration_set_config_file (
    GtkTermConfiguration * self,
    gpointer user_data ) [static]
```

Check if the file exists in the old/new location.

Old location of configuration file was `$HOME/.gtktermrc`. New location is `$XDG_CONFIG_HOME/.gtktermrc`. If configuration file exists at new location, use that one. Otherwise, if file exists at old location, move file to new location.

Version 2.0: Because we have to use `gtkterm_conv`, the file is always at the user directory. So we can skip eventually moving the file.

**Parameters**


<i>self</i>	The configuration class.
<i>user_data</i>	Not used.

**Returns**


The result of the operation.

Referenced by [gtkterm\\_configuration\\_class\\_constructed\(\)](#), and [gtkterm\\_configuration\\_load\\_keyfile\(\)](#).

Here is the call graph for this function:

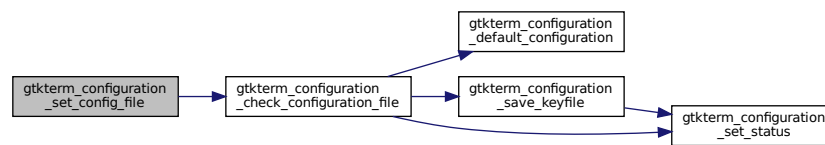

Here is the caller graph for this function:

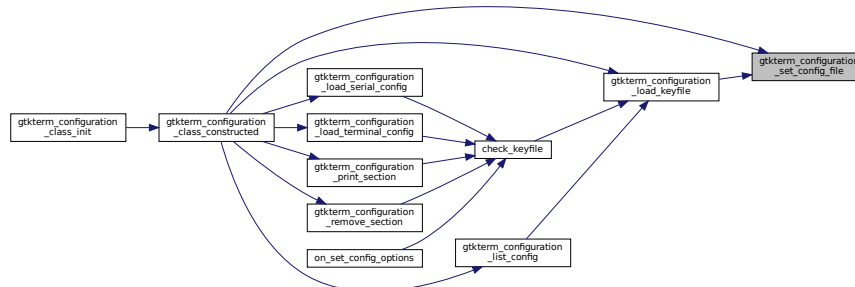**6.11.1.19 gtkterm\_configuration\_set\_status()**

```

GtkTermConfigurationState gtkterm_configuration_set_status (
    GtkTermConfiguration * self,
    GtkTermConfigurationState status,
    GError * error )
  
```

Sets the status and error of the last operation.

**Parameters**

<i>self</i>	The configuration for which the get the status for.
<i>status</i>	The status to be set.
<i>error</i>	The error message (can be NULL)


### Returns

The latest status.

If there is a previous error, clear it

Referenced by [check\\_keyfile\(\)](#), [gtkterm\\_configuration\\_check\\_configuration\\_file\(\)](#), [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_list\\_config\(\)](#), [gtkterm\\_configuration\\_load\\_keyfile\(\)](#), [gtkterm\\_configuration\\_print\\_section\(\)](#), [gtkterm\\_configuration\\_remove\\_section\(\)](#), [gtkterm\\_configuration\\_save\\_keyfile\(\)](#), [gtkterm\\_configuration\\_validate\(\)](#), and [on\\_set\\_config\\_options\(\)](#).

Here is the caller graph for this function:

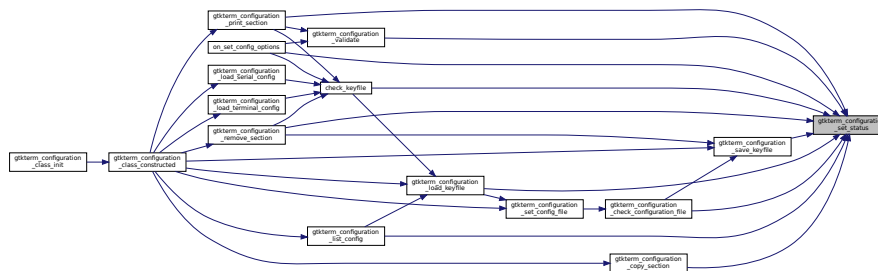

#### 6.11.1.20 gtkterm\_configuration\_validate()

```

GtkTermConfigurationState gtkterm_configuration_validate (
    GtkTermConfiguration * self,
    char * section )

```

validate the configuration, given by the section.

If not it creates a new default one and save it to disk. When it finds an invalid config option it returns with an error for which item the configuration check fails.

#### Parameters


<i>self</i>	The configuration class.
<i>section</i>	The section we want to validate.

### Returns


The result of the operation

Referenced by [gtkterm\\_configuration\\_print\\_section\(\)](#), and [on\\_set\\_config\\_options\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:

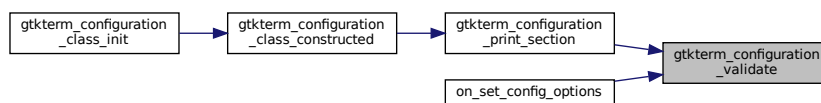

#### 6.11.1.21 on\_set\_config\_options()

```

GtkTermConfigurationState on_set_config_options (
    const char * name,
    const char * value,
    gpointer data,
    GError ** error )
  
```

Set the config option in the keyfile.

All option which are given from the CLI are stored into the keyfile with [section] Options are not saved to disk.

##### Parameters

<i>name</i>	The configoption we want to set.
<i>value</i>	The value for this option.
<i>data</i>	The section we want to get the config from.
<i>error</i>	Error (not used).

##### Returns

The inversed (0 -> 1, 1 -> 0) result of the operation. Because of the handling of the return value from `GOptionEntry`. `GOptionEntry` continues if callback returns 1.

First check and load the keyfile




Check if we use the long or short option. For the long option, the option start at position 3 (–option). So add 2. For the short option the option start at position 2 (-o) so add 1.

Search index for the option we want to set

Check for max path length. Exit if it is to long. Note: Serial port is also a path to a device.

We should not get here.

Set the dirty flag Here is the call graph for this function:

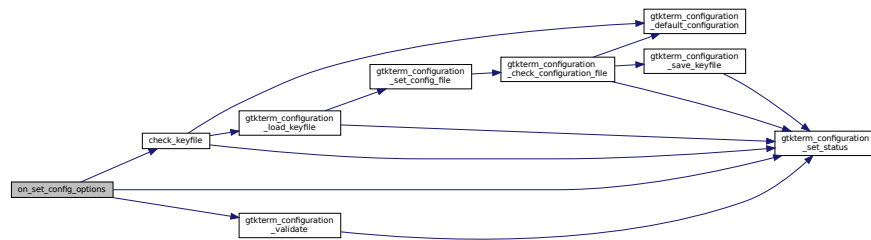

### 6.11.1.22 set\_color()

```
static void set_color (
    GdkRGBA * color,
    float R,
    float G,
    float B,
    float A ) [static]
```

Functions for internal use only.

Convert the colors RGB to internal color scheme.

#### Parameters

<i>color</i>	The composed color
<i>R</i>	The red component
<i>G</i>	The green component
<i>B</i>	The blue component
<i>A</i>	Alpha Convert the colors RGB to internal color scheme

Referenced by [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#).

Here is the caller graph for this function:



## 6.11.2 Variable Documentation

### 6.11.2.1 GtkTermCLIShortOption

```
const char GtkTermCLIShortOption[ ][CONF_ITEM_LENGTH]
```

Referenced by [on\\_set\\_config\\_options\(\)](#).

### 6.11.2.2 GtkTermConfigurationItems

```
const char GtkTermConfigurationItems[ ][CONF_ITEM_LENGTH]
```

Configuration options.


Used configuration options to hold consistency between load/save functions Also used as long-option when configuring by CLI

**Todo** Add the short option.

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_default\\_configuration\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), [gtkterm\\_configuration\\_print\\_section\(\)](#), [gtkterm\\_configuration\\_validate\(\)](#), and [on\\_set\\_config\\_options\(\)](#).

## 6.12 gtkterm\_configuration.h File Reference

This graph shows which files directly or indirectly include this file:

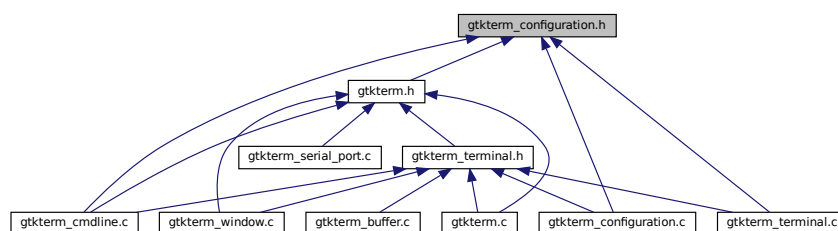

## Macros

- #define [GTKTERM\\_TYPE\\_CONFIGURATION](#) [gtkterm\\_configuration\\_get\\_type\(\)](#)

## Typedefs

- typedef struct [\\_GtkTermConfiguration](#) [GtkTermConfiguration](#)

## Enumerations

- enum {  
[CONF\\_ITEM\\_SERIAL\\_PORT](#) , [CONF\\_ITEM\\_SERIAL\\_BAUDRATE](#) , [CONF\\_ITEM\\_SERIAL\\_BITS](#) ,  
[CONF\\_ITEM\\_SERIAL\\_STOPBITS](#) ,  
[CONF\\_ITEM\\_SERIAL\\_PARITY](#) , [CONF\\_ITEM\\_SERIAL\\_FLOW\\_CONTROL](#) , [CONF\\_ITEM\\_TERM\\_WAIT\\_DELAY](#)  
[CONF\\_ITEM\\_TERM\\_WAIT\\_CHAR](#) ,  
[CONF\\_ITEM\\_SERIAL\\_RS485\\_RTS\\_TIME\\_BEFORE\\_TX](#) , [CONF\\_ITEM\\_SERIAL\\_RS485\\_RTS\\_TIME\\_AFTER\\_TX](#)  
[CONF\\_ITEM\\_TERM\\_MACROS](#) , [CONF\\_ITEM\\_TERM\\_RAW\\_FILENAME](#) ,  
[CONF\\_ITEM\\_TERM\\_ECHO](#) , [CONF\\_ITEM\\_TERM\\_AUTO\\_LF](#) , [CONF\\_ITEM\\_TERM\\_AUTO\\_CR](#) ,  
[CONF\\_ITEM\\_SERIAL\\_DISABLE\\_PORT\\_LOCK](#) ,  
[CONF\\_ITEM\\_TERM\\_FONT](#) , [CONF\\_ITEM\\_TERM\\_TIMESTAMP](#) , [CONF\\_ITEM\\_TERM\\_BLOCK\\_CURSOR](#)  
[CONF\\_ITEM\\_TERM\\_SHOW\\_CURSOR](#) ,  
[CONF\\_ITEM\\_TERM\\_ROWS](#) , [CONF\\_ITEM\\_TERM\\_COLS](#) , [CONF\\_ITEM\\_TERM\\_SCROLLBACK](#) ,  
[CONF\\_ITEM\\_TERM\\_VISUAL\\_BELL](#) ,  
[CONF\\_ITEM\\_TERM\\_FOREGROUND\\_RED](#) , [CONF\\_ITEM\\_TERM\\_FOREGROUND\\_GREEN](#) , [CONF\\_ITEM\\_TERM\\_FOREGROUND\\_BLUE](#)  
[CONF\\_ITEM\\_TERM\\_FOREGROUND\\_ALPHA](#) ,  
[CONF\\_ITEM\\_TERM\\_BACKGROUND\\_RED](#) , [CONF\\_ITEM\\_TERM\\_BACKGROUND\\_GREEN](#) , [CONF\\_ITEM\\_TERM\\_BACKGROUND\\_BLUE](#)  
[CONF\\_ITEM\\_TERM\\_BACKGROUND\\_ALPHA](#) ,  
[CONF\\_ITEM\\_LAST](#) }  
*Enum items for configuration.*
- enum [GtkTermConfigurationState](#) {  
[GTKTERM\\_CONFIGURATION\\_SUCCESS](#) , [GTKTERM\\_CONFIGURATION\\_FILE\\_CREATED](#) , [GTKTERM\\_CONFIGURATION\\_FILE\\_LOADED](#)  
[GTKTERM\\_CONFIGURATION\\_FILE\\_SAVED](#) ,  
[GTKTERM\\_CONFIGURATION\\_FILE\\_NOT\\_SAVED](#) , [GTKTERM\\_CONFIGURATION\\_NO\\_KEYFILE\\_LOADED](#)  
[GTKTERM\\_CONFIGURATION\\_SECTION\\_REMOVED](#) , [GTKTERM\\_CONFIGURATION\\_SECTION\\_NOT\\_REMOVED](#)  
  
[GTKTERM\\_CONFIGURATION\\_SECTION\\_UNKNOWN](#) , [GTKTERM\\_CONFIGURATION\\_INVALID\\_BAUDRATE](#)  
[GTKTERM\\_CONFIGURATION\\_INVALID\\_BITS](#) , [GTKTERM\\_CONFIGURATION\\_INVALID\\_STOPBITS](#) ,  
[GTKTERM\\_CONFIGURATION\\_INVALID\\_DELAY](#) , [GTKTERM\\_CONFIGURATION\\_FILENAME\\_TOO\\_LONG](#) ,  
[GTKTERM\\_CONFIGURATION\\_UNKNOWN\\_OPTION](#) , [GTKTERM\\_CONFIGURATION\\_LAST](#) }  
*Enum config\_error id.*

## Functions

- [GtkTermConfiguration \\*](#) [gtkterm\\_configuration\\_new](#) (void)
- [GtkTermConfigurationState](#) [on\\_set\\_config\\_options](#) (const char \*, const char \*, gpointer, GError \*\*)  
*Set the config option in the keyfile.*
- [GtkTermConfigurationState](#) [gtkterm\\_configuration\\_get\\_status](#) ([GtkTermConfiguration \\*](#))  
*Return the latest status condition for the file operation.*
- GError \* [gtkterm\\_configuration\\_get\\_error](#) ([GtkTermConfiguration \\*](#))  
*Return the latest error for the file operation.*

## Variables

- const char [GtkTermConfigurationItems](#) [\[\[CONF\\_ITEM\\_LENGTH\]](#)  
*Configuration options.*

## 6.12.1 Macro Definition Documentation

### 6.12.1.1 GTKTERM\_TYPE\_CONFIGURATION

```
#define GTKTERM_TYPE_CONFIGURATION gtkterm_configuration_get_type ()
```

## 6.12.2 Typedef Documentation

### 6.12.2.1 GtkTermConfiguration

```
typedef struct _GtkTermConfiguration GtkTermConfiguration
```

## 6.12.3 Enumeration Type Documentation

### 6.12.3.1 anonymous enum

```
anonymous enum
```

Enum items for configuration.

Define all configuration items which are used in the resource file. it is an index to ConfigurationItem. Configuration item names.

#### Enumerator

CONF_ITEM_SERIAL_PORT	
CONF_ITEM_SERIAL_BAUDRATE	
CONF_ITEM_SERIAL_BITS	
CONF_ITEM_SERIAL_STOPBITS	
CONF_ITEM_SERIAL_PARITY	
CONF_ITEM_SERIAL_FLOW_CONTROL	
CONF_ITEM_TERM_WAIT_DELAY	
CONF_ITEM_TERM_WAIT_CHAR	
CONF_ITEM_SERIAL_RS485_RTS_TIME_BEFORE_TX	
CONF_ITEM_SERIAL_RS485_RTS_TIME_AFTER_TX	

## Enumerator

CONF_ITEM_TERM_MACROS	
CONF_ITEM_TERM_RAW_FILENAME	
CONF_ITEM_TERM_ECHO	
CONF_ITEM_TERM_AUTO_LF	
CONF_ITEM_TERM_AUTO_CR	
CONF_ITEM_SERIAL_DISABLE_PORT_LOCK	
CONF_ITEM_TERM_FONT	
CONF_ITEM_TERM_TIMESTAMP	
CONF_ITEM_TERM_BLOCK_CURSOR	
CONF_ITEM_TERM_SHOW_CURSOR	
CONF_ITEM_TERM_ROWS	
CONF_ITEM_TERM_COLS	
CONF_ITEM_TERM_SCROLLBACK	
CONF_ITEM_TERM_VISUAL_BELL	
CONF_ITEM_TERM_FOREGROUND_RED	
CONF_ITEM_TERM_FOREGROUND_GREEN	
CONF_ITEM_TERM_FOREGROUND_BLUE	
CONF_ITEM_TERM_FOREGROUND_ALPHA	
CONF_ITEM_TERM_BACKGROUND_RED	
CONF_ITEM_TERM_BACKGROUND_GREEN	
CONF_ITEM_TERM_BACKGROUND_BLUE	
CONF_ITEM_TERM_BACKGROUND_ALPHA	
CONF_ITEM_LAST	Checking as last item in the list.

## 6.12.3.2 GtkTermConfigurationState

```
enum GtkTermConfigurationState
```

Enum `config_error` id.

Many of the `gtk_configuration` functions return an error id.

## Enumerator

GTKTERM_CONFIGURATION_SUCCESS	
GTKTERM_CONFIGURATION_FILE_CREATED	
GTKTERM_CONFIGURATION_FILE_CONFIG_LOAD	
GTKTERM_CONFIGURATION_FILE_SAVED	
GTKTERM_CONFIGURATION_FILE_NOT_SAVED	
GTKTERM_CONFIGURATION_NO_KEYFILE_LOADED	
GTKTERM_CONFIGURATION_SECTION_REMOVED	
GTKTERM_CONFIGURATION_SECTION_NOT_REMOVED	
GTKTERM_CONFIGURATION_SECTION_UNKNOWN	
GTKTERM_CONFIGURATION_INVALID_BAUDRATE	
GTKTERM_CONFIGURATION_INVALID_BITS	
GTKTERM_CONFIGURATION_INVALID_STOPBITS	

## Enumerator

GTKTERM_CONFIGURATION_INVALID_DELAY	
GTKTERM_CONFIGURATION_FILENAME_TOO_LONG	
GTKTERM_CONFIGURATION_UNKNOWN_OPTION	
GTKTERM_CONFIGURATION_LAST	

## 6.12.4 Function Documentation

### 6.12.4.1 gtkterm\_configuration\_get\_error()

```
GError * gtkterm_configuration_get_error (
    GtkTermConfiguration * self )
```

Return the latest error for the file operation.

## Parameters


<i>self</i>	The configuration for which the get the status for.
-------------	---

## Returns

The latest error.

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), [on\\_list\\_config\(\)](#), [on\\_print\\_section\(\)](#), [on\\_remove\\_config\(\)](#), and [on\\_save\\_section\(\)](#).

Here is the caller graph for this function:

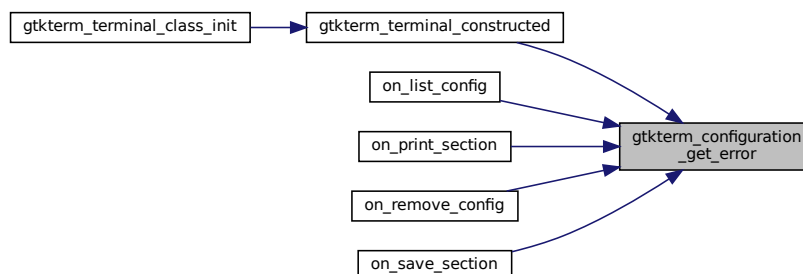

#### 6.12.4.2 gtkterm\_configuration\_get\_status()

```
GtkTermConfigurationState gtkterm_configuration_get_status (
    GtkTermConfiguration * self )
```

Return the latest status condiation for the file operation.

**Parameters**


<i>self</i>	The configuration for which the get the status for.
-------------	---

**Returns**

The latest status.

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

Here is the caller graph for this function:

**6.12.4.3 gtkterm\_configuration\_new()**

```

GtkTermConfiguration * gtkterm_configuration_new (
    void )
  
```

**6.12.4.4 on\_set\_config\_options()**

```

GtkTermConfigurationState on_set_config_options (
    const char * name,
    const char * value,
    gpointer data,
    GError ** error )
  
```

Set the config option in the keyfile.

All option which are given from the CLI are stored into the keyfile with [section] Options are not saved to disk.

**Parameters**

<i>name</i>	The configoption we want to set.
<i>value</i>	The value for this option.
<i>data</i>	The section we want to get the config from.
<i>error</i>	Error (not used).



### Returns

The inversed (0 -> 1, 1 -> 0) result of the operation. Because of the handling of the return value from GOptionEntry. GOptionEntry continues if callback returns 1.

First check and load the keyfile


Check if we use the long or short option. For the long option, the option start at position 3 (--option). So add 2. For the short option the option start at position 2 (-o) so add 1.

Search index for the option we want to set

Check for max path length. Exit if it is too long. Note: Serial port is also a path to a device.

We should not get here.

Set the dirty flag Here is the call graph for this function:

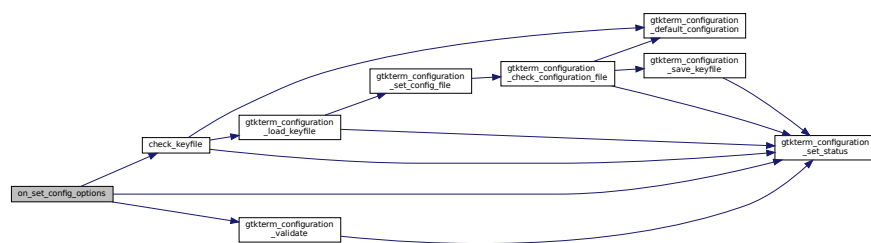

## 6.12.5 Variable Documentation

### 6.12.5.1 GtkTermConfigurationItems

```
const char GtkTermConfigurationItems[ ][CONF_ITEM_LENGTH] [extern]
```

Configuration options.

Used configuration options to hold consistency between load/save functions Also used as long-option when configuring by CLI

**Todo** Add the short option.

Referenced by [gtkterm\\_configuration\\_copy\\_section\(\)](#), [gtkterm\\_configuration\\_default\\_configuration\(\)](#), [gtkterm\\_configuration\\_load\\_serial\\_config\(\)](#), [gtkterm\\_configuration\\_load\\_terminal\\_config\(\)](#), [gtkterm\\_configuration\\_print\\_section\(\)](#), [gtkterm\\_configuration\\_validate\(\)](#), and [on\\_set\\_config\\_options\(\)](#).

## 6.13 gtkterm\_configuration.h

[Go to the documentation of this file.](#)

```

1  /*****
2  * gtkterm_configuration.h
3  *
4  * GTKTerm Software (c) Julien Schmitt
5  *
6  *
7  * @brief Purpose
8  *      Load and save configuration file
9  *      - Header file
10 *
11 *****/
12
13 #ifndef GTKTERM_CONFIGURATION_H
14 #define GTKTERM_CONFIGURATION_H
15
16
17 enum {
18     CONF_ITEM_SERIAL_PORT,
19     CONF_ITEM_SERIAL_BAUDRATE,
20     CONF_ITEM_SERIAL_BITS,
21     CONF_ITEM_SERIAL_STOPBITS,
22     CONF_ITEM_SERIAL_PARITY,
23     CONF_ITEM_SERIAL_FLOW_CONTROL,
24     CONF_ITEM_TERM_WAIT_DELAY,
25     CONF_ITEM_TERM_WAIT_CHAR,
26     CONF_ITEM_SERIAL_RS485_RTS_TIME_BEFORE_TX,
27     CONF_ITEM_SERIAL_RS485_RTS_TIME_AFTER_TX,
28     CONF_ITEM_TERM_MACROS,
29     CONF_ITEM_TERM_RAW_FILENAME,
30     CONF_ITEM_TERM_ECHO,
31     CONF_ITEM_TERM_AUTO_LF,
32     CONF_ITEM_TERM_AUTO_CR,
33     CONF_ITEM_SERIAL_DISABLE_PORT_LOCK,
34     CONF_ITEM_TERM_FONT,
35     CONF_ITEM_TERM_TIMESTAMP,
36     CONF_ITEM_TERM_BLOCK_CURSOR,
37     CONF_ITEM_TERM_SHOW_CURSOR,
38     CONF_ITEM_TERM_ROWS,
39     CONF_ITEM_TERM_COLS,
40     CONF_ITEM_TERM_SCROLLBACK,
41     CONF_ITEM_TERM_VISUAL_BELL,
42     CONF_ITEM_TERM_FOREGROUND_RED,
43     CONF_ITEM_TERM_FOREGROUND_GREEN,
44     CONF_ITEM_TERM_FOREGROUND_BLUE,
45     CONF_ITEM_TERM_FOREGROUND_ALPHA,
46     CONF_ITEM_TERM_BACKGROUND_RED,
47     CONF_ITEM_TERM_BACKGROUND_GREEN,
48     CONF_ITEM_TERM_BACKGROUND_BLUE,
49     CONF_ITEM_TERM_BACKGROUND_ALPHA,
50     CONF_ITEM_LAST
51 };
52
53 typedef enum {
54     GTKTERM_CONFIGURATION_SUCCESS,
55     GTKTERM_CONFIGURATION_FILE_CREATED,
56     GTKTERM_CONFIGURATION_FILE_CONFIG_LOAD,
57     GTKTERM_CONFIGURATION_FILE_SAVED,
58     GTKTERM_CONFIGURATION_FILE_NOT_SAVED,
59     GTKTERM_CONFIGURATION_NO_KEYFILE_LOADED,
60     GTKTERM_CONFIGURATION_SECTION_REMOVED,
61     GTKTERM_CONFIGURATION_SECTION_NOT_REMOVED,
62     GTKTERM_CONFIGURATION_SECTION_UNKNOWN,
63     GTKTERM_CONFIGURATION_INVALID_BAUDRATE,
64     GTKTERM_CONFIGURATION_INVALID_BITS,
65     GTKTERM_CONFIGURATION_INVALID_STOPBITS,
66     GTKTERM_CONFIGURATION_INVALID_DELAY,
67     GTKTERM_CONFIGURATION_FILENAME_TOO_LONG,
68     GTKTERM_CONFIGURATION_UNKNOWN_OPTION,
69     GTKTERM_CONFIGURATION_LAST
70 } GtkTermConfigurationState;
71
72 extern const char GtkTermConfigurationItems[][CONF_ITEM_LENGTH];
73
74 G_BEGIN_DECLS
75
76 #define GTKTERM_TYPE_CONFIGURATION gtkterm_configuration_get_type ()
77 G_DECLARE_FINAL_TYPE (GtkTermConfiguration, gtkterm_configuration, GTKTERM, CONFIGURATION, GObject)
78 typedef struct _GtkTermConfiguration GtkTermConfiguration;
79
80 GtkTermConfiguration *gtkterm_configuration_new (void);
81
82 GtkTermConfigurationState on_set_config_options (const char *, const char *, gpointer, GError **);

```


```

96 GtkTermConfigurationState gtkterm_configuration_get_status (GtkTermConfiguration *);
97 GError *gtkterm_configuration_get_error (GtkTermConfiguration *);
98
99 G_END_DECLS
100
101 #endif //GTKTERM_CONFIGURATION

```

## 6.14 gtkterm\_defaults.h File Reference

This graph shows which files directly or indirectly include this file:

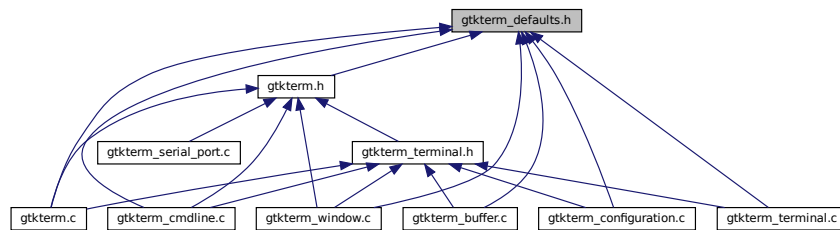

### Macros

- #define [DEFAULT\\_FONT](#) "Monospace 12"
- #define [DEFAULT\\_SCROLLBACK](#) 10000
- #define [DEFAULT\\_DELAY](#) 0
- #define [DEFAULT\\_CHAR](#) -1
- #define [DEFAULT\\_DELAY\\_RS485](#) 30
- #define [DEFAULT\\_ECHO](#) "false"
- #define [DEFAULT\\_VISUAL\\_BELL](#) "false"
- #define [DEFAULT\\_PORT](#) "/dev/ttyS0"
- #define [DEFAULT\\_BAUDRATE](#) 115200
- #define [DEFAULT\\_PARITY](#) "none"
- #define [DEFAULT\\_BITS](#) 8
- #define [DEFAULT\\_STOPBITS](#) 1
- #define [DEFAULT\\_FLOW](#) "none"
- #define [GTKTERM\\_SERIAL\\_PORT\\_RECEIVE\\_BUFFER\\_SIZE](#) 8192
- #define [GTKTERM\\_SERIAL\\_PORT\\_TRANSMIT\\_BUFFER\\_SIZE](#) 4096
- #define [LINE\\_FEED](#) 0x0A
- #define [POLL\\_DELAY](#) 100
- #define [BUFFER\\_LENGTH](#) 256
- #define [MAX\\_SECTION\\_LENGTH](#) 32
- #define [GTKTERM\\_MESSAGE\\_LENGTH](#) 128
- #define [DEFAULT\\_SECTION](#) "default"
- #define [CONFIGURATION\\_FILENAME](#) ".gtktermrc"
- #define [CONF\\_ITEM\\_LENGTH](#) 32
- #define [DEFAULT\\_STRING\\_LEN](#) 32
- #define [ASCII\\_VIEW](#) 0
- #define [HEXADECIMAL\\_VIEW](#) 1
- #define [BUFFER\\_SIZE](#) (128 \* 1024)

## 6.14.1 Macro Definition Documentation

### 6.14.1.1 ASCII\_VIEW

```
#define ASCII_VIEW 0
```

Type of terminal view

### 6.14.1.2 BUFFER\_LENGTH

```
#define BUFFER_LENGTH 256
```

Generic defaults

### 6.14.1.3 BUFFER\_SIZE

```
#define BUFFER_SIZE (128 * 1024)
```

Size of the buffer between the terminal and port

### 6.14.1.4 CONF\_ITEM\_LENGTH

```
#define CONF_ITEM_LENGTH 32
```

### 6.14.1.5 CONFIGURATION\_FILENAME

```
#define CONFIGURATION_FILENAME ".gtktermrc"
```

Name of the resource file

### 6.14.1.6 DEFAULT\_BAUDRATE

```
#define DEFAULT_BAUDRATE 115200
```

#### 6.14.1.7 DEFAULT\_BITS

```
#define DEFAULT_BITS 8
```

#### 6.14.1.8 DEFAULT\_CHAR

```
#define DEFAULT_CHAR -1
```

#### 6.14.1.9 DEFAULT\_DELAY

```
#define DEFAULT_DELAY 0
```

#### 6.14.1.10 DEFAULT\_DELAY\_RS485

```
#define DEFAULT_DELAY_RS485 30
```

#### 6.14.1.11 DEFAULT\_ECHO

```
#define DEFAULT_ECHO "false"
```

#### 6.14.1.12 DEFAULT\_FLOW

```
#define DEFAULT_FLOW "none"
```

#### 6.14.1.13 DEFAULT\_FONT

```
#define DEFAULT_FONT "Monospace 12"
```

Defaults for VTE-terminal

#### 6.14.1.14 DEFAULT\_PARITY

```
#define DEFAULT_PARITY "none"
```

#### 6.14.1.15 DEFAULT\_PORT

```
#define DEFAULT_PORT "/dev/ttyS0"
```

Defaults for serial ports

#### 6.14.1.16 DEFAULT\_SCROLLBACK

```
#define DEFAULT_SCROLLBACK 10000
```

#### 6.14.1.17 DEFAULT\_SECTION

```
#define DEFAULT_SECTION "default"
```

Default section if not specified

#### 6.14.1.18 DEFAULT\_STOPBITS

```
#define DEFAULT_STOPBITS 1
```

#### 6.14.1.19 DEFAULT\_STRING\_LEN

```
#define DEFAULT_STRING_LEN 32
```

#### 6.14.1.20 DEFAULT\_VISUAL\_BELL

```
#define DEFAULT_VISUAL_BELL "false"
```

#### 6.14.1.21 GTKTERM\_MESSAGE\_LENGTH

```
#define GTKTERM_MESSAGE_LENGTH 128
```

#### 6.14.1.22 GTKTERM\_SERIAL\_PORT\_RECEIVE\_BUFFER\_SIZE

```
#define GTKTERM_SERIAL_PORT_RECEIVE_BUFFER_SIZE 8192
```

The buffers for receive and transmit are internal buffers for the communication API. It is not the buffersize for the terminal/serialport communication Size of the receive buffer for the serial port

#### 6.14.1.23 GTKTERM\_SERIAL\_PORT\_TRANSMIT\_BUFFER\_SIZE

```
#define GTKTERM_SERIAL_PORT_TRANSMIT_BUFFER_SIZE 4096
```

Size of the transmit buuffer for the serial port

#### 6.14.1.24 HEXADECIMAL\_VIEW

```
#define HEXADECIMAL_VIEW 1
```

#### 6.14.1.25 LINE\_FEED

```
#define LINE_FEED 0x0A
```

#### 6.14.1.26 MAX\_SECTION\_LENGTH

```
#define MAX_SECTION_LENGTH 32
```

#### 6.14.1.27 POLL\_DELAY

```
#define POLL_DELAY 100
```

in ms (for control signals)

## 6.15 gtkterm\_defaults.h

[Go to the documentation of this file.](#)

```

1 #ifndef GTKTERM_DEFAULTS_H
2 #define GTKTERM_DEFAULTS_H
3
4
5 #define DEFAULT_FONT           "Monospace 12"
6 #define DEFAULT_SCROLLBACK    10000
7 #define DEFAULT_DELAY         0
8 #define DEFAULT_CHAR          -1
9 #define DEFAULT_DELAY_RS485   30
10 #define DEFAULT_ECHO          "false"
11 #define DEFAULT_VISUAL_BELL    "false"
12
13
14 #define DEFAULT_PORT           "/dev/ttyS0"
15 #define DEFAULT_BAUDRATE      115200
16 #define DEFAULT_PARITY        "none"
17 #define DEFAULT_BITS          8
18 #define DEFAULT_STOPBITS      1
19 #define DEFAULT_FLOW          "none"
20
21
25 #define GTKTERM_SERIAL_PORT_RECEIVE_BUFFER_SIZE 8192
26 #define GTKTERM_SERIAL_PORT_TRANSMIT_BUFFER_SIZE 4096
27
28 #define LINE_FEED              0x0A
29 #define POLL_DELAY             100
30
32 #define BUFFER_LENGTH          256
33 #define MAX_SECTION_LENGTH     32
34 #define GTKTERM_MESSAGE_LENGTH 128
35 #define DEFAULT_SECTION        "default"
36 #define CONFIGURATION_FILENAME ".gtktermrc"
37 #define CONF_ITEM_LENGTH       32
38 #define DEFAULT_STRING_LEN     32
39
40
41 #define ASCII_VIEW              0
42 #define HEXADECIMAL_VIEW       1
43
44 #define BUFFER_SIZE             (128 * 1024)
45
46 #endif // GTKTERM_DEFAULTS_H

```

## 6.16 gtkterm\_serial\_port.c File Reference

```

#include <gtk/gtk.h>
#include <glib.h>
#include <sys/ioctl.h>
#include <sys/types.h>
#include <sys/stat.h>
#include <sys/file.h>
#include <signal.h>
#include <string.h>
#include <errno.h>
#include <pwd.h>
#include <termios.h>
#include <fcntl.h>
#include <stdio.h>
#include <stdbool.h>
#include <unistd.h>
#include <config.h>
#include <glib/glib.h>
#include <glib/gprintf.h>
#include <glib-unix.h>
#include <gio/gio.h>
#include <gio-unix-2.0/gio/gunixinputstream.h>
#include <gio-unix-2.0/gio/gunixoutputstream.h>
#include <gudev/gudev.h>
#include "gtkterm.h"

```



Include dependency graph for gtkterm\_serial\_port.c:



- Handles USR2 signal. It closes the port.*
- `GtkTermSerialPort * gtkterm_serial_port_new (port_config_t *port_conf)`  
*Create a new serial port object.*
- `static void gtkterm_serial_port_set (GtkTermSerialPort *self, GtkTermSerialPortStatus status)`  
*Opens or closes the serial port.*
- `static void gtkterm_serial_port_handle (GtkTermSerialPort *self, const char *action)`  
*Based on the action return from uevent we handle to open or close the port.*
- `void gtkterm_serial_port_event_udev (GUdevClient *client, const char *action, GUdevDevice *device, gpointer user_data)`  
*Callback for the uevent signal.*
- `void gtkterm_serial_port_device_monitor (GtkTermSerialPort *self)`
- `static bool gtkterm_serial_port_config (GtkTermSerialPort *self, struct termios *termios_p, GError **error)`
- `char * gtkterm_serial_port_get_string (GtkTermSerialPort *self)`  
*Convert port config to a string.*
- `static void gtkterm_serial_port_class_constructed (GObject *object)`  
*Connect callback functions to signals.*
- `static void gtkterm_serial_port_get_property (GObject *object, unsigned int prop_id, GValue *value, GParamSpec *pspec)`  
*get the property of the GtkTermSerialPort structure*
- `static void gtkterm_serial_port_set_property (GObject *object, unsigned int prop_id, const GValue *value, GParamSpec *pspec)`  
*Set the property of the GtkTermSerialPort structure.*
- `static void gtkterm_serial_port_finalize (GObject *object)`  
*Remote all pointers when removing the object.*
- `static void gtkterm_serial_port_class_init (GtkTermSerialPortClass *class)`  
*Initializing the serial\_port class.*
- `static void gtkterm_serial_port_init (GtkTermSerialPort *self)`  
*Initialize the serial with the config parameters.*
- `GtkTermSerialPortState gtkterm_serial_port_get_status (GtkTermSerialPort *self)`  
*Return the status of the serial port.*
- `GError * gtkterm_serial_port_get_error (GtkTermSerialPort *self)`  
*Return the last error which occurred.*
- `unsigned int gtkterm_serial_port_get_signals (GtkTermSerialPort *self)`  
*Get the signals from the Serial Port structure.*
- `static int gtkterm_serial_port_read_signals (GtkTermSerialPort *self)`  
*Does the actual reading of the serial signals.*

## Variables

- `const char GtkTermSerialPortStateString [][DEFAULT_STRING_LEN]`
- `static GParamSpec * gtkterm_serial_port_properties [N_PROPS] = {NULL}`

## 6.16.1 Macro Definition Documentation


### 6.16.1.1 GTKTERM\_SERIAL\_PORT\_CONTROL\_POLL\_DELAY

```
#define GTKTERM_SERIAL_PORT_CONTROL_POLL_DELAY 100
```

In milliseconds for control signals



Here is the caller graph for this function:



### 6.16.3.2 gtkterm\_serial\_port\_class\_init()

```
static void gtkterm_serial_port_class_init (
    GtkTermSerialPortClass * class ) [static]
```


Initializing the serial\_port class.

Setting the properties and callback functions

#### Parameters

<i>class</i>	The serial_portclass
--------------	----------------------

Parameters to hand over at creation of the objectHere is the call graph for this function:

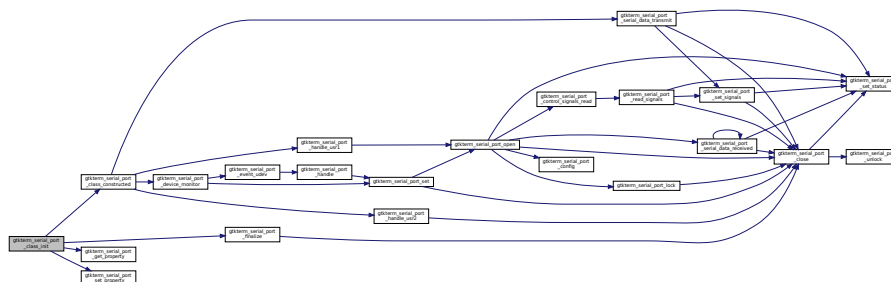

### 6.16.3.3 gtkterm\_serial\_port\_close()

```
static int gtkterm_serial_port_close (
    GtkTermSerialPort * self ) [static]
```

Closes the serial port.

It check is there is an open port and if yes it closes the port. Port will also be unlocked (if locked).

## Parameters

<i>self</i>	The Serial Port structure.
-------------	----------------------------

## Returns

int Result of the operation

Set the saved termios back to the port


Flush input and output data

Unlock the port


Close streams and port

Referenced by [gtkterm\\_serial\\_port\\_finalize\(\)](#), [gtkterm\\_serial\\_port\\_handle\\_usr2\(\)](#), [gtkterm\\_serial\\_port\\_lock\(\)](#), [gtkterm\\_serial\\_port\\_open\(\)](#), [gtkterm\\_serial\\_port\\_read\\_signals\(\)](#), [gtkterm\\_serial\\_port\\_serial\\_data\\_received\(\)](#), [gtkterm\\_serial\\_port\\_serial\\_data\\_transmit\(\)](#), [gtkterm\\_serial\\_port\\_set\(\)](#), and [gtkterm\\_serial\\_port\\_set\\_signals\(\)](#).

Here is the call graph for this function:

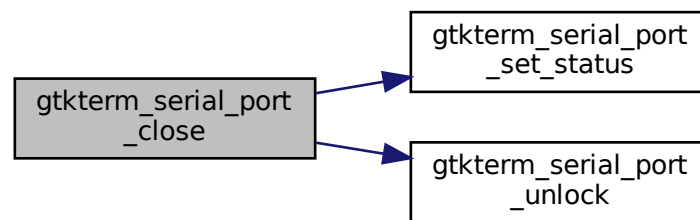

Here is the caller graph for this function:

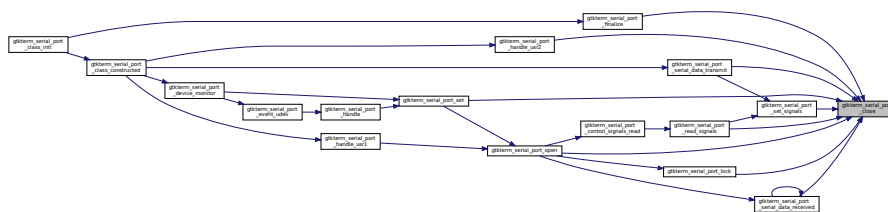

### 6.16.3.4 gtkterm\_serial\_port\_config()

```
static bool gtkterm_serial_port_config (
    GtkTermSerialPort * self,
    struct termios * termios_p,
    GError ** error ) [static]
```

set control / enable receiver

ignore break and framing errors

clear output and local mode

< Timeout in deciseconds for noncanonical read

< Minimal characters for noncanonical read

Referenced by [gtkterm\\_serial\\_port\\_open\(\)](#).

Here is the caller graph for this function:



### 6.16.3.5 gtkterm\_serial\_port\_control\_signals\_read()

```
static int gtkterm_serial_port_control_signals_read (
    gpointer data ) [static]
```

Reads the serial port signals (DTR, etc)

#### Parameters

<i>data</i>	The serial port to read the signals for.
-------------	--


#### Returns

int The result of readings.


If the signals are changed then notify the terminal so the statusbar can be updated

Referenced by [gtkterm\\_serial\\_port\\_open\(\)](#).

Here is the call graph for this function:

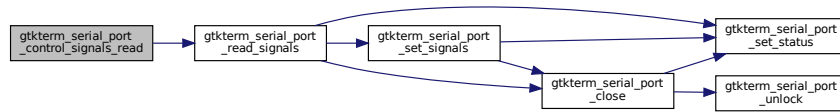

Here is the caller graph for this function:



### 6.16.3.6 gtkterm\_serial\_port\_device\_monitor()

```
void gtkterm_serial_port_device_monitor (
    GtkTermSerialPort * self )
```


Create the udev client

Get the initial status of the device


Monitor udev devices We add self as parameter so we can access the port configuration if needed.

Referenced by [gtkterm\\_serial\\_port\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

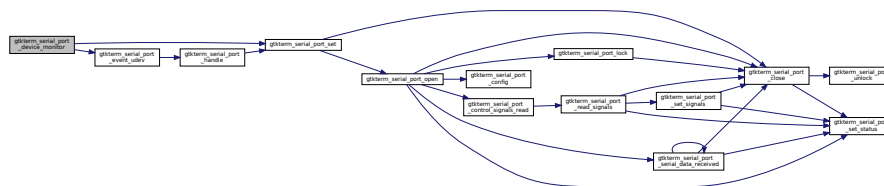

Here is the caller graph for this function:



### 6.16.3.7 gtkterm\_serial\_port\_event\_udev()

```
void gtkterm_serial_port_event_udev (
    GUdevClient * client,
    const char * action,
    GUdevDevice * device,
    gpointer user_data )
```

Callback for the uevent signal.


#### Parameters

<i>client</i>	The udev-client
<i>action</i>	The action it detects
<i>device</i>	The device.
<i>user_data</i>	The GtkTermSerialPort structure.

Check if the uevent device file matches the port of this configuration

Referenced by [gtkterm\\_serial\\_port\\_device\\_monitor\(\)](#).

Here is the call graph for this function:

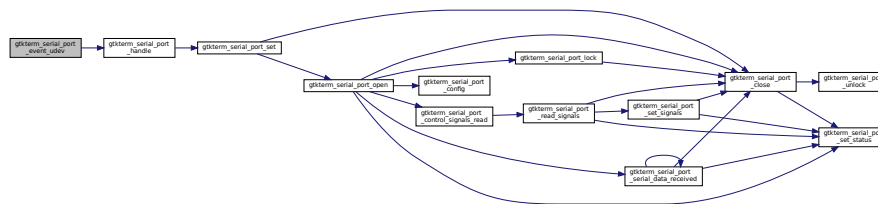

Here is the caller graph for this function:



### 6.16.3.8 gtkterm\_serial\_port\_finalize()

```
static void gtkterm_serial_port_finalize (
    GObject * object ) [static]
```

Remote all pointers when removing the object.




## Parameters

<i>object</i>	The pointer to the serial port object.
---------------	--


Close port, clear error

Referenced by [gtkterm\\_serial\\_port\\_class\\_init\(\)](#).

Here is the call graph for this function:

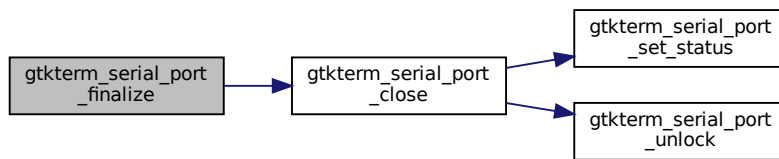

Here is the caller graph for this function:



### 6.16.3.9 gtkterm\_serial\_port\_get\_error()

```
GError * gtkterm_serial_port_get_error (
    GtkTermSerialPort * self )
```

Return the last error which occurred.

## Parameters

<i>self</i>	The serial port
-------------	-----------------

## Returns

GError The pointer to the GError struct

Referenced by [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

Here is the caller graph for this function:



#### 6.16.3.10 gtkterm\_serial\_port\_get\_property()

```

static void gtkterm_serial_port_get_property (
    GObject * object,
    unsigned int prop_id,
    GValue * value,
    GParamSpec * pspec ) [static]
  
```

get the property of the GtkTermSerialPort structure


This is used to update the properties. For now it is uses to update the notify.

##### Parameters

<i>object</i>	The object.
<i>prop_id</i>	The id of the property to get.
<i>value</i>	The value for the property
<i>pspec</i>	Metadata for property setting.

Referenced by [gtkterm\\_serial\\_port\\_class\\_init\(\)](#).

Here is the caller graph for this function:



### 6.16.3.11 `gtkterm_serial_port_get_signals()`

```
unsigned int gtkterm_serial_port_get_signals (  
    GtkTermSerialPort * self )
```

Get the signals from the Serial Port structure.

This is also used for external reading.

#### Parameters


<i>self</i>	The serial port to read the signals for.
-------------	--

#### Returns

unsigned int The latest serial port signals

Referenced by [gtkterm\\_terminal\\_port\\_signals\\_changed\(\)](#).

Here is the caller graph for this function:



### 6.16.3.12 `gtkterm_serial_port_get_status()`

```
GtkTermSerialPortState gtkterm_serial_port_get_status (  
    GtkTermSerialPort * self )
```

Return the status of the serial port.

#### Parameters


<i>self</i>	The serial port
-------------	-----------------

#### Returns

GtkTermSerialPortState The status of the serial port.

Referenced by [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

Here is the caller graph for this function:



#### 6.16.3.13 `gtkterm_serial_port_get_string()`

```
char * gtkterm_serial_port_get_string (
    GtkTermSerialPort * self )
```

Convert port config to a string.

This is used for setting the configuration in the statusbar and window title.

##### Parameters


<i>self</i>	The SerialPort structure
-------------	--------------------------

##### Returns

The port configuration as string.

Referenced by [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

Here is the caller graph for this function:



#### 6.16.3.14 `gtkterm_serial_port_handle()`

```
static void gtkterm_serial_port_handle (
    GtkTermSerialPort * self,
    const char * action ) [inline], [static]
```

Based on the action return from uevent we handle to open or close the port.


Note: This is an inline function. Without inline it wont work!.

## Parameters


<i>self</i>	Pointer to the serial port.
<i>action</i>	The action we are performing with this device.

Referenced by [gtkterm\\_serial\\_port\\_event\\_udev\(\)](#).

Here is the call graph for this function:

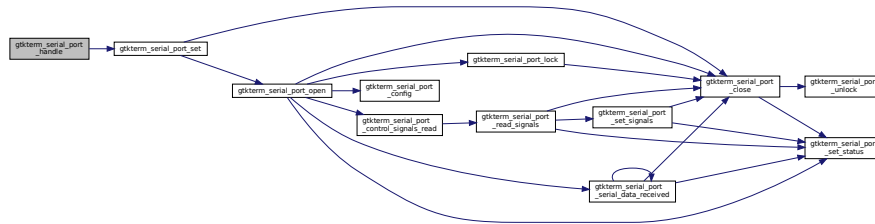

Here is the caller graph for this function:



### 6.16.3.15 gtkterm\_serial\_port\_handle\_usr1()

```
static bool gtkterm_serial_port_handle_usr1 (
    gpointer user_data ) [static]
```

Handles USR1 signal. It opens the port.

## Parameters


<i>user_data</i>	The serial port structure. Last param when installing the signal
------------------	--

## Returns


Continue the signal operation.

Referenced by [gtkterm\\_serial\\_port\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

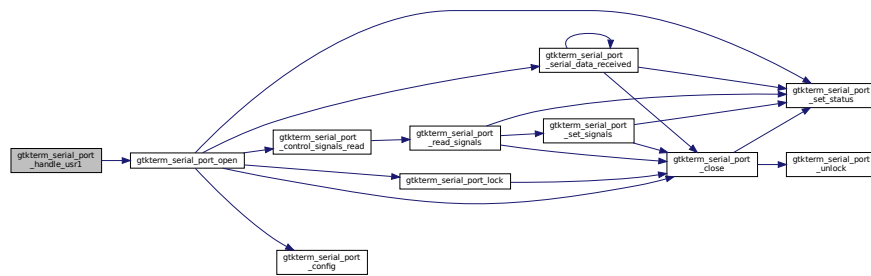

Here is the caller graph for this function:



#### 6.16.3.16 gtkterm\_serial\_port\_handle\_usr2()

```
static bool gtkterm_serial_port_handle_usr2 (
    gpointer user_data ) [static]
```

Handles USR2 signal. It closes the port.

##### Parameters


<i>user_data</i>	The serial port structure. Last param when installing the signal
------------------	--

**Returns**


Continue the signal operation.

Referenced by [gtkterm\\_serial\\_port\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

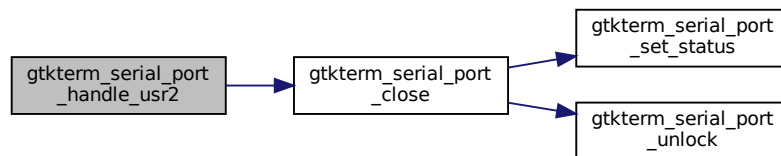

Here is the caller graph for this function:

**6.16.3.17 gtkterm\_serial\_port\_init()**

```
static void gtkterm_serial_port_init (
    GtkTermSerialPort * self ) [static]
```

Initialize the serial with the config parameters.

**Parameters**

<i>self</i>	The port we are initializing.
-------------	-------------------------------

Not yet connected

**6.16.3.18 gtkterm\_serial\_port\_lock()**

```
int gtkterm_serial_port_lock (
    GtkTermSerialPort * self,
    GError ** error )
```

Locks the serial port.

## Parameters


<i>self</i>	The serial port
<i>error</i>	The error occurred when locking the port

## Returns

int The result of the lock operation.

Referenced by [gtkterm\\_serial\\_port\\_open\(\)](#).

Here is the call graph for this function:

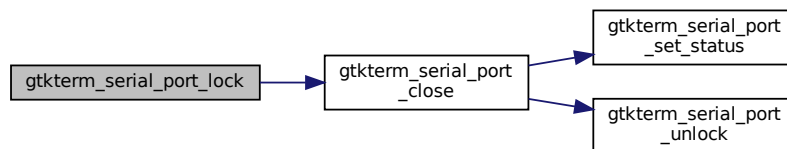

Here is the caller graph for this function:



### 6.16.3.19 gtkterm\_serial\_port\_new()

```

GtkTermSerialPort * gtkterm_serial_port_new (
    port_config_t * port_conf )

```

Create a new serial port object.

This also binds the parameter to the properties of the serial port.

## Parameters

<i>port_conf</i>	The section for the configuration in this terminal
------------------	--


## Returns

The serial\_port object.



Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

Here is the caller graph for this function:



### 6.16.3.20 gtkterm\_serial\_port\_open()

```
static int gtkterm_serial_port_open (
    GtkTermSerialPort * self ) [static]
```

Connects to the serial port.

Local functions

The settings for this port will be set. If needed port will be locked.

#### Parameters

<i>self</i>	The configuration class.
-------------	--------------------------

#### Returns

The result of the operation.

Handle to cancel async read operaton

Lock the port

get termios for the file descriptor

And back it up


Set the created termios to the file descriptor

Flush the in- output data which is not written/read

Set the streams for communicating with the device

Referenced by [gtkterm\\_serial\\_port\\_handle\\_usr1\(\)](#), and [gtkterm\\_serial\\_port\\_set\(\)](#).

Here is the call graph for this function:

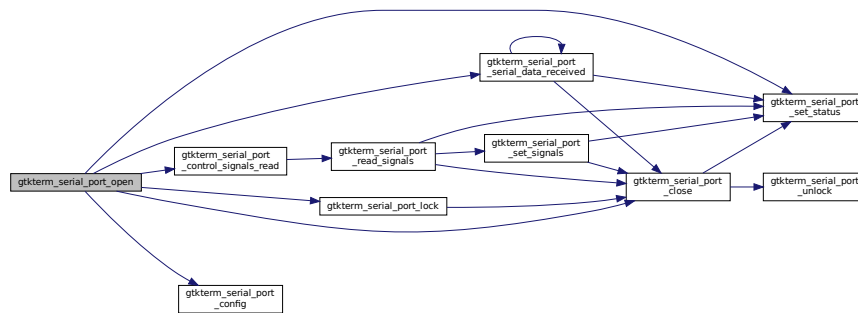

Here is the caller graph for this function:



### 6.16.3.21 gtkterm\_serial\_port\_read\_signals()

```
static int gtkterm_serial_port_read_signals (
    GtkTermSerialPort * self ) [static]
```

Does the actual reading of the serial signals.

#### Parameters

<i>self</i>	The serial port to read the signals for.
-------------	--

#### Returns

int The terminal status bits.

reset RTS (default = receive)

Check if we have a valid file descriptor and if the file descriptor points to a terminal device (tty\*)


Get the terminal statusbits

Ignore EINVAL, as some serial ports genuinely lack these lines Thanks to Elie De Brauer on ubuntu launchpad


Apparently recently trying this on Linux PTYs fails with ENOTTY instead, so exempt this as well

Referenced by [gtkterm\\_serial\\_port\\_control\\_signals\\_read\(\)](#).

Here is the call graph for this function:

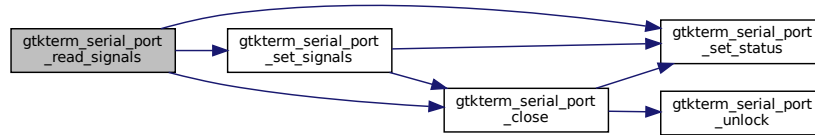

Here is the caller graph for this function:



### 6.16.3.22 gtkterm\_serial\_port\_serial\_data\_received()

```
static void gtkterm_serial_port_serial_data_received (
    GObject * source,
    GAsyncResult * res,
    gpointer user_data ) [static]
```

Callback where data is received from the input stream.

Because of the async operation the listener has to restart at the end of this callback. It isn't a continuous loop.

## Parameters

<i>source</i>	The inputstream
<i>res</i>	The result of the async function
<i>user_data</i>	The serial port struct.

Read bytes from the inputstream


**Todo** send to terminal window and show in infobar

Send signal to buffer when new data is arrived


Restart listener

Referenced by [gtkterm\\_serial\\_port\\_open\(\)](#), and [gtkterm\\_serial\\_port\\_serial\\_data\\_received\(\)](#).

Here is the call graph for this function:

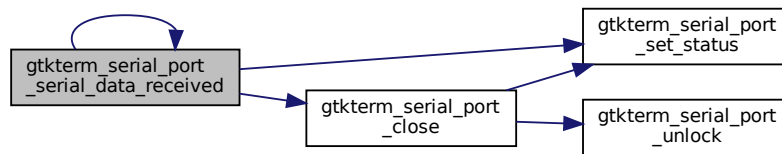

Here is the caller graph for this function:



### 6.16.3.23 gtkterm\_serial\_port\_serial\_data\_transmit()

```

static int gtkterm_serial_port_serial_data_transmit (
    GObject * object,
    gpointer data,
    unsigned int length,
    gpointer user_data ) [static]
  
```

Callback for signal where data is transmitted to the output stream of the port.

If necessary the RS485 signal are set.

#### Parameters

<i>object</i>	Not used
<i>data</i>	The string with data to send.
<i>length</i>	The length of the string.
<i>user_data</i>	The serial port struct.

#### Returns

int The bytes written to the outputstream

Check if we have a string > 0 and an active open port


Are we in RS485 half-duplex mode

Wait till all chars are send


Reset RTS (end of send, now receiving back)

Referenced by [gtkterm\\_serial\\_port\\_class\\_constructed\(\)](#).

Here is the call graph for this function:

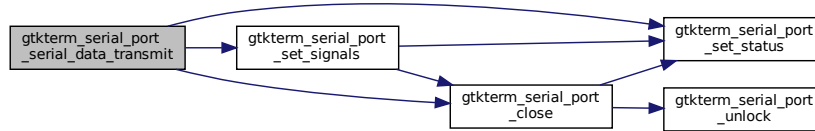

Here is the caller graph for this function:



### 6.16.3.24 gtkterm\_serial\_port\_set()

```
static void gtkterm_serial_port_set (
    GtkTermSerialPort * self,
    GtkTermSerialPortStatus status ) [inline], [static]
```


Opens or closes the serial port.

#### Parameters


<i>self</i>	The serial port structure.
<i>status</i>	The new status for this port

Referenced by [gtkterm\\_serial\\_port\\_device\\_monitor\(\)](#), and [gtkterm\\_serial\\_port\\_handle\(\)](#).

Here is the call graph for this function:

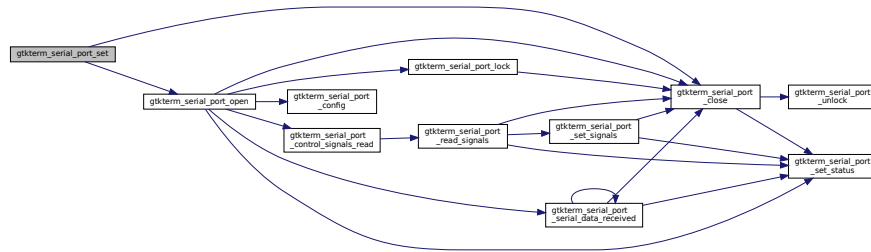

Here is the caller graph for this function:



### 6.16.3.25 gtkterm\_serial\_port\_set\_property()

```
static void gtkterm_serial_port_set_property (
    GObject * object,
    unsigned int prop_id,
    const GValue * value,
    GParamSpec * pspec ) [static]
```

Set the property of the GtkTermSerialPort structure.


This is used to initialize the variables when creating a new serial\_port

#### Parameters

<i>object</i>	The object.
<i>prop_id</i>	The id of the property to set.
<i>value</i>	The value for the property
<i>pspec</i>	Metadata for property setting.

Referenced by [gtkterm\\_serial\\_port\\_class\\_init\(\)](#).

Here is the caller graph for this function:



### 6.16.3.26 gtkterm\_serial\_port\_set\_signals()

```
void gtkterm_serial_port_set_signals (
    GtkTermSerialPort * self,
    unsigned int param )
```

Set the signals for the Serial Port structure.

#### Parameters

<i>self</i>	The serial port structure.
<i>param</i>	The signals for the serial port.

Get the terminal status


Set the DTR signal

Failure during setting the signal

Set the RTS signal

Referenced by [gtkterm\\_serial\\_port\\_read\\_signals\(\)](#), and [gtkterm\\_serial\\_port\\_serial\\_data\\_transmit\(\)](#).

Here is the call graph for this function:

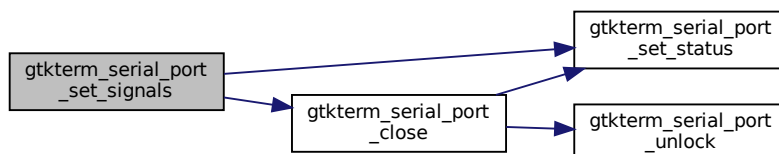








## 6.17 gtkterm\_serial\_port.h File Reference

This graph shows which files directly or indirectly include this file:



### Classes

- struct [port\\_config\\_t](#)  
*The typedef for the serial configuration.*

### Macros

- #define [GTKTERM\\_TYPE\\_SERIAL\\_PORT](#) [gtkterm\\_serial\\_port\\_get\\_type\(\)](#)

### Typedefs

- typedef struct [\\_GtkTermSerialPort](#) [GtkTermSerialPort](#)

### Enumerations

- enum [GtkTermSerialPortStatus](#) { [GTKTERM\\_SERIAL\\_PORT\\_OPEN](#) , [GTKTERM\\_SERIAL\\_PORT\\_CLOSE](#) }
- enum [GtkTermSerialPortParity](#) { [GTKTERM\\_SERIAL\\_PORT\\_PARITY\\_NONE](#) , [GTKTERM\\_SERIAL\\_PORT\\_PARITY\\_EVEN](#) , [GTKTERM\\_SERIAL\\_PORT\\_PARITY\\_ODD](#) }
- enum [GtkTermSerialPortFlowControl](#) { [GTKTERM\\_SERIAL\\_PORT\\_FLOWCONTROL\\_NONE](#) , [GTKTERM\\_SERIAL\\_PORT\\_FLOWCONTROL\\_RS485\\_CTS](#) , [GTKTERM\\_SERIAL\\_PORT\\_FLOWCONTROL\\_RS485\\_DTR](#) }
- enum [GtkTermSerialPortState](#) { [GTKTERM\\_SERIAL\\_PORT\\_CONNECTED](#) , [GTKTERM\\_SERIAL\\_PORT\\_DISCONNECTED](#) , [GTKTERM\\_SERIAL\\_PORT\\_ERROR](#) }

### Functions

- [GtkTermSerialPort \\*](#) [gtkterm\\_serial\\_port\\_new](#) ([port\\_config\\_t \\*](#))  
*Create a new serial port object.*
- char \* [gtkterm\\_serial\\_port\\_get\\_string](#) ([GtkTermSerialPort \\*](#))  
*Convert port config to a string.*
- [GtkTermSerialPortState](#) [gtkterm\\_serial\\_port\\_get\\_status](#) ([GtkTermSerialPort \\*](#))  
*Return the status of the serial port.*
- unsigned int [gtkterm\\_serial\\_port\\_get\\_signals](#) ([GtkTermSerialPort \\*](#))  
*Get the signals from the Serial Port structure.*
- GError \* [gtkterm\\_serial\\_port\\_get\\_error](#) ([GtkTermSerialPort \\*](#))  
*Return the last error which occurred.*

## Variables

- const char [GtkTermSerialPortStateString](#) [\[ \]](#)[DEFAULT\_STRING\_LEN]

## 6.17.1 Macro Definition Documentation

### 6.17.1.1 GTKTERM\_TYPE\_SERIAL\_PORT

```
#define GTKTERM_TYPE_SERIAL_PORT gtkterm_serial_port_get_type ()
```

## 6.17.2 Typedef Documentation

### 6.17.2.1 GtkTermSerialPort

```
typedef struct _GtkTermSerialPort GtkTermSerialPort
```

## 6.17.3 Enumeration Type Documentation

### 6.17.3.1 GtkTermSerialPortFlowControl

```
enum GtkTermSerialPortFlowControl
```

#### Enumerator

GTKTERM_SERIAL_PORT_FLOWCONTROL_NONE	
GTKTERM_SERIAL_PORT_FLOWCONTROL_XON_XOFF	
GTKTERM_SERIAL_PORT_FLOWCONTROL_RTS_CTS	
GTKTERM_SERIAL_PORT_FLOWCONTROL_RS485_HD	

### 6.17.3.2 GtkTermSerialPortParity

```
enum GtkTermSerialPortParity
```

## Enumerator

GTKTERM_SERIAL_PORT_PARITY_NONE	
GTKTERM_SERIAL_PORT_PARITY_EVEN	
GTKTERM_SERIAL_PORT_PARITY_ODD	

### 6.17.3.3 GtkTermSerialPortState

enum [GtkTermSerialPortState](#)

## Enumerator

GTKTERM_SERIAL_PORT_CONNECTED	
GTKTERM_SERIAL_PORT_DISCONNECTED	
GTKTERM_SERIAL_PORT_ERROR	

### 6.17.3.4 GtkTermSerialPortStatus

enum [GtkTermSerialPortStatus](#)

## Enumerator

GTKTERM_SERIAL_PORT_OPEN	
GTKTERM_SERIAL_PORT_CLOSE	

## 6.17.4 Function Documentation

### 6.17.4.1 gtkterm\_serial\_port\_get\_error()

```
GError * gtkterm_serial_port_get_error (  
    GtkTermSerialPort * self )
```

Return the last error which occurred.

## Parameters


<i>self</i>	The serial port
-------------	-----------------

**Returns**

GError The pointer to the GError struct

Referenced by [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

Here is the caller graph for this function:

**6.17.4.2 gtkterm\_serial\_port\_get\_signals()**

```

unsigned int gtkterm_serial_port_get_signals (
    GtkTermSerialPort * self )
  
```

Get the signals from the Serial Port structure.

This is also used for external reading.

**Parameters**


<i>self</i>	The serial port to read the signals for.
-------------	--

**Returns**

unsigned int The latest serial port signals

Referenced by [gtkterm\\_terminal\\_port\\_signals\\_changed\(\)](#).

Here is the caller graph for this function:

**6.17.4.3 gtkterm\_serial\_port\_get\_status()**

```

GtkTermSerialPortState gtkterm_serial_port_get_status (
    GtkTermSerialPort * self )
  
```

Return the status of the serial port.

**Parameters**


<i>self</i>	The serial port
-------------	-----------------

**Returns**

GtkTermSerialPortState The status of the serial port.

Referenced by [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

Here is the caller graph for this function:

**6.17.4.4 gtkterm\_serial\_port\_get\_string()**

```
char * gtkterm_serial_port_get_string (
    GtkTermSerialPort * self )
```

Convert port config to a string.

Global functions

This is used for setting the configuration in the statusbar and window title.

**Parameters**


<i>self</i>	The SerialPort structure
-------------	--------------------------

**Returns**

The port configuration as string.

Referenced by [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

Here is the caller graph for this function:



#### 6.17.4.5 gtkterm\_serial\_port\_new()

```
GtkTermSerialPort * gtkterm_serial_port_new (
    port_config_t * port_conf )
```

Create a new serial port object.

This also binds the parameter to the properties of the serial port.

##### Parameters


<code>port_conf</code>	The section for the configuration in this terminal
------------------------	--

##### Returns

The serial\_port object.

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

Here is the caller graph for this function:



### 6.17.5 Variable Documentation

#### 6.17.5.1 GtkTermSerialPortStateString

```
const char GtkTermSerialPortStateString[ ][DEFAULT_STRING_LEN] [extern]
```

Referenced by [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

## 6.18 gtkterm\_serial\_port.h

[Go to the documentation of this file.](#)

```
1 /*****
2  /* gtkterm_serial_port.h */
3  /* ----- */
4  /*      GTKTerm Software
5  /*      (c) Julien Schmitt
6  /*
7  /* ----- */
8  /*
9  /*      Purpose
10 /*      Serial port access functions
11 /*      - Header file -
12 /*
13 /*****/
```

```

14
15 #ifndef GTKTERM_SERIAL_H_
16 #define GTKTERM_SERIAL_H_
17
18 typedef enum {
19     GTKTERM_SERIAL_PORT_OPEN,
20     GTKTERM_SERIAL_PORT_CLOSE
21 } GtkTermSerialPortStatus;
22
23
24 typedef enum {
25     GTKTERM_SERIAL_PORT_PARITY_NONE,
26     GTKTERM_SERIAL_PORT_PARITY_EVEN,
27     GTKTERM_SERIAL_PORT_PARITY_ODD
28 } GtkTermSerialPortParity;
29
30
31 typedef enum {
32     GTKTERM_SERIAL_PORT_FLOWCONTROL_NONE,
33     GTKTERM_SERIAL_PORT_FLOWCONTROL_XON_XOFF,
34     GTKTERM_SERIAL_PORT_FLOWCONTROL_RTS_CTS,
35     GTKTERM_SERIAL_PORT_FLOWCONTROL_RS485_HD,
36 } GtkTermSerialPortFlowControl;
37
38
39 typedef enum {
40     GTKTERM_SERIAL_PORT_CONNECTED,
41     GTKTERM_SERIAL_PORT_DISCONNECTED,
42     GTKTERM_SERIAL_PORT_ERROR
43 } GtkTermSerialPortState;
44
45
46 typedef struct {
47     char *port;
48     long int baudrate;
49     int bits;
50     int stopbits;
51     GtkTermSerialPortParity parity;
52     GtkTermSerialPortFlowControl flow_control;
53     int rs485_rts_time_before_transmit;
54     int rs485_rts_time_after_transmit;
55     bool disable_port_lock;
56 } port_config_t;
57
58
59 G_BEGIN_DECLS
60
61 #define GTKTERM_TYPE_SERIAL_PORT gtkterm_serial_port_get_type ()
62 G_DECLARE_FINAL_TYPE (GtkTermSerialPort, gtkterm_serial_port, GTKTERM, SERIAL_PORT, GObject)
63 typedef struct _GtkTermSerialPort GtkTermSerialPort;
64
65
66 GtkTermSerialPort *gtkterm_serial_port_new (port_config_t *);
67
68
69 char* gtkterm_serial_port_get_string (GtkTermSerialPort *);
70 GtkTermSerialPortState gtkterm_serial_port_get_status (GtkTermSerialPort *);
71 unsigned int gtkterm_serial_port_get_signals (GtkTermSerialPort *);
72 GError *gtkterm_serial_port_get_error (GtkTermSerialPort *);
73
74
75 extern const char GtkTermSerialPortStateString [][DEFAULT_STRING_LEN];
76
77
78 G_END_DECLS
79
80 #endif // GTKTERM_SERIAL_H

```

## 6.19 gtkterm\_terminal.c File Reference

```


#include <stdio.h>
#include <stdbool.h>
#include <sys/stat.h>
#include <glib.h>
#include <glib/gi18n.h>
#include <glib/gprintf.h>
#include <glib-object.h>
#include <gtk/gtk.h>
#include <gio/gio.h>
#include <pango/pango-font.h>

```



```
#include "gtkterm_defaults.h"
#include "gtkterm_window.h"
#include "gtkterm_serial_port.h"
#include "gtkterm_terminal.h"
#include "gtkterm_buffer.h"
#include "macros.h"
#include "gtkterm_configuration.h"
```

Include dependency graph for gtkterm\_terminal.c:

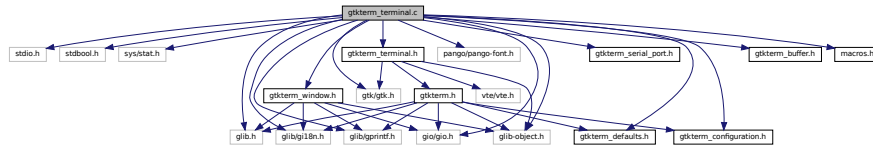

## Classes

- struct [GtkTermTerminalPrivate](#)
- struct [\\_GtkTermTerminal](#)
- struct [\\_GtkTermTerminalClass](#)

## Enumerations

- enum [GtkTermTerminalView](#) { [GTKTERM\\_TERMINAL\\_VIEW\\_TEXT](#) , [GGTKTERM\\_TERMINAL\\_VIEW\\_HEX](#) }
- enum { [PROP\\_0](#) , [PROP\\_SECTION](#) , [PROP\\_GTKTERM\\_APP](#) , [PROP\\_MAIN\\_WINDOW](#) , [N\\_PROPS](#) }

## Functions

- void [gtkterm\\_terminal\\_view\\_ascii](#) ([GtkTermTerminal](#) \*, char \*, uint)
- void [gtkterm\\_terminal\\_view\\_hex](#) ([GtkTermTerminal](#) \*, char \*, uint)
- [GtkTermTerminal](#) \* [gtkterm\\_terminal\\_new](#) (char \*section, [GtkTerm](#) \*gtkterm\_app, [GtkTermWindow](#) \*main\_↔\_window)
 

Create a new terminal object.
- static void [gtkterm\\_terminal\\_vte\\_data\\_received](#) ([VteTerminal](#) \*widget, char \*text, unsigned int length, gpointer ptr)
 

Callback when new data from the VTE widget is received.
- static void [gtkterm\\_terminal\\_port\\_signals\\_changed](#) ([GObject](#) \*object, [GParamSpec](#) \*pspec, gpointer user\_↔\_data)
 

When signalsof the serial port is changed we get a signal and have to update [GtkTermWindow](#).
- static void [gtkterm\\_terminal\\_port\\_status\\_changed](#) ([GObject](#) \*object, [GParamSpec](#) \*pspec, gpointer user\_↔\_data)
 

When the status of the serial port is changed we get a signal and have to update [GtkTermWindow](#).
- static void [gtkterm\\_terminal\\_buffer\\_updated](#) ([GObject](#) \*object, gpointer data, unsigned int length, gpointer user\_data)
 

When the buffer is updated the terminal is notified data new data is available.
- static void [gtkterm\\_terminal\\_constructed](#) ([GObject](#) \*object)
 

Constructs the terminal.

- static void [gtkterm\\_terminal\\_dispose](#) (GObject \*object)  
*Called when distroying the terminal.*
- static void [gtkterm\\_terminal\\_set\\_property](#) (GObject \*object, unsigned int prop\_id, const GValue \*value, GParamSpec \*pspec)  
*Set the property of the GtkTermTerminal structure.*
- static void [gtkterm\\_terminal\\_class\\_init](#) (GtkTermTerminalClass \*class)  
*Initializing the terminal class.*
- static void [gtkterm\\_terminal\\_init](#) (GtkTermTerminal \*self)  
*Initialize the terminal with the actions, etc.*
- void [gtkterm\\_terminal\\_view\\_ascii](#) (GtkTermTerminal \*self, char \*data, unsigned int length)  
*Outputs a string to the terminal widget in ASCII.*
- void [gtkterm\\_terminal\\_view\\_hex](#) (GtkTermTerminal \*self, char \*data, unsigned int length)  
*Outputs a string to the terminal widget in HEX layout.*

## Variables

- static GParamSpec \* [gtkterm\\_terminal\\_properties](#) [N\_PROPS] = {NULL}

## 6.19.1 Enumeration Type Documentation

### 6.19.1.1 anonymous enum

anonymous enum

#### Enumerator

PROP_0	
PROP_SECTION	
PROP_GTKTERM_APP	
PROP_MAIN_WINDOW	
N_PROPS	

### 6.19.1.2 GtkTermTerminalView

enum [GtkTermTerminalView](#)

#### Enumerator

GTKTERM_TERMINAL_VIEW_TEXT	
GGTKTERM_TERMINAL_VIEW_HEX	

## 6.19.2 Function Documentation

### 6.19.2.1 gtkterm\_terminal\_buffer\_updated()

```
static void gtkterm_terminal_buffer_updated (
    GObject * object,
    gpointer data,
    unsigned int length,
    gpointer user_data ) [static]
```

When the buffer is updated the terminal is notified data new data is available.


Depending of the setting the output will be in ASCII for HEX.

#### Parameters


<i>object</i>	Not used.
<i>data</i>	The new string of data in the buffer.
<i>length</i>	The length of the new string
<i>user_data</i>	The terminal.

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

Here is the call graph for this function:

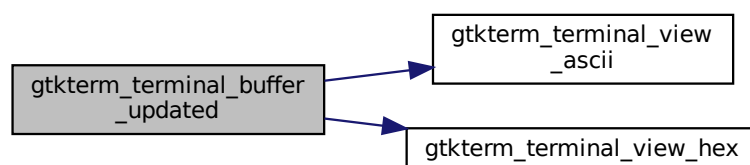

Here is the caller graph for this function:



### 6.19.2.2 gtkterm\_terminal\_class\_init()

```
static void gtkterm_terminal_class_init (
    GtkTermTerminalClass * class ) [static]
```

Initializing the terminal class.

Setting the properties and callback functions


#### Parameters

<i>class</i>	The terminal class
--------------	--------------------

Connect the serial port

We received data from the VTE widget and send it to the serial port

Parameters to hand over at creation of the object We need the section to load the config from the keyfile. Here is the call graph for this function:

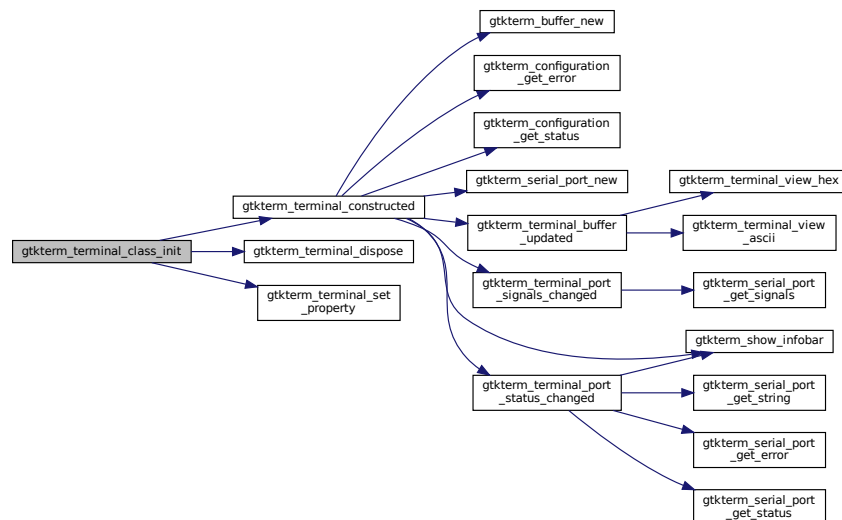

### 6.19.2.3 gtkterm\_terminal\_constructed()

```
static void gtkterm_terminal_constructed (
    GObject * object ) [static]
```

Constructs the terminal.

Setup signals, initialize terminal etc.

## Parameters

<i>object</i>	The terminal object we are constructing.
---------------	--

Check if the config file exists, if not it will be created

**Todo** : convert to notify on message

Load the configuration from [Section] into the port and terminal config. Take [section] as input, term/port conf are the pointers to the return values.

Create the serial port. The buffer will be a propertie, so they can exchange data without interference of the terminal.

Create a buffer for the terminal


Send initial notify to update the status bar

Set terminal properties.

**Todo** : make configurable from the config file

Referenced by [gtkterm\\_terminal\\_class\\_init\(\)](#).

Here is the call graph for this function:

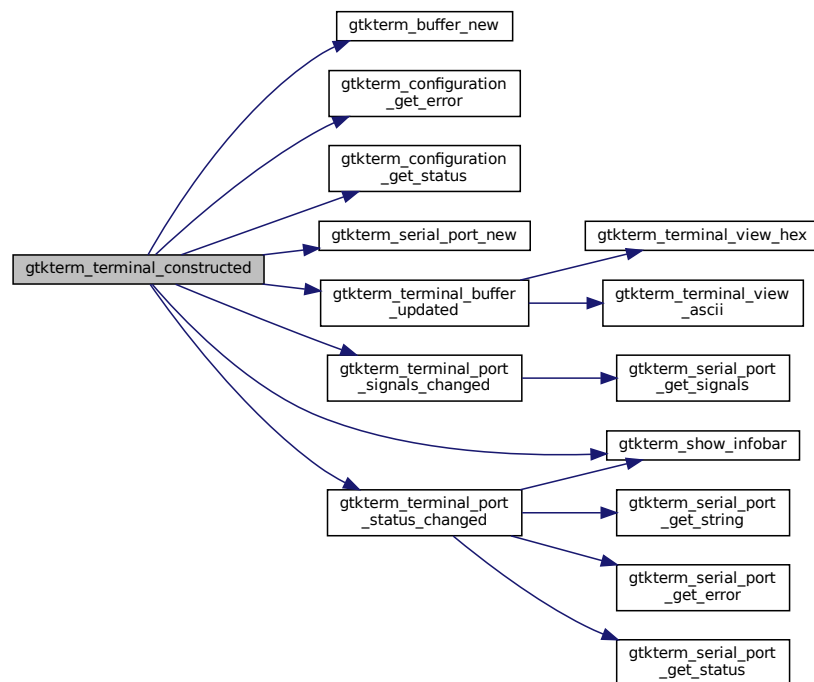

Here is the caller graph for this function:



#### 6.19.2.4 `gtkterm_terminal_dispose()`

```
static void gtkterm_terminal_dispose (  
    GObject * object ) [static]
```

Called when destroying the terminal.

This is used to clean up and freeing the variables in the terminal structure.

##### Parameters

<i>object</i>	The object.
---------------	-------------

Referenced by [gtkterm\\_terminal\\_class\\_init\(\)](#).

Here is the caller graph for this function:



#### 6.19.2.5 `gtkterm_terminal_init()`


```
static void gtkterm_terminal_init (  
    GtkTermTerminal * self ) [static]
```

Initialize the terminal with the actions, etc.

##### Parameters

<i>self</i>	The terminal we are initializing.
-------------	-----------------------------------

Here is the call graph for this function:



### 6.19.2.6 gtkterm\_terminal\_new()

```
GtkTermTerminal * gtkterm_terminal_new (  
    char * section,  
    GtkTerm * gtkterm_app,  
    GtkTermWindow * main_window )
```

Create a new terminal object.

This also binds the parameter to the properties of the terminal.

#### Parameters

<i>section</i>	The section for the configuration in this terminal
<i>gtkterm_app</i>	The GTKTerm application
<i>main_window</i>	The main_window this terminal is attached to.

#### Returns

The terminal object.

Referenced by [create\\_window\(\)](#).

Here is the caller graph for this function:



### 6.19.2.7 gtkterm\_terminal\_port\_signals\_changed()

```
static void gtkterm_terminal_port_signals_changed (
    GObject * object,
    GParamSpec * pspec,
    gpointer user_data ) [static]
```

When signalsof the serial port is changed we get a signal and have to update GtkTermWindow.

#### Parameters


<i>object</i>	The serial port.
<i>pspec</i>	Not used.
<i>user_data</i>	The active terminal.

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



### 6.19.2.8 gtkterm\_terminal\_port\_status\_changed()

```
static void gtkterm_terminal_port_status_changed (
    GObject * object,
    GParamSpec * pspec,
    gpointer user_data ) [static]
```

When the status of the serial port is changed we get a signal and have to update GtkTermWindow.



## Parameters


<i>object</i>	The serial port.
<i>pspec</i>	Not used.
<i>user_data</i>	The active terminal.

**Todo** convert to notify signal on message...


Update the statusbar and main window title

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#).

Here is the call graph for this function:

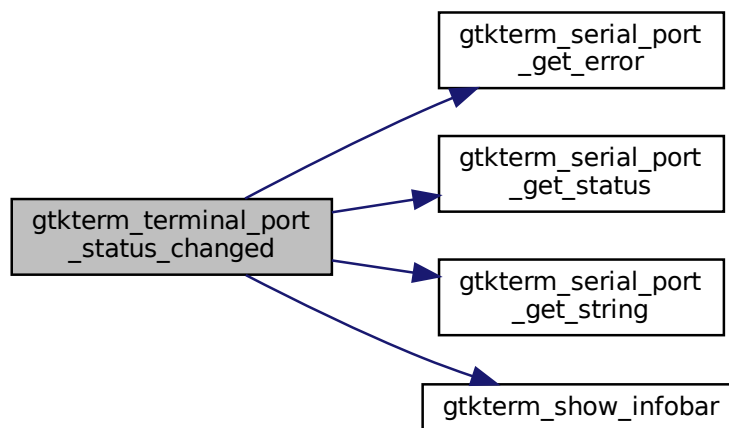

Here is the caller graph for this function:



### 6.19.2.9 gtkterm\_terminal\_set\_property()

```

static void gtkterm_terminal_set_property (
    GObject * object,
    unsigned int prop_id,
    const GValue * value,
    GParamSpec * pspec ) [static]
  
```

Set the property of the `GtkTermTerminal` structure.


This is used to initialize the variables when creating a new terminal

## Parameters

<i>object</i>	The object.
<i>prop↔ _id</i>	The id of the property to set.
<i>value</i>	The value for the property
<i>pspec</i>	Metadata for property setting.

Referenced by [gtkterm\\_terminal\\_class\\_init\(\)](#).

Here is the caller graph for this function:



#### 6.19.2.10 `gtkterm_terminal_view_ascii()` [1/2]

```
void gtkterm_terminal_view_ascii (
    GtkTermTerminal * ,
    char * ,
    uint )
```

Referenced by [gtkterm\\_terminal\\_buffer\\_updated\(\)](#).

Here is the caller graph for this function:



#### 6.19.2.11 `gtkterm_terminal_view_ascii()` [2/2]

```
void gtkterm_terminal_view_ascii (
    GtkTermTerminal * self,
    char * data,
    unsigned int length )
```

Outputs a string to the terminal widget in ASCII.

## Parameters


<i>self</i>	The terminal.
<i>data</i>	The string of data we want to show
<i>length</i>	The length of the string

**6.19.2.12** `gtkterm_terminal_view_hex()` [1/2]

```
void gtkterm_terminal_view_hex (  
    GtkTermTerminal * ,  
    char * ,  
    uint )
```

Referenced by [gtkterm\\_terminal\\_buffer\\_updated\(\)](#).

Here is the caller graph for this function:

**6.19.2.13** `gtkterm_terminal_view_hex()` [2/2]

```
void gtkterm_terminal_view_hex (  
    GtkTermTerminal * self,  
    char * data,  
    unsigned int length )
```

Outputs a string to the terminal widget in HEX layout.

## Parameters

<i>self</i>	The terminal.
<i>data</i>	The string of data we want to show
<i>length</i>	The length of the string

**6.19.2.14** `gtkterm_terminal_vte_data_received()`

```
static void gtkterm_terminal_vte_data_received (  
    VteTerminal * widget,
```

```
char * text,
unsigned int length,
gpointer ptr ) [static]
```

Callback when new data from the VTE widget is received.

If echo is enabled the string is also send to the buffer. Which will update the terminal by sending the new data signal.

#### Parameters

<i>widget</i>	The VTE widget.
<i>text</i>	The text which is entered
<i>length</i>	The length of the text
<i>ptr</i>	Not used.


On echo send data to the buffer which will update the terminal

Convert to GBytes, needed for the buffer

Send signal to buffer when new data is arrived

Referenced by [gtkterm\\_terminal\\_init\(\)](#).

Here is the caller graph for this function:



## 6.19.3 Variable Documentation

### 6.19.3.1 gtkterm\_terminal\_properties


```
GParamSpec* gtkterm_terminal_properties[N_PROPS] = {NULL} [static]
```

Referenced by [gtkterm\\_terminal\\_class\\_init\(\)](#).


## 6.20 gtkterm\_terminal.h File Reference

```
#include <glib-object.h>
#include <gtk/gtk.h>
#include <vte/vte.h>
#include "gtkterm.h"
```

Include dependency graph for gtkterm\_terminal.h:

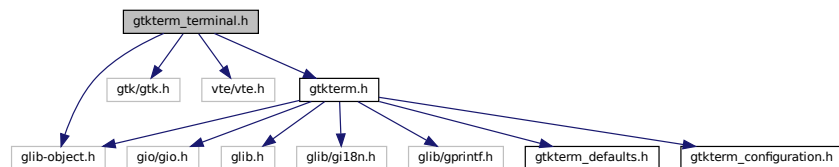

This graph shows which files directly or indirectly include this file:



### Classes

- struct [term\\_config\\_t](#)  
*The typedef for the terminal configuration.*

### Macros

- #define [GTKTERM\\_TYPE\\_TERMINAL](#) [gtkterm\\_terminal\\_get\\_type\(\)](#)

### Typedefs

- typedef struct [\\_GtkTermTerminal](#) [GtkTermTerminal](#)

### Functions

- [GtkTermTerminal](#) \* [gtkterm\\_terminal\\_new](#) (char \*, [GtkTerm](#) \*, [GtkTermWindow](#) \*)  
*Create a new terminal object.*

#### 6.20.1 Macro Definition Documentation

### 6.20.1.1 GTKTERM\_TYPE\_TERMINAL

```
#define GTKTERM_TYPE_TERMINAL gtkterm_terminal_get_type()
```

## 6.20.2 Typedef Documentation

### 6.20.2.1 GtkTermTerminal

```
typedef struct _GtkTermTerminal GtkTermTerminal
```

## 6.20.3 Function Documentation

### 6.20.3.1 gtkterm\_terminal\_new()

```
GtkTermTerminal * gtkterm_terminal_new (
    char * section,
    GtkTerm * gtkterm_app,
    GtkTermWindow * main_window )
```

Create a new terminal object.

This also binds the parameter to the properties of the terminal.

#### Parameters

<i>section</i>	The section for the configuration in this terminal
<i>gtkterm_app</i>	The GTKTerm application
<i>main_window</i>	The main_window this terminal is attached to.

#### Returns

The terminal object.

Referenced by [create\\_window\(\)](#).

Here is the caller graph for this function:



## 6.21 gtkterm\_terminal.h

[Go to the documentation of this file.](#)

```

1  /*****
2  /*  gtkterm_terminal.h
3  /*  -----
4  /*          GTKTerm Software
5  /*          (c) Julien Schmitt
6  /*
7  /*  -----
8  /*
9  /*  Purpose
10 /*      Handles all VTE in/output to/from serial port
11 /*      - Header file -
12 /*
13 /*****
14 #ifndef GTKTERM_TERMINAL_H
15 #define GTKTERM_TERMINAL_H
16
17 #include <glib-object.h>
18 #include <gtk/gtk.h>
19 #include <vte/vte.h>
20
21 #include "gtkterm.h"
22
23 typedef struct {
24
25     bool block_cursor;
26     bool show_cursor;
27     char char_queue;
28     bool echo;
29     bool auto_lf;
30     bool auto_cr;
31     bool timestamp;
32     int delay;
33     int rows;
34     int columns;
35     int scrollbar;
36     bool visual_bell;
37     GdkRGBA foreground_color;
38     GdkRGBA background_color;
39     PangoFontDescription *font;
40 } term_config_t;
41
42 G_BEGIN_DECLS
43
44 #define GTKTERM_TYPE_TERMINAL gtkterm_terminal_get_type()
45 G_DECLARE_FINAL_TYPE (GtkTermTerminal, gtkterm_terminal, GTKTERM, TERMINAL, VteTerminal)
46 typedef struct _GtkTermTerminal GtkTermTerminal;
47
48 GtkTermTerminal *gtkterm_terminal_new (char *, GtkTerm *, GtkTermWindow *);
49
50 G_END_DECLS
51
52 #endif // GTKTERM_TERMINAL_H

```


## 6.22 gtkterm\_window.c File Reference

```

#include <gtk/gtk.h>
#include <vte/vte.h>
#include <glib/glib.h>
#include <glib/gprintf.h>
#include <sys/ioctl.h>
#include "config.h"
#include "gtkterm_defaults.h"
#include "gtkterm.h"
#include "gtkterm_window.h"
#include "gtkterm_terminal.h"

```

Include dependency graph for `gtkterm_window.c`:

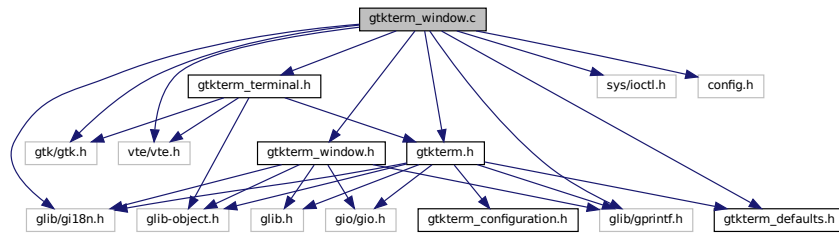

## Classes

- [struct `\_GtkTermWindow`](#)  
*MainWindow specific variables here.*

## Macros

- `#define` [`SERIAL\_SIGNALS`](#) 6

## Functions

- static void [`gtkterm\_window\_update\_statusbar`](#) ([GtkTermWindow](#) \*window, gpointer section, gpointer serial\_config\_string, gpointer serial\_status, gpointer user\_data)  
*Callbackfunction for updating window title and statusbus.*
- static void [`config\_status\_bar`](#) ([GtkTermWindow](#) \*window)  
*Set the statusbar with all relevant fields.*
- static void [`update\_statusbar`](#) ([GtkTermWindow](#) \*window, gpointer section, gpointer serial\_config\_string, gpointer serial\_status)  
*Updates the statusbar with the active terminal configuration.*
- void [`set\_window\_title`](#) ([GtkTermWindow](#) \*window, gpointer serial\_config\_string)  
*Sets title of the window.*
- static void [`on\_gtkterm\_about`](#) (GSimpleAction \*action, GVariant \*parameter, gpointer user\_data)  
*Show the About dialog.*
- static void [`on\_gtkterm\_toggle\_state`](#) (GSimpleAction \*, GVariant \*, gpointer)
- static void [`on\_gtkterm\_toggle\_dark`](#) (GSimpleAction \*action, GVariant \*state, gpointer user\_data)  
*Toggles the dark mode setting.*
- void [`create\_window`](#) (GApplication \*app, [GtkTermWindow](#) \*window)
- void [`gtkterm\_show\_infobar`](#) ([GtkTermWindow](#) \*window, char \*message, int message\_type)  
*Shows a message into the Infobar.*
- static void [`open\_response\_cb`](#) (GtkNativeDialog \*dialog, int response\_id, gpointer user\_data)
- static void [`on\_gtkterm\_send\_raw`](#) (GSimpleAction \*action, GVariant \*parameter, gpointer user\_data)
- static void [`on\_gtkterm\_toggle\_radio`](#) (GSimpleAction \*action, GVariant \*parameter, gpointer user\_data)
- static void [`gtkterm\_window\_set\_signals`](#) ([GtkTermWindow](#) \*window, unsigned int port\_signals, gpointer user\_data)  
*Set the serial signals (DTR etc) in the status bar.*
- static void [`on\_gtkterm\_toggle\_radio\_state`](#) (GSimpleAction \*action, GVariant \*state, gpointer user\_data)  
*Toggles the radio option in the menubar.*



- static void [clicked\\_cb](#) (GtkWidget \*widget, [GtkTermWindow](#) \*window)
- static void [gtkterm\\_window\\_store\\_state](#) ([GtkTermWindow](#) \*window)  
*Stores the setting of the window in the Gnome Settings.*
- static void [gtkterm\\_window\\_load\\_state](#) ([GtkTermWindow](#) \*window)  
*Loads the setting of the window from the Gnome Settings.*
- static void [gtkterm\\_window\\_init](#) ([GtkTermWindow](#) \*window)  
*Initialize the window with the actions, tools etc.*
- static void [gtkterm\\_window\\_constructed](#) (GObject \*object)  
*Constructs the window.*
- static void [gtkterm\\_window\\_size\\_allocate](#) (GtkWidget \*widget, int width, int height, int baseline)  
*Assigns size an position to the widget.*
- static void [surface\\_state\\_changed](#) (GtkWidget \*widget)  
*Called when the surface state is changed (min/max).*
- static void [gtkterm\\_window\\_realize](#) (GtkWidget \*widget)  
*Windows realize.*
- static void [gtkterm\\_window\\_unrealize](#) (GtkWidget \*widget)  
*Windows unrealize.*
- static void [gtkterm\\_window\\_dispose](#) (GObject \*object)  
*Called when destroying the window.*
- static void [gtkterm\\_window\\_class\\_init](#) ([GtkTermWindowClass](#) \*class)  
*Initializing the window class.*

## Variables

- static unsigned int [signal\\_flags](#) [] = {TIOCM\_DTR, TIOCM\_RTS, TIOCM\_CTS, TIOCM\_CD, TIOCM\_DSR, TIOCM\_RI}
- static char const \* [serial\\_signal](#) [] = {"DTR", "RTS", "CTS", "CD", "DSR", "RI"}
- static GActionEntry [gtkterm\\_window\\_entries](#) []
- static GActionEntry [win\\_entries](#) []

## 6.22.1 Macro Definition Documentation

### 6.22.1.1 SERIAL\_SIGNALS

```
#define SERIAL_SIGNALS 6
```

## 6.22.2 Function Documentation


### 6.22.2.1 clicked\_cb()

```
static void clicked_cb (  
    GtkWidget * widget,  
    GtkTermWindow * window ) [static]
```

To be implemented

Referenced by [gtkterm\\_window\\_class\\_init\(\)](#).

Here is the caller graph for this function:



### 6.22.2.2 config\_status\_bar()

```
void config_status_bar (  
    GtkTermWindow * window ) [static]
```

Set the statusbar with all relevant fields.

#### Parameters

<i>window</i>	The GtkTermWindow with the statusbar.
---------------	---------------------------------------

Fields for the configuration and port

Fill in the serial signals The signals are appended at the statusbox so they can glide along when resizing the window

Referenced by [gtkterm\\_window\\_init\(\)](#).

Here is the caller graph for this function:



### 6.22.2.3 create\_window()

```
void create_window (
    GApplication * app,
    GtkTermWindow * window )
```

**Todo** remove and set it with properties.

Create a new terminal window and send section and keyfile as parameter GTKTERM\_TERMINAL then can load the right section.


Make the VTE window scrollable

Referenced by [gtkterm\\_activate\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



### 6.22.2.4 gtkterm\_show\_infobar()

```
void gtkterm_show_infobar (
    GtkTermWindow * window,
    char * message,
    int message_type )
```


Shows a message into the Infobar.

#### Parameters

<i>window</i>	The window with the infobar property.
<i>message</i>	The message we want to show
<i>message_type</i>	The type of message GTK_MESSAGE_*

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), and [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

Here is the caller graph for this function:



### 6.22.2.5 gtkterm\_window\_class\_init()

```
static void gtkterm_window_class_init (
    GtkTermWindowClass * class ) [static]
```


Initializing the window class.

Setting the signals, the UI and callback functions

#### Parameters

<i>class</i>	The window class
--------------	------------------

Here is the call graph for this function:

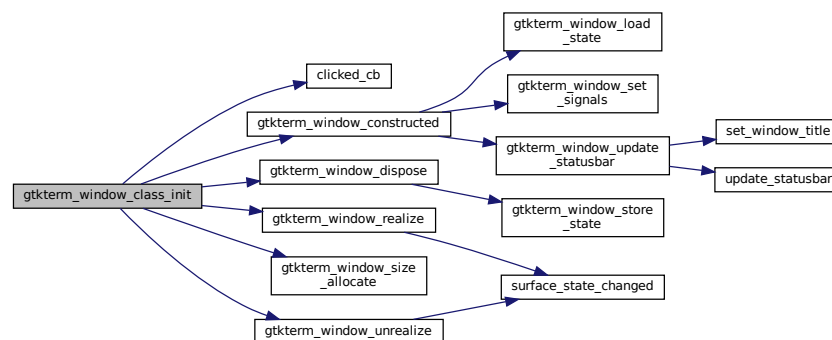

### 6.22.2.6 gtkterm\_window\_constructed()

```
static void gtkterm_window_constructed (
    GObject * object ) [static]
```

Constructs the window.

## Parameters

<i>object</i>	The window object we are constructing.
---------------	--


Create a new terminal window and send section and keyfile as parameter GTKTERM\_TERMINAL then can load the right section.

Make the VTE window scrollable

Connect to the terminal\_changed so we can update the statusbar and window title

Referenced by [gtkterm\\_window\\_class\\_init\(\)](#).

Here is the call graph for this function:

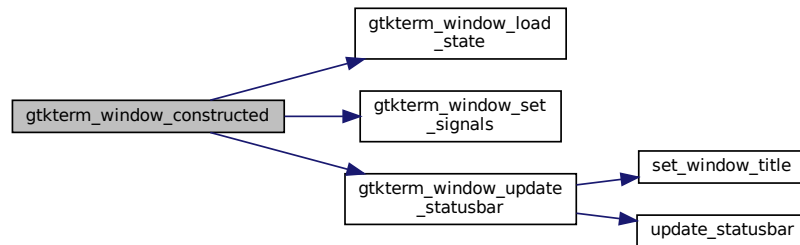

Here is the caller graph for this function:



### 6.22.2.7 gtkterm\_window\_dispose()

```
static void gtkterm_window_dispose (
    GObject * object ) [static]
```

Called when destroying the window.


This is used to clean up and freeing the variables in the window structure.

## Parameters

<i>object</i>	The object.
---------------	-------------

Referenced by [gtkterm\\_window\\_class\\_init\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



### 6.22.2.8 gtkterm\_window\_init()

```
static void gtkterm_window_init (  
    GtkTermWindow * window ) [static]
```

Initialize the window with the actions, tools etc.

## Parameters

<i>window</i>	The window we are initializing.
---------------	---------------------------------

**Todo** : Rename it

Here is the call graph for this function:



#### 6.22.2.9 gtkterm\_window\_load\_state()

```
static void gtkterm_window_load_state (  
    GtkTermWindow * window ) [static]
```


Loads the setting of the window from the Gnome Settings.

##### Parameters

<i>window</i>	The window we load the settings for.
---------------	--------------------------------------

Referenced by [gtkterm\\_window\\_constructed\(\)](#).

Here is the caller graph for this function:



#### 6.22.2.10 gtkterm\_window\_realize()

```
static void gtkterm_window_realize (  
    GtkWidget * widget ) [static]
```

Windows realize.

Operations to finish realizing the widget.

##### Parameters

<i>widget</i>	The widget.
---------------	-------------

Referenced by [gtkterm\\_window\\_class\\_init\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



#### 6.22.2.11 `gtkterm_window_set_signals()`

```
static void gtkterm_window_set_signals (
    GtkTermWindow * window,
    unsigned int port_signals,
    gpointer user_data ) [static]
```


Set the serial signals (DTR etc) in the status bar.

##### Parameters

<i>window</i>	The GtkTermWindow with the statusbar.
<i>port_signals</i>	The port signals to set.
<i>user_data</i>	Not used.

Referenced by [gtkterm\\_window\\_constructed\(\)](#).

Here is the caller graph for this function:





### 6.22.2.12 `gtkterm_window_size_allocate()`

```
static void gtkterm_window_size_allocate (  
    GtkWidget * widget,  
    int width,  
    int height,  
    int baseline ) [static]
```


Assigns size and position to the widget.

#### Parameters

<i>widget</i>	The widget.
<i>width</i>	The width of the widget.
<i>height</i>	The height of the widget.
<i>baseline</i>	The baseline for this widget.

Referenced by [gtkterm\\_window\\_class\\_init\(\)](#).

Here is the caller graph for this function:



### 6.22.2.13 `gtkterm_window_store_state()`

```
static void gtkterm_window_store_state (  
    GtkTermWindow * window ) [static]
```


Stores the setting of the window in the Gnome Settings.

#### Parameters

<i>window</i>	The window we store the settings for.
---------------	---------------------------------------

Referenced by [gtkterm\\_window\\_dispose\(\)](#).

Here is the caller graph for this function:



#### 6.22.2.14 `gtkterm_window_unrealize()`

```
static void gtkterm_window_unrealize (
    GtkWidget * widget ) [static]
```

Windows unrealize.

Operations when removing the widget.

##### Parameters

<i>widget</i>	The widget.
---------------	-------------

Referenced by [gtkterm\\_window\\_class\\_init\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



### 6.22.2.15 gtkterm\_window\_update\_statusbar()

```
static void gtkterm_window_update_statusbar (  
    GtkTermWindow * window,  
    gpointer section,  
    gpointer serial_config_string,  
    gpointer serial_status,  
    gpointer user_data ) [static]
```

Callbackfunction for updating window title and statusbus.


Internal functions

#### Parameters


<i>window</i>	The GtkTermWindow which we update
<i>section</i>	The active section of the terminal
<i>serial_config_string</i>	The connectionstring of the serial port
<i>serial_status</i>	The status of the serial port.
<i>user_data</i>	Not used.

Referenced by [gtkterm\\_window\\_constructed\(\)](#).

Here is the call graph for this function:

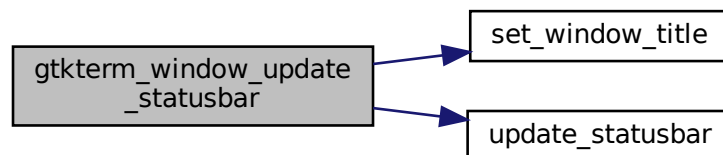

Here is the caller graph for this function:



### 6.22.2.16 on\_gtkterm\_about()

```
static void on_gtkterm_about (
    GSimpleAction * action,
    GVariant * parameter,
    gpointer user_data ) [static]
```

Show the About dialog.

Menu callbacks

#### Parameters

<i>action</i>	Not used.
<i>parameter</i>	Not used.
<i>user_data</i>	Pointer to the GtkTermWindow.

### 6.22.2.17 on\_gtkterm\_send\_raw()

```
static void on_gtkterm_send_raw (
    GSimpleAction * action,
    GVariant * parameter,
    gpointer user_data ) [static]
```

**Todo** rewrite for GTKTerm

Here is the call graph for this function:



### 6.22.2.18 on\_gtkterm\_toggle\_dark()

```
static void on_gtkterm_toggle_dark (
    GSimpleAction * action,
    GVariant * state,
    gpointer user_data ) [static]
```

Toggles the dark mode setting.

## Parameters

<i>action</i>	The action interface.
<i>state</i>	The new dark-mode setting
<i>user_data</i>	Not used.

**6.22.2.19 on\_gtkterm\_toggle\_radio()**

```
static void on_gtkterm_toggle_radio (
    GSimpleAction * action,
    GVariant * parameter,
    gpointer user_data ) [static]
```

**Todo** rewrite for GTKTerm

**6.22.2.20 on\_gtkterm\_toggle\_radio\_state()**

```
static void on_gtkterm_toggle_radio_state (
    GSimpleAction * action,
    GVariant * state,
    gpointer user_data ) [static]
```

Toggles the radio option in the menubar.

## Parameters

<i>action</i>	The action interface.
<i>state</i>	The new radio setting
<i>user_data</i>	Not used.

**6.22.2.21 on\_gtkterm\_toggle\_state()**

```
static void on_gtkterm_toggle_state (
    GSimpleAction * action,
    GVariant * parameter,
    gpointer user_data ) [static]
```

**Todo** rewrite for GTKTerm

### 6.22.2.22 open\_response\_cb()

```
static void open_response_cb (
    GtkNativeDialog * dialog,
    int response_id,
    gpointer user_data ) [static]
```

**Todo** rewrite for gtkterm

Referenced by [on\\_gtkterm\\_send\\_raw\(\)](#).

Here is the caller graph for this function:



### 6.22.2.23 set\_window\_title()

```
void set_window_title (
    GtkTermWindow * window,
    gpointer serial_config_string )
```

Sets title of the window.

The title of the window is concatenated with the serial options of the active terminal window.

#### Parameters

<i>window</i>	The GtkTermWindow for which we set the title
<i>serial_config_string</i>	The connectionstring of the serial port.

Referenced by [gtkterm\\_window\\_update\\_statusbar\(\)](#).

Here is the caller graph for this function:



### 6.22.2.24 surface\_state\_changed()

```
static void surface_state_changed (
    GtkWidget * widget ) [static]
```


Called when the surface state is changed (min/max).

#### Parameters

<i>widget</i>	The widget.
---------------	-------------

Referenced by [gtkterm\\_window\\_realize\(\)](#), and [gtkterm\\_window\\_unrealize\(\)](#).

Here is the caller graph for this function:

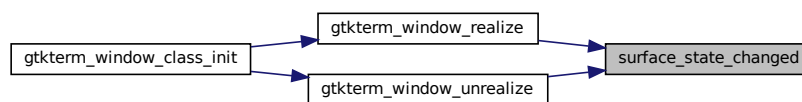

### 6.22.2.25 update\_statusbar()

```
static void update_statusbar (
    GtkTermWindow * window,
    gpointer section,
    gpointer serial_config_string,
    gpointer serial_status ) [static]
```


Updates the statusbar with the active terminal configuration.

#### Parameters

<i>window</i>	The GtkTermWindow with the statusbar.
<i>section</i>	The active section of the terminal
<i>serial_config_string</i>	The connectionstring of the serial port
<i>serial_status</i>	The status of the serial port.

Referenced by [gtkterm\\_window\\_update\\_statusbar\(\)](#).

Here is the caller graph for this function:



### 6.22.3 Variable Documentation

#### 6.22.3.1 `gtkterm_window_entries`

```
GActionEntry gtkterm_window_entries[] [static]
```

Menu definitions and callbacks

Referenced by [gtkterm\\_window\\_init\(\)](#).

#### 6.22.3.2 `serial_signal`

```
char const* serial_signal[] = {"DTR", "RTS", "CTS", "CD", "DSR", "RI"} [static]
```

Referenced by [config\\_status\\_bar\(\)](#).

#### 6.22.3.3 `signal_flags`

```
unsigned int signal_flags[] = {TIOCM_DTR, TIOCM_RTS, TIOCM_CTS, TIOCM_CD, TIOCM_DSR, TIOCM_RI}  
[static]
```

Serial signals

Referenced by [gtkterm\\_window\\_set\\_signals\(\)](#).

#### 6.22.3.4 `win_entries`

```
GActionEntry win_entries[] [static]
```

**Initial value:**

```
= {  
  { "about", on\_gtkterm\_about, NULL, NULL, NULL }  
}
```

GtkTermWindow definitions and callbacks


Referenced by [gtkterm\\_window\\_init\(\)](#).




## 6.23 gtkterm\_window.h File Reference

```
#include <gio/gio.h>
#include <glib-object.h>
#include <glib.h>
#include <glib/gi18n.h>
#include <glib/gprintf.h>
```

Include dependency graph for gtkterm\_window.h:



This graph shows which files directly or indirectly include this file:



### Macros

- `#define` [GTKTERM\\_TYPE GTKTERM\\_WINDOW](#) `gtkterm_window_get_type()`

### Typedefs

- `typedef struct` [\\_GtkTermWindow](#) `GtkTermWindow`

### Functions

- `void` [create\\_window](#) (`GApplication *`, [GtkTermWindow \\*](#))
- `void` [gtkterm\\_show\\_infobar](#) ([GtkTermWindow \\*](#), `char *`, `int`)  
*Shows a message into the Infobar.*

#### 6.23.1 Macro Definition Documentation

### 6.23.1.1 GTKTERM\_TYPE\_GTKTERM\_WINDOW

```
#define GTKTERM_TYPE_GTKTERM_WINDOW gtkterm_window_get_type()
```

## 6.23.2 Typedef Documentation

### 6.23.2.1 GtkTermWindow

```
typedef struct _GtkTermWindow GtkTermWindow
```

## 6.23.3 Function Documentation

### 6.23.3.1 create\_window()

```
void create_window (  
    GApplication * app,  
    GtkTermWindow * window )
```

**Todo** remove and set it with properties.

Create a new terminal window and send section and keyfile as parameter GTKTERM\_TERMINAL then can load the right section.


Make the VTE window scrollable

Referenced by [gtkterm\\_activate\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



### 6.23.3.2 gtkterm\_show\_infobar()

```
void gtkterm_show_infobar (
    GtkTermWindow * window,
    char * message,
    int message_type )
```


Shows a message into the Infobar.

#### Parameters

<i>window</i>	The window with the infobar property.
<i>message</i>	The message we want to show
<i>message_type</i>	The type of message GTK_MESSAGE_*

Referenced by [gtkterm\\_terminal\\_constructed\(\)](#), and [gtkterm\\_terminal\\_port\\_status\\_changed\(\)](#).

Here is the caller graph for this function:



## 6.24 gtkterm\_window.h

[Go to the documentation of this file.](#)


```
1 #ifndef GTKTERM_WINDOW_H
2 #define GTKTERM_WINDOW_H
3
4 #include <gio/gio.h>
5 #include <glib-object.h>
6 #include <glib.h>
7 #include <glib/gi18n.h>
8 #include <glib/gprintf.h>
9
10
11 G_BEGIN_DECLS
12
13 #define GTKTERM_TYPE_GTKTERM_WINDOW gtkterm_window_get_type()
14 G_DECLARE_FINAL_TYPE (GtkTermWindow, gtkterm_window, GTKTERM, WINDOW, GtkApplicationWindow)
15 typedef struct _GtkTermWindow GtkTermWindow;
16
17 void create_window (GApplication *, GtkTermWindow *);
18 void gtkterm_show_infobar (GtkTermWindow *, char *, int);
19
20 G_END_DECLS
21
22 #endif // GTKTERM_WINDOW_H
```

## 6.25 macros.c File Reference

```
#include <gtk/gtk.h>
#include <gdk/gdk.h>
#include <gdk/gdkkeysyms.h>
```

```
#include <stdlib.h>
#include <string.h>
#include <stdio.h>
#include "macros.h"
#include <config.h>
#include <glib/glib18n.h>
```

Include dependency graph for macros.c:



## Enumerations

- enum { [COLUMN\\_SHORTCUT](#) , [COLUMN\\_ACTION](#) , [NUM\\_COLUMNS](#) }

## Functions

- int [macro\\_count](#) ()
- void [convert\\_string\\_to\\_macros](#) (char \*\*string\_list, int size)  
*Convert the array of strings to macros.*
- int [convert\\_macros\\_to\\_string](#) (char \*\*string\_list)
- static void [macros\\_destroy](#) (void)
- [macro\\_t](#) \* [get\\_shortcuts](#) (int \*size)
- void [remove\\_shortcuts](#) (void)  
*Remove shortcuts from accel\_group and free memory.*

## Variables

- [macro\\_t](#) \* [macros](#) = NULL
- int [nr\\_of\\_macros](#) = 0

### 6.25.1 Enumeration Type Documentation

#### 6.25.1.1 anonymous enum

anonymous enum

**Todo** : Migrate to GObject

## Enumerator

COLUMN_SHORTCUT	
COLUMN_ACTION	
NUM_COLUMNS	

## 6.25.2 Function Documentation

### 6.25.2.1 convert\_macros\_to\_string()

```
int convert_macros_to_string (
    char ** string_list )
```

Convert the in memory macros to an array of strings for storage in file Must be NULL terminated

Number of strings is 2x the macros (shortcut and action)


### 6.25.2.2 convert\_string\_to\_macros()

```
void convert_string_to_macros (
    char ** string_list,
    int size )
```

Convert the array of strings to macros.

Referenced by [gtkterm\\_configuration\\_print\\_section\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



### 6.25.2.3 `get_shortcuts()`

```
macro_t * get_shortcuts (
    int * size )
```

### 6.25.2.4 `macro_count()`

```
int macro_count ( )
```

Referenced by [gtkterm\\_configuration\\_print\\_section\(\)](#).

Here is the caller graph for this function:



### 6.25.2.5 `macros_destroy()`

```
static void macros_destroy (
    void ) [static]
```

Free all macro-member memory

Referenced by [remove\\_shortcuts\(\)](#).

Here is the caller graph for this function:



### 6.25.2.6 remove\_shortcuts()

```
void remove_shortcuts (
    void )
```

Remove shortcuts from accel\_group and free memory.


Clean up all macros

Referenced by [convert\\_string\\_to\\_macros\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



## 6.25.3 Variable Documentation

### 6.25.3.1 macros

```
macro_t* macros = NULL
```

Referenced by [convert\\_macros\\_to\\_string\(\)](#), [convert\\_string\\_to\\_macros\(\)](#), [get\\_shortcuts\(\)](#), [gtkterm\\_configuration\\_print\\_section\(\)](#), [macros\\_destroy\(\)](#), and [remove\\_shortcuts\(\)](#).


### 6.25.3.2 nr\_of\_macros

```
int nr_of_macros = 0
```

Referenced by [convert\\_macros\\_to\\_string\(\)](#), [convert\\_string\\_to\\_macros\(\)](#), and [macro\\_count\(\)](#).

## 6.26 macros.h File Reference

This graph shows which files directly or indirectly include this file:

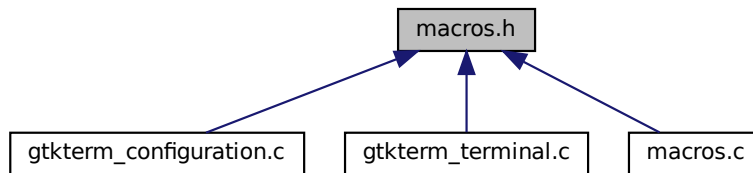

### Classes

- struct [macro\\_t](#)  
*Define macro structure type.*

### Functions

- void [remove\\_shortcuts](#) (void)  
*Remove shortcuts from accel\_group and free memory.*
- void [add\\_shortcuts](#) (void)
- [macro\\_t](#) \* [get\\_shortcuts](#) (gint \*)
- void [convert\\_string\\_to\\_macros](#) (char \*\*, int)  
*Convert the array of strings to macros.*
- int [convert\\_macros\\_to\\_string](#) (char \*\*)
- int [macro\\_count](#) ()

### Variables

- [macro\\_t](#) \* [macros](#)

### 6.26.1 Function Documentation

#### 6.26.1.1 add\_shortcuts()

```
void add_shortcuts (  
    void )
```



### 6.26.1.2 convert\_macros\_to\_string()

```
int convert_macros_to_string (
    char ** string_list )
```

Convert the in memory macros to an array of strings for storage in file Must be NULL terminated

Number of strings is 2x the macros (shortcut and action)


### 6.26.1.3 convert\_string\_to\_macros()

```
void convert_string_to_macros (
    char ** string_list,
    int size )
```

Convert the array of strings to macros.

Referenced by [gtkterm\\_configuration\\_print\\_section\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



### 6.26.1.4 get\_shortcuts()

```
macro_t * get_shortcuts (
    gint * )
```

### 6.26.1.5 macro\_count()

```
int macro_count ( )
```

Referenced by [gtkterm\\_configuration\\_print\\_section\(\)](#).

Here is the caller graph for this function:



### 6.26.1.6 remove\_shortcuts()

```
void remove_shortcuts (
    void )
```

Remove shortcuts from accel\_group and free memory.


Clean up all macros

Referenced by [convert\\_string\\_to\\_macros\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



## 6.26.2 Variable Documentation

## 6.26.2.1 macros

`macro_t* macros` [extern]

Referenced by [convert\\_macros\\_to\\_string\(\)](#), [convert\\_string\\_to\\_macros\(\)](#), [get\\_shortcuts\(\)](#), [gtkterm\\_configuration\\_print\\_section\(\)](#), [macros\\_destroy\(\)](#), and [remove\\_shortcuts\(\)](#).

## 6.27 macros.h

[Go to the documentation of this file.](#)

```

1 /*****
2  * macros.h
3  * -----
4  *          GTKTerm Software
5  *          (c) Julien Schmitt
6  *
7  * -----
8  *
9  * \brief Purpose
10 *      Functions for the management of the macros
11 *      - Header file -
12 *
13 *****/
14
15 #ifndef MACROS_H_
16 #define MACROS_H_
17
18 typedef struct
19 {
20     char *shortcut;
21     char *action;
22     GClosure *closure;
23 }
24 macro_t;
25
26 //void config_macros(GtkAction *action, gpointer data);
27 void remove_shortcuts(void);
28 void add_shortcuts(void);
29 macro_t *get_shortcuts(gint *);
30
31 void convert_string_to_macros (char **, int);
32 int convert_macros_to_string (char **);
33
34 int macro_count ();
35
36 extern macro_t *macros;
37
38 #endif

```



# Index

- [\\_GtkTerm, 11](#)
  - [action\\_group, 12](#)
  - [config, 12](#)
  - [g\\_config\\_group, 12](#)
  - [g\\_port\\_group, 12](#)
  - [g\\_term\\_group, 12](#)
  - [parent\\_instance, 13](#)
  - [section, 13](#)
- [\\_GtkTermBuffer, 13](#)
  - [parent\\_instance, 13](#)
- [\\_GtkTermBufferClass, 14](#)
  - [parent\\_class, 14](#)
- [\\_GtkTermConfiguration, 14](#)
  - [parent\\_instance, 14](#)
- [\\_GtkTermConfigurationClass, 14](#)
  - [parent\\_class, 15](#)
- [\\_GtkTermSerialPort, 15](#)
  - [parent\\_instance, 15](#)
- [\\_GtkTermSerialPortClass, 15](#)
  - [parent\\_class, 15](#)
- [\\_GtkTermTerminal, 16](#)
  - [vte\\_object, 16](#)
- [\\_GtkTermTerminalClass, 16](#)
  - [vte\\_class, 16](#)
- [\\_GtkTermWindow, 17](#)
  - [action\\_group, 17](#)
  - [fullscreen, 18](#)
  - [height, 18](#)
  - [infobar, 18](#)
  - [maximized, 18](#)
  - [menubutton, 19](#)
  - [message, 19](#)
  - [parent\\_instance, 19](#)
  - [scrolled\\_window, 19](#)
  - [search\\_bar, 19](#)
  - [status\\_config, 20](#)
  - [status\\_config\\_message, 20](#)
  - [status\\_message, 20](#)
  - [status\\_serial\\_signal, 20](#)
  - [statusbox, 20](#)
  - [terminal\\_window, 20](#)
  - [toolmenu, 21](#)
  - [width, 21](#)
- [action](#)
  - [macro\\_t, 32](#)
- [action\\_group](#)
  - [\\_GtkTerm, 12](#)
  - [\\_GtkTermWindow, 17](#)
- [add\\_shortcuts](#)
  - [macros.h, 178](#)
- [app](#)
  - [GtkTermTerminalPrivate, 30](#)
- [ASCII\\_VIEW](#)
  - [gtkterm\\_defaults.h, 102](#)
- [auto\\_cr](#)
  - [term\\_config\\_t, 36](#)
- [auto\\_if](#)
  - [term\\_config\\_t, 36](#)
- [background\\_color](#)
  - [term\\_config\\_t, 36](#)
- [baudrate](#)
  - [port\\_config\\_t, 33](#)
- [bits](#)
  - [port\\_config\\_t, 33](#)
- [block\\_cursor](#)
  - [term\\_config\\_t, 36](#)
- [buffer](#)
  - [GtkTermBufferPrivate, 22](#)
- [BUFFER\\_LENGTH](#)
  - [gtkterm\\_defaults.h, 102](#)
- [BUFFER\\_SIZE](#)
  - [gtkterm\\_defaults.h, 102](#)
- [cancellable](#)
  - [GtkTermSerialPortPrivate, 27](#)
- [char\\_queue](#)
  - [term\\_config\\_t, 36](#)
- [check\\_keyfile](#)
  - [gtkterm\\_configuration.c, 73](#)
- [clicked\\_cb](#)
  - [gtkterm\\_window.c, 155](#)
- [closure](#)
  - [macro\\_t, 32](#)
- [COLUMN\\_ACTION](#)
  - [macros.c, 175](#)
- [COLUMN\\_SHORTCUT](#)
  - [macros.c, 175](#)
- [columns](#)
  - [term\\_config\\_t, 37](#)
- [CONF\\_ITEM\\_LAST](#)
  - [gtkterm\\_configuration.h, 95](#)
- [CONF\\_ITEM\\_LENGTH](#)
  - [gtkterm\\_defaults.h, 102](#)
- [CONF\\_ITEM\\_SERIAL\\_BAUDRATE](#)
  - [gtkterm\\_configuration.h, 94](#)
- [CONF\\_ITEM\\_SERIAL\\_BITS](#)
  - [gtkterm\\_configuration.h, 94](#)
- [CONF\\_ITEM\\_SERIAL\\_DISABLE\\_PORT\\_LOCK](#)

- gtkterm\_configuration.h, 95
- CONF\_ITEM\_SERIAL\_FLOW\_CONTROL
  - gtkterm\_configuration.h, 94
- CONF\_ITEM\_SERIAL\_PARITY
  - gtkterm\_configuration.h, 94
- CONF\_ITEM\_SERIAL\_PORT
  - gtkterm\_configuration.h, 94
- CONF\_ITEM\_SERIAL\_RS485\_RTS\_TIME\_AFTER\_TX
  - gtkterm\_configuration.h, 94
- CONF\_ITEM\_SERIAL\_RS485\_RTS\_TIME\_BEFORE\_TX
  - gtkterm\_configuration.h, 94
- CONF\_ITEM\_SERIAL\_STOPBITS
  - gtkterm\_configuration.h, 94
- CONF\_ITEM\_TERM\_AUTO\_CR
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_AUTO\_LF
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_BACKGROUND\_ALPHA
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_BACKGROUND\_BLUE
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_BACKGROUND\_GREEN
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_BACKGROUND\_RED
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_BLOCK\_CURSOR
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_COLS
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_ECHO
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_FONT
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_FOREGROUND\_ALPHA
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_FOREGROUND\_BLUE
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_FOREGROUND\_GREEN
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_FOREGROUND\_RED
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_MACROS
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_RAW\_FILENAME
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_ROWS
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_SCROLLBACK
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_SHOW\_CURSOR
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_TIMESTAMP
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_VISUAL\_BELL
  - gtkterm\_configuration.h, 95
- CONF\_ITEM\_TERM\_WAIT\_CHAR
  - gtkterm\_configuration.h, 94
- CONF\_ITEM\_TERM\_WAIT\_DELAY
  - gtkterm\_configuration.h, 94
- config
  - \_GtkTerm, 12
- config\_error
  - GtkTermBufferPrivate, 22
  - GtkTermConfigurationPrivate, 24
- config\_file
  - GtkTermConfigurationPrivate, 25
- config\_is\_dirty
  - GtkTermConfigurationPrivate, 25
- config\_status
  - GtkTermBufferPrivate, 22
  - GtkTermConfigurationPrivate, 25
- config\_status\_bar
  - gtkterm\_window.c, 156
- CONFIGURATION\_FILENAME
  - gtkterm\_defaults.h, 102
- control\_signal\_timeout
  - GtkTermSerialPortPrivate, 27
- control\_signals
  - GtkTermSerialPortPrivate, 27
- convert\_macros\_to\_string
  - macros.c, 175
  - macros.h, 178
- convert\_string\_to\_macros
  - macros.c, 175
  - macros.h, 179
- cr\_received
  - GtkTermBufferPrivate, 22
- create\_window
  - gtkterm\_window.c, 156
  - gtkterm\_window.h, 172
- DEFAULT\_BAUDRATE
  - gtkterm\_defaults.h, 102
- DEFAULT\_BITS
  - gtkterm\_defaults.h, 102
- DEFAULT\_CHAR
  - gtkterm\_defaults.h, 103
- DEFAULT\_DELAY
  - gtkterm\_defaults.h, 103
- DEFAULT\_DELAY\_RS485
  - gtkterm\_defaults.h, 103
- DEFAULT\_ECHO
  - gtkterm\_defaults.h, 103
- DEFAULT\_FLOW
  - gtkterm\_defaults.h, 103
- DEFAULT\_FONT
  - gtkterm\_defaults.h, 103
- DEFAULT\_PARITY
  - gtkterm\_defaults.h, 103
- DEFAULT\_PORT
  - gtkterm\_defaults.h, 104
- DEFAULT\_SCROLLBACK
  - gtkterm\_defaults.h, 104
- DEFAULT\_SECTION
  - gtkterm\_defaults.h, 104
- DEFAULT\_STOPBITS
  - gtkterm\_defaults.h, 104

- DEFAULT\_STRING\_LEN
  - gtkterm\_defaults.h, 104
- DEFAULT\_VISUAL\_BELL
  - gtkterm\_defaults.h, 104
- delay
  - term\_config\_t, 37
- disable\_port\_lock
  - port\_config\_t, 33
- echo
  - term\_config\_t, 37
- error
  - GtkTermBufferPrivate, 23
- flow\_control
  - port\_config\_t, 34
- font
  - term\_config\_t, 37
- foreground\_color
  - term\_config\_t, 38
- fullscreen
  - \_GtkTermWindow, 18
- g\_config\_group
  - \_GtkTerm, 12
- g\_port\_group
  - \_GtkTerm, 12
- g\_term\_group
  - \_GtkTerm, 12
- get\_shortcuts
  - macros.c, 175
  - macros.h, 179
- GGTKTERM\_TERMINAL\_VIEW\_HEX
  - gtkterm\_terminal.c, 140
- GtkTerm
  - gtkterm.h, 47
- gtkterm.c, 41
  - gtkterm\_activate, 42
  - gtkterm\_class\_init, 43
  - gtkterm\_entries, 45
  - gtkterm\_init, 43
  - gtkterm\_signals, 45
  - gtkterm\_startup, 44
  - main, 44
  - on\_gtkterm\_quit, 45
- gtkterm.h, 46, 48
  - GtkTerm, 47
  - gtkterm\_signals, 48
  - GTKTERM\_TYPE\_APP, 47
  - LAST\_GTKTERM\_SIGNAL, 48
  - SIGNAL\_GTKTERM\_BUFFER\_UPDATED, 48
  - SIGNAL\_GTKTERM\_CONFIG\_CHECK\_FILE, 48
  - SIGNAL\_GTKTERM\_CONFIG\_SERIAL, 48
  - SIGNAL\_GTKTERM\_CONFIG\_TERMINAL, 48
  - SIGNAL\_GTKTERM\_COPY\_SECTION, 48
  - SIGNAL\_GTKTERM\_LIST\_CONFIG, 48
  - SIGNAL\_GTKTERM\_LOAD\_CONFIG, 48
  - SIGNAL\_GTKTERM\_PRINT\_SECTION, 48
  - SIGNAL\_GTKTERM\_REMOVE\_SECTION, 48
  - SIGNAL\_GTKTERM\_SAVE\_CONFIG, 48
  - SIGNAL\_GTKTERM\_SERIAL\_CONNECT, 48
  - SIGNAL\_GTKTERM\_SERIAL\_DATA\_RECEIVED, 48
  - SIGNAL\_GTKTERM\_SERIAL\_DATA\_TRANSMIT, 48
  - SIGNAL\_GTKTERM\_SERIAL\_SIGNALS\_CHANGED, 48
  - SIGNAL\_GTKTERM\_TERMINAL\_CHANGED, 48
  - SIGNAL\_GTKTERM\_VTE\_DATA\_RECEIVED, 48
- gtkterm\_activate
  - gtkterm.c, 42
- gtkterm\_add\_cmdline\_options
  - gtkterm\_cmdline.c, 64
  - gtkterm\_cmdline.h, 70
- gtkterm\_buffer.c, 49
  - gtkterm\_buffer\_add\_data, 51
  - gtkterm\_buffer\_class\_init, 53
  - gtkterm\_buffer\_constructed, 53
  - gtkterm\_buffer\_dispose, 54
  - gtkterm\_buffer\_finalize, 55
  - gtkterm\_buffer\_get\_error, 55
  - gtkterm\_buffer\_get\_status, 56
  - gtkterm\_buffer\_init, 56
  - gtkterm\_buffer\_new, 56
  - gtkterm\_buffer\_properties, 59
  - gtkterm\_buffer\_repage, 57
  - gtkterm\_buffer\_set\_property, 57
  - gtkterm\_buffer\_set\_status, 58
  - insert\_timestamp, 59
  - N\_PROPS, 51
  - PROP\_0, 51
  - PROP\_SERIAL\_PORT, 51
  - PROP\_TERM\_CONF, 51
  - PROP\_TERMINAL, 51
  - TIMESTAMP\_SIZE, 51
- gtkterm\_buffer.h, 60, 63
  - gtkterm\_buffer\_get\_error, 61
  - gtkterm\_buffer\_get\_status, 62
  - GTKTERM\_BUFFER\_H, 60
  - GTKTERM\_BUFFER\_LAST, 61
  - gtkterm\_buffer\_new, 62
  - GTKTERM\_BUFFER\_NOT\_INITIALIZED, 61
  - GTKTERM\_BUFFER\_OVERFLOW, 61
  - GTKTERM\_BUFFER\_SUCCESS, 61
  - GTKTERM\_TYPE\_BUFFER, 60
  - GtkTermBuffer, 61
  - GtkTermBufferState, 61
- gtkterm\_buffer\_add\_data
  - gtkterm\_buffer.c, 51
- gtkterm\_buffer\_class\_init
  - gtkterm\_buffer.c, 53
- gtkterm\_buffer\_constructed
  - gtkterm\_buffer.c, 53
- gtkterm\_buffer\_dispose
  - gtkterm\_buffer.c, 54
- gtkterm\_buffer\_finalize
  - gtkterm\_buffer.c, 55

- gtkterm\_buffer\_get\_error
  - gtkterm\_buffer.c, 55
  - gtkterm\_buffer.h, 61
- gtkterm\_buffer\_get\_status
  - gtkterm\_buffer.c, 56
  - gtkterm\_buffer.h, 62
- GTKTERM\_BUFFER\_H
  - gtkterm\_buffer.h, 60
- gtkterm\_buffer\_init
  - gtkterm\_buffer.c, 56
- GTKTERM\_BUFFER\_LAST
  - gtkterm\_buffer.h, 61
- gtkterm\_buffer\_new
  - gtkterm\_buffer.c, 56
  - gtkterm\_buffer.h, 62
- GTKTERM\_BUFFER\_NOT\_INITIALIZED
  - gtkterm\_buffer.h, 61
- GTKTERM\_BUFFER\_OVERFLOW
  - gtkterm\_buffer.h, 61
- gtkterm\_buffer\_properties
  - gtkterm\_buffer.c, 59
- gtkterm\_buffer\_repage
  - gtkterm\_buffer.c, 57
- gtkterm\_buffer\_set\_property
  - gtkterm\_buffer.c, 57
- gtkterm\_buffer\_set\_status
  - gtkterm\_buffer.c, 58
- GTKTERM\_BUFFER\_SUCCESS
  - gtkterm\_buffer.h, 61
- gtkterm\_class\_init
  - gtkterm.c, 43
- gtkterm\_cmdline.c, 63
  - gtkterm\_add\_cmdline\_options, 64
  - gtkterm\_config\_options, 68
  - gtkterm\_port\_options, 68
  - gtkterm\_term\_options, 69
  - on\_list\_config, 65
  - on\_print\_section, 65
  - on\_remove\_config, 66
  - on\_save\_section, 67
  - on\_use\_config, 67
- gtkterm\_cmdline.h, 70, 71
  - gtkterm\_add\_cmdline\_options, 70
- gtkterm\_config\_options
  - gtkterm\_cmdline.c, 68
- gtkterm\_configuration.c, 71
  - check\_keyfile, 73
  - gtkterm\_configuration\_check\_configuration\_file, 74
  - gtkterm\_configuration\_class\_constructed, 75
  - gtkterm\_configuration\_class\_init, 76
  - gtkterm\_configuration\_copy\_section, 77
  - gtkterm\_configuration\_default\_configuration, 78
  - gtkterm\_configuration\_finalize, 78
  - gtkterm\_configuration\_get\_error, 79
  - gtkterm\_configuration\_get\_status, 80
  - gtkterm\_configuration\_init, 80
  - gtkterm\_configuration\_list\_config, 81
  - gtkterm\_configuration\_load\_keyfile, 81
  - gtkterm\_configuration\_load\_serial\_config, 82
  - gtkterm\_configuration\_load\_terminal\_config, 83
  - gtkterm\_configuration\_print\_section, 84
  - gtkterm\_configuration\_remove\_section, 85
  - gtkterm\_configuration\_save\_keyfile, 86
  - gtkterm\_configuration\_set\_config\_file, 87
  - gtkterm\_configuration\_set\_status, 88
  - gtkterm\_configuration\_validate, 89
  - GtkTermCLIShortOption, 92
  - GtkTermConfigurationItems, 92
  - on\_set\_config\_options, 90
  - set\_color, 91
- gtkterm\_configuration.h, 92, 100
  - CONF\_ITEM\_LAST, 95
  - CONF\_ITEM\_SERIAL\_BAUDRATE, 94
  - CONF\_ITEM\_SERIAL\_BITS, 94
  - CONF\_ITEM\_SERIAL\_DISABLE\_PORT\_LOCK, 95
  - CONF\_ITEM\_SERIAL\_FLOW\_CONTROL, 94
  - CONF\_ITEM\_SERIAL\_PARITY, 94
  - CONF\_ITEM\_SERIAL\_PORT, 94
  - CONF\_ITEM\_SERIAL\_RS485\_RTS\_TIME\_AFTER\_TX, 94
  - CONF\_ITEM\_SERIAL\_RS485\_RTS\_TIME\_BEFORE\_TX, 94
  - CONF\_ITEM\_SERIAL\_STOPBITS, 94
  - CONF\_ITEM\_TERM\_AUTO\_CR, 95
  - CONF\_ITEM\_TERM\_AUTO\_LF, 95
  - CONF\_ITEM\_TERM\_BACKGROUND\_ALPHA, 95
  - CONF\_ITEM\_TERM\_BACKGROUND\_BLUE, 95
  - CONF\_ITEM\_TERM\_BACKGROUND\_GREEN, 95
  - CONF\_ITEM\_TERM\_BACKGROUND\_RED, 95
  - CONF\_ITEM\_TERM\_BLOCK\_CURSOR, 95
  - CONF\_ITEM\_TERM\_COLS, 95
  - CONF\_ITEM\_TERM\_ECHO, 95
  - CONF\_ITEM\_TERM\_FONT, 95
  - CONF\_ITEM\_TERM\_FOREGROUND\_ALPHA, 95
  - CONF\_ITEM\_TERM\_FOREGROUND\_BLUE, 95
  - CONF\_ITEM\_TERM\_FOREGROUND\_GREEN, 95
  - CONF\_ITEM\_TERM\_FOREGROUND\_RED, 95
  - CONF\_ITEM\_TERM\_MACROS, 95
  - CONF\_ITEM\_TERM\_RAW\_FILENAME, 95
  - CONF\_ITEM\_TERM\_ROWS, 95
  - CONF\_ITEM\_TERM\_SCROLLBACK, 95
  - CONF\_ITEM\_TERM\_SHOW\_CURSOR, 95
  - CONF\_ITEM\_TERM\_TIMESTAMP, 95
  - CONF\_ITEM\_TERM\_VISUAL\_BELL, 95
  - CONF\_ITEM\_TERM\_WAIT\_CHAR, 94
  - CONF\_ITEM\_TERM\_WAIT\_DELAY, 94
  - GTKTERM\_CONFIGURATION\_FILE\_CONFIG\_LOAD, 95
  - GTKTERM\_CONFIGURATION\_FILE\_CREATED, 95
  - GTKTERM\_CONFIGURATION\_FILE\_NOT\_SAVED, 95
  - GTKTERM\_CONFIGURATION\_FILE\_SAVED, 95



- GTKTERM\_CONFIGURATION\_FILNAME\_TO\_LONG, 96
- gtkterm\_configuration\_get\_error, 96
- gtkterm\_configuration\_get\_status, 96
- GTKTERM\_CONFIGURATION\_INVALID\_BAUDRATE, 95
- GTKTERM\_CONFIGURATION\_INVALID\_BITS, 95
- GTKTERM\_CONFIGURATION\_INVALID\_DELAY, 96
- GTKTERM\_CONFIGURATION\_INVALID\_STOPBITS, 95
- GTKTERM\_CONFIGURATION\_LAST, 96
- gtkterm\_configuration\_list\_config, 81
- gtkterm\_configuration\_new, 98
- GTKTERM\_CONFIGURATION\_NO\_KEYFILE\_LOADED, 95
- GTKTERM\_CONFIGURATION\_SECTION\_NOT\_REMOVED, 95
- GTKTERM\_CONFIGURATION\_SECTION\_REMOVED, 95
- GTKTERM\_CONFIGURATION\_SECTION\_UNKNOWN, 95
- GTKTERM\_CONFIGURATION\_SUCCESS, 95
- GTKTERM\_CONFIGURATION\_UNKNOWN\_OPTION, 96
- GTKTERM\_TYPE\_CONFIGURATION, 94
- GtkTermConfiguration, 94
- GtkTermConfigurationItems, 99
- GtkTermConfigurationState, 95
- on\_set\_config\_options, 98
- gtkterm\_configuration\_check\_configuration\_file, 74
- gtkterm\_configuration\_class\_constructed, 75
- gtkterm\_configuration\_class\_init, 76
- gtkterm\_configuration\_copy\_section, 77
- gtkterm\_configuration\_default\_configuration, 78
- GTKTERM\_CONFIGURATION\_FILE\_CONFIG\_LOAD, 95
- GTKTERM\_CONFIGURATION\_FILE\_CREATED, 95
- GTKTERM\_CONFIGURATION\_FILE\_NOT\_SAVED, 95
- GTKTERM\_CONFIGURATION\_FILE\_SAVED, 95
- GTKTERM\_CONFIGURATION\_FILNAME\_TO\_LONG, 96
- gtkterm\_configuration\_finalize, 78
- gtkterm\_configuration\_get\_error, 79
- gtkterm\_configuration\_get\_status, 80
- gtkterm\_configuration\_init, 80
- gtkterm\_configuration.c, 80
- GTKTERM\_CONFIGURATION\_INVALID\_BAUDRATE, 95
- GTKTERM\_CONFIGURATION\_INVALID\_BITS, 95
- GTKTERM\_CONFIGURATION\_INVALID\_DELAY, 96
- GTKTERM\_CONFIGURATION\_INVALID\_STOPBITS, 95
- GTKTERM\_CONFIGURATION\_LAST, 96
- gtkterm\_configuration\_load\_keyfile, 81
- gtkterm\_configuration\_load\_serial\_config, 82
- gtkterm\_configuration\_load\_terminal\_config, 83
- gtkterm\_configuration\_new, 98
- GTKTERM\_CONFIGURATION\_NO\_KEYFILE\_LOADED, 95
- gtkterm\_configuration\_print\_section, 84
- gtkterm\_configuration\_remove\_section, 85
- gtkterm\_configuration\_save\_keyfile, 86
- GTKTERM\_CONFIGURATION\_SECTION\_NOT\_REMOVED, 95
- GTKTERM\_CONFIGURATION\_SECTION\_REMOVED, 95
- GTKTERM\_CONFIGURATION\_SECTION\_UNKNOWN, 95
- gtkterm\_configuration\_set\_config\_file, 87
- gtkterm\_configuration\_set\_status, 88
- GTKTERM\_CONFIGURATION\_SUCCESS, 95
- GTKTERM\_CONFIGURATION\_UNKNOWN\_OPTION, 96
- gtkterm\_configuration\_validate, 89
- gtkterm\_defaults.h, 101, 106
- ASCII\_VIEW, 102
- BUFFER\_LENGTH, 102
- BUFFER\_SIZE, 102
- CONF\_ITEM\_LENGTH, 102
- CONFIGURATION\_FILENAME, 102
- DEFAULT\_BAUDRATE, 102
- DEFAULT\_BITS, 102
- DEFAULT\_CHAR, 103
- DEFAULT\_DELAY, 103
- DEFAULT\_DELAY\_RS485, 103
- DEFAULT\_ECHO, 103
- DEFAULT\_FLOW, 103

- DEFAULT\_FONT, [103](#)
- DEFAULT\_PARITY, [103](#)
- DEFAULT\_PORT, [104](#)
- DEFAULT\_SCROLLBACK, [104](#)
- DEFAULT\_SECTION, [104](#)
- DEFAULT\_STOPBITS, [104](#)
- DEFAULT\_STRING\_LEN, [104](#)
- DEFAULT\_VISUAL\_BELL, [104](#)
- GTKTERM\_MESSAGE\_LENGTH, [104](#)
- GTKTERM\_SERIAL\_PORT\_RECEIVE\_BUFFER\_SIZE, [105](#)
- GTKTERM\_SERIAL\_PORT\_TRANSMIT\_BUFFER\_SIZE, [105](#)
- HEXADECIMAL\_VIEW, [105](#)
- LINE\_FEED, [105](#)
- MAX\_SECTION\_LENGTH, [105](#)
- POLL\_DELAY, [105](#)
- gtkterm\_entries
  - gtkterm.c, [45](#)
- gtkterm\_init
  - gtkterm.c, [43](#)
- GTKTERM\_MESSAGE\_LENGTH
  - gtkterm\_defaults.h, [104](#)
- gtkterm\_port\_options
  - gtkterm\_cmdline.c, [68](#)
- gtkterm\_serial\_port.c, [106](#)
  - gtkterm\_serial\_port\_class\_constructed, [109](#)
  - gtkterm\_serial\_port\_class\_init, [110](#)
  - gtkterm\_serial\_port\_close, [110](#)
  - gtkterm\_serial\_port\_config, [111](#)
  - GTKTERM\_SERIAL\_PORT\_CONTROL\_POLL\_DELAY, [108](#)
  - gtkterm\_serial\_port\_control\_signals\_read, [112](#)
  - gtkterm\_serial\_port\_device\_monitor, [113](#)
  - gtkterm\_serial\_port\_event\_udev, [113](#)
  - gtkterm\_serial\_port\_finalize, [114](#)
  - gtkterm\_serial\_port\_get\_error, [115](#)
  - gtkterm\_serial\_port\_get\_property, [116](#)
  - gtkterm\_serial\_port\_get\_signals, [116](#)
  - gtkterm\_serial\_port\_get\_status, [117](#)
  - gtkterm\_serial\_port\_get\_string, [118](#)
  - gtkterm\_serial\_port\_handle, [118](#)
  - gtkterm\_serial\_port\_handle\_usr1, [119](#)
  - gtkterm\_serial\_port\_handle\_usr2, [120](#)
  - gtkterm\_serial\_port\_init, [121](#)
  - gtkterm\_serial\_port\_lock, [121](#)
  - gtkterm\_serial\_port\_new, [122](#)
  - gtkterm\_serial\_port\_open, [123](#)
  - gtkterm\_serial\_port\_properties, [131](#)
  - gtkterm\_serial\_port\_read\_signals, [124](#)
  - gtkterm\_serial\_port\_serial\_data\_received, [125](#)
  - gtkterm\_serial\_port\_serial\_data\_transmit, [126](#)
  - gtkterm\_serial\_port\_set, [127](#)
  - gtkterm\_serial\_port\_set\_property, [128](#)
  - gtkterm\_serial\_port\_set\_signals, [129](#)
  - gtkterm\_serial\_port\_set\_status, [130](#)
  - gtkterm\_serial\_port\_unlock, [130](#)
  - GtkTermSerialPortStateString, [131](#)
  - N\_PROPS, [109](#)
  - PROP\_0, [109](#)
  - PROP\_PORT\_CONFIG, [109](#)
  - PROP\_PORT\_SIGNALS, [109](#)
  - PROP\_PORT\_STATUS, [109](#)
  - gtkterm\_serial\_port.h, [132](#), [137](#)
  - GTKTERM\_SERIAL\_PORT\_CLOSE, [134](#)
  - GTKTERM\_SERIAL\_PORT\_CONNECTED, [134](#)
  - GTKTERM\_SERIAL\_PORT\_DISCONNECTED, [134](#)
  - GTKTERM\_SERIAL\_PORT\_ERROR, [134](#)
  - GTKTERM\_SERIAL\_PORT\_FLOWCONTROL\_NONE, [133](#)
  - GTKTERM\_SERIAL\_PORT\_FLOWCONTROL\_RS485\_HD, [133](#)
  - GTKTERM\_SERIAL\_PORT\_FLOWCONTROL\_RTS\_CTS, [133](#)
  - GTKTERM\_SERIAL\_PORT\_FLOWCONTROL\_XON\_XOFF, [133](#)
  - gtkterm\_serial\_port\_get\_error, [134](#)
  - gtkterm\_serial\_port\_get\_signals, [135](#)
  - gtkterm\_serial\_port\_get\_status, [135](#)
  - gtkterm\_serial\_port\_get\_string, [136](#)
  - gtkterm\_serial\_port\_new, [136](#)
  - GTKTERM\_SERIAL\_PORT\_OPEN, [134](#)
  - GTKTERM\_SERIAL\_PORT\_PARITY\_EVEN, [134](#)
  - GTKTERM\_SERIAL\_PORT\_PARITY\_NONE, [134](#)
  - GTKTERM\_SERIAL\_PORT\_PARITY\_ODD, [134](#)
  - GTKTERM\_TYPE\_SERIAL\_PORT, [133](#)
  - GtkTermSerialPort, [133](#)
  - GtkTermSerialPortFlowControl, [133](#)
  - GtkTermSerialPortParity, [133](#)
  - GtkTermSerialPortState, [134](#)
  - GtkTermSerialPortStateString, [137](#)
  - GtkTermSerialPortStatus, [134](#)
  - gtkterm\_serial\_port\_class\_constructed
    - gtkterm\_serial\_port.c, [109](#)
  - gtkterm\_serial\_port\_class\_init
    - gtkterm\_serial\_port.c, [110](#)
  - GTKTERM\_SERIAL\_PORT\_CLOSE
    - gtkterm\_serial\_port.h, [134](#)
  - gtkterm\_serial\_port\_close
    - gtkterm\_serial\_port.c, [110](#)
  - gtkterm\_serial\_port\_config
    - gtkterm\_serial\_port.c, [111](#)
  - GTKTERM\_SERIAL\_PORT\_CONNECTED
    - gtkterm\_serial\_port.h, [134](#)
  - GTKTERM\_SERIAL\_PORT\_CONTROL\_POLL\_DELAY
    - gtkterm\_serial\_port.c, [108](#)
  - gtkterm\_serial\_port\_control\_signals\_read
    - gtkterm\_serial\_port.c, [112](#)
  - gtkterm\_serial\_port\_device\_monitor
    - gtkterm\_serial\_port.c, [113](#)
  - GTKTERM\_SERIAL\_PORT\_DISCONNECTED
    - gtkterm\_serial\_port.h, [134](#)
  - GTKTERM\_SERIAL\_PORT\_ERROR
    - gtkterm\_serial\_port.h, [134](#)
  - gtkterm\_serial\_port\_event\_udev

- gtkterm\_serial\_port.c, [113](#)
- gtkterm\_serial\_port\_finalize
  - gtkterm\_serial\_port.c, [114](#)
- GTKTERM\_SERIAL\_PORT\_FLOWCONTROL\_NONE
  - gtkterm\_serial\_port.h, [133](#)
- GTKTERM\_SERIAL\_PORT\_FLOWCONTROL\_RS485\_HD
  - gtkterm\_serial\_port.h, [133](#)
- GTKTERM\_SERIAL\_PORT\_FLOWCONTROL\_RTS\_CTS
  - gtkterm\_serial\_port.h, [133](#)
- GTKTERM\_SERIAL\_PORT\_FLOWCONTROL\_XON\_XOFF
  - gtkterm\_serial\_port.h, [133](#)
- gtkterm\_serial\_port\_get\_error
  - gtkterm\_serial\_port.c, [115](#)
  - gtkterm\_serial\_port.h, [134](#)
- gtkterm\_serial\_port\_get\_property
  - gtkterm\_serial\_port.c, [116](#)
- gtkterm\_serial\_port\_get\_signals
  - gtkterm\_serial\_port.c, [116](#)
  - gtkterm\_serial\_port.h, [135](#)
- gtkterm\_serial\_port\_get\_status
  - gtkterm\_serial\_port.c, [117](#)
  - gtkterm\_serial\_port.h, [135](#)
- gtkterm\_serial\_port\_get\_string
  - gtkterm\_serial\_port.c, [118](#)
  - gtkterm\_serial\_port.h, [136](#)
- gtkterm\_serial\_port\_handle
  - gtkterm\_serial\_port.c, [118](#)
- gtkterm\_serial\_port\_handle\_usr1
  - gtkterm\_serial\_port.c, [119](#)
- gtkterm\_serial\_port\_handle\_usr2
  - gtkterm\_serial\_port.c, [120](#)
- gtkterm\_serial\_port\_init
  - gtkterm\_serial\_port.c, [121](#)
- gtkterm\_serial\_port\_lock
  - gtkterm\_serial\_port.c, [121](#)
- gtkterm\_serial\_port\_new
  - gtkterm\_serial\_port.c, [122](#)
  - gtkterm\_serial\_port.h, [136](#)
- GTKTERM\_SERIAL\_PORT\_OPEN
  - gtkterm\_serial\_port.h, [134](#)
- gtkterm\_serial\_port\_open
  - gtkterm\_serial\_port.c, [123](#)
- GTKTERM\_SERIAL\_PORT\_PARITY\_EVEN
  - gtkterm\_serial\_port.h, [134](#)
- GTKTERM\_SERIAL\_PORT\_PARITY\_NONE
  - gtkterm\_serial\_port.h, [134](#)
- GTKTERM\_SERIAL\_PORT\_PARITY\_ODD
  - gtkterm\_serial\_port.h, [134](#)
- gtkterm\_serial\_port\_properties
  - gtkterm\_serial\_port.c, [131](#)
- gtkterm\_serial\_port\_read\_signals
  - gtkterm\_serial\_port.c, [124](#)
- GTKTERM\_SERIAL\_PORT\_RECEIVE\_BUFFER\_SIZE
  - gtkterm\_defaults.h, [105](#)
- gtkterm\_serial\_port\_serial\_data\_received
  - gtkterm\_serial\_port.c, [125](#)
- gtkterm\_serial\_port\_serial\_data\_transmit
  - gtkterm\_serial\_port.c, [126](#)
- gtkterm\_serial\_port\_set
  - gtkterm\_serial\_port.c, [127](#)
- gtkterm\_serial\_port\_set\_property
  - gtkterm\_serial\_port.c, [128](#)
- gtkterm\_serial\_port\_set\_signals
  - gtkterm\_serial\_port.c, [129](#)
- gtkterm\_serial\_port\_set\_status
  - gtkterm\_serial\_port.c, [130](#)
- GTKTERM\_SERIAL\_PORT\_TRANSMIT\_BUFFER\_SIZE
  - gtkterm\_defaults.h, [105](#)
- gtkterm\_serial\_port\_unlock
  - gtkterm\_serial\_port.c, [130](#)
- gtkterm\_show\_infobar
  - gtkterm\_window.c, [157](#)
  - gtkterm\_window.h, [172](#)
- gtkterm\_signals
  - gtkterm.c, [45](#)
  - gtkterm.h, [48](#)
- gtkterm\_startup
  - gtkterm.c, [44](#)
- gtkterm\_term\_options
  - gtkterm\_cmdline.c, [69](#)
- gtkterm\_terminal.c, [138](#)
  - GGTKTERM\_TERMINAL\_VIEW\_HEX, [140](#)
  - gtkterm\_terminal\_buffer\_updated, [141](#)
  - gtkterm\_terminal\_class\_init, [141](#)
  - gtkterm\_terminal\_constructed, [142](#)
  - gtkterm\_terminal\_dispose, [144](#)
  - gtkterm\_terminal\_init, [144](#)
  - gtkterm\_terminal\_new, [145](#)
  - gtkterm\_terminal\_port\_signals\_changed, [145](#)
  - gtkterm\_terminal\_port\_status\_changed, [146](#)
  - gtkterm\_terminal\_properties, [150](#)
  - gtkterm\_terminal\_set\_property, [147](#)
  - gtkterm\_terminal\_view\_ascii, [148](#)
  - gtkterm\_terminal\_view\_hex, [149](#)
  - GTKTERM\_TERMINAL\_VIEW\_TEXT, [140](#)
  - gtkterm\_terminal\_vte\_data\_received, [149](#)
  - GtkTermTerminalView, [140](#)
  - N\_PROPS, [140](#)
  - PROP\_0, [140](#)
  - PROP\_GTKTERM\_APP, [140](#)
  - PROP\_MAIN\_WINDOW, [140](#)
  - PROP\_SECTION, [140](#)
- gtkterm\_terminal.h, [151](#), [153](#)
  - gtkterm\_terminal\_new, [152](#)
  - GTKTERM\_TYPE\_TERMINAL, [151](#)
  - GtkTermTerminal, [152](#)
- gtkterm\_terminal\_buffer\_updated
  - gtkterm\_terminal.c, [141](#)
- gtkterm\_terminal\_class\_init
  - gtkterm\_terminal.c, [141](#)
- gtkterm\_terminal\_constructed
  - gtkterm\_terminal.c, [142](#)
- gtkterm\_terminal\_dispose
  - gtkterm\_terminal.c, [144](#)
- gtkterm\_terminal\_init
  - gtkterm\_terminal.c, [144](#)

- gtkterm\_terminal\_new
  - gtkterm\_terminal.c, 145
  - gtkterm\_terminal.h, 152
- gtkterm\_terminal\_port\_signals\_changed
  - gtkterm\_terminal.c, 145
- gtkterm\_terminal\_port\_status\_changed
  - gtkterm\_terminal.c, 146
- gtkterm\_terminal\_properties
  - gtkterm\_terminal.c, 150
- gtkterm\_terminal\_set\_property
  - gtkterm\_terminal.c, 147
- gtkterm\_terminal\_view\_ascii
  - gtkterm\_terminal.c, 148
- gtkterm\_terminal\_view\_hex
  - gtkterm\_terminal.c, 149
- GTKTERM\_TERMINAL\_VIEW\_TEXT
  - gtkterm\_terminal.c, 140
- gtkterm\_terminal\_vte\_data\_received
  - gtkterm\_terminal.c, 149
- GTKTERM\_TYPE\_APP
  - gtkterm.h, 47
- GTKTERM\_TYPE\_BUFFER
  - gtkterm\_buffer.h, 60
- GTKTERM\_TYPE\_CONFIGURATION
  - gtkterm\_configuration.h, 94
- GTKTERM\_TYPE\_GTKTERM\_WINDOW
  - gtkterm\_window.h, 171
- GTKTERM\_TYPE\_SERIAL\_PORT
  - gtkterm\_serial\_port.h, 133
- GTKTERM\_TYPE\_TERMINAL
  - gtkterm\_terminal.h, 151
- gtkterm\_window.c, 153
  - clicked\_cb, 155
  - config\_status\_bar, 156
  - create\_window, 156
  - gtkterm\_show\_infobar, 157
  - gtkterm\_window\_class\_init, 158
  - gtkterm\_window\_constructed, 158
  - gtkterm\_window\_dispose, 159
  - gtkterm\_window\_entries, 170
  - gtkterm\_window\_init, 160
  - gtkterm\_window\_load\_state, 161
  - gtkterm\_window\_realize, 161
  - gtkterm\_window\_set\_signals, 162
  - gtkterm\_window\_size\_allocate, 163
  - gtkterm\_window\_store\_state, 163
  - gtkterm\_window\_unrealize, 164
  - gtkterm\_window\_update\_statusbar, 164
  - on\_gtkterm\_about, 165
  - on\_gtkterm\_send\_raw, 166
  - on\_gtkterm\_toggle\_dark, 166
  - on\_gtkterm\_toggle\_radio, 167
  - on\_gtkterm\_toggle\_radio\_state, 167
  - on\_gtkterm\_toggle\_state, 167
  - open\_response\_cb, 167
  - serial\_signal, 170
  - SERIAL\_SIGNALS, 155
  - set\_window\_title, 168
  - signal\_flags, 170
  - surface\_state\_changed, 168
  - update\_statusbar, 169
  - win\_entries, 170
- gtkterm\_window.h, 171, 173
  - create\_window, 172
  - gtkterm\_show\_infobar, 172
  - GTKTERM\_TYPE\_GTKTERM\_WINDOW, 171
  - GtkTermWindow, 172
- gtkterm\_window\_class\_init
  - gtkterm\_window.c, 158
- gtkterm\_window\_constructed
  - gtkterm\_window.c, 158
- gtkterm\_window\_dispose
  - gtkterm\_window.c, 159
- gtkterm\_window\_entries
  - gtkterm\_window.c, 170
- gtkterm\_window\_init
  - gtkterm\_window.c, 160
- gtkterm\_window\_load\_state
  - gtkterm\_window.c, 161
- gtkterm\_window\_realize
  - gtkterm\_window.c, 161
- gtkterm\_window\_set\_signals
  - gtkterm\_window.c, 162
- gtkterm\_window\_size\_allocate
  - gtkterm\_window.c, 163
- gtkterm\_window\_store\_state
  - gtkterm\_window.c, 163
- gtkterm\_window\_unrealize
  - gtkterm\_window.c, 164
- gtkterm\_window\_update\_statusbar
  - gtkterm\_window.c, 164
- GtkTermBuffer
  - gtkterm\_buffer.h, 61
- GtkTermBufferPrivate, 21
  - buffer, 22
  - config\_error, 22
  - config\_status, 22
  - cr\_received, 22
  - error, 23
  - If\_received, 23
  - need\_to\_write\_timestamp, 23
  - serial\_port, 23
  - tail, 23
  - term\_conf, 24
  - terminal, 24
- GtkTermBufferState
  - gtkterm\_buffer.h, 61
- GtkTermCLIShortOption
  - gtkterm\_configuration.c, 92
- GtkTermConfiguration
  - gtkterm\_configuration.h, 94
- GtkTermConfigurationItems
  - gtkterm\_configuration.c, 92
  - gtkterm\_configuration.h, 99
- GtkTermConfigurationPrivate, 24
  - config\_error, 24

- config\_file, 25
- config\_is\_dirty, 25
- config\_status, 25
- key\_file, 25
- GtkTermConfigurationState
  - gtkterm\_configuration.h, 95
- GtkTermSerialPort
  - gtkterm\_serial\_port.h, 133
- GtkTermSerialPortFlowControl
  - gtkterm\_serial\_port.h, 133
- GtkTermSerialPortParity
  - gtkterm\_serial\_port.h, 133
- GtkTermSerialPortPrivate, 26
  - cancellable, 27
  - control\_signal\_timeout, 27
  - control\_signals, 27
  - input\_stream, 27
  - output\_stream, 27
  - port\_conf, 28
  - port\_error, 28
  - port\_fd, 28
  - port\_status, 28
  - port\_termios, 28
  - udev\_client, 29
- GtkTermSerialPortState
  - gtkterm\_serial\_port.h, 134
- GtkTermSerialPortStateString
  - gtkterm\_serial\_port.c, 131
  - gtkterm\_serial\_port.h, 137
- GtkTermSerialPortStatus
  - gtkterm\_serial\_port.h, 134
- GtkTermTerminal
  - gtkterm\_terminal.h, 152
- GtkTermTerminalPrivate, 29
  - app, 30
  - macros, 30
  - main\_window, 30
  - port\_conf, 30
  - section, 30
  - serial\_port, 31
  - term\_buffer, 31
  - term\_conf, 31
  - view\_mode, 31
- GtkTermTerminalView
  - gtkterm\_terminal.c, 140
- GtkTermWindow
  - gtkterm\_window.h, 172
- height
  - \_GtkTermWindow, 18
- HEXADECIMAL\_VIEW
  - gtkterm\_defaults.h, 105
- infobar
  - \_GtkTermWindow, 18
- input\_stream
  - GtkTermSerialPortPrivate, 27
- insert\_timestamp
  - gtkterm\_buffer.c, 59
- key\_file
  - GtkTermConfigurationPrivate, 25
- LAST\_GTKTERM\_SIGNAL
  - gtkterm.h, 48
- lf\_received
  - GtkTermBufferPrivate, 23
- LINE\_FEED
  - gtkterm\_defaults.h, 105
- macro\_count
  - macros.c, 176
  - macros.h, 179
- macro\_t, 32
  - action, 32
  - closure, 32
  - shortcut, 32
- macros
  - GtkTermTerminalPrivate, 30
  - macros.c, 177
  - macros.h, 180
- macros.c, 173
  - COLUMN\_ACTION, 175
  - COLUMN\_SHORTCUT, 175
  - convert\_macros\_to\_string, 175
  - convert\_string\_to\_macros, 175
  - get\_shortcuts, 175
  - macro\_count, 176
  - macros, 177
  - macros\_destroy, 176
  - nr\_of\_macros, 177
  - NUM\_COLUMNS, 175
  - remove\_shortcuts, 176
- macros.h, 178, 181
  - add\_shortcuts, 178
  - convert\_macros\_to\_string, 178
  - convert\_string\_to\_macros, 179
  - get\_shortcuts, 179
  - macro\_count, 179
  - macros, 180
  - remove\_shortcuts, 180
- macros\_destroy
  - macros.c, 176
- main
  - gtkterm.c, 44
- main\_window
  - GtkTermTerminalPrivate, 30
- MAX\_SECTION\_LENGTH
  - gtkterm\_defaults.h, 105
- maximized
  - \_GtkTermWindow, 18
- menubutton
  - \_GtkTermWindow, 19
- message
  - \_GtkTermWindow, 19
- N\_PROPS
  - gtkterm\_buffer.c, 51
  - gtkterm\_serial\_port.c, 109

- gtkterm\_terminal.c, 140
- need\_to\_write\_timestamp
  - GtkTermBufferPrivate, 23
- nr\_of\_macros
  - macros.c, 177
- NUM\_COLUMNS
  - macros.c, 175
- on\_gtkterm\_about
  - gtkterm\_window.c, 165
- on\_gtkterm\_quit
  - gtkterm.c, 45
- on\_gtkterm\_send\_raw
  - gtkterm\_window.c, 166
- on\_gtkterm\_toggle\_dark
  - gtkterm\_window.c, 166
- on\_gtkterm\_toggle\_radio
  - gtkterm\_window.c, 167
- on\_gtkterm\_toggle\_radio\_state
  - gtkterm\_window.c, 167
- on\_gtkterm\_toggle\_state
  - gtkterm\_window.c, 167
- on\_list\_config
  - gtkterm\_cmdline.c, 65
- on\_print\_section
  - gtkterm\_cmdline.c, 65
- on\_remove\_config
  - gtkterm\_cmdline.c, 66
- on\_save\_section
  - gtkterm\_cmdline.c, 67
- on\_set\_config\_options
  - gtkterm\_configuration.c, 90
  - gtkterm\_configuration.h, 98
- on\_use\_config
  - gtkterm\_cmdline.c, 67
- open\_response\_cb
  - gtkterm\_window.c, 167
- output\_stream
  - GtkTermSerialPortPrivate, 27
- parent\_class
  - \_GtkTermBufferClass, 14
  - \_GtkTermConfigurationClass, 15
  - \_GtkTermSerialPortClass, 15
- parent\_instance
  - \_GtkTerm, 13
  - \_GtkTermBuffer, 13
  - \_GtkTermConfiguration, 14
  - \_GtkTermSerialPort, 15
  - \_GtkTermWindow, 19
- parity
  - port\_config\_t, 34
- POLL\_DELAY
  - gtkterm\_defaults.h, 105
- port
  - port\_config\_t, 34
- port\_conf
  - GtkTermSerialPortPrivate, 28
  - GtkTermTerminalPrivate, 30
- port\_config\_t, 33
  - baudrate, 33
  - bits, 33
  - disable\_port\_lock, 33
  - flow\_control, 34
  - parity, 34
  - port, 34
  - rs485\_rts\_time\_after\_transmit, 34
  - rs485\_rts\_time\_before\_transmit, 34
  - stopbits, 35
- port\_error
  - GtkTermSerialPortPrivate, 28
- port\_fd
  - GtkTermSerialPortPrivate, 28
- port\_status
  - GtkTermSerialPortPrivate, 28
- port\_termios
  - GtkTermSerialPortPrivate, 28
- PROP\_0
  - gtkterm\_buffer.c, 51
  - gtkterm\_serial\_port.c, 109
  - gtkterm\_terminal.c, 140
- PROP\_GTKTERM\_APP
  - gtkterm\_terminal.c, 140
- PROP\_MAIN\_WINDOW
  - gtkterm\_terminal.c, 140
- PROP\_PORT\_CONFIG
  - gtkterm\_serial\_port.c, 109
- PROP\_PORT\_SIGNALS
  - gtkterm\_serial\_port.c, 109
- PROP\_PORT\_STATUS
  - gtkterm\_serial\_port.c, 109
- PROP\_SECTION
  - gtkterm\_terminal.c, 140
- PROP\_SERIAL\_PORT
  - gtkterm\_buffer.c, 51
- PROP\_TERM\_CONF
  - gtkterm\_buffer.c, 51
- PROP\_TERMINAL
  - gtkterm\_buffer.c, 51
- README\_source.md, 41
- remove\_shortcuts
  - macros.c, 176
  - macros.h, 180
- rows
  - term\_config\_t, 38
- rs485\_rts\_time\_after\_transmit
  - port\_config\_t, 34
- rs485\_rts\_time\_before\_transmit
  - port\_config\_t, 34
- scrollback
  - term\_config\_t, 38
- scrolled\_window
  - \_GtkTermWindow, 19
- search\_bar
  - \_GtkTermWindow, 19
- section

- [\\_GtkTerm](#), 13
  - [GtkTermTerminalPrivate](#), 30
- [serial\\_port](#)
  - [GtkTermBufferPrivate](#), 23
  - [GtkTermTerminalPrivate](#), 31
- [serial\\_signal](#)
  - [gtkterm\\_window.c](#), 170
- [SERIAL\\_SIGNALS](#)
  - [gtkterm\\_window.c](#), 155
- [set\\_color](#)
  - [gtkterm\\_configuration.c](#), 91
- [set\\_window\\_title](#)
  - [gtkterm\\_window.c](#), 168
- [shortcut](#)
  - [macro\\_t](#), 32
- [show\\_cursor](#)
  - [term\\_config\\_t](#), 38
- [signal\\_flags](#)
  - [gtkterm\\_window.c](#), 170
- [SIGNAL\\_GTKTERM\\_BUFFER\\_UPDATED](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_CONFIG\\_CHECK\\_FILE](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_CONFIG\\_SERIAL](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_CONFIG\\_TERMINAL](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_COPY\\_SECTION](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_LIST\\_CONFIG](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_LOAD\\_CONFIG](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_PRINT\\_SECTION](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_REMOVE\\_SECTION](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_SAVE\\_CONFIG](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_SERIAL\\_CONNECT](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_SERIAL\\_DATA\\_RECEIVED](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_SERIAL\\_DATA\\_TRANSMIT](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_SERIAL\\_SIGNALS\\_CHANGED](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_TERMINAL\\_CHANGED](#)
  - [gtkterm.h](#), 48
- [SIGNAL\\_GTKTERM\\_VTE\\_DATA\\_RECEIVED](#)
  - [gtkterm.h](#), 48

- [status\\_config](#)
  - [\\_GtkTermWindow](#), 20
- [status\\_config\\_message](#)
  - [\\_GtkTermWindow](#), 20
- [status\\_message](#)
  - [\\_GtkTermWindow](#), 20
- [status\\_serial\\_signal](#)
  - [\\_GtkTermWindow](#), 20
- [statusbox](#)
  - [\\_GtkTermWindow](#), 20
- [stopbits](#)
  - [port\\_config\\_t](#), 35
- [surface\\_state\\_changed](#)
  - [gtkterm\\_window.c](#), 168
- [tail](#)
  - [GtkTermBufferPrivate](#), 23
- [term\\_buffer](#)
  - [GtkTermTerminalPrivate](#), 31
- [term\\_conf](#)
  - [GtkTermBufferPrivate](#), 24
  - [GtkTermTerminalPrivate](#), 31
- [term\\_config\\_t](#), 35
  - [auto\\_cr](#), 36
  - [auto\\_lf](#), 36
  - [background\\_color](#), 36
  - [block\\_cursor](#), 36
  - [char\\_queue](#), 36
  - [columns](#), 37
  - [delay](#), 37
  - [echo](#), 37
  - [font](#), 37
  - [foreground\\_color](#), 38
  - [rows](#), 38
  - [scrollback](#), 38
  - [show\\_cursor](#), 38
  - [timestamp](#), 39
  - [visual\\_bell](#), 39
- [terminal](#)
  - [GtkTermBufferPrivate](#), 24
- [terminal\\_window](#)
  - [\\_GtkTermWindow](#), 20
- [timestamp](#)
  - [term\\_config\\_t](#), 39
- [TIMESTAMP\\_SIZE](#)
  - [gtkterm\\_buffer.c](#), 51
- [toolmenu](#)
  - [\\_GtkTermWindow](#), 21
- [udev\\_client](#)
  - [GtkTermSerialPortPrivate](#), 29
- [update\\_statusbar](#)
  - [gtkterm\\_window.c](#), 169
- [view\\_mode](#)
  - [GtkTermTerminalPrivate](#), 31
- [visual\\_bell](#)
  - [term\\_config\\_t](#), 39
- [vte\\_class](#)
  - [\\_GtkTermTerminalClass](#), 16
- [vte\\_object](#)
  - [\\_GtkTermTerminal](#), 16
- [width](#)
  - [\\_GtkTermWindow](#), 21
- [win\\_entries](#)
  - [gtkterm\\_window.c](#), 170