

Project Requirement Analysis Phase


Data Flow Diagram & User Stories

Date	01 October 2026
Team ID	SWTID-2026-7951
Project Name	Script-Controlled ACL – Restrict Record Access Based on Field Value
Maximum Marks	4 Marks

The DFD follows the supplied template's purpose: showing how data enters and leaves the system, how information is processed, and where data is stored. [filecite](#)[turn1file1](#)[L8-L13](#)

DFD Level 0 – Script-Controlled ACL

DFD Level 0 - Script-Controlled ACL

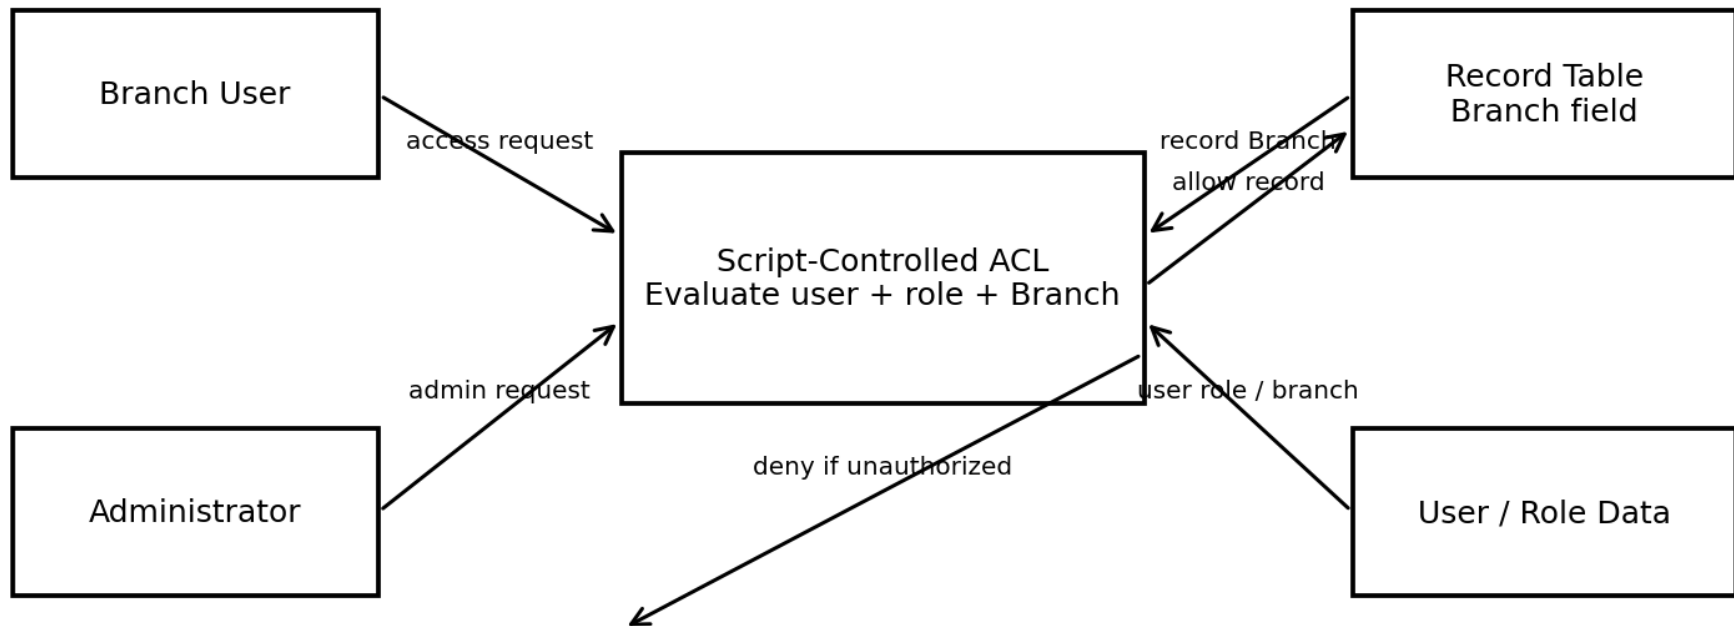

Flow:

User/Admin → access request → scripted ACL → user/role and record Branch evaluation → authorized record or access denial. The DFD represents the project's core security decision rather than unrelated application features.

User Stories

The user-story table follows the supplied columns: User Type, Functional Requirement (Epic), User Story Number, User Story/Task, Acceptance Criteria, Priority and Release. [filecite turn1file1 L16-L23](#)

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance Criteria	Priority	Release
Branch User – EEE	User Access	USN-1	As an EEE user, I can view records whose Branch field is EEE.	EEE record opens successfully when the user satisfies the branch condition.	High	Sprint-1
Branch User – Non-EEE	Restricted Access	USN-2	As a non-EEE user, I cannot view a record restricted to EEE.	The protected EEE record is denied when the user does not satisfy the required condition.	High	Sprint-1
Administrator	Administrator Access	USN-3	As an administrator, I can view records across branches.	Administrator can open EEE and non-EEE records without the branch restriction blocking access.	High	Sprint-1
System / ACL	Access Validation	USN-4	As the system, I evaluate the logged-in user's role and branch against the record's Branch value.	The ACL makes a deterministic allow/deny decision before the protected record is displayed.	High	Sprint-1
System / ACL	Access Denial	USN-5	As the system, I prevent unauthorized users from viewing protected records.	Unauthorized access is blocked and normal access-denied behaviour is shown.	High	Sprint-1
Developer / Tester	ACL Validation	USN-6	As a tester, I can validate EEE, non-EEE and administrator scenarios.	All three test cases return the expected access result.	Medium	Sprint-2