

Skill: React

File Name: 12.ReactJS-HOL

Project Creation

```
MINGW64/c/Users/hp/ticketbookingapp
hp@Geethika MINGW64 ~
$ npx create-react-app ticketbookingapp
-creating a new React app in C:\Users\hp\ticketbookingapp.
Installing packages. This might take a couple of minutes.
Installing react, react-dom, and react-scripts with cra-template...

added 1296 packages in 47s
272 packages are looking for funding
  run `npm fund` for details
Initialized a git repository.
Installing template dependencies using npm...
added 17 packages, and removed 1 package in 6s
271 packages are looking for funding
  run `npm fund` for details
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (install: (install scripts present))
npm warn allow-scripts   core-js-pure@3.49.0 (install: (install scripts present))
npm warn allow-scripts   Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
Removing template package using npm...

removed 1 package, and audited 1312 packages in 8s
271 packages are looking for funding
  run `npm fund` for details
28 vulnerabilities (9 low, 6 moderate, 13 high)
To address issues that do not require attention, run:
  npm audit fix
To address all issues (including breaking changes), run:
  npm audit fix --force
Run `npm audit` for details.
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (install: (install scripts present))
npm warn allow-scripts   core-js-pure@3.49.0 (install: (install scripts present))
npm warn allow-scripts   Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
created git commit.
Success! Created ticketbookingapp at C:\Users\hp\ticketbookingapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

MINGW64/c/Users/hp/ticketbookingapp
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (install: (install scripts present))
npm warn allow-scripts   core-js-pure@3.49.0 (install: (install scripts present))
npm warn allow-scripts   Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
Removing template package using npm...

removed 1 package, and audited 1312 packages in 8s
271 packages are looking for funding
  run `npm fund` for details
28 vulnerabilities (9 low, 6 moderate, 13 high)
To address issues that do not require attention, run:
  npm audit fix
To address all issues (including breaking changes), run:
  npm audit fix --force
Run `npm audit` for details.
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (install: (install scripts present))
npm warn allow-scripts   core-js-pure@3.49.0 (install: (install scripts present))
npm warn allow-scripts   Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
created git commit.
Success! Created ticketbookingapp at C:\Users\hp\ticketbookingapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.


  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:


  cd ticketbookingapp
  npm start

Happy hacking!
hp@Geethika MINGW64 ~
$ cd ticketbookingapp
hp@Geethika MINGW64 ~/ticketbookingapp (master)
$
```


Project Structure

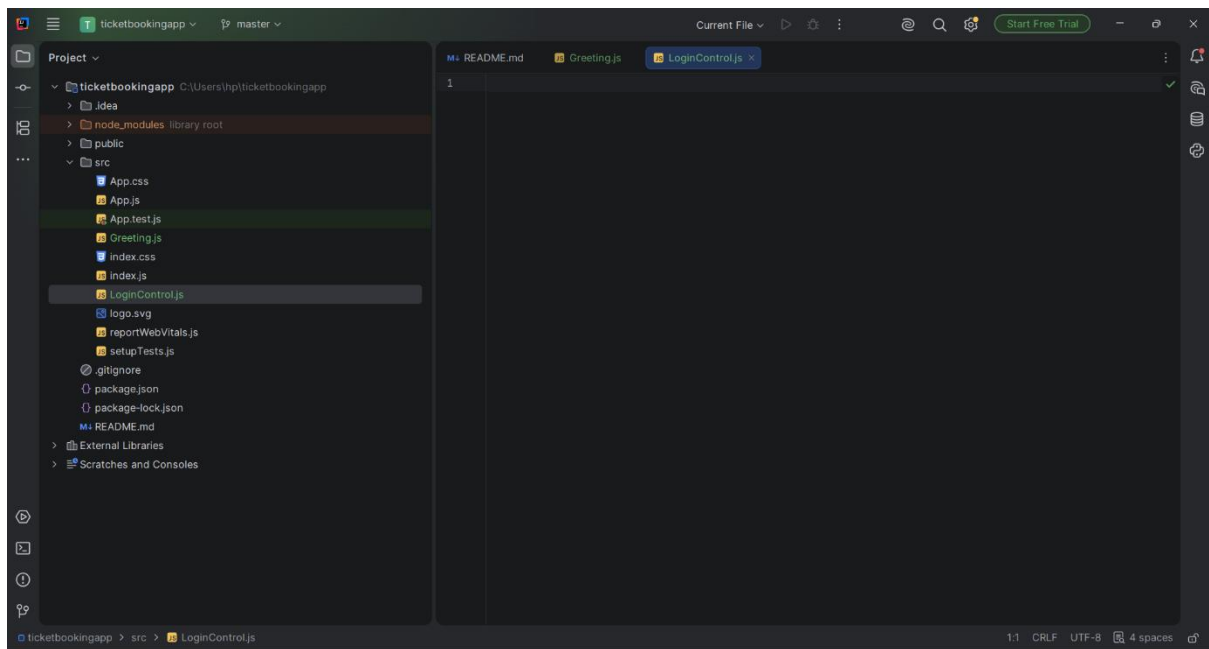

Greeting Code

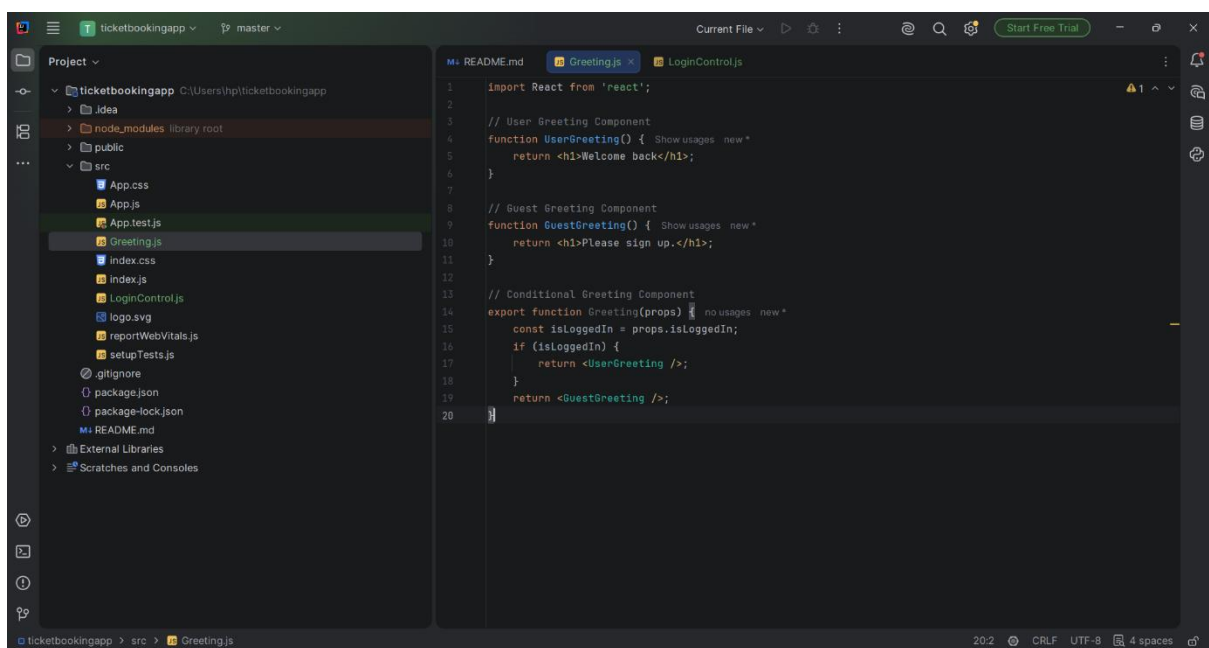


Logincontrol code

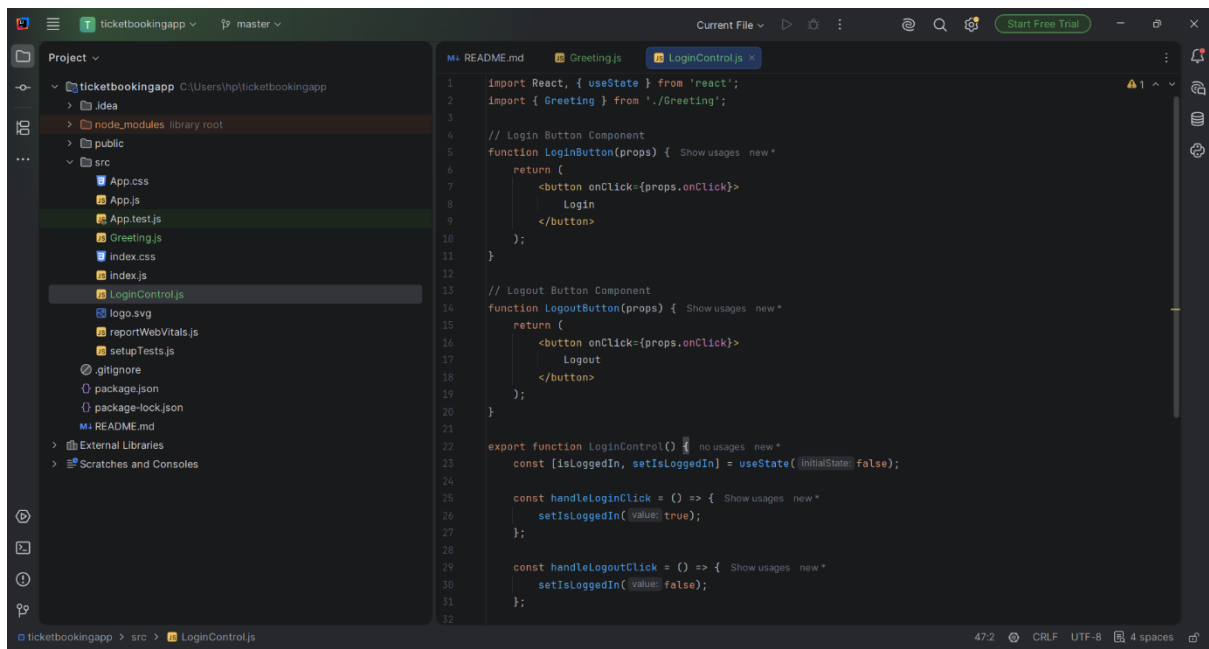

The screenshot shows the VS Code editor with the 'ticketbookingapp' project open. The file explorer on the left shows the project structure, with 'LoginControl.js' selected under the 'src' directory. The main editor displays the code for 'LoginControl.js'.

```
1 import React, { useState } from 'react';
2 import { Greeting } from './Greeting';
3
4 // Login Button Component
5 function LoginButton(props) { Show usages new *
6   return (
7     <button onClick={props.onClick}>
8       Login
9     </button>
10  );
11 }
12
13 // Logout Button Component
14 function LogoutButton(props) { Show usages new *
15   return (
16     <button onClick={props.onClick}>
17       Logout
18     </button>
19   );
20 }
21
22 export function loginControl() { Show usages new *
23   const [isLoggedIn, setIsLoggedIn] = useState( initialState: false);
24
25   const handleLoginClick = () => { Show usages new *
26     setIsLoggedIn( value: true);
27   };
28
29   const handleLogoutClick = () => { Show usages new *
30     setIsLoggedIn( value: false);
31   };
32 }
```


App.js code

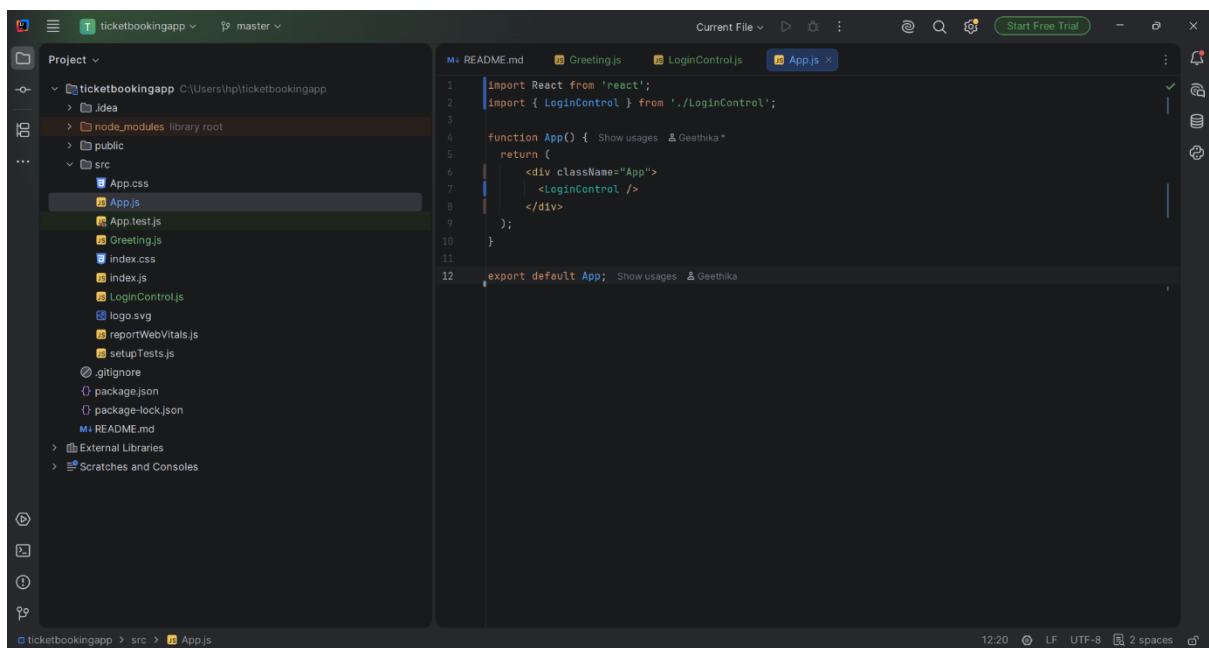

The screenshot shows the VS Code editor with the 'ticketbookingapp' project open. The file explorer on the left shows the project structure, with 'App.js' selected under the 'src' directory. The main editor displays the code for 'App.js'.


```
1 import React from 'react';
2 import { LoginControl } from './LoginControl';
3
4 function App() { Show usages Geethika *
5   return (
6     <div className="App">
7       <LoginControl />
8     </div>
9   );
10 }
11
12 export default App; Show usages Geethika
```

Development Server Execution

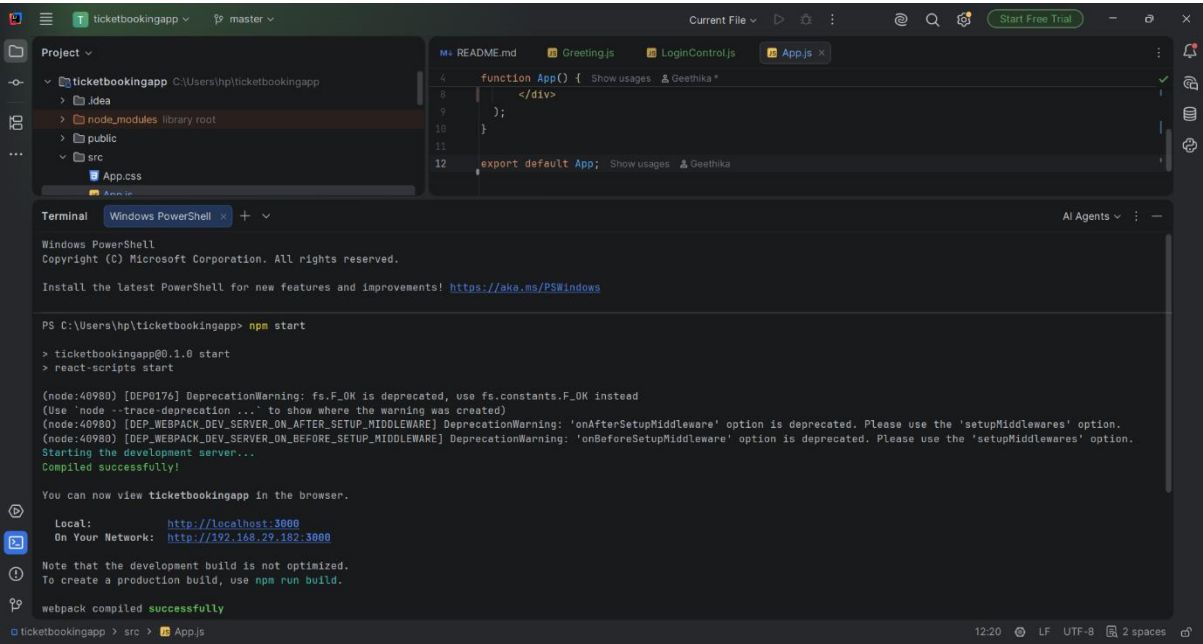

Browser output verification:

Guest view

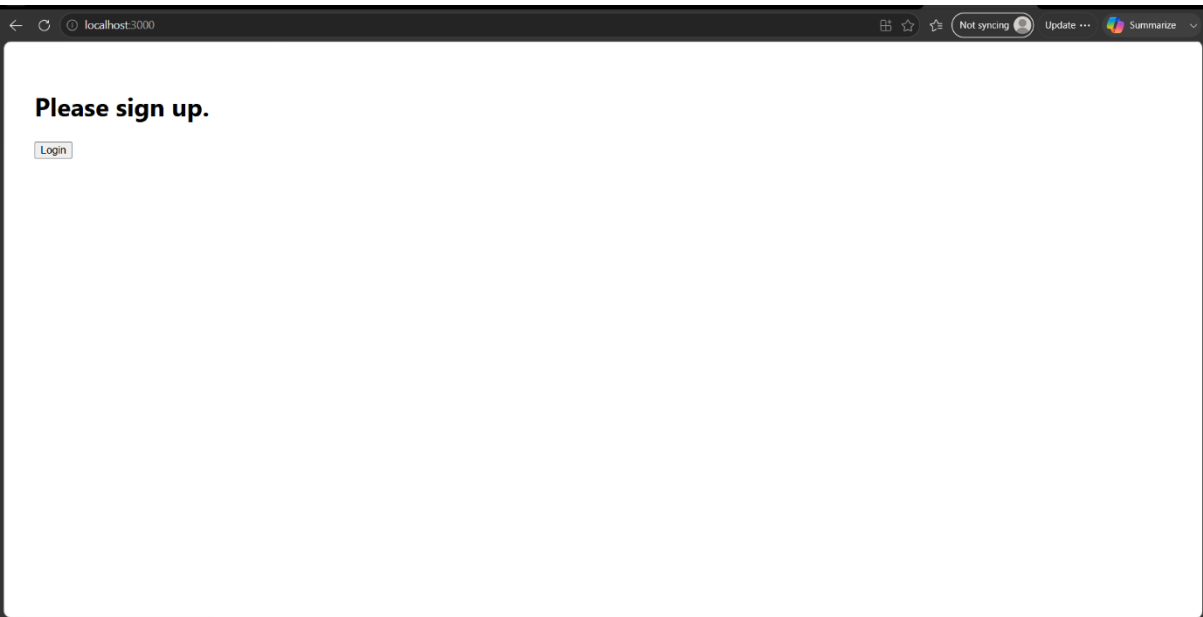

Logged in view

