

Skill: React

File Name: 4.ReactJS-HOL

React Application Initialization

```
MINGW64/c/Users/hp/blogapp
hpGeethika MINGW64 ~
$ npx create-react-app blogapp
Creating a new React app in C:\Users\hp\blogapp.
Installing packages. This might take a couple of minutes.
Installing react, react-dom, and react-scripts with cra-template...

added 1296 packages in 2m
272 packages are looking for funding
  run `npm fund` for details
initialized a git repository.
Installing template dependencies using npm...
added 17 packages, and removed 1 package in 7s
271 packages are looking for funding
  run `npm fund` for details
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (install: (install scripts present))
npm warn allow-scripts   core-js-pure@3.49.0 (install: (install scripts present))
npm warn allow-scripts Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
Removing template package using npm...

removed 1 package, and audited 1312 packages in 15s
271 packages are looking for funding
  run `npm fund` for details
28 vulnerabilities (9 low, 6 moderate, 13 high)
To address issues that do not require attention, run:
  npm audit fix
To address all issues (including breaking changes), run:
  npm audit fix --force
Run `npm audit` for details.
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (install: (install scripts present))
npm warn allow-scripts   core-js-pure@3.49.0 (install: (install scripts present))
npm warn allow-scripts Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
Created git commit.
Success! Created blogapp at C:\Users\hp\blogapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

MINGW64/c/Users/hp/blogapp
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (install: (install scripts present))
npm warn allow-scripts   core-js-pure@3.49.0 (install: (install scripts present))
npm warn allow-scripts Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
Removing template package using npm...

removed 1 package, and audited 1312 packages in 15s
271 packages are looking for funding
  run `npm fund` for details
28 vulnerabilities (9 low, 6 moderate, 13 high)
To address issues that do not require attention, run:
  npm audit fix
To address all issues (including breaking changes), run:
  npm audit fix --force
Run `npm audit` for details.
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (install: (install scripts present))
npm warn allow-scripts   core-js-pure@3.49.0 (install: (install scripts present))
npm warn allow-scripts Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
Created git commit.
Success! Created blogapp at C:\Users\hp\blogapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.


  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!

we suggest that you begin by typing:

  cd blogapp
  npm start


Happy hacking!
hpGeethika MINGW64 ~
$ cd blogapp
hpGeethika MINGW64 ~/blogapp (master)
$
```

Class Component Creation

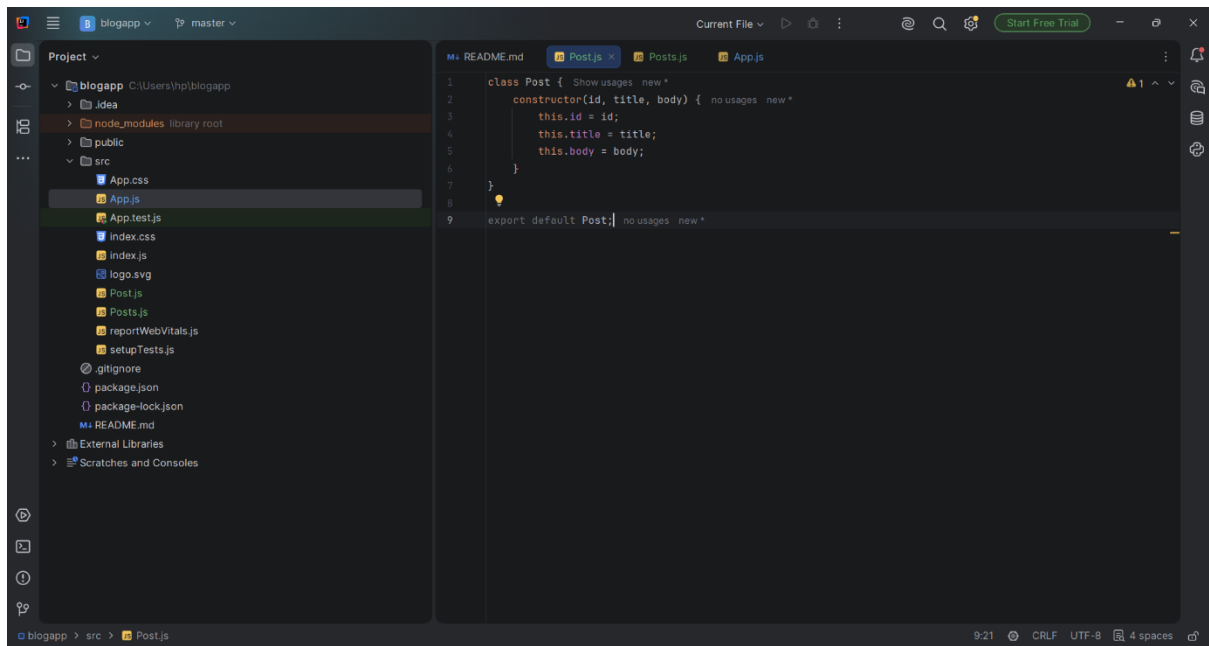

The screenshot shows the VS Code editor with the 'blogapp' project open. The file explorer on the left shows the project structure, with 'src' containing 'App.js', 'App.test.js', 'index.css', 'index.js', 'logo.svg', 'Post.js', 'Posts.js', 'reportWebVitals.js', and 'setupTests.js'. The 'Posts.js' file is selected and open in the editor. The code in 'Posts.js' is as follows:


```
1 class Post { Show usages new *
2   constructor(id, title, body) { no usages new *
3     this.id = id;
4     this.title = title;
5     this.body = body;
6   }
7 }
8
9 export default Post;
```

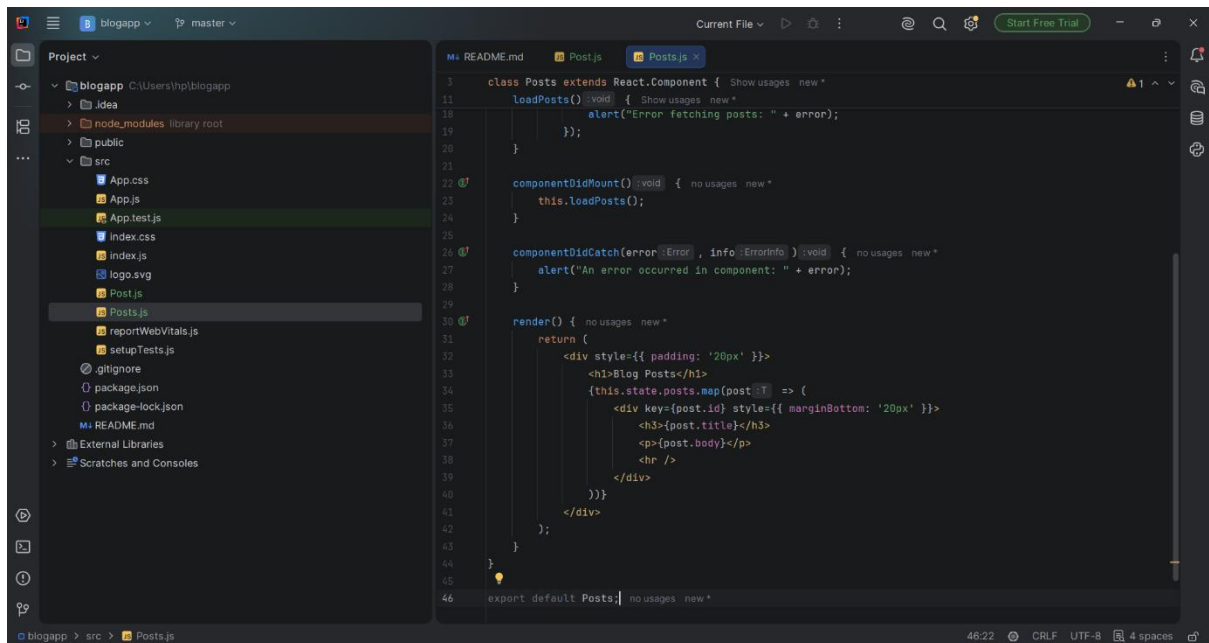


The screenshot shows the VS Code editor with the 'blogapp' project open. The file explorer on the left shows the project structure, with 'src' containing 'App.js', 'App.test.js', 'index.css', 'index.js', 'logo.svg', 'Post.js', 'Posts.js', 'reportWebVitals.js', and 'setupTests.js'. The 'Posts.js' file is selected and open in the editor. The code in 'Posts.js' is as follows:

```
3 class Posts extends React.Component { Show usages new *
11   loadPosts() { Show usages new *
18     alert("Error fetching posts: " + error);
19   }
20 }
21
22 componentDidMount() { Show usages new *
23   this.loadPosts();
24 }
25
26 componentDidCatch(error:Error, info:ErrorInfo) { Show usages new *
27   alert("An error occurred in component: " + error);
28 }
29
30 render() { no usages new *
31   return (
32     <div style={{ padding: '20px' }}>
33       <h1>Blog Posts</h1>
34       {this.state.posts.map(post => (
35         <div key={post.id} style={{ marginBottom: '20px' }}>
36           <h3>{post.title}</h3>
37           <p>{post.body}</p>
38         </div>
39       ))}
40     </div>
41   );
42 }
43
44
45
46 export default Posts;
```

App Component Integration

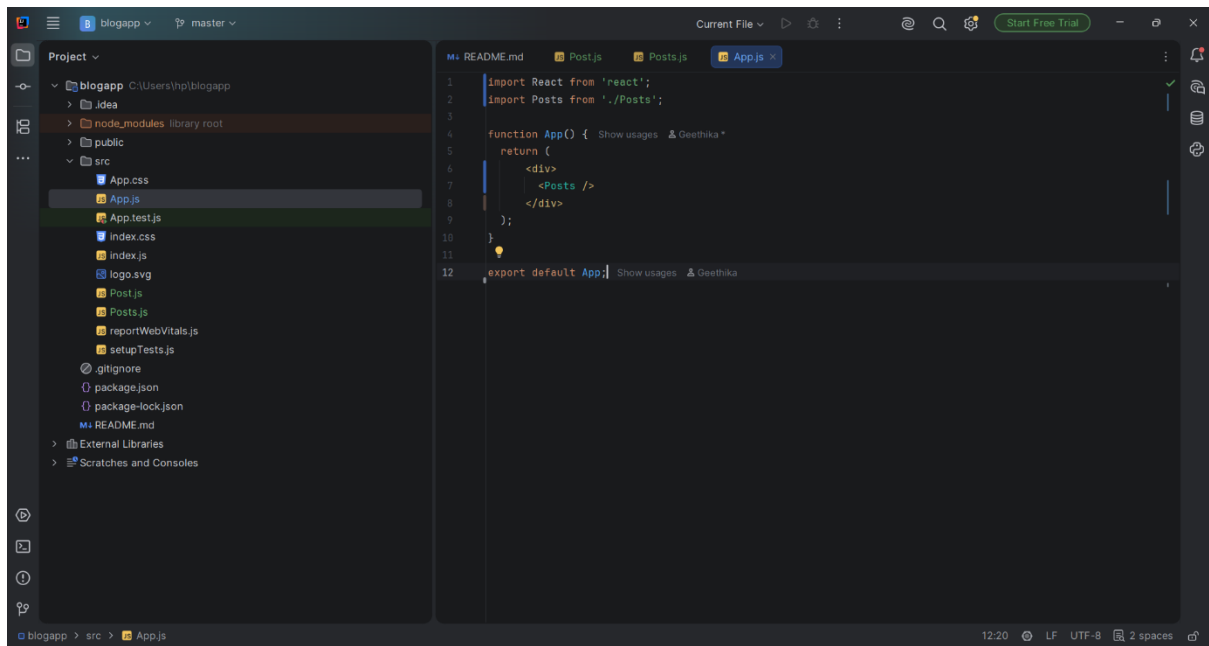

Development Server Execution

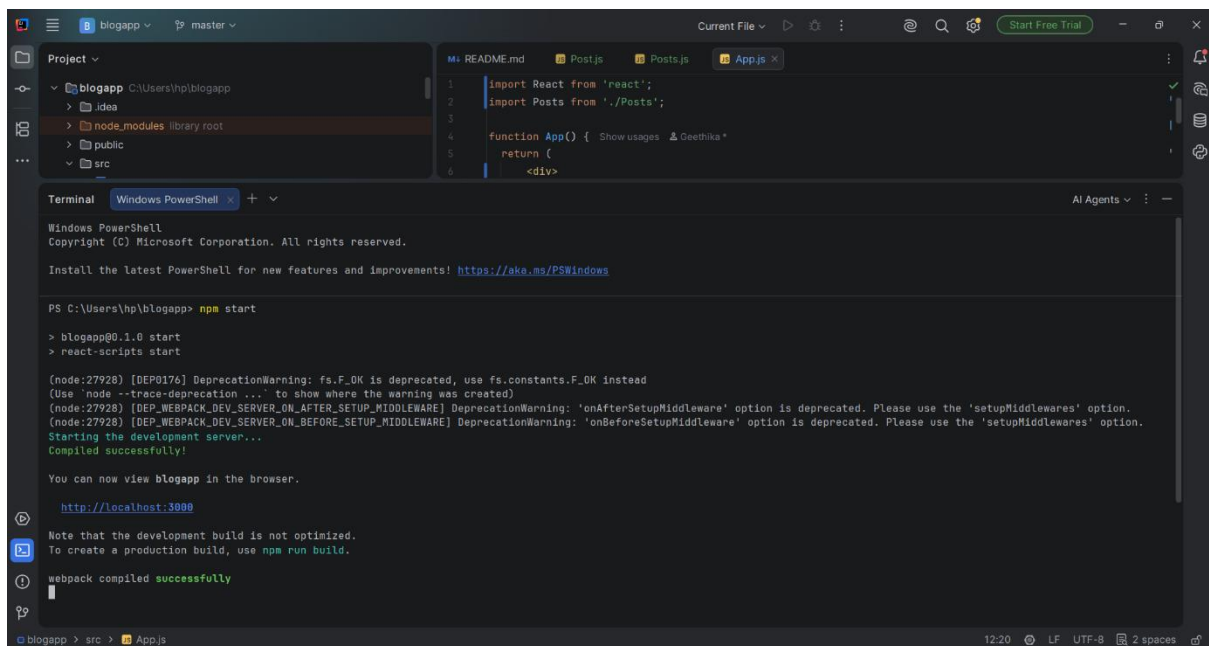

Browser Verification

