

# HTML <select> Tag

## Example

Create a drop-down list with four options:

```
<label for="cars">Choose a car:</label>

<select name="cars" id="cars">
  <option value="volvo">Volvo</option>
  <option value="saab">Saab</option>
  <option value="mercedes">Mercedes</option>
  <option value="audi">Audi</option>
</select>
```

Try it Yourself »

More "Try it Yourself" examples below.

## Definition and Usage

The `<select>` element is used to create a drop-down list.

The `<select>` element is most often used in a form, to collect user input.






The `name` attribute is needed to reference the form data after the form is submitted (if you omit the `name` attribute, no data from the drop-down list will be submitted).

The `id` attribute is needed to associate the drop-down list with a label.

The `<option>` tags inside the `<select>` element define the available options in the drop-down list.

**Tip:** Always add the `<label>` tag for best accessibility practices!

## Browser Support

Element					
<select>	Yes	Yes	Yes	Yes	Yes

## Attributes

Attribute	Value	Description
<u>autofocus</u>	autofocus	Specifies that the drop-down list should automatically get focus when the page loads
<u>disabled</u>	disabled	Specifies that a drop-down list should be disabled
<u>form</u>	<i>form_id</i>	Defines which form the drop-down list belongs to
<u>multiple</u>	multiple	Specifies that multiple options can be selected at once
<u>name</u>	<i>name</i>	Defines a name for the drop-down list
<u>required</u>	required	Specifies that the user is required to select a value before submitting the form
<u>size</u>	<i>number</i>	Defines the number of visible options in a drop-down list

## Global Attributes

The `<select>` tag also supports the [Global Attributes in HTML](#).

## Event Attributes

The `<select>` tag also supports the [Event Attributes in HTML](#).

## More Examples

### Example

Use `<select>` with `<optgroup>` tags:

```
<label for="cars">Choose a car:</label>
<select name="cars" id="cars">
  <optgroup label="Swedish Cars">
    <option value="volvo">Volvo</option>
    <option value="saab">Saab</option>
  </optgroup>
  <optgroup label="German Cars">
    <option value="mercedes">Mercedes</option>
    <option value="audi">Audi</option>
  </optgroup>
</select>
```

## Related Pages


HTML DOM reference: [Select Object](#)

CSS Tutorial: [Styling Forms](#)

## Default CSS Settings


None.

Visual Learner?

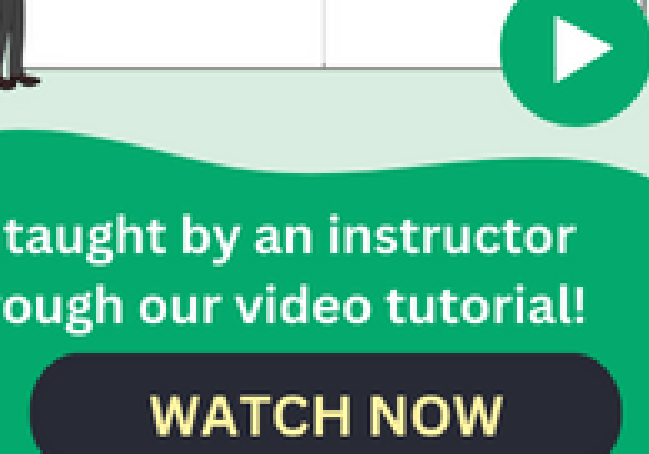


Be taught by an instructor through our video tutorial!


WATCH NOW



### COLOR PICKER

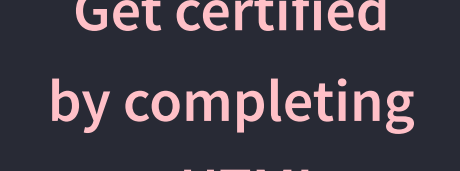


Get certified by completing a HTML course today!




Get started

Unlock POWERFUL features!

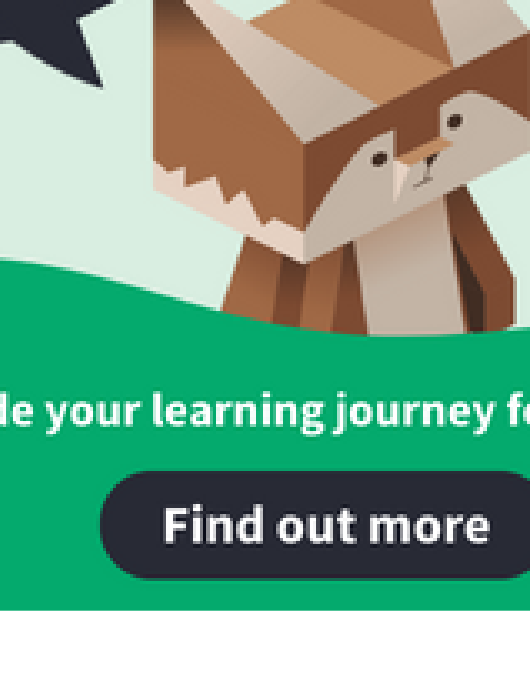

Upgrade your learning journey for only \$4.99

Find out more



- Report Error
- Spaces
- Upgrade
- Newsletter
- Get Certified

### Top Tutorials

- HTML Tutorial
- CSS Tutorial
- JavaScript Tutorial
- How To Tutorial
- SQL Tutorial
- Python Tutorial
- W3.CSS Tutorial
- Bootstrap Tutorial
- PHP Tutorial
- Java Tutorial
- C++ Tutorial
- jQuery Tutorial

### Top Examples

- HTML Examples
- CSS Examples
- JavaScript Examples
- How To Examples
- SQL Examples
- Python Examples
- W3.CSS Examples
- Bootstrap Examples
- PHP Examples
- Java Examples
- XML Examples
- jQuery Examples

### Top References

- HTML Reference
- CSS Reference
- JavaScript Reference
- SQL Reference
- Python Reference
- W3.CSS Reference
- Bootstrap Reference
- PHP Reference
- HTML Colors
- Java Reference
- Angular Reference
- jQuery Reference

### Get Certified

- HTML Certificate
- CSS Certificate
- JavaScript Certificate
- Front End Certificate
- SQL Certificate
- Python Certificate
- PHP Certificate
- jQuery Certificate
- Java Certificate
- C++ Certificate
- C# Certificate
- XML Certificate

