

CSS Selector Reference

[< Previous](#)[Next >](#)

CSS Selectors


In CSS, selectors are patterns used to select the element(s) you want to style.

Use our [CSS Selector Tester](#) to demonstrate the different selectors.

Selector	Example	Example description
<u>.class</u>	.intro	Selects all elements with class="intro"
<u>.class1.class2</u>	.name1.name2	Selects all elements with both <i>name1</i> and <i>name2</i> set within its class attribute
<u>.class1 .class2</u>	.name1 .name2	Selects all elements with <i>name2</i> that is a descendant of an element with <i>name1</i>
<u>#id</u>	#firstname	Selects the element with id="firstname"
<u>*</u>	*	Selects all elements
<u>element</u>	p	Selects all <p> elements
<u>element.class</u>	p.intro	Selects all <p> elements with class="intro"
<u>element,element</u>	div, p	Selects all <div> elements and all <p> elements
<u>element element</u>	div p	Selects all <p> elements inside <div> elements
<u>element>element</u>	div > p	Selects all <p> elements where the parent is a <div> element
<u>element+element</u>	div + p	Selects the first <p> element that is placed immediately after <div> elements
<u>element1~element2</u>	p ~ ul	Selects every element that is preceded by a <p> element
<u>[attribute]</u>	[target]	Selects all elements with a target attribute
<u>[attribute=value]</u>	[target=_blank]	Selects all elements with target="_blank"
<u>[attribute~=value]</u>	[title~=flower]	Selects all elements with a title attribute containing the word "flower"
<u>[attribute =value]</u>	[lang =en]	Selects all elements with a lang attribute value equal to "en" or starting with "en-"
<u>[attribute^=value]</u>	a[href^="https"]	Selects every <a> element whose href attribute value begins with "https"
<u>[attribute\$=value]</u>	a[href\$=".pdf"]	Selects every <a> element whose href attribute value ends with ".pdf"
<u>[attribute*=value]</u>	a[href*="w3schools"]	Selects every <a> element whose href attribute value contains the substring "w3schools"
<u>:active</u>	a:active	Selects the active link
<u>::after</u>	p::after	Insert something after the content of each <p> element
<u>::before</u>	p::before	Insert something before the content of each <p> element
<u>:checked</u>	input:checked	Selects every checked <input> element
<u>:default</u>	input:default	Selects the default <input> element
<u>:disabled</u>	input:disabled	Selects every disabled <input> element
<u>:empty</u>	p:empty	Selects every <p> element that has no children (including text nodes)
<u>:enabled</u>	input:enabled	Selects every enabled <input> element
<u>:first-child</u>	p:first-child	Selects every <p> element that is the first child of its parent
<u>::first-letter</u>	p::first-letter	Selects the first letter of every <p> element
<u>::first-line</u>	p::first-line	Selects the first line of every <p> element
<u>:first-of-type</u>	p:first-of-type	Selects every <p> element that is the first <p> element of its parent
<u>:focus</u>	input:focus	Selects the input element which has focus
<u>:fullscreen</u>	:fullscreen	Selects the element that is in full-screen mode
<u>:hover</u>	a:hover	Selects links on mouse over
<u>:in-range</u>	input:in-range	Selects input elements with a value within a specified range
<u>:indeterminate</u>	input:indeterminate	Selects input elements that are in an indeterminate state
<u>:invalid</u>	input:invalid	Selects all input elements with an invalid value
<u>:lang(<i>language</i>)</u>	p:lang(it)	Selects every <p> element with a lang attribute equal to "it" (Italian)
<u>:last-child</u>	p:last-child	Selects every <p> element that is the last child of its parent
<u>:last-of-type</u>	p:last-of-type	Selects every <p> element that is the last <p> element of its parent
<u>:link</u>	a:link	Selects all unvisited links
<u>::marker</u>	::marker	Selects the markers of list items
<u>:not(<i>selector</i>)</u>	:not(p)	Selects every element that is not a <p> element
<u>:nth-child(<i>n</i>)</u>	p:nth-child(2)	Selects every <p> element that is the second child of its parent
<u>:nth-last-child(<i>n</i>)</u>	p:nth-last-child(2)	Selects every <p> element that is the second child of its parent, counting from the last child
<u>:nth-last-of-type(<i>n</i>)</u>	p:nth-last-of-type(2)	Selects every <p> element that is the second <p> element of its parent, counting from the last child
<u>:nth-of-type(<i>n</i>)</u>	p:nth-of-type(2)	Selects every <p> element that is the second <p> element of its parent
<u>:only-of-type</u>	p:only-of-type	Selects every <p> element that is the only <p> element of its parent
<u>:only-child</u>	p:only-child	Selects every <p> element that is the only child of its parent
<u>:optional</u>	input:optional	Selects input elements with no "required" attribute
<u>:out-of-range</u>	input:out-of-range	Selects input elements with a value outside a specified range
<u>::placeholder</u>	input::placeholder	Selects input elements with the "placeholder" attribute specified
<u>:read-only</u>	input:read-only	Selects input elements with the "readonly" attribute specified
<u>:read-write</u>	input:read-write	Selects input elements with the "readonly" attribute NOT specified
<u>:required</u>	input:required	Selects input elements with the "required" attribute specified
<u>:root</u>	:root	Selects the document's root element
<u>::selection</u>	::selection	Selects the portion of an element that is selected by a user
<u>:target</u>	#news:target	Selects the current active #news element (clicked on a URL containing that anchor name)
<u>:valid</u>	input:valid	Selects all input elements with a valid value
<u>:visited</u>	a:visited	Selects all visited links

[< Previous](#)[Next >](#)

COLOR PICKER

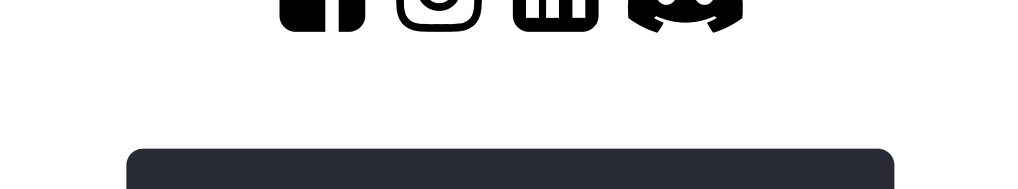

Get certified by completing a CSS course today!

W3schools

CERTIFIED

2022

Get started

Unlock POWERFUL features!

W3schools

Upgrade your learning journey for only \$4.99

Find out more

Report Error	
Spaces	
Upgrade	
Newsletter	
Get Certified	

Top Tutorials	Top References
HTML Tutorial	HTML Reference
CSS Tutorial	CSS Reference
JavaScript Tutorial	JavaScript Reference
How To Tutorial	SQL Reference
SQL Tutorial	Python Reference
Python Tutorial	W3.CSS Reference
W3.CSS Tutorial	Bootstrap Reference
Bootstrap Tutorial	PHP Reference
PHP Tutorial	HTML Colors
Java Tutorial	Java Reference
C++ Tutorial	Angular Reference
jQuery Tutorial	jQuery Reference

Top Examples	Get Certified
HTML Examples	HTML Certificate
CSS Examples	CSS Certificate
JavaScript Examples	JavaScript Certificate
How To Examples	Front End Certificate
SQL Examples	SQL Certificate
Python Examples	Python Certificate
W3.CSS Examples	PHP Certificate
Bootstrap Examples	jQuery Certificate
PHP Examples	Java Certificate
Java Examples	C++ Certificate
XML Examples	C# Certificate
jQuery Examples	XML Certificate

FORUM	ABOUT
-------	-------

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).