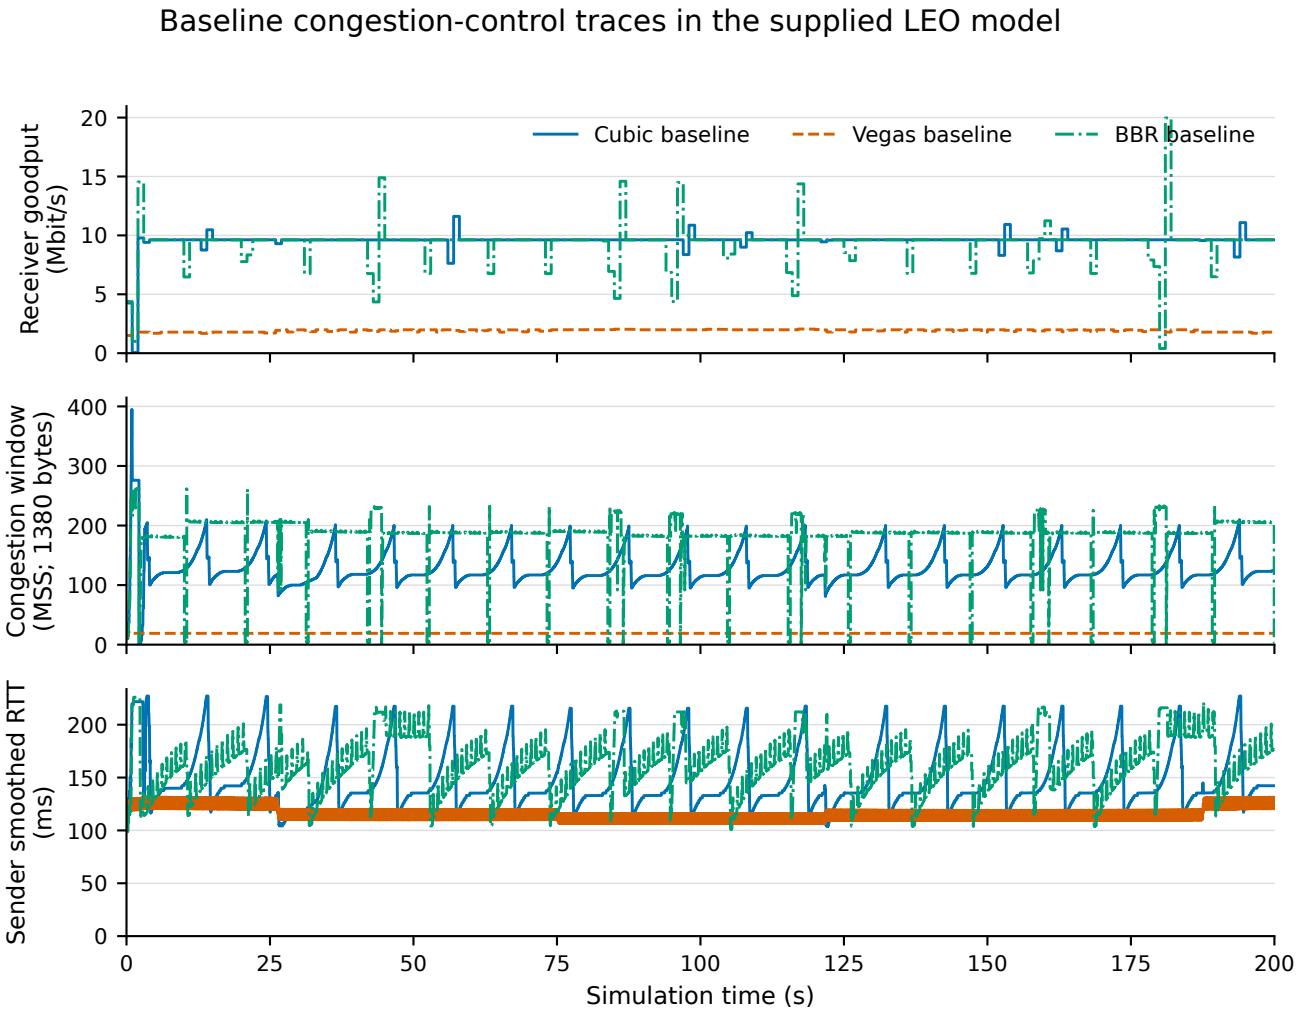


Initial controlled experiment, v4; one trace per algorithm. Receiver goodput uses 1 s bins.
In-order application release can temporarily exceed link rate when buffered data becomes deliverable.
RTT is the sender SRTT trace, not raw packet RTT or an isolated measurement of queueing delay.