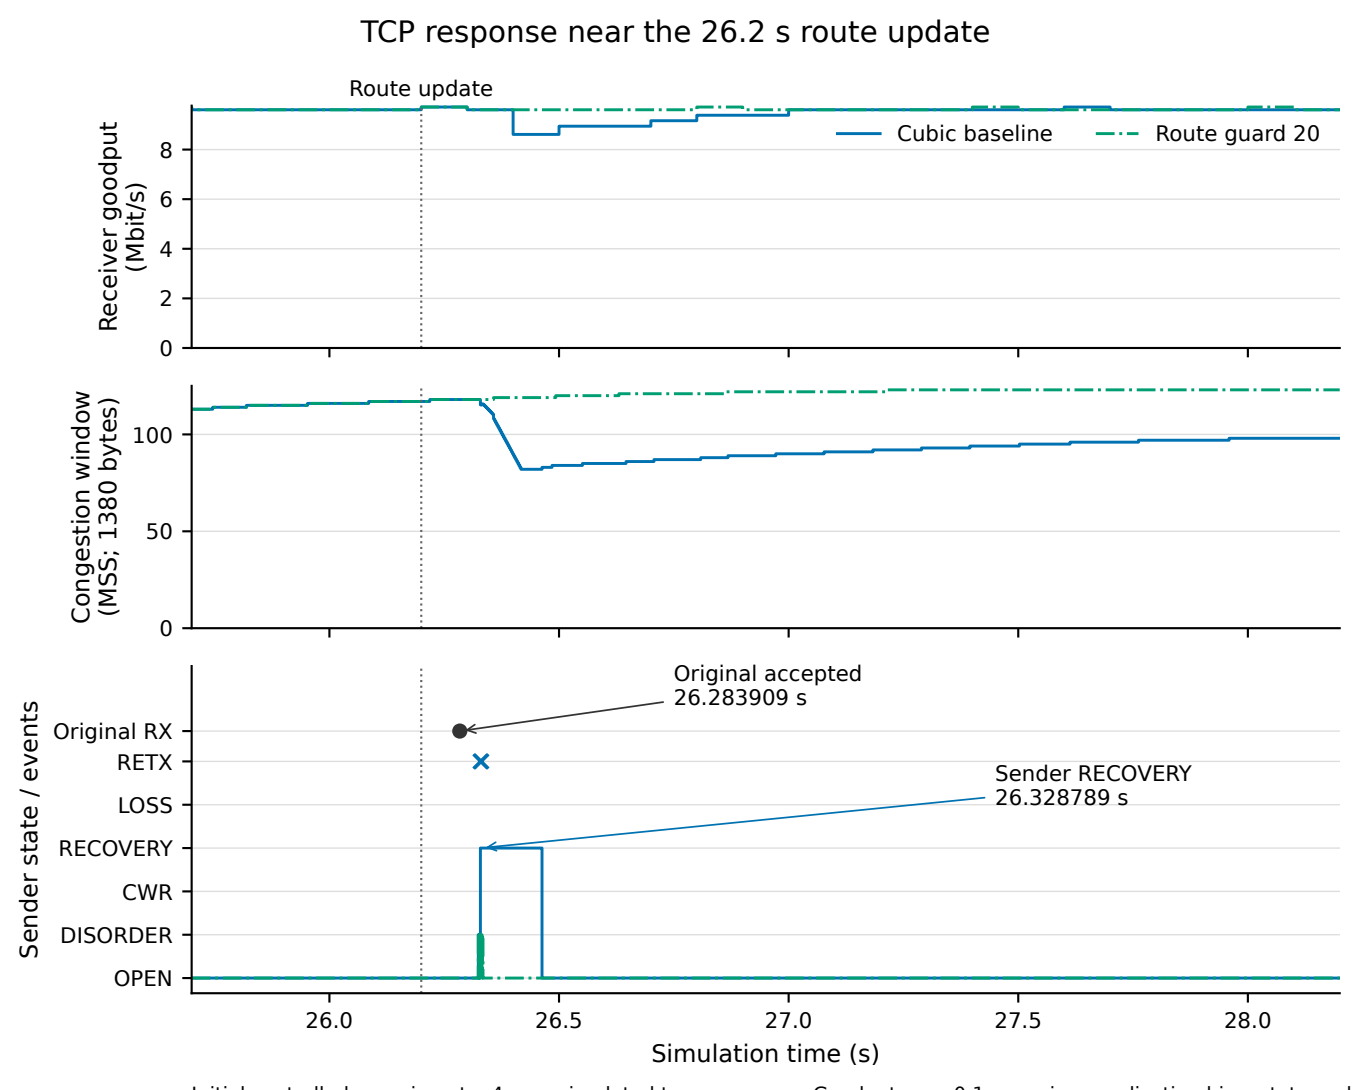

Initial controlled experiment, v4; one simulated trace per case. Goodput uses 0.1 s receiver application bins; state and transmission events use exact trace times.