
Dijkstra’s Algorithm: Worked Example

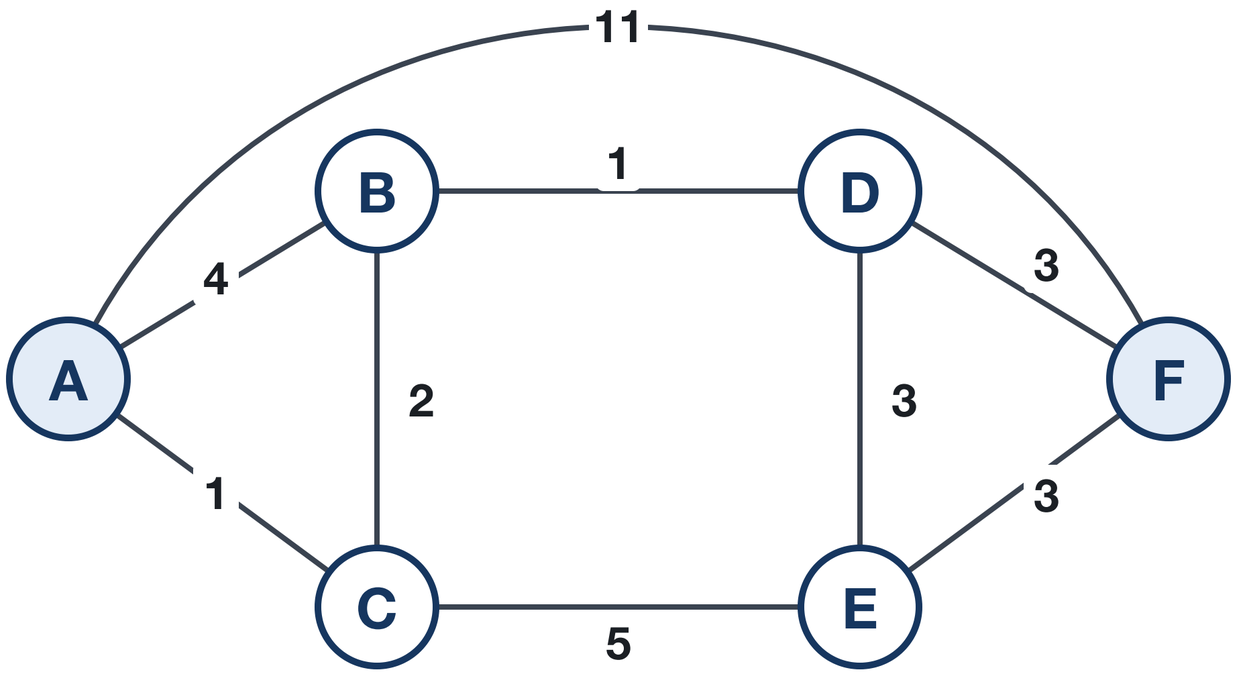

Find the cheapest path from A to F.
Edges are undirected; weights are costs.

1. Set `dist[A] = 0`; every other vertex `∞`.
2. Settle the unsettled vertex with the smallest `dist`.
3. Relax each edge `(u, v)`:
   `dist[v] = min(dist[v], dist[u] + w)`
4. Repeat until F is settled.

Shortest A → F cost: **7**