

Exp No: 9

Date:

HADOOP

SET UP A SINGLE HADOOP CLUSTER AND SHOW THE PROCESS USING WEB UI

AIM:

To set-up one node Hadoop cluster.

PROCEDURE:

1. System Update
2. Install Java
3. Add a dedicated Hadoop user
4. Install SSH and setup SSH certificates
5. Check if SSH works
6. Install Hadoop
7. Modify Hadoop config files
8. Format Hadoop filesystem
9. Start Hadoop
10. Check Hadoop through web UI
11. Stop Hadoop

THEORY

Hadoop is an Apache open source framework written in java that allows distributed processing of large datasets across clusters of computers using simple programming models. A Hadoop frame-worked application works in an environment that provides distributed storage and computation across clusters of computers. Hadoop is designed to scale up from a single server to thousands of machines, each offering local computation and storage.

HADOOP ARCHITECTURE

Hadoop framework includes following four modules:


Hadoop Common: These are Java libraries and utilities required by other Hadoop modules. These libraries provide filesystem and OS level abstractions and contain the necessary Java files and scripts required to start Hadoop.

Hadoop YARN: This is a framework for job scheduling and cluster resource management.

Hadoop Distributed File System (HDFS): A distributed file system that provides high-throughput access to application data.

Hadoop MapReduce: This is a YARN-based system for parallel processing of large data sets.

We can use following diagram to depict these four components available in Hadoop framework.

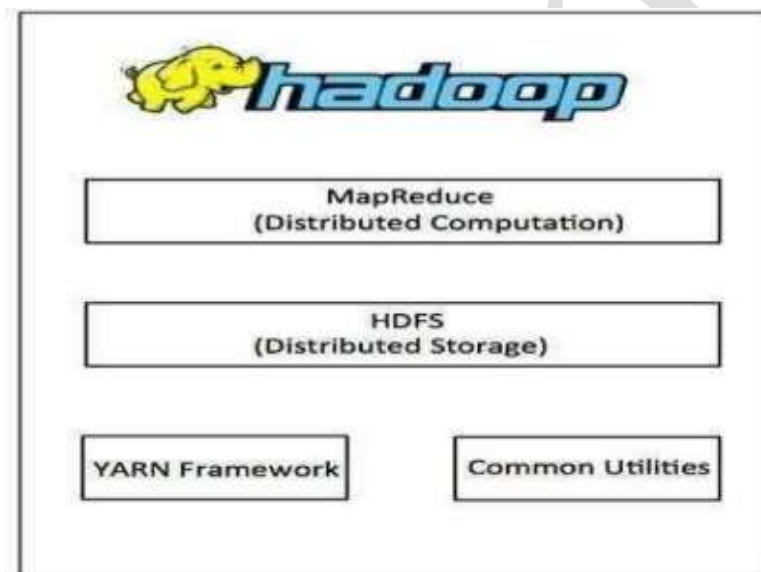

```
$ nano ~/.bashrc
```

```

hadoop@kali: ~
File Actions Edit View Help
GNU nano 7.2 _bashrc

# Alias definitions.
# You may want to put all your additions into a separate file like
# ~/.bash_aliases, instead of adding them here directly.
# See /usr/share/doc/bash-doc/examples in the bash-doc package.

if [ -f ~/.bash_aliases ]; then
    . ~/.bash_aliases
fi

# Enable programmable completion features (you don't need to enable
# this, if it's already enabled in /etc/bash.bashrc and /etc/profile
# sources /etc/bash.bashrc).
if ! shopt -oq posix; then
    if [ -f /usr/share/bash-completion/bash_completion ]; then
        . /usr/share/bash-completion/bash_completion
    elif [ -f /etc/bash_completion ]; then
        . /etc/bash_completion
    fi
fi

export JAVA_HOME=/usr/lib/jvm/jdk1.8.0_202
export PATH=$PATH:/usr/local/bin
export HADOOP_HOME=/usr/local/hadoop
export PATH=$PATH:$HADOOP_HOME/bin
export PATH=$PATH:$HADOOP_HOME/sbin
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export HADOOP_CONF_DIR=$HADOOP_HOME/etc/hadoop
export HADOOP_STREAMING=$HADOOP_HOME/share/hadoop/tools/lib/hadoop-streaming-3.4.0.jar
export HADOOP_LOG_DIR=$HADOOP_HOME/logs
export DFS_COMMAND_TYPE=ssh
export HADOOP_COMMON_LIB_NATIVE_DIR=/usr/local/hadoop/lib/native
export HADOOP_OPTS="-Djava.library.path=/usr/local/hadoop/lib/native"

```

[illegible]

```
$nano $HADOOP_HOME/etc/hadoop/core-site.xml
```

```
File Actions Edit View Help
GNU nano 7.2 /home/hac
<?xml version="1.0" encoding="UTF-8"?>
<?xml-stylesheet type="text/xsl" href="configuration.xsl"?>
<!--
Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

    http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License. See accompanying LICENSE file.
-->

<!-- Put site-specific property overrides in this file. -->

<configuration>
<property>
  <name>fs.defaultFS</name>
  <value>hdfs://localhost:9000</value> </property>
</property>
<name>hadoop.proxyuser.dataflair.groups</name> <value>*</value>
</property>
<property>
<name>hadoop.proxyuser.dataflair.hosts</name> <value>*</value>
</property>
<property>
<name>hadoop.proxyuser.server.hosts</name> <value>*</value>
</property>
<property>
<name>hadoop.proxyuser.server.groups</name> <value>*</value>
</property>
</configuration>
```

\$nano \$HADOOP_HOME/etc/hadoop/hdfs-site.xml

```
File Actions Edit View Help
GNU nano 7.2 /home/hadoop/hadoop/etc/hadoop
<?xml version="1.0" encoding="UTF-8"?>
<?xml-stylesheet type="text/xsl" href="configuration.xsl"?>
<!--
Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

    http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License. See accompanying LICENSE file.
-->

<!-- Put site-specific property overrides in this file. -->

<configuration>
  <property>
    <name>dfs.replication</name>
    <value>1</value>
  </property>
  <property>
    <name>dfs.name.dir</name>
    <value>file:///home/hadoop/hadoopdata/hdfs/namenode</value>
  </property>
  <property>
    <name>dfs.datanode.data.dir</name>
    <value>file:///home/hadoop/hadoopdata/hdfs/datanode</value>
  </property>
</configuration>
```

\$nano \$HADOOP_HOME/etc/hadoop/mapred-site.xml

```
File Actions Edit View Help
GNU nano 7.2 /home/hadoop/hadoop/etc/hadoop/mapre

<?xml version="1.0"?>
<?xml-stylesheet type="text/xsl" href="configuration.xsl"?>
<!--
Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

    http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License. See accompanying LICENSE file.
-->
<!-- Put site-specific property overrides in this file. -->
<configuration>
  <property>
    <name>mapreduce.framework.name</name>    <value>yarn</value>
  </property>
  <property>
    <name>mapreduce.application.classpath</name>
    <value>${HADOOP_MAPRED_HOME}/share/hadoop/mapreduce/*:${HADOOP_MAPRED_HOME}/share/hadoop/mapreduce/lib/*</value>
  </property>
</configuration>
```

\$nano \$HADOOP_HOME/etc/hadoop/yarn-site.xml

```
File Actions Edit View Help
GNU nano 7.2 /home/hadoop/hadoop/etc/hadoop/yarn-site.xml

<?xml version="1.0"?>
<!--
Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

    http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License. See accompanying LICENSE file.
-->
<configuration>
  <!-- Site specific YARN configuration properties -->
  <property>
    <name>yarn.nodemanager.aux-services</name>
    <value>mapreduce_shuffle</value>
  </property>
  <property>
    <name>yarn.nodemanager.env-whitelist</name>
    <value>JAVA_HOME,HADOOP_COMMON_HOME,HADOOP_HDFS_HOME,HADOOP_CONF_DIR,CLASSPATH_PREPENDED_DISTCACHE,HADOOP_YARN_HOME,HADOOP_MAPRED_HOME</value>
  </property>
</configuration>
```

\$ start-all.sh


```
File Actions Edit View Help

[hadoop@kali:~]$ start-all.sh
WARNING: Attempting to start all Apache Hadoop daemons as hadoop in 10 seconds.
WARNING: This is not a recommended production deployment configuration.
WARNING: Use CTRL-C to abort.
Starting namenodes on [localhost]
Starting datanodes
Starting secondary namenodes [kali]
Picked up _JAVA_OPTIONS: -Dont.useSystemAAFontSettings-on -Dswing.text=true
2024-09-11 04:59:16,429 WARN util.NativeCodeLoader: Unable to load native-hadoop library for your platform... using builtin-java classes where applicable
Starting resourcemanager
Starting node managers
```


\$ jps

```
[hadoop@kali:~]$ jps
Picked up _JAVA_OPTIONS: -Dswt.useSystemAAFontSettings=on -Dswing.aatext=true
14436 ModeManager
16772 Jps
13838 SecondaryNameNode
14311 ResourceManager
15597 DataNode
13471 NameNode
[hadoop@kali:~]$
```

localhost:9870

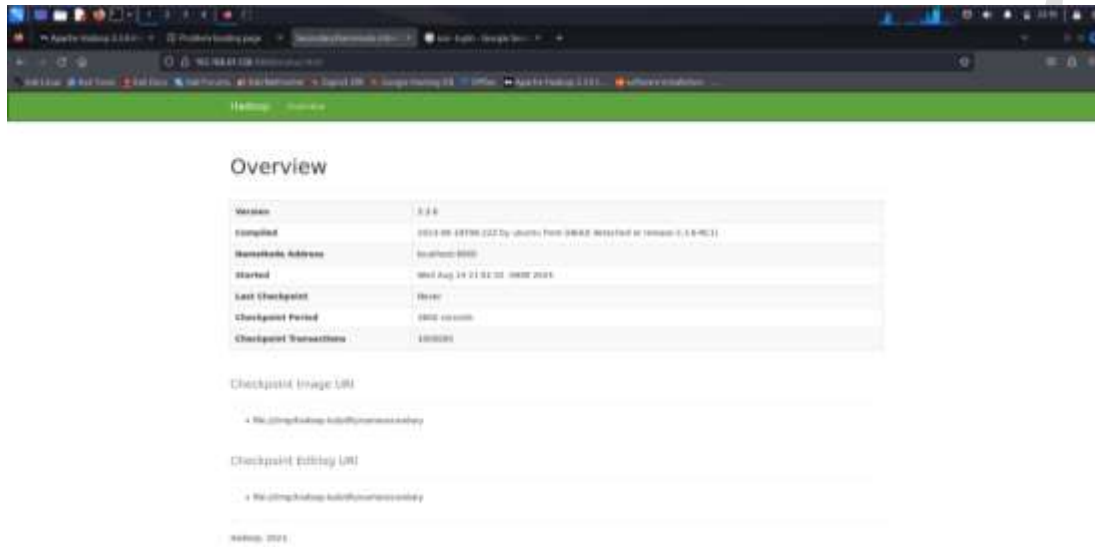

localhost:8088

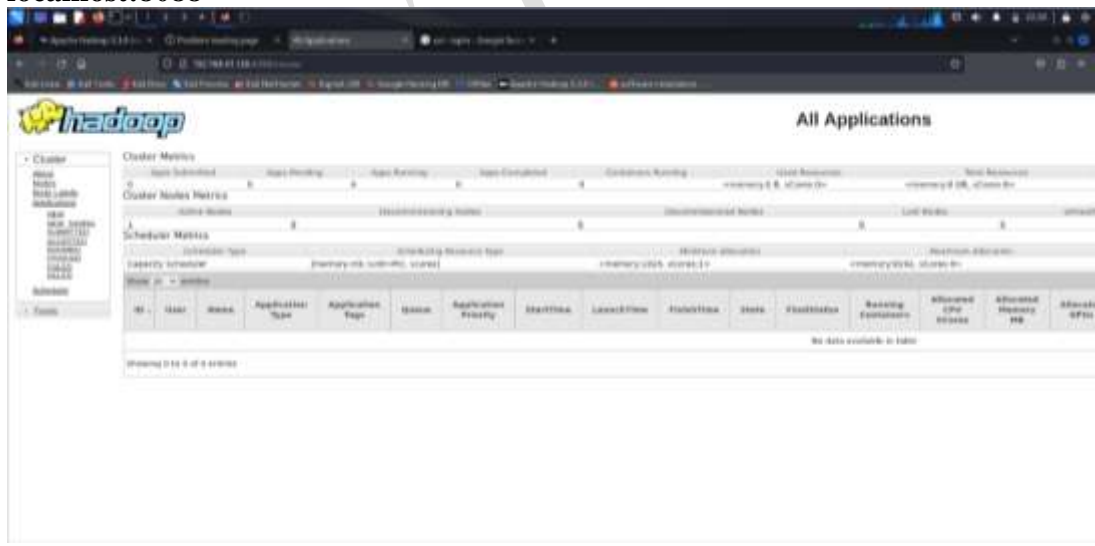

RESULT:

Thus, Hadoop has been successfully installed.