

# **Acoustic classification of Australian frogs for ecosystem surveys**

A THESIS SUBMITTED TO  
THE SCIENCE AND ENGINEERING FACULTY  
OF QUEENSLAND UNIVERSITY OF TECHNOLOGY  
IN FULFILMENT OF THE REQUIREMENTS FOR THE DEGREE OF  
DOCTOR OF PHILOSOPHY

**Jie Xie**

School of Electrical Engineering and Computer Science  
Science and Engineering Faculty  
Queensland University of Technology

July 2016



### **Copyright in Relation to This Thesis**

© Copyright 2016 by Jie Xie. All rights reserved.

### **Statement of Original Authorship**

The work contained in this thesis has not been previously submitted to meet requirements for an award at this or any other higher education institution. To the best of my knowledge and belief, the thesis contains no material previously published or written by another person except where due reference is made.

**Signature:**

**Date:**



*To my family*



# Abstract

---

Frogs play an important role in the Earth’s ecosystem, but the decline of their population has been spotted from locations around the world. Monitoring frog activity can assist conservation efforts, and improve our understanding of their interactions with the environment and other organisms. Traditional observation methods require ecologists and volunteers to visit the field, which limit the scale for acoustic data collection. Recent advances in acoustic sensors provide a novel method to survey vocalising animals such as frogs. Once sensors are successfully installed in the field, acoustic data can be automatically collected at large spatial and temporal scales. For each acoustic sensor, several gigabytes of compressed audio data can be generated per day, and large volumes of raw acoustic data have been collected. Enabling automated species identification in acoustic data has become very important to gain insights about frogs and the environment. Most previous studies on machine learning for frog calls often have two limitations: (1) frog recordings often have a higher SNR ( $\geq 15dB$ ); (2) each individual recording contains only a frog species. However, most environmental recordings typically have a low SNR and contain multiple simultaneously vocalising frogs. This thesis aims to address those two limitations, and has the following contributions.

- (1) Develop a fused feature set from temporal, perceptual, and cepstral domains for improving the performance of state-of-the-art frog call classification methods using high SNR recordings (Chapter 3).

Various acoustic features have been developed to classify frog calls, and most features can be categorised into three types: temporal feature, perceptual feature, and cepstral feature. Most previous studies only use features from one domain or two domains, which cannot effectively classify those frog species that share similar acoustic attributes in those one or two domains. In this thesis, a novel fusion of temporal, perceptual, and cepstral features is proposed, so that those frog species share similar acoustic attributes in one or

two domains can be successfully classified. An intensive analysis shows that our fused feature set consistently outperforms the state-of-the-art classification system using high SNR recordings.

- (2) Propose a novel cepstral feature based on adaptive frequency scaled WPD to classify frog calls using both low and high SNR recordings (Chapter 4).

Existing approaches have widely used cepstral features (MFCCs) for frog call classification, and have demonstrated high performance. However, cepstral features are also found to be very sensitive to the background noise. This thesis proposes a novel cepstral feature using adaptive frequency scaled WPD, and the scale is adaptively generated by applying k-means clustering to dominant frequencies of all the frog species to be classified. Compared to Mel-scale, the adaptive scale can better reflect the frequency distribution of those frog species to be classified. Therefore, cepstral features calculated from adaptive frequency scaled WPD can capture more frequency information than Mel-scale. Experimental results demonstrate that the proposed cepstral feature outperforms existing cepstral features that have been used for animal call classification.

- (3) Design a novel MIML framework to classify multiple simultaneously vocalising frog species in low SNR recordings (Chapter 5).

One individual recording contain only one frog species is an assumption that widely existed in the previous studies, but most recordings collected using acoustic sensors contain multiple frog species. This thesis proposes to use MIML learning to classify multiple simultaneously vocalising frog species with AED. A novel frog syllable segmentation method using AED is proposed with limited annotated frog recordings. Compared to other AED methods, our proposed AED can achieve a better syllable segmentation results. With segmented syllables, frog call classification is realised using three MIML classifiers and low-level features extracted from segmented syllables. Experimental results show that the proposed MIML classification framework can achieve a better performance compared to the SISL classification.

- (4) Design a novel ML framework to classify multiple simultaneously vocalising frog species in low SNR recordings (Chapter 6).

The weakness of the MIML classification framework is that the classification performance is highly affected by AED results. One solution is to prepare large volumes of

annotated acoustic data and apply supervised learning algorithms for improving segmentation results. Another is to used a different framework without the need of syllable segmentation. This thesis examines the latter option and proposes a ML classification framework to classify multiple simultaneously vocalising frog species. A novel feature set using LPCs and multi-stage AWSCCs is proposed for the ML classification. Experimental results show that ML classification results outperform MIML classification results.

- (5) Apply the designed ML framework to sampled frog recordings over three months. 7).

Both frog calling activity and species richness are estimated. The correlations between frog calling activity/species richness and mean temperature/rainfall are reflected. Experimental results is in accordance with previous studies. Meanwhile, frog species richness of different sites is compared.



# **Keywords**

---

Bioacoustics

Soundscape ecology

Environmental audio data

Frog call classification

Acoustic feature

Syllable segmentation

Wavelet packet decomposition

Multiple-instance multiple-label learning

Multiple-label learning



# Acknowledgments

---

First, I would like to express my sincere gratitude and thanks to Dr. Jinglan Zhang (principal supervisor), for giving me an opportunity to study in Australia. During the entirety of this PhD study, I have learnt so much from her about having passion for work, combined with high motivation, which will benefit me throughout my life. I would also like to express my gratitude to Prof. Paul Roe (associate supervisor), for his consistent instructions and supports through the last three years.

I would also like to thank Dr. Michael Towsey (associate supervisor) for his provision of consistent guidance, discussions, and encouragement during my PhD study. Michael's attitude towards scientific research keeps motivating me go deeper into research.

I want to thank Prof. Vinod Chandran (associate supervisor) for his support in writing my confirmation report and this thesis. Vinod's strong background knowledge in signal processing greatly helps me improve my understanding of this research.

I would also like to express my gratitude to my family, especially my grandparents, parents and my wife. They have always supported my overseas study. Without their support, I could not give my full attention to PhD study and the completion of this thesis. My sincere thanks also go to all my friends for their love, attention and support to my PhD study.

Finally, I extend my thanks to the China Scholarship Council (CSC), Queensland University of Technology and the Wet Tropics Management Authority for their financial support.



# Table of Contents

---

<b>Abstract</b>	v
<b>Keywords</b>	ix
<b>Acknowledgments</b>	xi
<b>List of Figures</b>	xx
<b>List of Tables</b>	xxii
<b>Abbreviations</b>	
<b>1 Introduction</b>	1
1.1 Motivation and Overview . . . . .	1
1.2 Scope of PhD . . . . .	2
1.3 Thesis Structure . . . . .	3
1.4 Original contributions . . . . .	5
1.5 Publications . . . . .	7
<b>2 An overview of frog call classification</b>	11
2.1 Overview . . . . .	11
2.2 Signal pre-processing . . . . .	11
2.2.1 Signal processing . . . . .	12
2.2.2 Noise reduction . . . . .	13

2.2.3	Syllable segmentation . . . . .	13
2.3	Acoustic features for frog call classification . . . . .	14
2.3.1	Temporal and perceptual features for frog call classification . . . . .	14
2.3.2	Time-frequency features for frog call classification . . . . .	15
2.3.3	Cepstral features for frog call classification . . . . .	16
2.3.4	Other features for frog call classification . . . . .	16
2.4	Classifiers . . . . .	16
2.5	MIML or ML learning for bioacoustic classification . . . . .	17
2.6	Experiment results with state-of-the-art methods . . . . .	19
2.6.1	Evaluation criteria . . . . .	19
2.6.2	Previous experimental results . . . . .	19
2.7	Research gap in current literature . . . . .	21
2.7.1	Database . . . . .	21
2.7.2	Signal pre-processing . . . . .	21
2.7.3	Acoustic features . . . . .	22
2.7.4	Classifiers . . . . .	22
2.8	Summary . . . . .	23
<b>3</b>	<b>Frog call classification based on feature fusion and machine learning algorithms</b>	<b>25</b>
3.1	Overview . . . . .	25
3.2	Architecture of the classification system for frog calls . . . . .	26
3.2.1	Data description . . . . .	26
3.2.2	Syllable segmentation based on an adaptive end point detection . . . . .	26
3.2.3	Pre-processing . . . . .	28
3.2.4	Feature extraction . . . . .	31
3.2.5	Classifier description . . . . .	35
3.3	Experiment results . . . . .	38
3.3.1	Effects of different feature sets . . . . .	39

3.3.2	Effects of different machine learning techniques . . . . .	39
3.3.3	Effects of different window size for MFCCs and perceptual features . . . . .	40
3.3.4	Effects of noise . . . . .	40
3.4	Discussion . . . . .	42
3.5	Summary and limitations . . . . .	42
<b>4</b>	<b>Adaptive frequency scaled wavelet packet decomposition for frog call classification</b>	<b>45</b>
4.1	Overview . . . . .	45
4.2	Method . . . . .	46
4.2.1	Sound recording and pre-processing . . . . .	46
4.2.2	Spectrogram analysis for validation set . . . . .	47
4.2.3	Syllable segmentation . . . . .	48
4.2.4	Spectral peak track extraction . . . . .	49
4.2.5	Syllable SPT features . . . . .	52
4.2.6	Wavelet packet decomposition . . . . .	53
4.2.7	WPD based on an adaptive frequency scale . . . . .	54
4.2.8	Feature extraction based on adaptive frequency scaled WPD . . . . .	54
4.2.9	Classification . . . . .	57
4.3	Experiment result and discussion . . . . .	58
4.3.1	Parameter tuning . . . . .	58
4.3.2	Feature evaluation . . . . .	59
4.3.3	Comparison between different feature sets . . . . .	59
4.3.4	Comparison under different SNRs . . . . .	63
4.3.5	Feature evaluation using the real world recordings . . . . .	63
4.4	Summary and limitations . . . . .	64
<b>5</b>	<b>Multiple-instance multiple-label learning for the classification of frog calls with acoustic event detection</b>	<b>67</b>

5.1	Overview . . . . .	67
5.2	Materials and methods . . . . .	68
5.2.1	Materials . . . . .	68
5.2.2	Signal processing . . . . .	69
5.2.3	Acoustic event detection for syllable segmentation . . . . .	69
5.2.4	Feature extraction . . . . .	72
5.2.5	Multiple-instance multiple-label classifiers . . . . .	73
5.3	Experiment results . . . . .	73
5.3.1	Parameter tuning . . . . .	73
5.3.2	Classification . . . . .	74
5.4	Discussion . . . . .	76
5.5	Summary and limitations . . . . .	76
<b>6</b>	<b>Estimating frog calling activity and species richness based on acoustic event detection and multi-label learning</b>	<b>79</b>
6.1	Overview . . . . .	79
6.2	Acquisition of frog call recordings . . . . .	80
6.3	Experiment setup . . . . .	81
6.4	Frog calling activity . . . . .	81
6.4.1	Frog calling activity of each 10-second recording . . . . .	81
6.4.2	Long-term monitoring of frog calling activity . . . . .	81
6.5	Frog species richness . . . . .	83
6.5.1	Multi-label classification for species richness estimation . . . . .	84
6.5.2	Frog species richness analysis . . . . .	85
6.5.3	Comparison with MIML . . . . .	86
6.6	Statistical analysis . . . . .	87
6.7	Summary and limitations . . . . .	88

<b>7</b>	<b>Acoustic monitoring of frog calling activity and species richness over long term</b>	<b>89</b>
<b>8</b>	<b>Conclusion and future work</b>	<b>91</b>
8.1	Summary of contributions . . . . .	91
8.2	Limitations and future work . . . . .	93
<b>A</b>	<b>Waveform, spectrogram and SNR of frog species from David Stewart's CD</b>	<b>95</b>
<b>B</b>	<b>Waveform, spectrogram and SNR of six frog species from JCU recordings</b>	<b>97</b>
<b>References</b>		<b>107</b>



# List of Figures

---

1.1	Photos of frogs . . . . .	1
1.2	An example of collected recording . . . . .	3
1.3	Structure of the four main chapters of this thesis . . . . .	4
2.1	Flowchart of frog call classification: pre-processing, feature extraction, and classification. . . . .	12
2.2	Waveform, spectrum and spectrogram of one frog syllable . . . . .	13
3.1	Flowchart of frog call classification system using enhanced features . . . . .	26
3.2	Härmä's segmentation algorithm . . . . .	28
3.3	Syllable segmentation results . . . . .	29
3.4	Distribution of syllable number for all frog species . . . . .	30
3.5	Classification results with different feature sets using the window size of 64 samples . . . . .	39
3.6	Results of different classifiers . . . . .	40
3.7	Classification results of MFCCs with different window sizes . . . . .	41
3.8	Classification results of TemPer with different window sizes . . . . .	41
3.9	Sensitivity for different features for different levels of noise contamination . . . . .	42
4.1	Block diagram of the frog call classification system for wavelet-based feature extraction . . . . .	46
4.2	Distribution of number of syllables for all frog species . . . . .	49
4.3	Segmentation results based on bandpass filtering . . . . .	50

4.4	Spectral peak track extraction results . . . . .	52
4.5	Adaptive wavelet packet tree for classifying twenty frog species . . . . .	56
4.6	Description of three feature extraction methods including MFCCs, MWSCCs, and different statistical types of AWSCCs. . . . .	56
4.7	The feature vectors for 31 syllables of the single species, <i>Assa darlingtoni</i> . . .	60
4.8	Wavelet packet tree based on adaptive frequency scale for classifying ten and fifteen frog species. . . . .	62
4.9	Mel-scaled wavelet packet tree for frog call classification. . . . .	63
4.10	Sensitivity of five features for different levels of noise contamination. . . . .	64
5.1	Flowchart of a frog call classification system using MIML learning . . . . .	68
5.2	Acoustic event detection results before (Left) and after (Right) event filtering based on dominant frequency . . . . .	72
5.3	Acoustic event detection results after region growing . . . . .	72
6.1	Flowchart of a frog call classification system using AED and ML learning . . .	80
6.2	AED for frog abundance monitoring using different methods . . . . .	82
6.3	Frog calling activity detection of different sites . . . . .	83
6.4	Frog species richness distribution of three selected sites . . . . .	86
6.5	Averaged frog species richness of different sites. . . . .	87

# List of Tables

---

2.1	Summary of related work . . . . .	14
2.2	A brief summary of classifiers used in previous studies. . . . .	17
2.3	Overview of frog call classification performance . . . . .	20
3.1	Summary of scientific name, common name, and corresponding code . . . . .	27
3.2	Comparison with previous used feature sets . . . . .	43
4.1	Parameters of 18 frog species averaged of three randomly selected syllable samples in the commercial recording . . . . .	47
4.2	Parameters of eight frog species obtained by averaging three randomly selected syllable samples from recordings of James Cook University . . . . .	48
4.3	Parameters used for spectral peak extraction . . . . .	51
4.4	Parameter setting for calculating spectral peak track. . . . .	58
4.5	Weighted classification accuracy (mean and standard deviation) comparison for five feature sets with two classifiers. . . . .	59
4.6	Classification accuracy of five features for the classification of twenty-four frog species using the SVM classifier . . . . .	61
4.7	Paired statistical analysis of the results in Table 4.6 . . . . .	62
4.8	Classification accuracy (%) for classifying different number of frog species with four feature sets. . . . .	63
4.9	Classification accuracy using the JCU recordings. . . . .	64
5.1	Acoustic parameters of eight frog species averaged for ten randomly selected syllables . . . . .	69

5.2	Accuracy measure for MIML classifiers with different feature sets . . . . .	75
5.3	Example predictions with MIML-RBF. . . . .	76
6.1	Classification results based on four feature sets and four ML learning algorithms. .	86
A.1	Waveform, spectrogram, and SNR of CD . . . . .	95
B.1	Waveform, spectrogram, and SNR of JCU recordings . . . . .	97

## List of Abbreviations

---

<b>SNR</b>	signal-to-noise ratio
<b>DFT</b>	discrete Fourier transform
<b>DCT</b>	discrete cosine transform
<b>STFT</b>	short-time Fourier transform
<b>DWT</b>	discrete wavelet transform
<b>LPCs</b>	linear predictive coefficients
<b>MFCCs</b>	Mel-frequency cepstral coefficients
<b>MWSCCs</b>	Mel-frequency scaled wavelet packet decomposition sub-band cepstral coefficients
<b>AWSCCs</b>	adaptive-frequency scaled wavelet packet decomposition sub-band cepstral coefficients
<b>LDA</b>	linear discriminant analysis
<b>DT</b>	decision tree
<b>NN</b>	neural network
<b>kNN</b>	k-nearest neighbour
<b>SVM</b>	support vector machine
<b>MLP</b>	multiple layer perceptron
<b>RBF</b>	radial basis function
<b>RF</b>	random forest

---

<b>AED</b>	acoustic event detection
<b>WPD</b>	wavelet packet decomposition
<b>MIML</b>	multiple-instance multiple-label
<b>ML</b>	multiple-label

# Chapter 1

## Introduction

---

### 1.1 Motivation and Overview

Over the last two decades, rapid decline in frog populations, which is regarded as one of the most critical danger to the global biodiversity, has been spotted worldwide. The causes for this decline are many, but an emerging disease called *chytridiomycosis* [Mutschmann, 2015] and global climate change [Carey and Alexander, 2003] are thought as the biggest threats. On the one hand frog populations are declining rapidly, but on the other, frogs are greatly important to the Earth's ecosystem. For instance, frogs are an integral part of the food web, and are often considered as a valuable indicator for their sensitivity to the environmental change [Böll et al., 2013]. Therefore, it is becoming ever more important to develop better tools for frog monitoring. In the field, frogs are often much easier to be heard than seen (Figure 1.1).



**Figure 1.1:** Photos of frogs to indicate that frogs are difficult to be found in the field

Also frog vocalisations are often employed for most communications, which offer a possible

way to study and evaluate frogs by detecting species-specific calls [Dorcas et al., 2009]. Traditional methods require ecologists and volunteers to physically visit sites for acoustic data analysis, which are costly and time-consuming. Although traditional methods can provide an accurate measure of daytime species and richness, the scale limitation in both spatial and temporal domains is unavoidable. To address this limitation, recent advances in acoustic sensors provide a way to automatically survey vocal animals (such as frogs). Deploying acoustic sensors in the field, frog vocalisations can then be automatically collected. Compared to the manual point-counting method, sensors can greatly extend the survey into larger spatial and temporal scales, and generate large volumes of acoustic data that needs to be analysed. Consequently, enabling automatic species identification in acoustic data has become increasingly important.


To build an accurate and robust frog call classification system for environmental recordings, two major challenges must be faced:

1. Compared to commercial recordings which are collected in constrained environment with a directional microphone, environmental recordings tend to be noisy. Very often the desired signal (frog call) is weak, and there are other overlapping signals such as bird calls and insect calls over frog calls. Therefore, features used for classifying frogs in environment recordings must have a good anti-noise ability.
2. Most environmental recordings contain multiple frog species in an individual recording (Figure. 1.2), which is different from recordings used in previous studies (one species per recording). The classification framework used for classifying frog species in environmental recordings must be able to predict multiple labels for one individual recording.

## 1.2 Scope of PhD

The broad scope of this PhD research is to address the aforementioned two major challenges, which could pave a way to successful classification of frog species in environmental recordings. The outcome of the research is of benefit to many applications of bioacoustics.

In recent times, various frog call classification methods have been proposed, but the recordings used often have a high SNR and contain only one frog species. Our first experiment aims to propose a fused feature set to further improve the performance of classifying frog species

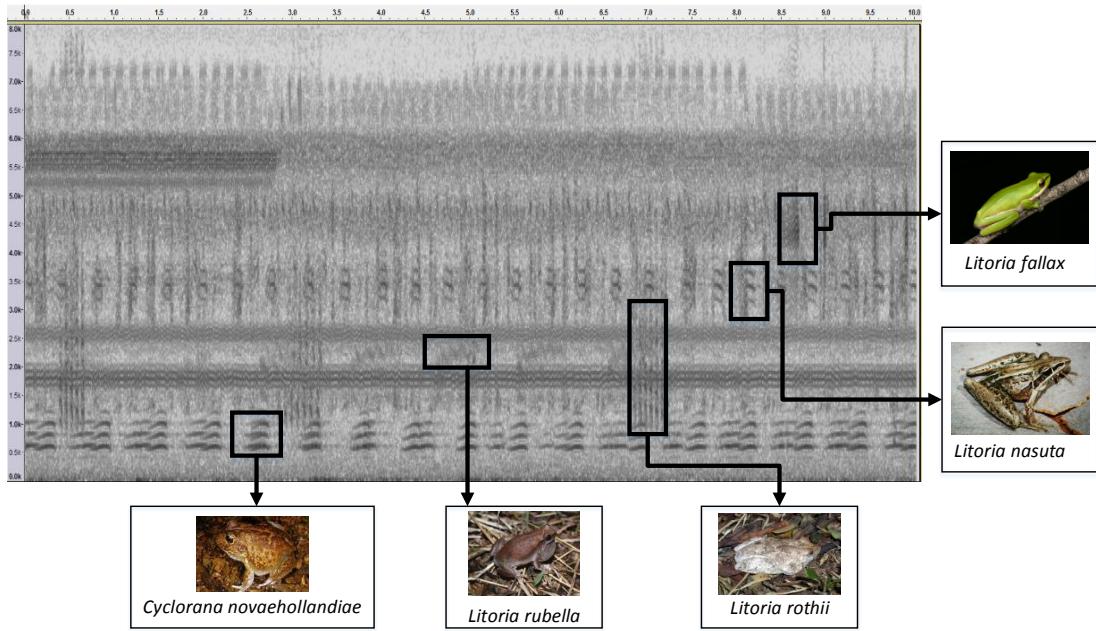


**Figure 1.2:** An example of collected recording with multiple simultaneously vocalising frog species. Five frog species exist in this 10-second recording: *Cyclorana novaehollandiae*, *Litoria rubella*, *Litoria nasuta*, *Litoria rothii*, and *Litoria fallax*.

in high SNR recordings. The second experiment moves to develop a novel cepstral feature that can classify frog species in low SNR recordings. However, those two experiments assume that each individual recording contain only one frog species. In the third experiment, a novel MIML classification framework is proposed to classify frog species in low SNR recordings with multiple frog species. The last experiment is to further improve the performance for classifying frog species in low SNR recordings with multiple frog species, where a novel ML classification framework is used.

## 1.3 Thesis Structure

This thesis is organised in the manner outlined in Figure 1.3

- Chapter 2 reviews the significant and latest literature of frog call classification using machine learning techniques. Three main parts of a frog call classification system are discussed: syllable segmentation, feature extraction, and classification. In addition, evaluation metrics and previous experimental results are presented. This chapter intends

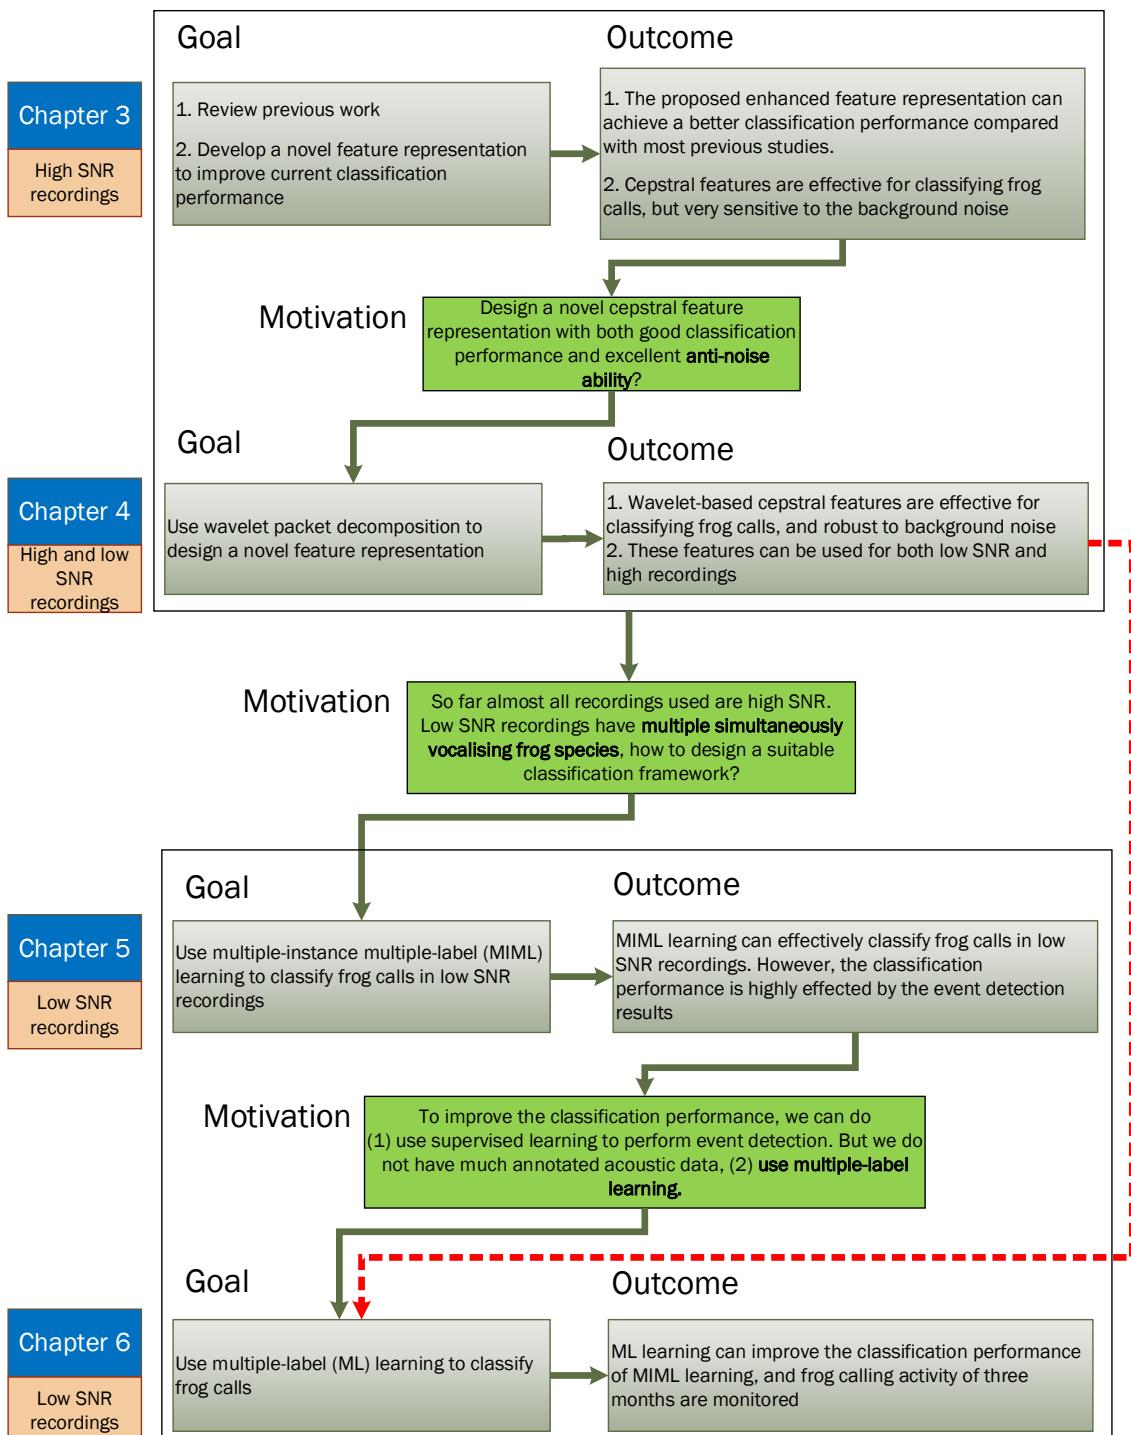

**Figure 1.3:** Structure of the four main chapters of this thesis

to provide a foundation for the research problem and necessary information about the state-of-the-art development of frog call classification. Furthermore, the research gap is identified, which points out the potential research direction.

- Chapter 3 develops a fused feature set for further improving the performance of frog call

classification using high SNR recordings. A fusion of temporal, perceptual, and cepstral features is proposed for frog call classification. The classification performance of five machine learning algorithms are studied with the fused feature set.

- Chapter 4 investigates WPD for extracting a novel cepstral feature. An adaptive frequency scale is first generated by applying k-means clustering to dominant frequencies of the training dataset. Then, adaptive frequency scaled WPD is used for calculating cepstral features. Two other cepstral features are used for the comparison. Two machine learning algorithms are used for the classification.
- Chapter 5 discusses the limitations of traditional SISL classification framework for classify frog species in low SNR recordings, and proposed a novel MIML classification framework to classify frog species in low SNR recordings with multiple frog species. A novel AED method is developed for frog syllable segmentation. Three MIML classifiers are combined with features extracted from segmented syllables to perform the classification.
- Chapter 6 investigates the shortcomings of the MIML classification framework, and introduces ML learning for classify frog species in low SNR recordings with multiple frog species. Subsequently, three global features are calculated without the segmentation process. Four ML classifiers are then used for the classification with various combined feature sets.
- Chapter 7 applies the ML classification for the long-term monitoring of frog calling activity and species richness. Both frog calling activity and species richness over three months are estimated. Frog species richness of three different sites are compared. The correlation between frog calling activity/species richness and weather variables (mean temperature and rainfall) are investigated.
- Chapter 8 summarises and concludes the thesis, and identifies the achievements.

## 1.4 Original contributions

This research makes important contributions to the domains of syllable segmentation, feature extraction, and classification. Specifically, this research proposes a novel AED to segment frog

syllables in low SNR recordings. For further improving the classification performance using high SNR recordings, a fused feature set from temporal, perceptual, and cepstral features is constructed. To increase the anti-noise ability of cepstral features, a novel cepstral feature via adaptive frequency scaled WPD is developed. Moreover, two classification frameworks, MIML classification and ML classification, are used to cope with low SNR recording including multiple frog species.

1. Most previous studies test the proposed frog call classification methods using high SNR recordings, and each recording has only one frog species. The first experiment of this thesis aims to further improve the classification performance using high SNR recordings. A novel feature fusion using temporal, perceptual, and cepstral features is proposed for the classification. To reduce the bias of syllable segmentation, Gaussian filtering is selectively used to remove the temporal gap within one syllable. For various fused feature sets, five machine learning algorithms are used for the classification. Experimental results on high SNR recordings show that our proposed feature set outperforms other widely used feature sets for classifying frog calls.

This research has led to one ISSNIP conference paper, one Applied Acoustic journal article.

2. Since most environmental recordings have a low SNR, the anti-noise ability is critical for achieving a good classification performance. Previous studies demonstrate that cepstral features used for classifying high SNR recordings often have a high classification accuracy. However, those cepstral features are very sensitive to the background noise. A novel cepstral feature is proposed via adaptive frequency scaled WPD for classifying frog species in low SNR recordings. Here, the adaptive frequency scale is generated by applying k-means clustering to the dominant frequencies of training dataset. Previous studies have shown that dominant frequencies of most different frog species are different. Generating a frequency scale that can best describe the frequency distribution of different frog species can greatly increase the discriminability of extracted features. Experimental results show that our proposed cepstral feature not only outperform other cepstral features but also has a better anti-noise ability.

This research has led to one ICISP conference paper, one IEEE e-science conference paper, and one Ecological Informatics journal article.

3. Since most environmental recordings contain multiple frog species of one individual recording, the MIML classification framework is a natural fit for acoustic data of frog calls, and enables the classification of multiple simultaneously vocalising frog species. A novel AED method is proposed for the segmentation of frog syllables in low SNR recordings with limited annotated data. Compared to other AED methods, our proposed AED method can achieve the best syllable segmentation results. For each segmented frog syllable, low-level features are calculated. Three MIML classifiers are then used for the classification with various feature sets build from low-level features. Experimental results demonstrate that our proposed MIML classification framework can achieve a better classification performance than the SISL classification framework.

This research has led to one ICISP conference paper.

4. For the MIML classification, the results are highly affected by the AED results. To further improve the classification performance, one solution is to prepare large volumes of annotated acoustic data and apply supervised learning algorithms for improving segmentation results. Another is to used a different framework without the need of syllable segmentation. This thesis examines the latter option and proposes a ML classification framework to classify multiple simultaneously vocalising frog species. Three global features are first extracted from each individual recordings: LPCs, MFCCs, and AWSCCs. Then a novel feature set using LPCs and multi-stage AWSCCs is used for the ML classification. Experimental results show that ML classification results outperform MIML classification results.

This research has led to a ICCS conference paper.

## 1.5 Publications

### Journal Articles

1. **Xie, Jie**, Towsey, Michael, Zhang, Jinglan, and Roe, Paul, Frog call classification based on enhanced features and machine learning algorithms, *Applied Acoustics*, Volume 113, June 2016, pp. 193-201.

This work corresponds to Chapter 3 in this thesis, which presents a fused feature set for frog call classification in high SNR recordings.

2. **Xie, Jie**, Towsey, Michael, Zhang, Jinglan, and Roe, Paul (2016) Adaptive frequency scaled wavelet packet decomposition for frog call classification. Ecological Informatics, Volume 32, pp. 134-144.

This work corresponds to Chapter 4 in this thesis, which develops a novel cepstral feature for frog call classification in low SNR recordings.

3. Zhang Liang, Towsey Michael, **Xie Jie**, Zhang Jinglan, Roe Paul, Using multi-label classification for acoustic pattern detection and assisting bird species surveys, Applied Acoustics, Volume 110, September 2016, Pages 91-98.
4. **Xie, Jie**, Towsey, Michael, Zhang, Jinglan, and Roe, Paul, Frog call classification: a survey, Artificial Intelligence Review (**Under review**)

This work corresponds to Chapter 2 in this thesis, which reviewed the extant literature on frog call classification.

## Conference Papers

1. **Xie, Jie**, Michael Towsey, Jinglan Zhang, Paul Roe, Detecting Frog Calling Activity Based on Acoustic Event Detection and Multi-label Learning, Procedia Computer Science, Volume 80, 2016, Pages 627-638.

This work corresponds to Chapter 5 in this thesis, which applied ML learning for frog call classification.

2. **Xie, Jie**, Towsey, Michael, Zhang, Liang, Yasumiba, Kiyomi and Schwarzkopf, Lin, Zhang, Jinglan, and Roe, Paul. Multiple-Instance Multiple-Label Learning for the Classification of Frog Calls with Acoustic Event Detection. International Conference on Image and Signal Processing. Springer International Publishing, 2016, pp 222-230.

This work corresponds to Chapter 6 in this thesis, which applies MIML learning for frog call classification.

3. **Xie, Jie**, Towsey, Michael, Zhang, Liang, Zhang, Jinglan, and Roe, Paul, Feature Extraction Based on Bandpass Filtering for Frog Call Classification, International Conference on Image and Signal Processing, Springer International Publishing, 2016, pp 231-239.

4. **Xie, Jie**, Towsey, Michael, Truskinger, Anthony, Eichinski, Philip, Zhang, Jinglan, and Roe, Paul (2015) Acoustic classification of Australian anurans using syllable features. In 2015 IEEE Tenth International Conference on Intelligent Sensors, Sensor Networks and Information Processing (ISSNIP), IEEE, Singapore, pp. 1-6.
5. **Xie, Jie**, Towsey, Michael, Yasumiba, Kiyomi, Zhang, Jinglan, and Roe, Paul (2015) Detection of anuran calling activity in long field recordings for bio-acoustic monitoring. In 2015 IEEE Tenth International Conference on Intelligent Sensors, Sensor Networks and Information Processing (ISSNIP), IEEE, Singapore, pp. 1-6.
6. **Xie, Jie**, Towsey, Michael, Zhang, Jinglan, and Roe, Paul (2015) Image processing and classification procedure for the analysis of Australian frog vocalisations. In Proceedings of the 2nd International Workshop on Environmental Multimedia Retrieval, ACM, Shanghai, China, pp. 15-20.
7. **Xie, Jie**, Towsey, Michael, Zhang, Jinglan, Dong, Xueyan, and Roe, Paul (2015) Application of image processing techniques for frog call classification. In IEEE International Conference on Image Processing (ICIP 2015), 27-30 September 2015, Quebec City, Canada.
8. **Xie, Jie**, Towsey, Michael, Eichinski, Philip, Zhang, Jinglan, and Roe, Paul (2015) Acoustic feature extraction using perceptual wavelet packet decomposition for frog call classification. In 2015 IEEE 11th International Conference on e-Science (e-Science), IEEE, Munich, Germany, pp. 237-242.
9. **Xie, Jie**, Zhang, Jinglan and Roe, Paul, Discovering acoustic feature extraction and selection algorithms for frog vocalization monitoring with machine learning techniques, 2015 Annual Conference of the Ecological Society of Australia. (Abstract accepted for poster presentation)
10. **Xie, Jie**, Zhang, Jinglan, and Roe, Paul (2015) Acoustic features for hierarchical classification of Australian frog calls. In 10th International Conference on Information, Communications and Signal Processing, 2-4 December 2015, Singapore.
11. Dong, Xueyan, **Xie, Jie**, Towsey, Michael, Zhang, Jinglan, and Roe, Paul (2015) Generalised features for bird vocalisation retrieval in acoustic recordings. In IEEE International Workshop on Multimedia Signal Processing, 19-21 October 2015, Xiamen, China.



# **Chapter 2**

## **An overview of frog call classification**

---


This chapter reviews the extant literature on frog call classification using machine learning algorithms. To the best of our knowledge, no previous studies focus on frog call classification using MIML learning or ML learning. Therefore, this chapter will mainly review the SISL classification of frog calls. For MIML and ML learning, some prior work on MIML and ML for bird call classification are reviewed. This review mainly aims to give a quantitative and detailed analysis of related techniques for frog call classification. Then, several major challenges that have not been addressed in prior work are identified, and hence the advances in this thesis are necessary and significant.

### **2.1 Overview**

For frog call classification, three parts play important roles in the performance and precision: signal pre-processing, feature extraction, and classification. In this chapter, these three important parts are presented as shown in Figure 2.1.

### **2.2 Signal pre-processing**

It often consists of signal processing, noise reduction, and syllable segmentation.

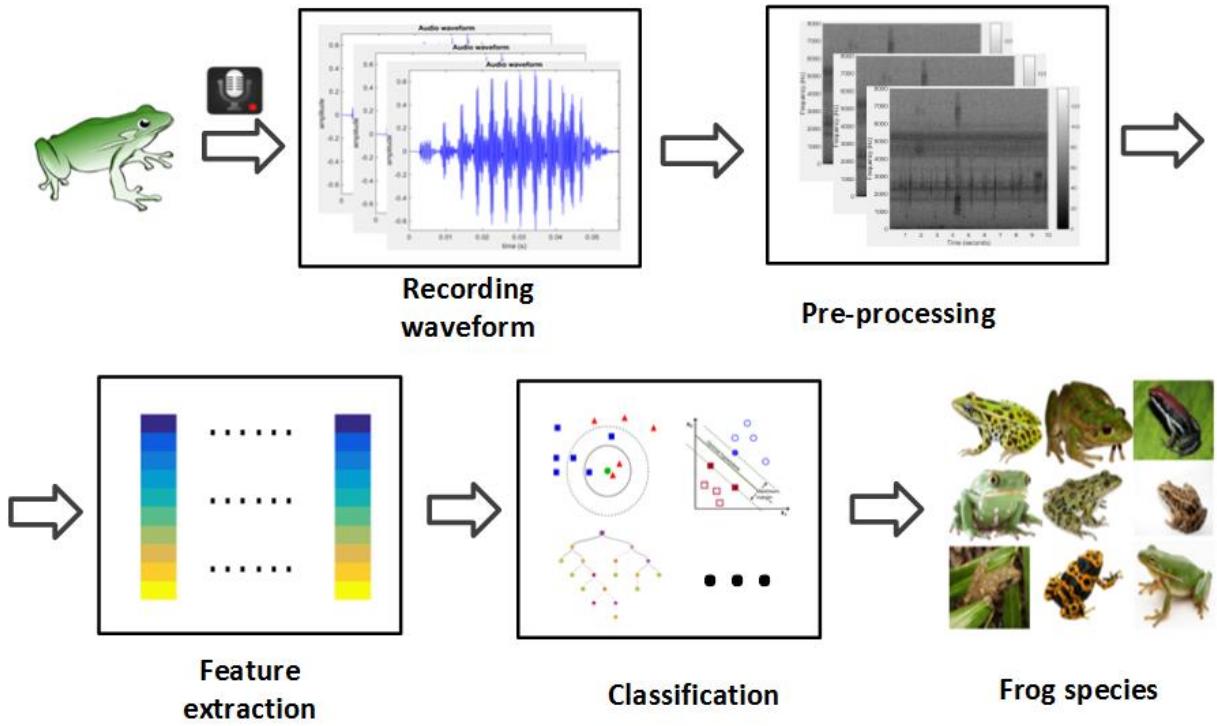


**Figure 2.1:** Flowchart of frog call classification: pre-processing, feature extraction, and classification.

### 2.2.1 Signal processing

Signal processing often denotes the transformation of frog calls from one-dimension (recording waveform) to two dimensions (time-frequency representation). Two main techniques used for frog signal processing are STFT [Colonna et al., 2015, Huang et al., 2014, 2009, Noda et al., 2016], WPD [Yen and Fu, 2002], and DWT [Colonna et al., 2012b]. STFT is the most widely used technique for its flexible implementation and better applicability. Given one frog call  $x(n)$ , its fast Fourier transform can be expressed as

$$X(k) = \sum_{n=0}^{L-1} x(n)w(n)e^{-j2\pi kn/L}, 0 \leq k \leq L - 1 \quad (2.1)$$

where  $X(k)$  is the frequency domain signal (spectrum) and denotes each frame of the spectrogram, and  $w(n)$  is the window function. The waveform, spectrum and spectrogram of one individual syllable for *Mixophyes fasciolatus* is illustrated in Figure. 2.2. Here three representations are consistent with features in three domains: time domain, frequency domain, and time-frequency domain.

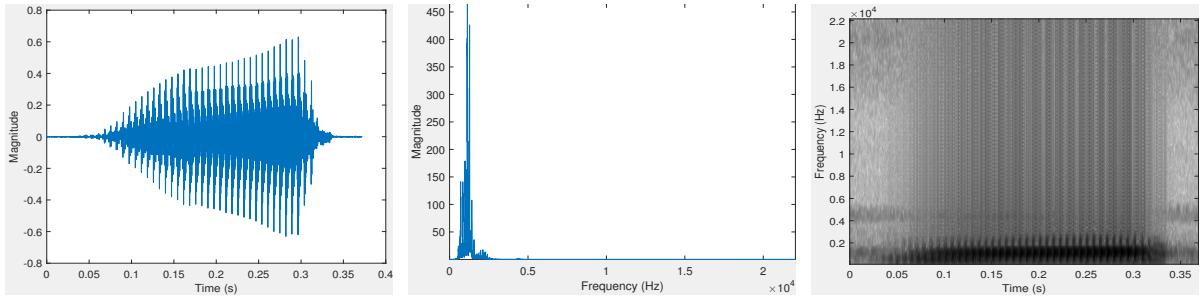

**Figure 2.2:** Waveform, spectrum and spectrogram of one frog syllable for *Mixophyes fasciolatus*. The window function, size and overlap are Hamming window, 128 samples and 85%, respectively

### 2.2.2 Noise reduction

Noise reduction is an optional process for frog call classification. Huang et al. [2014] applied a de-noise filter for noise reduction. The wavelet threshold function in the one-dimensional signal was used as the filter kernel function. Bedoya et al. [2014] introduced a spectral noise gating method for noise reduction. Specifically, the selected frequency band spectrum of the frogs' call to be detected was estimated and suppressed. While the aforementioned noise reduction methods can remove the background noise, some of the desired signals will be suppressed. Noise reduction methods are therefore selectively used based on the SNR of acoustic data and the research problem.

### 2.2.3 Syllable segmentation

For frog calls, the basic elementary acoustic unit is a syllable, which is a continuous frog vocalisation emitted by an individual frog [Huang et al., 2009]. The precision of syllable segmentation will directly affect the classification performance, because features used for frog call classification are directly calculated from each syllable. Frog syllable segmentation methods in previous studies are summarised and listed in Table 2.1. However, all previous methods cannot address recordings with simultaneous vocalising frog calls. Meanwhile, those methods that used the time domain feature for segmentation, cannot address recordings with low signal-to-noise ratio.

**Table 2.1:** Summary of prior work for frog syllable segmentation. Here,  $E$  denotes energy, ZCR denotes zero-crossing rate. Sequential means that syllables are segmented using the same sequence of those syllables in the recording.

Authors	Features for segmentation	Procedure
Han et al. [2011]	Spectral entropy	Manual
Jaafar and Ramli [2013a]	$E$ and ZCR	Sequential
Huang et al. [2009]	Amplitude	Non-sequential
Harma [2003]	Spectrogram	Non-sequential
Colonna et al. [2015]	Incremental $E$ and Incremental ZCR	Sequential and real time

## 2.3 Acoustic features for frog call classification

Developing effective acoustic features that show greater variation between rather than within species is important for achieving a high classification performance [Fox, 2008]. For frog call classification, acoustic features can be classified into five categories: temporal features, perceptual features, time-frequency features, cepstral features, and other features.

### 2.3.1 Temporal and perceptual features for frog call classification

Temporal features for frog call classification have been explored for a long time [Camacho et al., 2011, Chen et al., 2012, Dayou et al., 2011, Huang et al., 2014, 2009, 2008]. To achieve a better performance, temporal features are often combined with perceptual features for frog call classification.

Huang et al. [2009] used spectral centroid, signal bandwidth, and threshold-crossing rate for frog call classification with a k-nearest neighbour classifier (K-NN) and support vector machines (SVM). In another work, Huang et al. [2014] combined spectral centroid, signal bandwidth, spectral roll-off, threshold-crossing rate, spectral flatness, and average energy to classify frog calls using neural networks. Another paper published by [Huang et al., 2008] used spectral centroid, signal bandwidth, spectral roll-off, and threshold-crossing rate for frog call classification. Dayou et al. [2011] combined Shannon entropy, Rényi entropy and Tsallis entropy for frog call classification. Based on this work, Han et al. [2011] improved the classification accuracy by replacing Tsallis entropy with spectral centroid. To classify anurans into

four genera, a three-parameter model was proposed based on advertisement calls,<sup>1</sup> which used mean values for dominant frequency, coefficients of variation of root-mean square energy, and spectral flux [Gingras and Fitch, 2013]. With this model, three classifiers were employed for classification: K-NN, a multivariate Gaussian distribution model and a Gaussian Mixture Model (GMM) [Gingras and Fitch, 2013]. Chen et al. [2012] proposed a method based on syllable duration and a multi-stage average spectrum for frog call recognition. Their recognition stage was completed by the Euclidean distance-based similarity measure. Camacho et al. [2011] used the loudness, timbre and pitch to detect frogs with a multivariate ANOVA test.

### 2.3.2 Time-frequency features for frog call classification

For frog call classification, we often transform the one-dimensional signal into its two-dimensional time-frequency representation. Then, features based on the time-frequency representation can be calculated for classification. Acevedo et al. [2009] developed two feature sets for automated animal classification. The first was minimum and maximum frequencies, call duration, and maximum power; the second was minimum and maximum frequencies, call duration, and frequency of maximum power in eight segments of duration. With two feature sets, three classifiers were used for the classification: linear discriminant analysis(LDA), decision tree and SVM. Brandes [2008] proposed a method for classifying animal calls using duration, maximum frequency, and frequency bandwidth, and with Hidden Markov Model (HMM) used as the classifier. Yen and Fu [2002] combined wavelet packet feature extraction and two different dimensionality reduction algorithms to produce the final feature vectors. Then, they adopted a neural network classifier for classification. Grigg et al. [1996] developed a system to monitor the effect of the introduced Cane Toad on the frog population of Queensland. The classification was based on the local peaks in the spectrogram using Quinlan's machine learning system, C4.5. Brandes et al. [2006] proposed a method to classify frogs using central frequency, duration, and bandwidth with a Bayesian classifier. Croker and Kottege [2012] introduced a feature vector for detecting frogs with a similarity measure based on Euclidean distance. The feature vector consisted of dominant frequency, frequency difference between the lowest and dominant frequencies, frequency difference between the highest and dominant frequencies, time from the start of the sound to the peak volume, and time from the peak volume to the end of the sound.

---

<sup>1</sup>an advertisement call is produced by a male frog in order to attract females during the breeding season and to warn other rival males of his presence.

### 2.3.3 Cepstral features for frog call classification

Cepstral features (MFCCs) are also popular for frog call classification. Jaafar et al. [2013a] introduced MFCCs and LPCs as features, and kNN and SVM as classifiers for frog call identification. Yuan and Ramli [2012] also used MFCCs and LPCs as features, and kNN as the classifier for frog sound identification. Lee et al. [2006] used the averaged MFCCs and LDA for the automatic recognition of animal sounds. Bedoya et al. [2014] combined MFCCs and a learning algorithm for multivariate data analysis (LAMDA) for frog call recognition. Vaca-Castano and Rodriguez [2010] proposed a method to identify animal species, which consisted of MFCCs, principal component analysis (PCA) and kNN. Jaafar and Ramli [2013a], Jaafar et al. [2013b], Tan et al. [2014] published three papers about frog call classification with MFCCs,  $\Delta$  MFCC and  $\Delta\Delta$  MFCC calculated as features, and kNN and SVM used as classifiers. Colonna et al. [2012a] introduced MFCCs for classifying anurans with a kNN classifier.

### 2.3.4 Other features for frog call classification

Besides temporal features, perceptual features, time-frequency features and cepstral features, other features are also introduced to classify frog calls. Wei et al. [2012] proposed a distributed sparse approximation method based on  $\ell_1$  minimization for frog call classification. Dang et al. [2008] extracted the vocalisation waveform envelope as features, then classified calls by matching the extracted envelope with the original signal envelope. Kular et al. [2015] treated the sound signal of a frog call as a texture image. Then, texture visual words and MFCCs were calculated as the features for frog call classification.

## 2.4 Classifiers

For frog call classification, numerous pattern recognition methods have been used to construct the classifier, such as the Bayesian classifier [Brandes et al., 2006], kNN [Colonna et al., 2012a, Dayou et al., 2011, Gingras and Fitch, 2013, Han et al., 2011, Huang et al., 2009, 2008, Jaafar and Ramli, 2013a, Jaafar et al., 2013a,b, Vaca-Castano and Rodriguez, 2010, Yuan and Ramli, 2012], SVM [Acevedo et al., 2009, Gingras and Fitch, 2013, Huang et al., 2009, 2008, Jaafar et al., 2013a, Tan et al., 2014], HMM [Brandes, 2008], GMM [Gingras and Fitch, 2013, Huang et al., 2008], NN [Huang et al., 2014, Yen and Fu, 2002], DT [Acevedo et al., 2009, Grigg et al.,

1996], one-way multivariate ANOVA [Camacho et al., 2011], and LDA [Acevedo et al., 2009, Lee et al., 2006]. Besides classifiers, other methods for classifying frog species include those based on the similarity measure [Chen et al., 2012, Croker and Kottege, 2012, Dang et al., 2008] and those based on the clustering technique [Bedoya et al., 2014, Colombia and del Cauca, 2009, Wei et al., 2012]. The summary of those classifiers used in frog call classification is listed in Table 2.2. kNN is the most commonly used classifier for its simplicity and easy application. However, the kNN classifier is sensitive to the local structure of the data, as well as to the initial cluster centroids. Therefore, the kNN classifier is often run multiple times based on different initial points. SVM is another classifier that is widely used for its good generalisation ability. However, the performance of SVM can be quite sensitive to the selection of the regularisation and kernel parameters, and it is possible to over-fit when tuning these hyper-parameters. In most previous studies, selecting suitable parameters for SVM is very important and is realised by grid search [Hsu et al., 2003].

**Table 2.2:** A brief summary of classifiers used in previous studies.

Reference	Classifier	Reference	Classifier
Brandes et al. [2006]	Bayesian classifier	Acevedo et al. [2009]	Support vector machine
Huang et al. [2008]	K-nearest neighbour	Huang et al. [2009]	Support vector machine
Huang et al. [2009]	K-nearest neighbour	Tan et al. [2014]	Support vector machine
Han et al. [2011]	K-nearest neighbour	Gingras and Fitch [2013]	Support vector machine
Dayou et al. [2011]	K-nearest neighbour	Jaafar et al. [2013a]	Support vector machine
Jaafar and Ramli [2013a]	K-nearest neighbour	Gingras and Fitch [2013]	K-nearest neighbour
Brandes [2008]	Hidden Markov model	Jaafar et al. [2013b]	K-nearest neighbour
Huang et al. [2008]	Gaussian mixture model	Jaafar et al. [2013a]	K-nearest neighbour
Gingras and Fitch [2013]	Gaussian mixture model	Yuan and Ramli [2012]	K-nearest neighbour
Huang et al. [2014]	Neural networks	Vaca-Castano and Rodriguez [2010]	K-nearest neighbour
Yen and Fu [2002]	Neural networks	Grigg et al. [1996]	Decision tree
Acevedo et al. [2009]	Decision tree	Camacho et al. [2011]	One-way multivariate ANOVA
Colonna et al. [2012a]	K-nearest neighbour	Acevedo et al. [2009]	Linear discriminant analysis
Huang et al. [2008]	Support vector machine	Lee et al. [2006]	Linear discriminant analysis

## 2.5 MIML or ML learning for bioacoustic classification

To the best of this author's knowledge, there is still no paper that uses MIML or ML learning to focus on frog call classification. In contrast, some previous research has applied MIML or ML learning to study bird calls.

For MIML learning, [Briggs et al., 2012] introduced the MIML classifiers for acoustic classification of multiple simultaneous bird species. In their method, a supervised learning

classifier (RF) was first employed for segmenting acoustic events. Then features were extracted from each segmented acoustic event. Before putting features into classifiers, a bag generator was used to construct a bag-level feature. Lastly, three MIML classifiers were experimentally evaluated: MIML-SVM (support vector machines based Multi-Instance Multi-Label Learning Algorithm), MIML-RBF (MIML Radial Basis Function), and MIML-kNN (k-Nearest Neighbor Based Multi-Instance Multi-Label Learning Algorithm). [Dufour et al., 2013] used Mel-filter cepstral coefficients and three MIML classifiers to classify birds. To be specific, Mel-filter cepstral coefficients were first calculated for each frame. Then two new feature vectors were computed to represent longer segments. Lastly, three MIML classifiers were experimentally evaluated: MIML-RBF, MIML-kNN, and M3MIML (Maximum Margin Method for Multi-instance Multi-label Learning).

For ML learning, several papers have been published in the Neural Information Processing Scaled for Bioacoustics (NIPS4B challenge), which classified birds, insects, and amphibians recordings, followed by pre-processing and segmentation, feature extraction, feature selection, and classification [Chen et al., 2013, Lasseck, 2013, Massaron, 2013, Mencia et al., 2013, Stowell and Plumbley, 2013]. [Lasseck, 2013] first pre-processed the recordings via the application of STFT, noise reduction and segmentation. Then, file-statistics, segment-statistics and segment-probabilities are calculated as features. Finally, an ensemble of randomised decision trees is applied for the classification of each sound class. [Stowell and Plumbley, 2013] used either MFCC statistics (52 dimensions), chirplet histograms (up to 20,000 dimensions), or both, as the features. Then, RF was applied for ML classification. [Mencia et al., 2013] proposed a new feature extraction method via an unsupervised generation of an aleatory number of features, which included random patching, a de-noising auto-encoder unit and subsequent convolution. For the classification, a pairwise ensemble of SVMs, random decision trees and a single layer NN were used. [Massaron, 2013] described an approach that involved building an ensemble of generalised linear models and a classification model by hinge loss and program based on stochastic gradient descent optimisation, and boosted trees ensembles. [Chen et al., 2013] first calculated prominent features from windowed MFCCs with window overlap, and leveraged them to build an ensemble classifier which was a blend of different classifiers (Gradient Boosting Tree models, RF, Lasso and elastic-net regularized generalised linear model).

## 2.6 Experiment results with state-of-the-art methods

### 2.6.1 Evaluation criteria

Accuracy is the most widely used statistical criterion for evaluating frog call classification. Other evaluation criteria such as precision, recall, sensitivity, specificity, F-measure, and ROC curves are also used. Before defining these evaluation criteria, we first define true positives (TP), true negatives (TN), false negatives (FN), and false positives (FP) as described by [Gordon et al., 2003] (1) TP: correctly recognised positives; (2) TN: correctly recognised negatives; (3) FN: positives recognised as negatives; (4) FP: negatives recognised as positives. Then, accuracy, precision, recall (sensitivity), specificity, and false positive rate can be defined as

$$\text{Accuracy} = \frac{TP + TN}{TP + TN + FP + FN} \quad (2.2)$$

$$\text{Precision} = \frac{TP}{TP + FP} \quad (2.3)$$

$$\text{Recall} = \frac{TP}{TP + FN} \quad (2.4)$$

$$\text{Specificity} = \frac{TN}{FP + TN} \quad (2.5)$$

$$\text{FPR} = \frac{FP}{FP + TN} \quad (2.6)$$

### 2.6.2 Previous experimental results

Table 2.3 shows the list of summarised frog call classification methods, together with the database they used and corresponding performance. From Table 2.3, we can find that few studies explored frog vocalisations using signal processing and machine learning techniques before 2010. Due to the decrease of frog biodiversity, advances in signal processing, machine learning techniques and acoustic sensors, the research in frogs has been increased in the last five years. In addition, few datasets are publicly shared with researchers. The classification

performance of different studies varies a lot. One of the main reasons is the use of different datasets.

**Table 2.3:** A brief overview of frog call classification performance. The asterisk denotes that frog species are not the only animal species to be studied.

Database	Performance	Reference	Data source
3 frog species with 635 calls	Precision of 99%, recall of 92% Sensitivity of 0.85 with specificity of 0.92 when distinguishing <i>Mixophyes iteratus</i> calls from other species' call. Sensitivity of 0.88 with specificity of 0.82 against background noise	Camacho et al. [2011]	Collected from Costa Rica (unavailable)
1 frog species with 100 samples	50% true positive accuracy, over 50 false-negative for 4 animal types	Croker and Kotiege [2012]	Recorded next to a running stream (unavailable)
17 animal types	NA	Brandes et al. [2006]	Collected from NE Costa Rica (unavailable)
22 frog species	Best performance with averaged classification Accuracy of 72.18% and 0.76% for standard deviation.	Griegg et al. [1996]	Collected from Queensland, Australia (unavailable)
4 frog species with 66 samples	Accuracy of 88% for frogs	Yen and Fu [2002]	Unknown
10 frog species, 9 bird species, and 8 cricket species	Best true positive rate of 94.95% and 0.94% for false positive rate	Brandes [2008]*	Collected from Costa Rica (unavailable)
9 frog species and 3 bird species with 1061 samples	Averaged classification accuracy of 90.00%	Acveedo et al. [2009]*	Collected from 14 montane sites in Puerto Rico
9 frog species with 90 syllables	Averaged classification accuracy of 98.00%	Dayou et al. [2011]	Obtained from <a href="http://www.Frogsaustralia.net.au/frogs">http://www.Frogsaustralia.net.au/frogs</a>
9 frog species with 54 syllables	Averaged classification accuracy of 98.86%	Han et al. [2011]	Obtained from <a href="http://www.Frogsaustralia.net.au/frogs">http://www.Frogsaustralia.net.au/frogs</a>
5 frog species with 727 syllables	Averaged classification accuracy of 95.86%	Huang et al. [2008]	Unknown
142 species belonging to four genera	Genus classification accuracy above 70%	Gingras and Fitch [2013]	obtained from commercially available compact discs (CDs) (available)
18 frog species with 960 syllables	Classification accuracy of 94.3%	Chen et al. [2012]	Recorded in a wild field located in the Shan-Ping forest ecological garden in Kaohsiung city, Taiwan (unavailable)
13 frog species with 1514 samples	Averaged recognition rate of 93.4%	Huang et al. [2014]	Unknown
5 frog species with 950 samples	Averaged classification accuracy of 90.03%	Huang et al. [2009]	recorded at Sungai Sedim, in Kulim, Kedah, Malaysia
15 frog species with 286 samples	Averaged classification accuracy of 95.67%	Tan et al. [2014]	Obtained from AmphibiaWeb ( <a href="http://amphibiaweb.org/">http://amphibiaweb.org/</a> ) (available)
8 frog species with 160 samples	averaged classification accuracy of 98.1%	Yuan and Ramli [2012]	Internet database ( <a href="http://learning.frogphone.org/">http://learning.frogphone.org/</a> )
10 frog species with 250 syllables	Averaged classification accuracy of 98.8%	Jafar et al. [2013a]	and IBM LSUM ( <a href="http://www.frogwatch.org.au/Faction=animalList">http://www.frogwatch.org.au/Faction=animalList</a> ) (available)
15 frog species with 386 syllables	Averaged classification accuracy of 85.78%	Jafar et al. [2013b]	Recorded from locations around Baling and Kulim, Kedah, Malaysia (unavailable)
12 frog species with 291 syllables	Averaged classification accuracy of 97%	Jafar and Ramli [2013a]	Recorded from locations around Baling and Kulim, Kedah, Malaysia (unavailable)
12 frog species with 379 samples,	Averaged classification accuracy of 97%		
10 bird species with 193 samples	Averaged classification accuracy of 86.6%	Vaca-Castano and Rodriguez [2010]	Recorded in Puerto Rico ( <a href="http://www.amazon.com/Los-Antibios-Reptiles-Puerto-Rico/dp/084770243X">http://www.amazon.com/Los-Antibios-Reptiles-Puerto-Rico/dp/084770243X</a> ) (available)
13 frog species with 916 calls	Averaged classification accuracy of 100%, and 99.61 % respectively for two database	Bedoya et al. [2014]	Provided by the Smithsonian Tropical Research Institute (STRI) and the Grupo Herpetológico de Antioquia (GHA) (unavailable)
30 frog species and 19 cricket calls	Averaged classification accuracy of 96.8% and 98.1%	Lee et al. [2006]	Derived from compact disk (unavailable)
15 frog species with 896 syllables	Precision of 99.00%	Colonna et al. [2015]	Obtained from Internet( <a href="http://bit.ly/1b8byvE">http://bit.ly/1b8byvE</a> ) (available)
10 frog species with 516 syllables	Averaged classification accuracy of 97.45%	Xie et al. [2015a]	Collected from compact disk ( <a href="http://www.naturesound.com.au/">http://www.naturesound.com.au/</a> ) (available)
15 frog species with 436 syllables	Averaged classification accuracy of 74.73%	Xie et al. [2015c]	Collected from compact disk ( <a href="http://www.naturesound.com.au/">http://www.naturesound.com.au/</a> ) (available)
9 frog species with 49 samples	Averaged classification accuracy of 97.60%	Colonna et al. [2012a]	Collected on the campus of the Federal University of Amazonas in Manaus, Brazil (unavailable)
3 frog species with 50 samples	Averaged classification accuracy of 90%	Dang et al. [2008]	Unknown
1564 syllables of 41 anurans,	98.8%, 96.9%, 95.48%, and 95.38% respectively	Noda et al. [2016]	AmphibiaWeb(41 anurans), 58 frogs from Cuba, 100 anurans from Brizil-Uruguay, and 199 anurans from all datasets ( <a href="http://www.nhbs.com/">http://www.nhbs.com/</a> ) (available)
5201 syllables of 58 frogs,			
10905 syllables of 100 anurans,			
and 17671 syllables of 199 anurans			

## 2.7 Research gap in current literature

In this section, the research gap of each part of a frog call classification system is identified.

### 2.7.1 Database

One major problem for frog call classification is the lack of a universal database. The databases used in prior work are often related to geographical regions, because researchers from different countries focus on particular frog species in their specific area (Table 2.3). Therefore, it is difficult for researchers to compare their particular classification methods. Current studies often focus on the study of limited number of frog species (less than 100), but the number of known amphibian species is above 7000. To reach a high quality resolution, there still is a long way to go.

### 2.7.2 Signal pre-processing

Currently, STFT is the most widely used technique for frog call classification. However, STFT has a trade-off between time and frequency resolution, which restricts the discriminability of features extracted from the spectrogram.

Noise reduction is an optional processing step for frog call classification. For some databases used as shown in Table 2.3, frog recordings have a high SNR, where noise reduction is unnecessary. However, when studying recordings of low SNR, noise reduction is essential for improving the classification performance [Bedoya et al., 2014, Huang et al., 2014]. After noise reduction, both the accuracy of syllable segmentation and feature extraction can be relatively improved.

Frog syllable segmentation based on energy and zero-crossing rate cannot address low SNR recordings. Meanwhile, this method cannot segment frog syllables in low SNR recordings with multiple frog species. Recent use of unsupervised learning algorithms opens a path for segmenting frog syllables in low SNR recordings with multiple frog species. However, like other unsupervised algorithms, this method has a disadvantage that not all segmented syllables are frog vocalisations [Potamitis, 2015]. [Briggs et al., 2012] used a supervised RF for bird call segmentation. However, this method required lots of tagged acoustic data to train the classifier.

For syllable segmentation, temporal features are more sensitive to the background noise than

perceptual features, because different frequency components can be separated by transforming the signal from temporal domain to perceptual domain. However, temporal features cannot segment frog syllables in low SNR recordings with multiple frog species, because temporal features have no ability to separate different frequency components. Compared to temporal features, the use of amplitude-frequency information provides a robust method to segment low SNR recordings.

### 2.7.3 Acoustic features

Most previous studies directly transplant features developed for speech recognition to analyse frog calls, which might not be suitable. For example, MFCCs, which are based on the calculation of a non-linear Mel-scale filter-bank, are designed for studying speech. The Mel-scale is designed for the perceptual scale of pitches judged by human listeners. The frequency distribution might not be suitable for studying frogs. The direct use of speech features will therefore restrict classification performance.

Most perceptual features are extracted by directly calculating the statistics over frames, which will loss the temporal information. To add the temporal information of the feature set, temporal features can be combined with perceptual features and cepstral features to achieve higher classification accuracy. Transforming audio data into its two-dimensional representation (such as a spectrogram) for quick visual analysis, has led to increasing attention being given to image processing techniques for automatically analysing animal calls. Image features derived from spectrograms are worth investigating for frog call classification. Sparse coding has been widely applied for feature extraction in other scaled bioacoustics studies [Glotin et al., 2013, Razik et al., 2015], which could be a potential direction for frog call classification.

### 2.7.4 Classifiers

Almost all previous studies assume that each recording has only one frog species, and then a SISL classification framework is adopted to classify frog calls. However, recent advances in acoustic sensor techniques have collected large volumes of acoustic data that have multiple simultaneously vocalising frog species, because different frog species tend to call together to make a frog chorus (Figure 1.2). Based on this attribute of frog call recordings, the classification problem can be naturally framed as a MIML classification or a ML classification problem rather

than SISL classification. In previous studies, MIML learning and ML learning have been used to solve bioacoustic problems, but mainly focus on birds.

## 2.8 Summary

The main objective of this chapter is to provide a research direction for analysing frog calls. With the use of signal processing and machine learning techniques, different frog species can be classified based on their vocalisations. To achieve this goal, three main parts of a frog call classification system are discussed: signal pre-processing, feature extraction, and classification. For each part, current techniques used by different researchers are explored.

For future work, it is worth further improving the accuracy and efficiency of noise reduction and syllable segmentation because they are critical processes for frog call classification. Since collected frog calls in the field often contain many background noises (birds, insects, rain, wind, human voices, etc.), it is necessary to design new noise reduction methods based on different environments. It is also necessary to develop accurate and efficient syllable segmentation methods for its great influence in the frog call classification system performance. Currently, studies have focused on frequency domain features for classification. In the future, features extracted from various domains can be incorporated for increasing the frog call classification accuracy. For the classification framework, studying frog recordings with MIML learning or ML learning may be a productive research direction because of the attribute of collected environmental recordings. It is also worth making a uniform dataset that covers different frog species from different areas, since there is still no available uniform dataset of frog calls. Then researchers can evaluate their particular methods on a uniform platform.



# **Chapter 3**

## **Frog call classification based on feature fusion and machine learning algorithms**

---

### **Research problem**

Previous studies classified frog calls in SNR recordings using one or two types of features from temporal, perceptual, and cepstral features. However, the fused feature set using one or two types of features cannot classify frog species that share similar characteristics in one or two domains.

### **Research sub-question**

How to build a feature set for further improving frog call classification performance in high SNR recordings?

### **3.1 Overview**


This chapter aims to compare various feature sets using different machine learning techniques, and finds the best feature set for classifying frogs in high SNR recordings. Based on the classification performance, suggested features can then be adapted to study low SNR recordings. In particular, we want to know which of those features can be adapted from high SNR recordings to low SNR recordings, because the final goal of this thesis is to classify low SNR recordings with multiple frog species.

The performance of the proposed method is evaluated based on twenty-four frog species, which are geographically well distributed through Queensland, Australia. Five feature sets are

constructed and evaluated using five machine learning algorithms.

## 3.2 Architecture of the classification system for frog calls

Our frog call classification system consists of six steps (Figure 3.1): data description, syllable segmentation, pre-processing, feature extraction, feature fusion, and classification. Detailed information of each step is shown in following subsections. Different from [Huang et al., 2009], pre-processing is directly applied to the segmented syllables rather than continuous recordings.

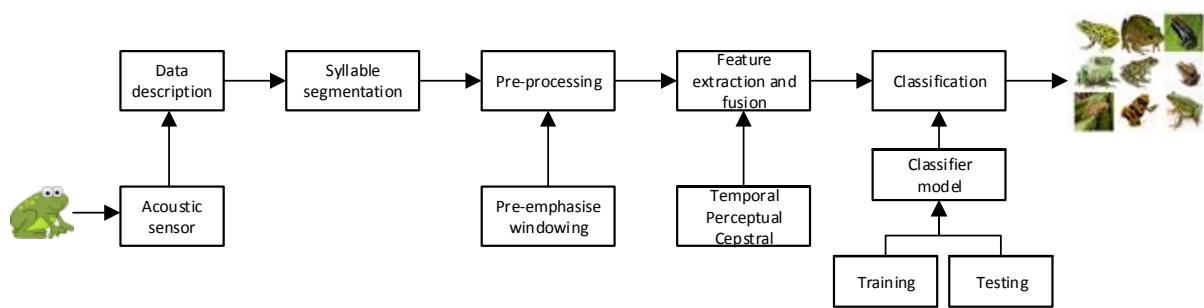

**Figure 3.1:** Flowchart of frog call classification system using enhanced features

### 3.2.1 Data description

In this study, twenty-four frog species, which are widespread in Queensland, Australia, are selected for experiments (Table 3.1). All the recordings are obtained from David Stewart's CD with a sample rate of 44.10 kHz and saved in MP3 format [Stewart, 1999]. Each recording includes one frog species with the duration ranging from eight to fifty-five seconds.


### 3.2.2 Syllable segmentation based on an adaptive end point detection

Each recording is made up of multiple continuous calls of one frog species. For frogs, one syllable is an elementary acoustic unit for classification, which is a continuous frog vocalisation emitted from an individual [Huang et al., 2009]. In this chapter, one method built on the Härmä's method is used to perform syllable segmentation for frog calls [Harma, 2003]. The syllable segmentation process is based on the spectrogram, which is generated by applying short-time Fourier transform (STFT) to each recording. For STFT, the window function used is Hamming window with the size and overlap being 512 samples and 25%, respectively. The

**Table 3.1:** Summary of scientific name, common name, and corresponding code. Frog species name with asterisk means that it needs to be smoothed before segmentation

No.	Scientific-name	Common-name	Code
1	<i>Assa darlingtoni</i>	Pouched frog	ADI
2	<i>Crinia parinsignifera</i>	Eastern sign-bearing froglet	CPA
3	<i>Crinia signifera</i>	Common eastern froglet	CSA
4	<i>Limnodynastes convexiusculus</i>	Marbled frog	LCS
5	<i>Limnodynastes ornatus</i>	Ornate burrowing frog	LOS
6	<i>Limnodynastes tasmaniensis</i> *	Spotted grass frog	LTS
7	<i>Limnodynastes terraereginae</i>	Northern banjo frog	LTE
8	<i>Litoria caerulea</i>	Australian green tree frog	LCA
9	<i>Litoria chloris</i>	Red-eyed tree frog	LCS
10	<i>Litoria latopalmata</i>	Broad-palmed frog	LLA
11	<i>Litoria nasuta</i>	Striped rocket frog	LNA
12	<i>Litoria revelata</i>	Revealed tree frog	LEA
13	<i>Litoria rubella</i>	Desert tree frog	LRA
14	<i>Litoria tyleri</i>	Southern laughing tree frog	LTI
15	<i>Litoria verreauxii verreauxii</i>	Whistling tree frog	LVI
16	<i>Mixophyes fasciolatus</i>	Great barred frog	MFS
17	<i>Mixophyes fleayi</i>	Fleay's barred Frog	MFI
18	<i>Neobatrachus sudelli</i> *	Painted burrowing frog	NSI
19	<i>Philoria kundagungan</i>	Mountain frog	PKN
20	<i>Philoria sphagnicola</i> *	Sphagnum frog	PSS
21	<i>Pseudophryne coriacea</i>	Red-backed toadlet	PCA
22	<i>Pseudophryne raveni</i> *	Copper-backed brood frog	PRI
23	<i>Uperoleia fusca</i> *	Dusky toadlet	UFA
24	<i>Uperoleia laevigata</i>	Smooth toadlet	ULA

detail of the segmentation method is described in Figure 3.2, which is based on the iterative frequency-amplitude information of the spectrogram. This chapter focuses on the evaluation of fused features, but the accuracy of segmentation results can greatly affect the classification performance. To reduce the bias introduced by syllable segmentation, the segmented syllables are further filtered. First, those syllables whose length are smaller than 300 samples are removed. Then, those syllables whose averaged energy is smaller than 15% of the maximum energy and larger than 1.5 times the averaged energy are removed for each frog species experimentally [Gingras and Fitch, 2013].

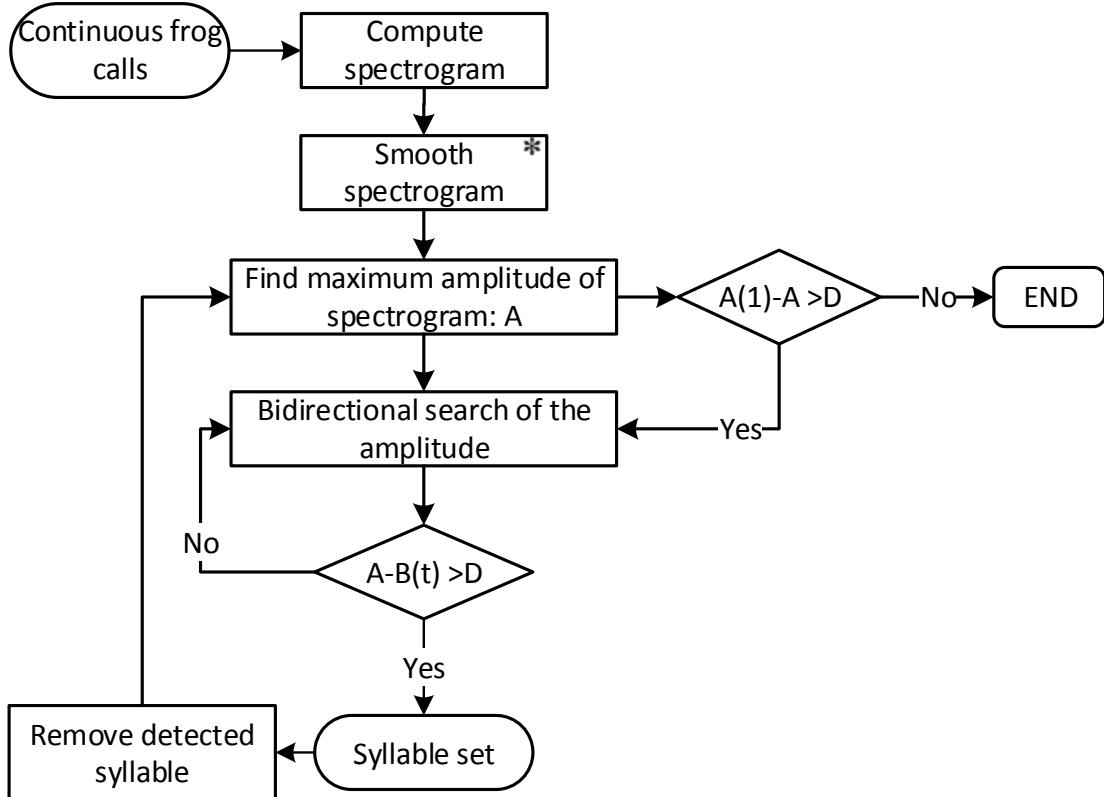


**Figure 3.2:** Segmentation method based on Härmä's algorithm. Here,  $D$  is the amplitude threshold for stopping criteria which is set at 20 dB experimentally, and the segmentation result is sensitive with this value.  $A$  is the maximum amplitude value of the spectrogram and we save the first maximum amplitude as  $A(1)$ ,  $B(t)$  is the amplitude of frame  $t$ . An asterisk denotes the optional processing step.

In this study, smoothing spectrogram is optionally applied to the spectrogram before the Härmä's algorithm, because some frog species have a large temporal gap within one syllable (see in Figure 3.3). As for the smoothing, a Gaussian filter ( $7 \times 7$ ) is applied to the spectrogram, where the size is set, taking into account a trade-off between connecting gaps within one syllable and separating adjacent syllables. The segmentation result after segmentation is shown in Figure 3.3. The distribution of syllable numbers after segmentation for all frog species is shown in Figure 3.4.

### 3.2.3 Pre-processing

Since features play an important role in the classification performance, pre-processing is applied to each syllable to improve the accuracy of feature extraction. The pre-processing of each

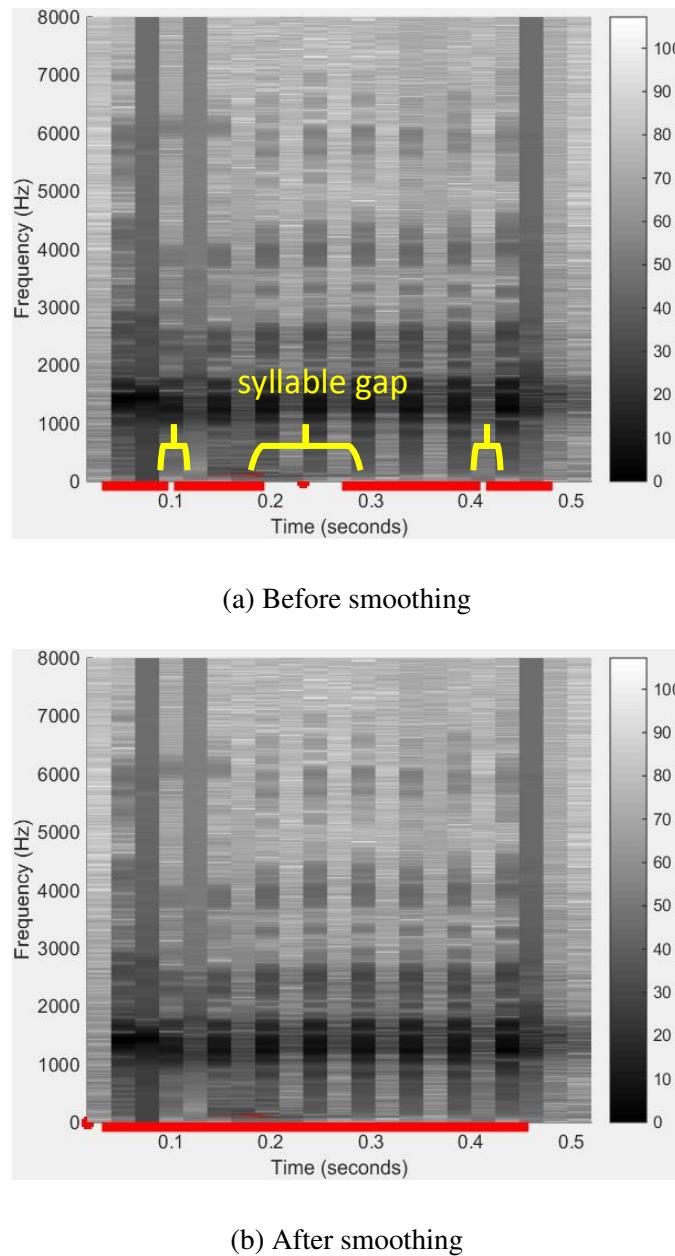


**Figure 3.3:** Syllable segmentation results are marked with a red line for *Neobatrachus sudelli* (one syllable).

syllable consists of the following steps:

### Pre-emphasis

Some collected frog calls have low amplitude but in the high frequency, which will have an effect on feature extraction of the spectrum at the high frequency end. To enhance those high-frequency components and reduce the low-frequency components, a first-order high-pass filter with finite impulse response (FIR) is introduced and defined as

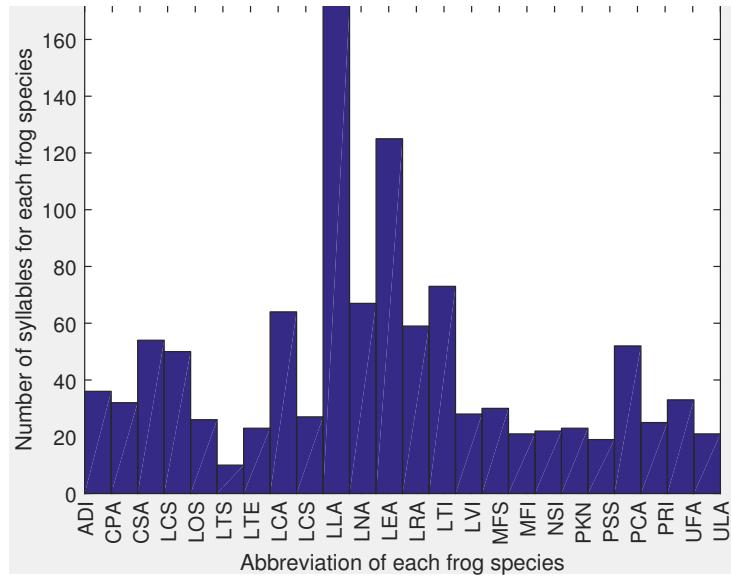

**Figure 3.4:** Distribution of syllable number for all frog species. The x-axis is the abbreviation of each frog species, and the corresponding scientific name can be found in Table 3.1.

$$y(n) = s(n) - \alpha s(n-1) \quad (3.1)$$

where  $s$  denotes a frog syllable,  $y$  is the output of the high-pass filter,  $\alpha$  denotes the cut-off frequency of the high-pass filter and is set at 0.97 here,  $n$  is the n-th sample of the syllable.

## Widowing

After pre-emphasis, each syllable is segmented into overlapping frames with fixed length. A Hamming widow is used to minimise the maximum side-lobe in the frequency domain and get side-lobe suppression, which is defined as

$$w(n) = 0.54 - 0.46\cos\left(\frac{2n\pi}{L-1}\right), 0 \leq n \leq L-1 \quad (3.2)$$

where  $L$  is the length of the frame. Because window sizes have an effect on the classification results, different window sizes are optimised for different features in this study. The signal after windowing process is expressed as

$$x(n) = w(n)y(n) \quad (3.3)$$

### 3.2.4 Feature extraction

After pre-processing of each syllable, various parametric representations are used to represent the syllable. In the literature, a variety of parametric representations of frog calls can be found, such as LPCs and MFCCs [Bedoya et al., 2014, Jaafar and Ramli, 2013b, Yuan and Ramli, 2012]. MFCCs achieved a better performance than LPCs [Yuan and Ramli, 2012]. Different from the hybrid features used [Gingras and Fitch, 2013, Han et al., 2011, Huang et al., 2009], our enhanced feature consists of more features, such as oscillation rate [Xie et al., 2015b], to further improve the classification accuracy. In this study, temporal features include syllable duration, Shannon entropy, rényi entropy, zero-crossing rate, averaged energy, and oscillation rate. Perceptual features contains spectral centroid, spectral flatness, spectral roll-off, signal bandwidth, spectral flux, and fundamental frequency. Here the word *perceptual* is defined according to [Lei et al., 2014]. MFCCs are used as a cepstral feature. The description of each feature is listed below.

- (1) Syllable duration: Syllable duration [Xie et al., 2015b] is directly obtained from the bounds (time domain) of the segmentation results.

$$Dr = x(n_e) - x(n_s) \quad (3.4)$$

where  $n_e$  and  $n_s$  are the end and start location of one segmented syllable.

- (2) Shannon entropy: Shannon entropy is the expected information content of a sequence of a signal. It is often used to describe the average of all the information contents weighted by their probabilities  $p_i$ .

$$Se = - \sum_{i=1}^L p_i \log_2(p_i) \quad (3.5)$$

where  $L$  is the length of a frog syllable.

- (3) Rényi entropy: rényi entropy is calculated to obtain the different averaging of probabilities via the parameter  $\alpha$ , and defined as

$$Re = \frac{1}{1-\alpha} \log_2 \left( \sum_i^n p_i^\alpha \right) \quad (3.6)$$

where  $p_i$  is the probabilities of the occurrence  $x(n)$  in the signal.

(3) Zero-crossing rate: zero-crossing rate denotes the rate of signal change along a signal. When adjacent signals have different signs, a zero-crossing occurs. The mathematical expression of  $ZCR$  can be defined as

$$Zcr = \frac{1}{2} \sum_{n=0}^{L-1} [sgn(x(n)) - sgn(x(n+1))] \quad (3.7)$$

(4) Averaged energy: Averaged energy is defined as the sum of intensity of signal.

$$Ae = \frac{1}{L} \sum_{n=0}^{L-1} x(n)^2 \quad (3.8)$$

(5) Oscillation rate: Oscillation rate is calculated in the frequency boundary around the fundamental frequency. First, the power within the frequency boundary is calculated. After normalising the power, the first and last 20% part of the power vector is discarded due to the uncertainty. Next, the autocorrelation is performed by the length of the vector. Furthermore, a discrete cosine transform is employed to the vector after mean subtraction, and the position of the highest frequency is achieved to calculate the oscillation rate.

(6) Spectral centroid: spectral centroid is the centre point of spectrum distribution. In terms of human audio perception, it is often associated with the brightness of the sound. With the magnitudes as the weight, it is calculated as the weighted mean of the frequencies.

$$Sc = \frac{\sum_{k=0}^{N-1} f_k X(k)}{\sum_{k=0}^{N-1} X(k)} \quad (3.9)$$

where  $X(k)$  is the discrete Fourier transform (DFT) of the syllable signal of the k-th frame, N is the half size of DFT.

(7) Spectral flatness: spectral flatness provides a way to quantify the tonality of a sound. A higher spectral flatness indicates a similar amount of power of the spectrum in all spectral bands. Spectral flatness is measured by the ratio between the geometric mean and the arithmetic mean

of the power spectrum and defined as

$$Sf = \frac{\exp\left(\frac{1}{N} \sum_{k=0}^{N-1} \ln X(k)\right)}{\frac{1}{N} \sum_{k=0}^{N-1} X(k)} \quad (3.10)$$

(8) Spectral roll-off: spectral roll-off is often used to measure the spectral shape, and defined as the frequency  $H$ . Here  $H$  is the value below which the  $\theta$  of the magnitude distribution is concentrated.

$$\sum_k^H X(k) = \theta \sum_{k=1}^{N-1} X(k) \quad (3.11)$$

where  $\theta$  is set at 0.85.

(9) Signal bandwidth: signal bandwidth can be used to represent the difference between the upper and lower cut-off frequencies.

$$Bw = \sqrt{\frac{\sum_{k=0}^{N-1} (k - Sc)^2 |x(n)|}{\sum_{k=0}^{N-1} X(k)}} \quad (3.12)$$

(10) Spectral flux: spectral flux is used to measure how quickly the power spectrum of a signal is changing. The spectral flux can be obtained via the power spectrum comparison between one frame and its previous one. The calculation of spectral flux is denoted as

$$Sf = \sum_{k=-\frac{N}{2}}^{\frac{N}{2}} H[|X(n, k)| - |X(n - 1, k)|] \quad (3.13)$$

where  $H(x) = (x + |x|)/2$  is a half-wave rectifier function.

(11) Fundamental frequency: fundamental frequency is calculated via averaging peak intensity of all frames within one frog syllable. If the peak intensity value is higher than an empirically chosen or specified threshold, the frequency of that peak will be selected to calculate the fundamental frequency.

(12) Mel-frequency cepstral coefficients (MFCCs): MFCCs, which are obtained by applying cosine transform to a sub-band Mel-frequency spectrum within a short time, have been widely

used in bird classification [Lee et al., 2006], speech/speaker recognition [Han et al., 2006], and frog identification [Bedoya et al., 2014]. In this study, MFCCs are calculated based on the method of [Lee et al., 2006].

**Step 1:** Band-pass filtering: The amplitude spectrum is then filtered using a set of triangular band-pass filters.

$$E_j = \sum_{k=0}^{N/2-1} \phi_j(k) A_k, 0 \leq j \leq J-1 \quad (3.14)$$

where  $J$  is the number of filters,  $\phi_j$  is the  $j^{th}$  filter, and  $A_k$  is the amplitude of  $X(k)$ .

$$A_k = |X[k]|^2, 0 \leq k \leq N/2 \quad (3.15)$$

**Step 2:** Discrete cosine transform: MFCCs for the  $i^{th}$  frame are computed by performing DCT on the logarithm of  $E_j$ .

$$C_m^j = \sum_{j=0}^{J-1} \cos\left(m \frac{\pi}{J}(j + 0.5)\right) \log_{10}(E_j), 0 \leq m \leq L-1 \quad (3.16)$$

where  $L$  is the number of MFCCs.

In this study, the filter bank consists of 40 triangular filters, that is  $J = 40$ . The length of MFCCs of each frame is 12 ( $L=12$ ). After calculating MFCCs from each frame, the averaged MFCCs of all frames within one syllable are calculated as

$$f_m = \frac{\sum_{i=1}^K (C_m^i)}{K}, 0 \leq m \leq L-1 \quad (3.17)$$

where  $f_m$  is the  $m^{th}$  MFCCs,  $K$  is the number of frames within the syllable.

For all perceptual features and  $Zcr$ , the mean values are calculated to characterise the frog syllable. Then, the  $L$ -dimensional MFCC vectors are fused with the other 11 feature vectors to form the enhanced temporal, perceptual and cepstral (TemPerCep) features.

After the formulation of feature vectors, normalisation is conducted as

$$v_i = \frac{v_i - \mu_i}{\sigma_i} \quad (3.18)$$

where  $\mu_i$  and  $\sigma_i$  are the mean and standard deviation computed for each feature vector  $i$ .

Let  $F_1$  represent temporal features with length  $L_1$ ,  $F_2$  and  $F_3$  represent perceptual features and cepstral features with length  $L_2$  and  $L_3$ , respectively. The enhanced procedure is performed as

$$F_H = w_1 F_1 \oplus w_2 F_2 \oplus w_3 F_3 \quad (3.19)$$

where  $w_1$ ,  $w_2$ , and  $w_3$  are the weights,  $\oplus$  is the concatenation operation.

### 3.2.5 Classifier description

In this chapter we report the results for five classification algorithms: 1) Linear discriminant analysis (LDA), 2) K-nearest neighbour, 3) Support vector machines, 4) Random forest, 5) Artificial neural network. Five feature vectors, LPCs, MFCCs, enhanced temporal feature and MFCCs (*TemCep*), enhanced temporal and perceptual features (*TemPer*), enhanced temporal, perceptual features, and MFCCs (*TemCepPer*), are fed into each classifier respectively to test their classification performance.

#### Linear discriminant analysis

After transforming the feature vector into low-dimensional space, the classification accuracy can be improved for linear discriminant analysis (LDA). In LDA, the goal is to find an optimal transformation matrix to transform the feature vector from an n-dimensional space to a d-dimensional space. A linear mapping, which maximises the Fisher criterion  $J_F$ , is used to obtain the transformation matrix as

$$J_F(A) = \text{tr}((A^T S_w A)^{-1} (A^T S_B A)) \quad (3.20)$$

where  $S_w$  and  $S_B$  are the within-class scatter matrix and between-class scatter matrix, respectively. The within-class scatter matrix and between-class scatter matrix are respectively defined as

$$S_W = \sum_{j=1}^C \sum_{i=1}^{N_j} (F_i^j - \mu_j)(F_i^j - \mu_j)^T \quad (3.21)$$

$$S_B = \sum_{j=1}^C (\mu_i - \mu)(\mu_i - \mu)^T \quad (3.22)$$

where  $F_i^j$  is the i-th feature vector of frog species  $j$ ,  $\mu_j$  is the mean vector of species  $j$ ,  $C$  is the number of frog species, and  $N_j$  is the number of feature vectors in species  $j$ ,  $\mu$  is the mean vector of all frog species.

The optimisation of the transform matrix can be determined via finding the eigenvectors of  $S_W^{-1} S_B$ .

$$A_{opt} = \operatorname{argmax} \frac{\operatorname{tr}(A^T S_B A)}{A^T S_W A} \quad (3.23)$$

In the recognition stage, the feature vector is first transformed into a lower-dimensional space via  $A_{opt}$  derived by LDA. Then, the distance between the feature vector of the test syllable and the feature vector representing this species is calculated. The one with minimum distance is regarded as the identified species.

### K-nearest neighbour

For the kNN classifier, the distance between an input frog feature vector and all stored feature vectors is first calculated. Then  $K$  closest vectors are selected to determine the species of the input feature vector by majority voting. For example, the Euclidean distance between an input instance  $i$  (frog feature vector) and one stored instance  $j$  is calculated as

$$d(i, j) = \sqrt{\sum_{c=1}^n (F_{i,c} - F_{j,c})^2} \quad (3.24)$$

Then the species of this input instance  $i$  can be predicted from the selected  $k$  nearest neighbours.

If

$$\frac{1}{k_1} \sum_{j \in S_1} d(i, j(S_1)) \leq \frac{2}{k_2} \sum_{j \in S_2} d(i, j(S_2)) \quad (3.25)$$

where  $k = k_1 + k_2$ ,  $k_1$  is the number of frog species  $S_1$ ,  $k_2$  is the number of frog species  $S_2$ . Here the input instance  $i$  will be classified as frog species  $S_2$ . Following prior work ([Han et al.,

2011, Xie et al., 2015b]), the distance function used for kNN is the Euclidean function, and  $k$  is set at 1.

### Support vector machines

Due to the high accuracy and superior generalisation properties, support vector machines (SVM) have been widely used for classifying animal sounds [Huang et al., 2009] [Acevedo et al., 2009]. In this study, the feature set obtained is first selected as training data. Then, the pairs  $(F_l^n, L_l^n), l = 1, 2, \dots, C_l$  are constructed using the selected training data, where  $C_l$  is the number of frog instances in the training data,  $F_l^n$  is the feature vector obtained from the  $l$ -th frog instance in the training data,  $L_l^n$  is the frog species label. Furthermore, the decision function for the classification problem based on SVM [Cortes and Vapnik, 1995] is defined by the training data as

$$f(v) = \operatorname{sgn}\left(\sum_{sv} \alpha_l^n L_l^n K(v, v_l^n) + b_l^n\right) \quad (3.26)$$

where  $K(., .)$  is the kernel function,  $\alpha_l^n$  is the Lagrange multiplier, and  $b_l^n$  is the constant value. In this work, the Gaussian kernel is selected as the kernel function. Parameters  $\alpha$  and  $v$  are selected independently for each feature vector by grid search using cross-validation [Hsu et al., 2003].

### Random forest

Random forest (RF) is a tree-based algorithm, which builds a specified number of classification trees without pruning. The nodes are split on a random drawing of  $m$  features from the entire feature set  $M$ . A bootstrapped random sample from the training set is used to build each tree. The advantage of RF is its ability to generate a metric to rank predictors based on their relative contribution to the model's predictive accuracy [Bao and Cui, 2005]. The prediction is defined as

$$\operatorname{Pred} = \frac{1}{K} \sum_{n=1}^K T_i \quad (3.27)$$

where  $T_i$  is the n-th tree response of the RF. In this work, the number of trees  $K$  is set at 300 trees to characterise frog calls. As for the predictor variables  $m$ , it is set at  $\sqrt{N}$ , where  $N$  is the feature dimension in a syllable.

### Artificial neural network

Artificial neural network (ANN) is a non-linear, adaptive, machine learning tool with great capabilities for learning, generalisation, non-linear approximation, and classification. An ANN architecture often consists of many interconnected neurons organised in successive layers: pattern layer, summation layer, and decision layer. The neuron in class is often computed by a Gaussian function. Then, the summation layer uses summation units to memorise the class conditional probability density functions of each class through a combination of Gaussian densities. Lastly, the decision layer unit classifies the pattern in accordance with the Bayesian decision rule based on the output of all summation layer neurons as

$$D(F) = \text{argmax} p_i(F), i = 1, \dots, N \quad (3.28)$$

where  $i$  is the species index,  $N$  is the total number of frog species.

$$p_i(F) = \sum_{j=1}^{m_i} \beta_{ij} \phi_{ij}(F) \quad (3.29)$$

where  $m_i$  is the number of Gaussian components,  $\beta_{ij}$  and  $\phi_{ij}(F)$  can be represented as

$$\sum_{j=1}^{m_i} \beta_{ij} = 1 \quad (3.30)$$

$$\phi_{ij}(F) = \frac{1}{(2\pi)^{(d/2)} \sigma^d} \exp\left[-\frac{(F - \mu_{ij})^T (F - \mu_{ij})}{2\sigma^2}\right] \quad (3.31)$$

where  $i = 1, \dots, N$ ,  $j = 1, \dots, m_i$ ,  $d$  denotes the dimension of the input vector  $F$ ,  $\sigma$  is the smoothing parameter,  $\mu_{ij}$  is the mean vector and the central of the classification. In this study, one ANN classifier named multiple perception layer (MLP) is used to classify frog calls.


### 3.3 Experiment results

In this experiment, performance statistics is evaluated using 5-fold cross-validation. The performance of the proposed frog call classification system is evaluated by quantitatively expressed

detection metrics, such as average accuracy, precision, and specificity. The definition of accuracy, precision, and specificity can be found in Chapter 2.6.

### 3.3.1 Effects of different feature sets

Figure 3.5 illustrates the classification accuracy with different feature sets: LPCs, MFCCs (*Cep*), temporal features and MFCCs (*TempCep*), temporal features and perceptual features (*TemPer*), and temporal features, perceptual features and MFCCs (*TemPerCep*). It can be seen that cepstral features (*Cep*, *TempCep*, *TemPerCep*) have a more stable performance than LPCs and perceptual features. It is evident that our proposed enhanced feature (*TemPerCep*) shows outstanding performance of all proposed feature sets of all the machine learning techniques. The reason for the high classification accuracy is that frog calls are of short duration and cover a small spectral band. Our proposed enhanced feature, *TemPerCep*, can better characterise the content of frog calls. Although the classification performance of *TemPerCep* is not significantly higher than other feature sets, the difference does show that our proposed feature set is suitable and effective for the classification of frog calls.

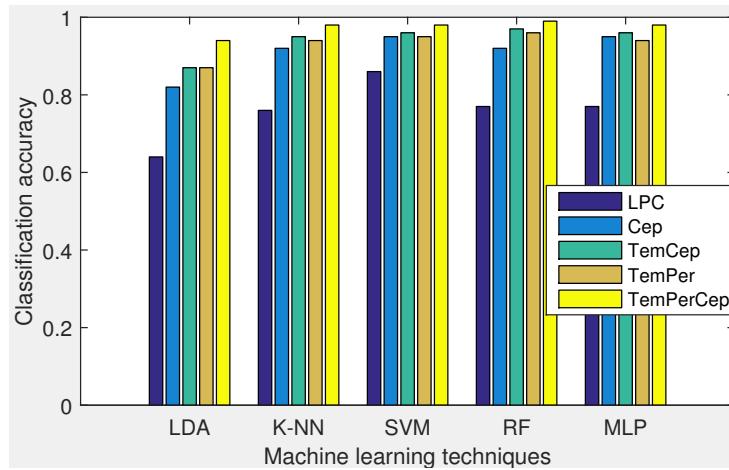


**Figure 3.5:** Classification results with different feature sets using the window size of 64 samples

### 3.3.2 Effects of different machine learning techniques

Figure 3.6 shows the frog call classification performance of *TemPerCep* with different machine learning techniques. The high classification results in term of the accuracy, sensitivity and specificity measure of different classifiers indicates good classification performance. It can be observed that RF achieves the best classification performance, while the classification

performance of LDA is the lowest. Meanwhile, the classification performances of SVM and MLP are very good, which might be that the features and classifiers are quite suitable. It can be seen from Figure 3.6 that frog call classification with different machine learning techniques can achieve good performance with our enhanced feature set, because the classification accuracy is very high. It can also be noted that RF can be highly recommended for classification of frog calls due to the highest classification accuracy.

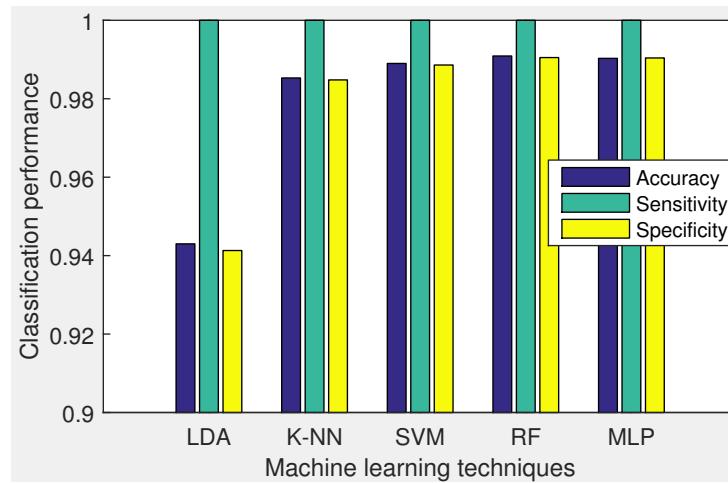


**Figure 3.6:** Results of different classifiers

### 3.3.3 Effects of different window size for MFCCs and perceptual features


As we know, the window size has an effect on the MFCCs and perceptual features. Therefore, a different window size will lead to a different classification performance (Figure 3.7 and Figure 3.8). The window size used for the test is 32, 64, 128, 256, because the syllable length of some frog species is less than 512 samples. It is found that the best classification performance for MFCCs is achieved with window size of 64 samples. For *TemPer*, the window size of 64 obtains the best classification performance. It also can be observed that SVM and RF achieve the best classification performance. Moreover, different window sizes of MFCCs have a larger variation than *TemPer* features, which might be because temporal features have a high weight in *TemPer* for the classification task.

### 3.3.4 Effects of noise

To further evaluate the robustness of our proposed feature set, white noise with different signal-to-noise (SNR) of 40 dB, 30 dB, 20 dB, 10 dB, 0dB, and -10 dB is added to the frog calls.

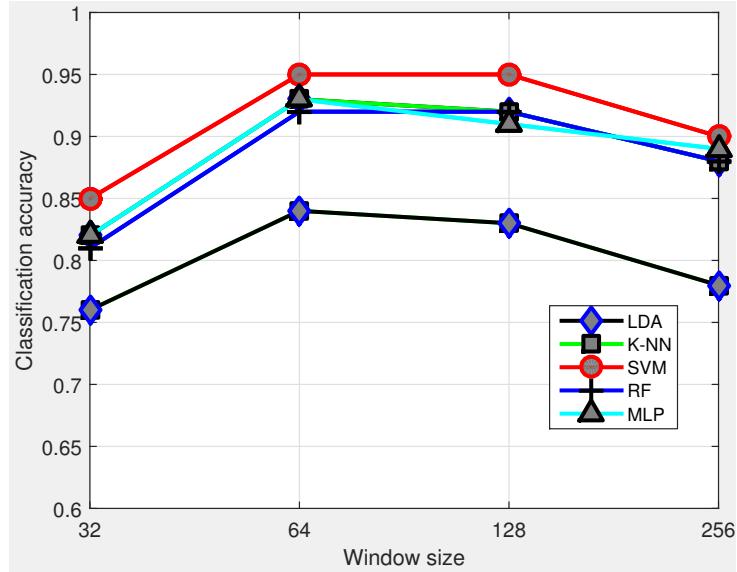


**Figure 3.7:** Classification results of MFCCs with different window sizes

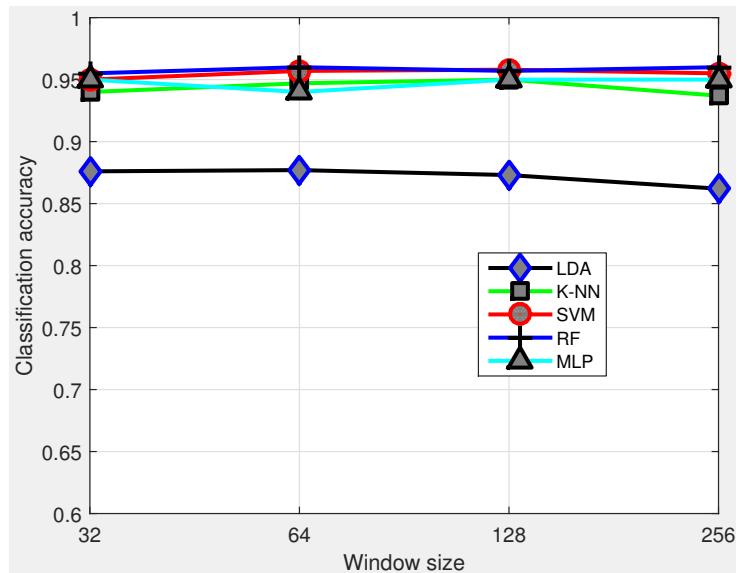

**Figure 3.8:** Classification results of TemPer with different window sizes

Because this chapter focuses on the evaluation of features rather than the segmentation method, the artificial noise is added after syllable segmentation. Since SVM has shown a good performance for frog call classification in 3.3.1, we only use SVM to test the effects of different levels of artificial noise. The classification results of different levels of noise contamination are shown in Figure 3.9. It is found from Figure 3.9, that MFCCs (Cep) are very sensitive to background noise, compared with other feature sets. Comparing *TemCep* with *TemPer*, it can be observed that perceptual features have a better anti-noise ability than the cepstral feature. It is also found that LPCs have a good anti-noise ability when SNR is larger than 10, but the classification accuracy quickly decreases when SNR is smaller than 10.

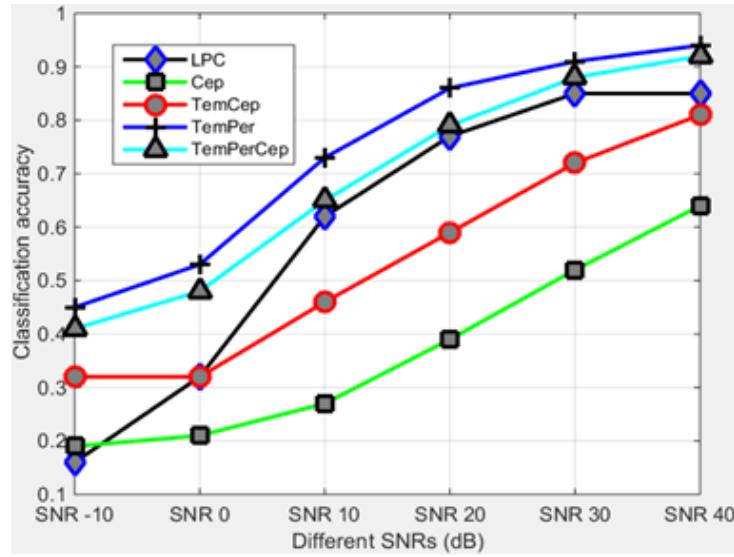

**Figure 3.9:** Sensitivity for different features for different levels of noise contamination

### 3.4 Discussion

Table 3.2 shows the classification performance of previous methods. Since previous studies often used different datasets to perform the classification task, this research implemented all those features and applied them to the used dataset with the same classifier (SVM). Compared with those previous methods, this proposed enhanced feature set significantly outperforms other methods. Therefore, it can be concluded that the results of this research stand above the current classification performance. From the table, we can also observe that MFCCs are the most popular feature that has been used for frog call classification. Among all used machine learning techniques, SVM shows the superior performance and is widely used for the classification task. It can be found that the classification accuracy of *TemPerCep* does not show significant improvement when compared with MFCCs. However, combining temporal and perceptual features with cepstral features greatly improves the anti-noise ability of MFCCs.

### 3.5 Summary and limitations

In this chapter, a novel fused feature set was proposed to classify frog calls in high SNR recordings with five machine learning techniques. After segmenting continuous recordings into individual syllables, a variety of acoustic features are extracted from each syllable. Then, different features are combined to construct different feature sets. Finally, five machine learning techniques are used to classify frog calls in high SNR recordings with different feature sets.

**Table 3.2:** Comparison with previous used feature sets

Ref.	Feature	Accuracy (%)
[Juan Mayor, 2009, Yuan and Ramli, 2012]	LPCs	93.5
[Bedoya et al., 2014, Jaafar and Ramli, 2013b, Lee et al., 2006, Xie et al., 2015b]	MFCCs	94.9
[Han et al., 2011]	Spectral centroid, Shannon entropy, Rényi entropy	75.6
[Xie et al., 2015b]	Syllable duration, dominant frequency, oscillation rate, frequency modulation, energy modulation	92.3
[Huang et al., 2014]	Spectral centroid, signal bandwidth, spectral roll-off, threshold-crossing rate, spectral flatness, and average energy	95.8
Our feature set	<i>TemPerCep</i>	99.1

Classification results demonstrate that a fusion of temporal, spectral and cepstral features can achieve the best performance. Compared to temporal and spectral features, cepstral features can achieve a robust classification accuracy when used individually, but are sensitive to the background noise. Therefore, in the next chapter, we aim to develop robust cepstral features that are not sensitive to the background noise.



# **Chapter 4**

## **Adaptive frequency scaled wavelet packet decomposition for frog call classification**

---

### **Research problem**

Following the conclusion of Chapter 3, it is found that cepstral feature has been widely used for calssifying frog species in high SNR recordings, and achieves a good classification, but is very sensitive to background noise.

### **Research sub-question**

How to develop robust cepstral features to classify frog species in low SNR recordings?


### **4.1 Overview**

This chapter presents a novel cepstral feature based on adaptive frequency scaled wavelet packet decomposition, whose goal is to develop a novel ceptral feature with a good anti-noise ability.

Since both high and low SNR recordings are studied in this chapter, developing features with a good anti-noise ability is important for dealing with low SNR recordings. Different from most previous studies that extracted features via the Fourier transform, WPD is employed in this chapter for feature extraction. The classification performance is evaluated with two different datasets from Queensland, Australia (18 frog species from commercial recordings (high SNR) and field recordings of eight frog species from James Cook University recordings (low SNR)). Although low SNR recordings are used in this research, the classification task is regarded as a SISL classification problem.

## 4.2 Method

The architecture of the proposed classification method consists of five modules: syllable segmentation, syllable feature extraction, adaptive frequency scale generation, WPD feature extraction and classification (see Figure 4.1). Each module is described in the following sections.

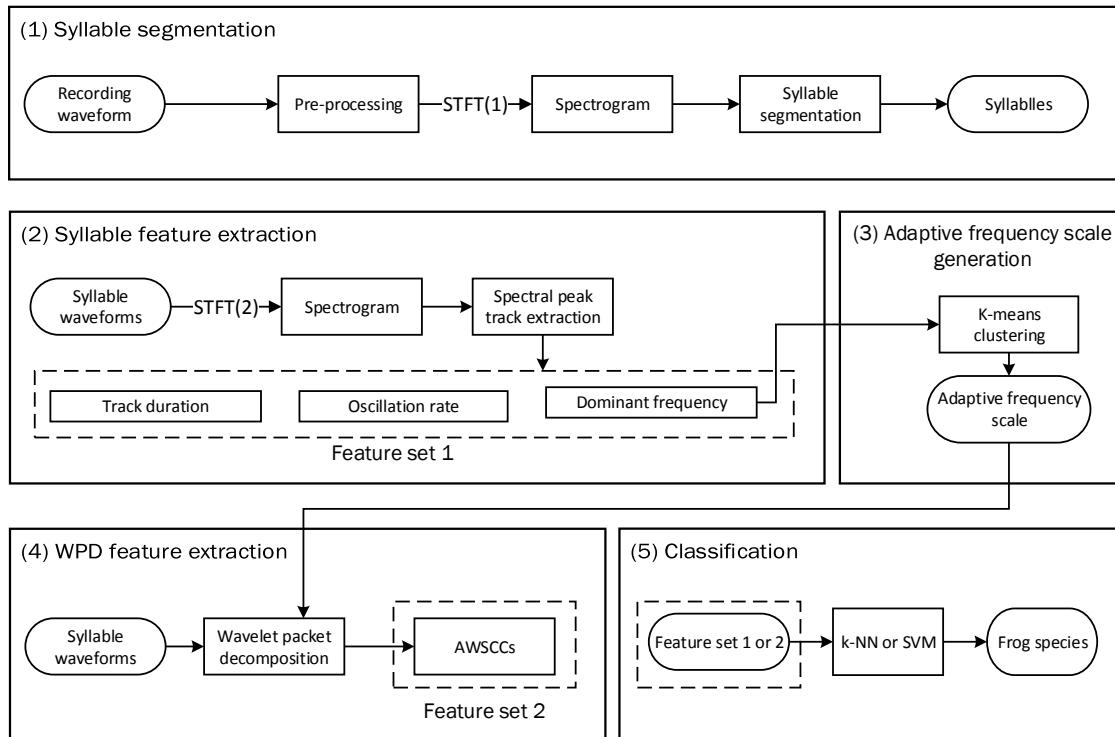

**Figure 4.1:** Block diagram of the frog call classification system. The line of dashes indicates the extracted feature set. AWSCCs is the abbreviation of *adaptive wavelet packet decomposition sub-band cepstral coefficients*. STFT is short-time Fourier transform. For STFT(1), the window function, size and overlap are Kaiser window, 512 samples and 25%. For STFT(2), the window function, size and overlap are Hamming window, 128 samples and 90%. In this diagram, two feature sets are extracted, the description of other feature sets is shown in Figure 4.6.

### 4.2.1 Sound recording and pre-processing

Two datasets obtained from a commercial recording [Stewart, 1999] and James Cook University (JCU) were selected for this chapter. Recordings, which were collected from the CD, are two-channel, sampled at 44.10 kHz and saved in MP3 format. All recordings were obtained with a directional microphone and have a high signal to noise ratio (SNR). Each recording includes one frog species, and has a duration ranging from twenty-one to fifty-four seconds. The calls of eighteen frog species recorded in Queensland, Australia were used to develop the detailed

methodology described in Figure 4.1. To reduce the subsequent computational burden, all the recordings selected from the CD were re-sampled at 16 kHz per second, mixed to mono, and saved in WAV format.

The JCU recordings were obtained from Kiyomi dam (S 19° 22' 16.0'', E 146° 27' 31.3'') BG Creek dam (S 19° 27' 1.23'', E 146° 24' 5.65'') and Stony Creek dam (S 19° 24' 07.0'', E 146° 25 51.3) in Townsville, using Song Meter (SM2) [Xie, 2016]. The recordings were stored on 16 GB SD cards in 64 kbps MP3 mono format and have a low SNR compared with the commercial recording. The sample rate is 16.00 kHz. All the JCU recordings started around sunset, finished around sunrise every day and have 12 hour duration.

#### 4.2.2 Spectrogram analysis for validation set

In this chapter, three syllables for each frog species are set aside and used as a *reference data set*. For the commercial recording, three parameters including syllable duration, dominant frequency, and oscillation rate, are manually calculated for those three syllables of each species and averaged, as listed in Table 4.1. The reference data set is excluded from the data used in the testing stage.

**Table 4.1:** Parameters of 18 frog species averaged of three randomly selected syllable samples in the commercial recording. These selected samples make the *reference data set*.

No.	Scientific name	Abbreviation	Syllable duration (millisecond)	Peak frequency (Hz)	Oscillation rate (cycle/second)
1	Assa darlingtoni	ADI	80	3200	160
2	Crinia parinsignifera	CPA	250	4300	350
3	Litoria caerulea	LCA	500	500	50
4	Litoria chloris	LCS	800	1700	220
5	Litoria fallax	LFX	430	4700	70
6	Litoria gracilenta	LGA	1400	2700	100
7	Litoria latopalmata	LLA	30	1400	2100
8	Litoria nasuta	LNA	100	2800	160
9	Litoria revelata	LRA	160	4100	70
10	Litoria rubella	LUA	500	2900	60
11	Litoria verreauxii verreauxii	LVV	270	3100	125
12	Mixophyes fasciolatus	MFS	200	1200	140
13	Mixophyes fleayi	MFI	50	1000	140
14	Philoria kundagungan	PKN	170	430	95
15	Pseudophryne coriacea	PCA	300	2400	80
16	Pseudophryne raveni	PRI	370	2500	45
17	Rheobatrachus silus	RSS	510	1500	60
18	Uperoleia laevigata	ULA	450	2400	150

For the JCU recordings<sup>2</sup>, the corresponding parameters are described in Table 4.2. Compared with the commercial recordings from the CD, peak frequency shows a smaller variation than syllable duration and oscillation rate.

**Table 4.2:** Parameters of eight frog species obtained by averaging three randomly selected syllable samples from recordings of James Cook University. NA indicates there is no oscillation structure in the spectrogram for the background noise and frog chorus. Since syllable durations of *Rhinella marina* (Common name: Canetoad) are very different from each other, we manually set the duration of Canetoad using the maximum duration of other frog species, which is 500 milliseconds.

No.	Scientific name	Abbreviation	Syllable duration (millisecond)	Peak frequency (Hz)	Oscillation rate (cycles/second)
1	<i>Rhinella marina</i>	CTD	500	680	12
2	<i>Cyclorana novaehollandiae</i>	CNE	350	600	NA
3	<i>Limnodynastes terraereginae</i>	LTE	80	630	NA
4	<i>Litoria fallax</i>	LFX	120	4100	50
5	<i>Litoria nasuta</i>	LNA	100	2700	NA
6	<i>Litoria rothii</i>	LRI	350	1150	15
7	<i>Litoria rubella</i>	LUA	500	2400	NA
8	<i>Uperoleia mimula</i>	UMA	120	2400	40

### 4.2.3 Syllable segmentation

The syllable segmentation process is described in Chapter 3.2.2. To further improve the segmentation result, the averaged energy of which is less than 15% of the maximum energy, are removed [Gingras and Fitch, 2013]. The distribution of syllable numbers after segmentation for all frog species is shown in Figure 4.2.

For the JCU recordings, bandpass filtering is applied to each recording before using the Härmä's method [Harma, 2003]. A bandpass filter is first used to filter specific frog species, because different frog species tend to call simultaneously. The filtering is

$$S'(t, f) = \begin{cases} S(t, f) & F_{lower} \leq f \leq F_{upper} \\ 0 & \text{otherwise} \end{cases}$$

Here,  $S'(t, f)$  is the filtered spectrogram, the  $F_{lower}$  and  $F_{upper}$  are lower and upper cutoff

---

<sup>2</sup><https://www.ecosounds.org/>


frequency and calculated as

$$\begin{aligned} F_{upper} &= F_{peak} + \beta \\ F_{lower} &= F_{peak} - \beta \end{aligned} \quad (4.1)$$

where  $F_{peak}$  is the peak frequency (Table 4.2),  $\beta$  is a threshold for determining the frequency bandwidth and set at 300 Hz based on the *reference data set*.

After bandpass filtering, noise reduction is essential for improving the segmentation result for the low signal to noise ratio in JCU recordings. Here, we use the method of Towsey et al. [2012] for noise reduction. Finally, we use the Härmä's method to detect individual syllables (Figure 4.3).


For the JCU recordings, eight frog species were used for the experiment. After syllable segmentation of continuous recordings, for each frog species, we randomly selected 30 syllables from segmentation results for subsequent analysis.

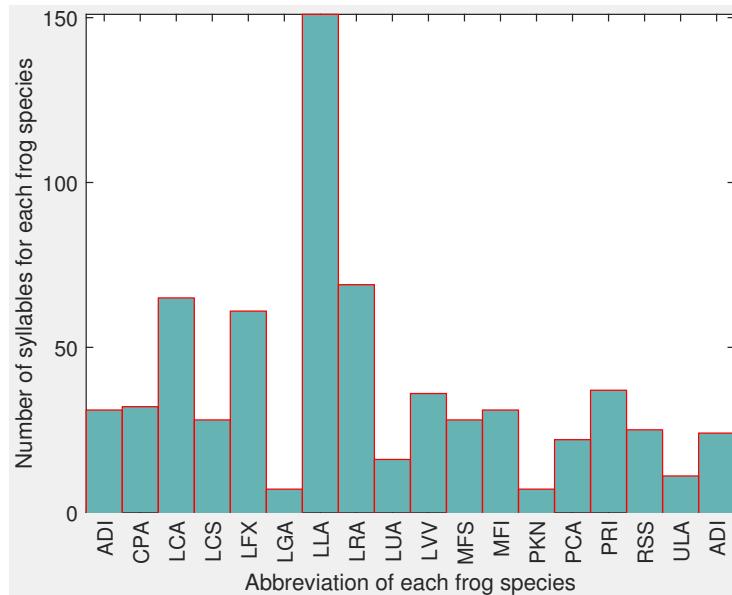

**Figure 4.2:** Distribution of syllable number for all frog species. The x-axis is the abbreviation of each frog species, and the corresponding scientific name can be found in Table 4.1.

#### 4.2.4 Spectral peak track extraction

Spectral peak tracks (SPT) (also called frequency tracks) have been explored for studying birds [Heller and Pinezich, 2008, Jancovic and Kokuer, 2015] and whales [Roch et al., 2011]. In this chapter, the spectral peak track is used to represent the trace of a frog advertisement call, because frogs that are genetically related share more similar advertisement calls than distantly

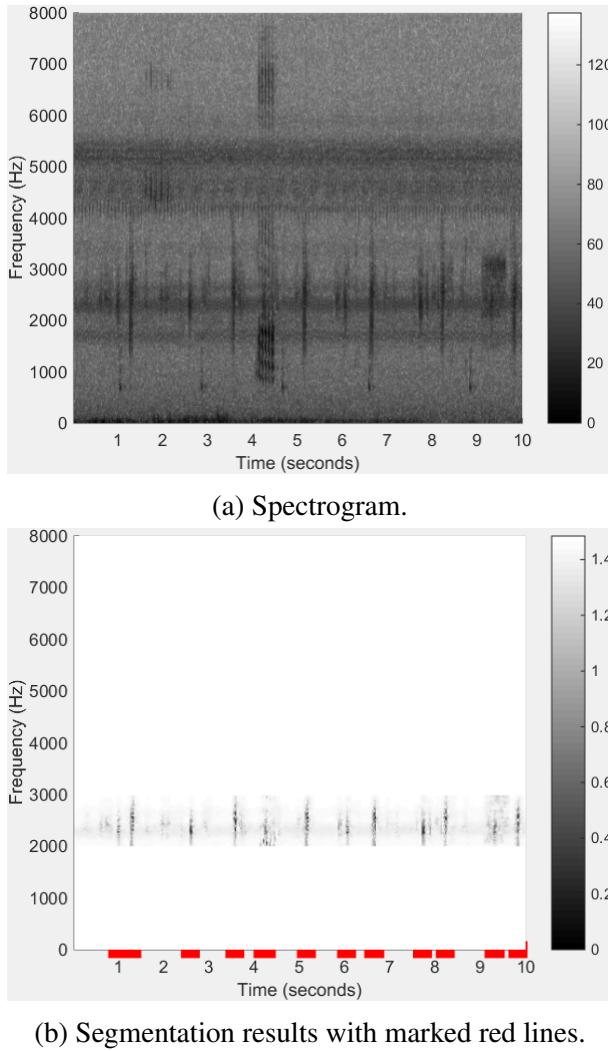

**Figure 4.3:** Segmentation results for *Uperolela mimula* using bandpass filtering, noise reduction and Härmä's method. The red line in (b) indicates the start and stop location of each segmented syllable.

related frogs [Gingras and Fitch, 2013]. The reasons for using SPT are (1) to isolate the desired frog calls from the background noise; (2) to extract corresponding SPT features. Here, the SPT method is reported in [Xie et al., 2015b].

For the SPT extraction algorithm, seven parameters need to be set (Table 4.3). The process for determining those parameters is explained in Section 3.

Before applying the SPT extraction algorithm, each syllable is transformed to a spectrogram with the following parameter settings (Hamming window, frame size is 128 samples, and window overlap is 90%). For the generated spectrogram, the maximum intensity (real peak) is selected from each frame with a minimum required intensity,  $I$ . Then, the time and frequency domain intervals between two successive peaks are calculated. If the time and frequency


**Table 4.3:** Parameters used for spectral peak extraction

Parameter	Description
$I$ (dB)	Minimum intensity threshold for peak selection
$T_c$ (s)	Maximum time domain interval for peak connection
$T_s$ (s)	Minimum time interval for stopping growing tracks
$f_c$ (Hz)	Maximum frequency domain interval for peak connection
$d_{min}$ (s)	Minimum track duration
$d_{max}$ (s)	Maximum track duration
$\beta$ (0~1)	Minimum density value


intervals are smaller than  $T_c$  and  $f_c$  respectively, one initial track ( $SPT_1$ ) will be generated. After that, linear regression is applied to the generated track for calculating the position of the next predicted peak. Based on peaks  $p_1(t_1, f_1)$  and  $p_2(t_2, f_2)$  within the initial track ( $SPT_1$ ),  $a$  and  $b$  in Equation (4.2) can be solved.

$$f = at + b \quad (4.2)$$

Based on  $a$  and  $b$ , the predicted peak  $\hat{p}_n$  of the following frame  $t_n$  can be calculated. Next, the time and frequency domain intervals between predicted peak ( $\hat{p}_n$ ) and the real peak of the successive frame are recalculated. If the time and frequency intervals are smaller than  $T_c$  and  $f_c$  respectively, the real peak will be added to the initial track. After each peak is added to the initial track, linear regression is repeated to recalculate the next predicted peak using at most the last 10 included peaks. This iterative process continues until  $T_s$  is no longer satisfied. When no more peaks will be added to one track, the next step is to compare the duration and density of the track with  $d_{min}$ ,  $d_{max}$ , and  $\beta$ . If all conditions are satisfied, then the track will be saved to the track list. The SPT results for *Neobatrachus sudelli* are shown in Figure 4.4. During the process of track extraction, time domain gaps are generated where the intensity threshold  $I$  is not reached. These gaps can be filled by predicting the correct frequency bin using linear regression, as illustrated in Figure 4.4.

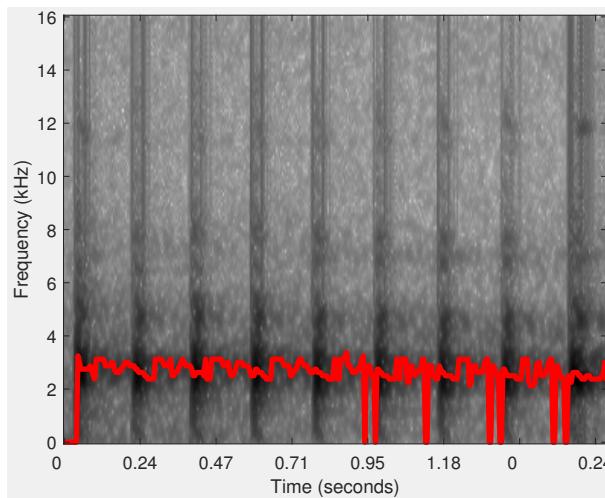

(a) selected peaks below the intensity threshold  $I$  are set to zero.

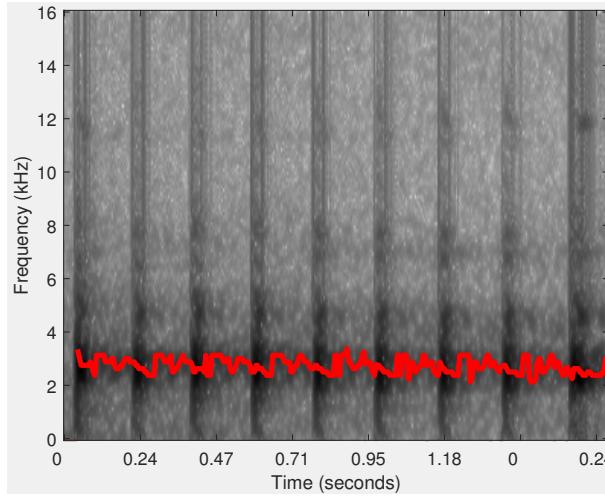

(b) spectral peak track with predicted peaks using linear regression.

**Figure 4.4:** Spectral peak track extraction results for *Neobatrachus sudelli*. By filling the gaps within the track, the dominant frequency can be more accurately calculated.

#### 4.2.5 Syllable SPT features

After SPT extraction, each SPT is expressed in the following format: (1) track start time  $t_s$ ; (2) track stop time  $t_e$ ; (3) frequency bin index for each of the peaks within the track  $f_t$  ( $t_s \leq t \leq t_e$ ). Then, syllable features including track duration, dominant frequency, and oscillation rate are calculated based on the SPT.

- a)** Track duration (second): Track duration ( $D_t$ ) is directly obtained from the bounds of the track.

$$D_t = (t_e - t_s) * r_x \quad (4.3)$$

where  $r_x$  is the time domain resolution in unit second per frame.

**b) Dominant frequency (Hz):** Dominant frequency ( $\bar{f}$ ) is calculated by averaging the frequency of all peaks within one track

$$\bar{f} = \sum_{t=t_s}^{t_e} f_t / (t_e - t_s + 1) * r_y \quad (4.4)$$

where  $r_y$  is the frequency domain resolution with unit frequency per bin,  $f_t$  is the frequency bin index of peak  $t$ .

**c) Oscillation rate (Hz):** Oscillation rate ( $O_r$ ) represents the number of pulses per second. The algorithm for extracting oscillation rate is introduced and summarised as follows. First, the frequency domain boundary is defined based on the dominant frequency, and the power within the boundary is calculated. Then, the power vector is normalised, and the first and last 20% part of the vector is discarded, because of the uncertainty in the start and end of the syllables. Next, the autocorrelation with the length of the vector is calculated. Furthermore, a discrete cosine transform (DCT) is applied to the vector after subtracting the mean, and the position of the highest frequency ( $P_f$ ) is achieved. Finally, the oscillation rate is defined as

$$O_r = \frac{P_f}{L_{dct}} * r_x * \gamma \quad (4.5)$$

where  $P_f$  is the position of the highest frequency values of the DCT result,  $L_{dct}$  is the length for applying DCT to the power vector set as 0.2 second in this experiment.

#### 4.2.6 Wavelet packet decomposition

Wavelet packet decomposition (WPD) is a powerful tool for the analysis of non-stationary signals, which includes multiple bases and different basis [Selin et al., 2007]. With WPD, an original acoustic signal can be split into two frequency bands such as lower and higher frequency band. Then, both lower and higher frequency bands can be further continuously decomposed into two sub-bands, which produce a complete wavelet packet tree [Farooq and Datta, 2001]. Due to its ability for analysing a non-stationary signal, WPD has been used to analyse acoustic signals [Ren et al., 2008, Selin et al., 2007]. Here, WPD is used to obtain features for frog call classification.

#### 4.2.7 WPD based on an adaptive frequency scale

To obtain robust features for frog call classification, the frequency scale used for WPD is crucial. In prior work [Biswas et al., 2014, Litvin and Cohen, 2011, Zhang and Li, 2015], different frequency scales have already been proposed for WPD. Bark-scaled WPD was proposed by Litvin and Cohen to separate blind source from a single channel audio source [Litvin and Cohen, 2011]. Biswas et al. [2014] used features based on ERB-scaled (Equivalent rectangular bandwidth) WPD for Hindi consonant recognition. Zhang and Li [2015] developed a method based on Mel-scaled WPD for bird sound detection with the SVMs classifier. However, most frequency scales used for WPD are developed for studying speech rather than frogs. Therefore, finding a suitable frequency scale for frogs to perform the WPD is important for obtaining features with strong discriminatory power. In this chapter, an adaptive frequency scale for WPD for frog calls is proposed, based on the dominant frequency of frog species to be classified. Specifically, the k-means clustering algorithm is used to cluster the dominant frequency of all syllables. Then, the centroids of the clustering result are used to generate the frequency scale. Here, the value of  $k$  for the k-means clustering algorithm is the same as the number of frog species to be classified, the distance function used is *city block* [Melter, 1987].

Based on the obtained frequency scale, an adaptive frequency scaled WPD method is proposed, which is described in Algorithm 1. The wavelet packet tree used for classifying 18 frog species is shown in Figure 4.5.

#### 4.2.8 Feature extraction based on adaptive frequency scaled WPD

In previous studies [Bedoya et al., 2014, Xie et al., 2015b], MFCCs have been used for studying bioacoustic data, and it is used as the baseline for feature comparison in this chapter. Besides MFCCs, another feature set called Mel-scaled wavelet packet decomposition sub-band cepstral coefficients (MWSCCs) is also included in the comparison experiment [Zhang and Li, 2015], because it shows better performance than MFCCs for bird detection in a complex environment. In this chapter, we propose a novel feature set named *adaptive frequency scale wavelet packet decomposition sub-band cepstral coefficients* (AWSCCs) for frog call classification. The extraction procedure of AWSCCs is similar to MWSCCs. However, the frequency scale used for our AWSCCs is based on an adaptive frequency scale rather than the Mel-scale for MWSCCs. Meanwhile, after performing DCT, temporal feature integration is used for calculating the

---

**Algorithm 1:** Adaptive frequency scale for WPD

---

**Data:**  $c_i (i = 1, 2, \dots, K)$ ,  $f_s$ , where  $K$  is the number of frog species to be classified,  $c_i$  is the centroid of the clustering results,  $f_s = S_r/2$  where  $S_r$  is the sample rate of the audio recordings, which is 16 kHz here.

**Result:** Adaptive wavelet packet tree

**begin**

**Step 1:** Sort the centroid  $c_i (i = 1, 2, \dots, K)$ , and calculate the difference between the consecutive vectors of  $c$ , sort the difference and save it as  $d_j (j = 1, 2, \dots, K - 1)$

**Step 2:** Calculate the decomposition level  $L$  based on the following rule

$$f_s / \min(d) \leq 2^{L-1}$$

where  $L$  is the minimum integer that satisfies that equation.

**Step 3:** Perform the wavelet packet decomposition

**for**  $l = 1 : L$  **do**

1. Calculate the frequency resolution of level 1

**for**  $i = 1 : K$  **do**

1: Put the  $c_i$  into the right frequency band

2: Count the number of  $c_i$  in each band ( $n$ )

**if**  $n \geq 2$  **then**

| perform further decomposition to that particular node

**else**

| stop decomposition

---

statistics of feature vectors which generates different statistical types of AWSCCs. (see in Figure 4.6).

After syllable segmentation, the signal of one syllable is represented as  $y(n)$ ,  $n = 1, \dots, N$ , where  $N$  is the length of one syllable of frog calls. Based on the  $y(n)$ , steps for AWSCCs extraction are described as follows:

1). Add Hamming window to the signal  $y(n)$ .


$$x(n) = w(n)y(n) \quad (4.6)$$

where  $w(L)$  is the Hamming window function and defined as  $w(n) = 0.54 - 0.46\cos(\frac{2n\pi}{L-1})$ ,  $L$  is the length of Hamming window and set as 128 samples here.


2). Perform wavelet packet decomposition spaced in adaptive frequency scale as described in Section 4.2.7.

$$WP(i, j) = \sum_{i=1}^M x(n)\psi_{(a,b)}(n) \quad (4.7)$$

where  $WP(i, j)$  is the wavelet coefficients of the decomposition,  $i$  is the sub-band index,  $j$  is the index of wavelet coefficients,  $\psi_{(a,b)}(n)$  is the wavelet base function, and we use 'Db 4'

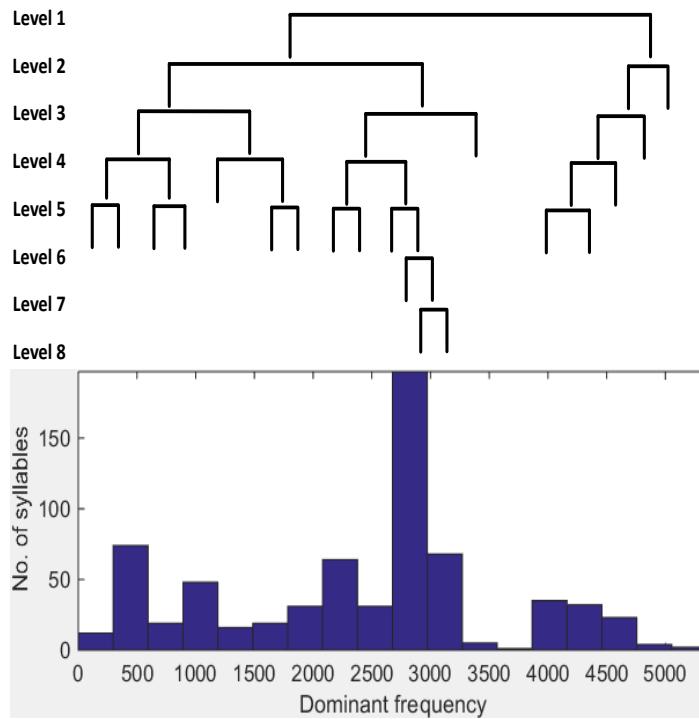

**Figure 4.5:** Adaptive wavelet packet tree for classifying twenty frog species. The upper image is the wavelet packet tree; the lower image is the histogram of dominant frequency for twenty frog species.

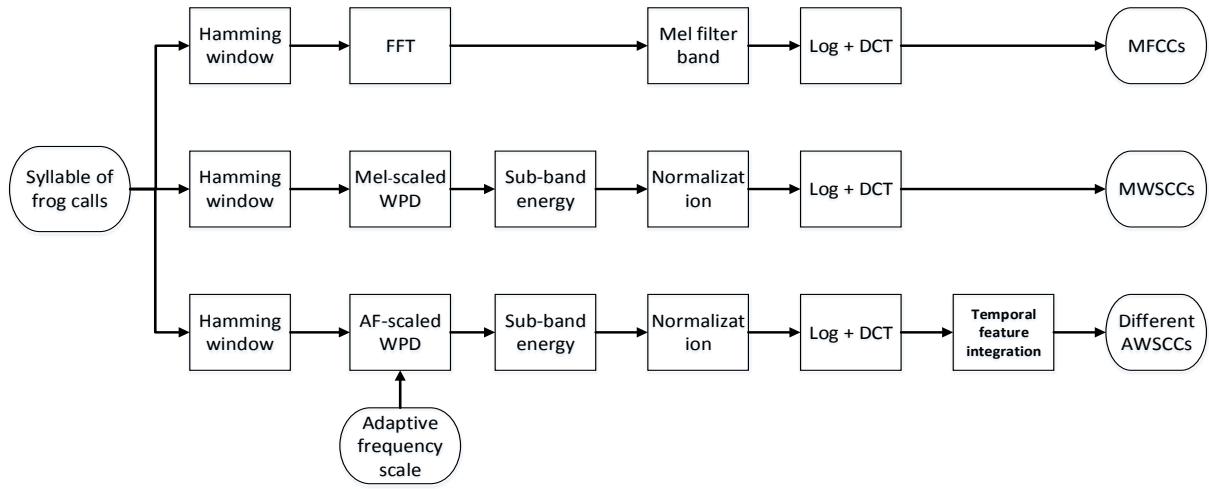

**Figure 4.6:** Description of three feature extraction methods including MFCCs, MWSCCs, and different statistical types of AWSCCs.

experimentally. Here,  $a$  and  $b$  are the scale and shift parameters, respectively. 'Db 4' represents the Daubechies wavelet transform which has four scaling and wavelet function coefficients.

**3).** Calculate the total energy of each sub-band.

$$WP_i = \sum_{j=1}^{M_i} [WP(i, j)]^2 \quad (4.8)$$

where  $i = 1, 2, \dots, T$ , and  $T$  is the total number of sub-band, and  $j = 1, 2, \dots, M_i$ ,  $M_i$  is the total number of wavelet coefficients.

**4).** Normalise the energy of each sub-band.

$$SE_i = \frac{WP_i}{M_i} \quad (4.9)$$

where  $i = 1, 2, \dots, T$ .

**5).** Perform DCT on the logarithm sub-band energy for dimension reduction and obtain the feature AWSCCs.

$$AWSCCs(d) = \sum_{i=1}^T \log SE_i \cos\left(\frac{d(i - 0.5)}{T}\pi\right) \quad (4.10)$$

where  $d = 1, 2, \dots, d'$ ,  $1 \leq d' \leq T$ , here  $d'$  is the dimension of AWSCCs, and set as 12 here. To keep the feature dimension consistency, the dimensions for MFCCs and MWSCCs are also set as 12 in this chapter, and the detailed steps for extraction can be found in [Bedoya et al., 2014] and [Zhang and Li, 2015].

**6).** Temporal feature integration

Here, the statistics of all feature vectors over each windowed signal are calculated, which include sum, average, standard deviation, and skewness. With randomly selected five instances for each frog species, the classification accuracy of averaged AWSCCs is higher than other statistics of AWSCCs. Therefore, only averaged AWSCCs are used in the subsequent experiment. To capture the dynamic information of the frog calls, the delta-AWSCCs are also calculated based on the averaged AWSCCs.

#### 4.2.9 Classification

In this chapter, the k-nearest neighbour (kNN) and support vector machine (SVM) classification algorithms are used for frog call classification. The input parameters for each classifier are syllable features (SFs), MFCCs, MWSCCs, and different AWSCCs, and the output is the frog species. The descriptions of those two classifiers can be found in Chapter 3.2.5.

## 4.3 Experiment result and discussion

Several experiments are described for evaluating our proposed frog call classification system. First, the parameter tuning is discussed based on the reference data set. Then, the comparisons between all proposed features are studied. Finally, the classification results under different SNR are described.

### 4.3.1 Parameter tuning

There are five modules that require parameter tuning: syllable segmentation, spectral peak track, feature extraction, and classification (Figure 5.1).

For syllable segmentation, the window size and overlap are 512 samples and 25%, but the intensity thresholds are 10 dB and 5 dB for the commercial recordings and the JCU recordings, respectively.

In the spectral peak track determination, there are seven parameters (see in Table 4.3). The parameter settings are shown in Table 4.4.

**Table 4.4:** Parameter setting for calculating spectral peak track.

Parameter	Commercial recordings	JCU recordings
$I$ (dB)	3	3
$T_c$ (s)	0.005	0.1
$T_s$ (s)	0.05	0.2
$f_c$ (Hz)	800	800
$d_{min}$ (s)	0.01	0.05
$d_{max}$ (s)	2	2
$\beta$ (0~1)	0.8	0.6

With a random parameter setting start, an iterative loop is performed for a fixed range of each parameter as seen in Table 4.1 to optimise those parameters.

For feature extraction, the window size and overlap are the same for MFCCs, MWSCCs, and AWSCCs using Hamming window, which are 128 samples and 90%, respectively. The dimensions of MFCCs, MWSCCs and AWSCCs are 12. For SFs and delta-AWSCCs, the dimensions are 3 and 24, respectively.

Following prior work [Han et al., 2011, Huang et al., 2009, Xie et al., 2015b], the distance function used for kNN is the Euclidean distance, and  $k$  is set as 3. As for the SVM classifier, the Gaussian kernel is used. Parameters  $\alpha$  and  $v$  are selected independently for each feature set by grid-search using cross validation [Hsu et al., 2003].

### 4.3.2 Feature evaluation

All experiments are carried out in Matlab R2014b. Performance statistics are estimated with ten-fold cross validation. Totally, five feature sets including SFs, MFCCs, MWSCCs, and averaged AWSCCs, and delta-AWSCCs, are fed to two classifiers, which are the kNN and SVM classifiers. Due to the non-uniform distribution of the number of syllables for different frog species in the commercial recordings, a weighted classification accuracy is defined as

$$\text{weighted Acc} = \sum_{i=1}^N \text{Acc}(i) * \frac{n_i}{N} \quad (4.11)$$

where  $n_i$  is the number of syllables for frog species  $i$ ,  $N$  is the number of syllables for all frog species,  $\text{Acc}$  is the classification accuracy for that particular frog species.

### 4.3.3 Comparison between different feature sets


The classification accuracy comparison for 18 frog species using five feature sets and two classifiers is shown in Table 4.5.

**Table 4.5:** Weighted classification accuracy (mean and standard deviation) comparison for five feature sets with two classifiers.

<b>Feature set</b>	<b>Classification accuracy (%)</b>	
	<b>kNN</b>	<b>SVM</b>
SFs	$82.2 \pm 11.2$	$84.2 \pm 10.5$
MFCCs	$90.8 \pm 8.6$	$92.8 \pm 11.0$
MWSCCs	$95.0 \pm 7.7$	$97.6 \pm 5.7$
Averaged AWSCCs	$98.8 \pm 4.2$	$99.0 \pm 3.6$
Delta-AWSCCs	$99.2 \pm 2.1$	<b><math>99.6 \pm 1.8</math></b>

In this experiment, the best classification accuracy is 99.6%, which is achieved by the delta-AWSCCs with the SVM classifier. Compared with the average AWSCCs, the delta-AWSCCs

achieved a slightly better performance. One may conjecture that the delta-AWSCCs can capture the dynamic information of the frog calls. For MWSCCs, the averaged classification accuracy of both classifiers is about 2% lower than that of averaged AWSCCs and delta-AWSCCs with 96.3%. The improvement shows that the proposed adaptive frequency scale can capture more information about frog calls than the Mel-scale (Figure 4.7).

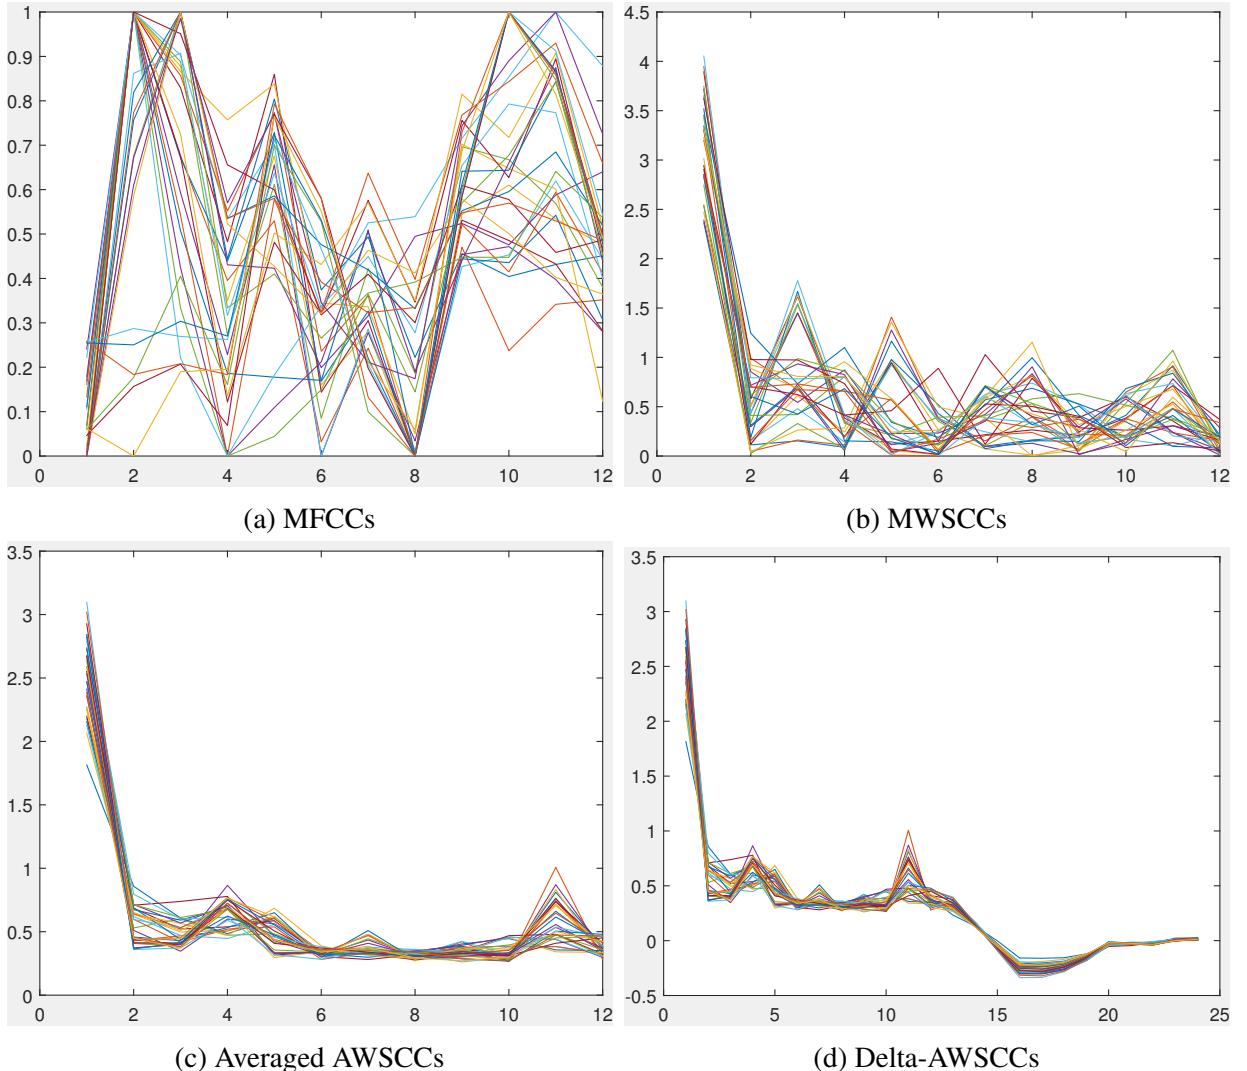

**Figure 4.7:** The feature vectors for 31 syllables of the single species, *Assa darlingtoni*. The x-axis is the feature index and y-axis is the feature value. Note that the feature vectors for averaged AWSCCs (c) and delta-AWSCCs (d) are more highly correlated than for the other two methods (a) and (b).

As for SFs and MFCCs, the averaged classification accuracy is much lower than AWSCCs, which is 83.2% and 91.8%, respectively. To explore the reason for the improvement of the proposed feature, the frog call classification accuracy of all frog species is shown in Table 4.6. However, only the features that use the SVM classifier are shown, because averaged accuracy of the kNN classifier (93.2%) is lower than the SVM classifier (94.64%).

**Table 4.6:** Classification accuracy of five features for the classification of twenty-four frog species using the SVM classifier. Here, Avg AWSCCs means the averaged AWSCCs.

Code	Classification accuracy (%)				
	SFs	MFCCs	MelCCs	Avg AWSCCs	Delta-AWSCCs
ADI	76.7 ± 15.3	80.0 ± 22.1	83.3 ± 16.7	100.0 ± 0.0	100.0 ± 0.0
CPA	86.7 ± 16.3	100.0 ± 0.0	93.3 ± 13.3	100.0 ± 0.0	100.0 ± 0.0
LCA	93.3 ± 15.3	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0
LCS	70.0 ± 23.3	63.3 ± 27.7	96.7 ± 10.0	93.3 ± 13.3	96.7 ± 10.0
LFX	91.7 ± 8.3	93.3 ± 8.2	93.3 ± 8.2	100.0 ± 0.0	100.0 ± 0.0
LGA	30.0 ± 45.8	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0
LLA	92.7 ± 8.1	98.7 ± 2.7	98.0 ± 4.3	100.0 ± 0.0	100.0 ± 0.0
LNA	78.6 ± 14.6	94.3 ± 9.5	95.7 ± 9.1	100.0 ± 0.0	100.0 ± 0.0
LRA	40.0 ± 30.0	10.0 ± 20.0	100.0 ± 0.0	90.0 ± 20.0	98.2 ± 6.5
LUA	60.0 ± 20.0	100.0 ± 0.0	86.7 ± 22.1	100.0 ± 0.0	100.0 ± 0.0
LVV	100.0 ± 0.0	96.7 ± 10.0	80.0 ± 22.1	93.3 ± 13.3	100.0 ± 0.0
MFS	90.0 ± 15.3	76.7 ± 21.3	90.0 ± 15.3	100.0 ± 0.0	100.0 ± 0.0
MFI	90.0 ± 30.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0
PKN	90.0 ± 20.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0
PCA	72.5 ± 20.8	77.5 ± 20.8	95.0 ± 10.0	92.5 ± 11.5	100.0 ± 0.0
PRI	45.0 ± 35.0	80.0 ± 33.2	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0
RSS	50.0 ± 50.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0
ULA	93.3 ± 13.3	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0


Table 4.6 lists the classification accuracy of all 18 frog species with five features. It can be seen from the table that delta-AWSCCs have an accuracy greater than 95% for all frog species. Compared with averaged AWSCCs, the classification accuracy of *Pseudophryne coriacea* (PCA) and *Litoria verreauxii verreauxii* (LVV) are improved to 100%; it might be that the delta-AWSCCs include the dynamic information of frog calls. For *Litoria revelata* (LRA), both the classification accuracy of averaged AWSCCs and delta-AWSCCs are lower than 100%; this is because the dominant frequency is quite similar with multiple frog species including *Assa darlingtoni* (ADI), *Litoria nasuta* (LNA) and *Litoria verreauxii verreauxii* (LVV). However, the classification of *Litoria revelata* (LRA) is 100% using Mel-scale based techniques, because the Mel-scale has a better frequency resolution for *Litoria chloris* (LCS) within its dominant frequency range. In Table 4.8, the classification accuracy of SFs and MFCCs is lower than the other three features, at only 84.2% and 92.8%, respectively.

The statistical significance of the results is shown in Table 4.7. The classification accuracy of average AWSCCs is not significantly lower than the delta-AWSCCs. However, the classification accuracy of MWSCCs, MFCCs and SFs is significantly lower than delta-AWSCCs.


**Table 4.7:** Paired statistical analysis of the results in Table 4.6. For the classification accuracy of each frog species, the paired Student t-test was conducted [Tanton, 2005].

Pairs	t-test results
Delta-AWSCCs - Avg AWSCCs	t=1.95 (not significant)
Delta-AWSCCs - MWSCCs	t=3.41 (significant at $p < 0.01$ , df = 17)
Delta-AWSCCs - MFCCs	t=2.91 (significant at $p < 0.01$ , df = 17)
Delta-AWSCCs - SFs	t=5.52 (significant at $p < 0.001$ , df = 17)

Since our wavelet packet tree for feature extraction is obtained based on the frog species to be classified, two more experiments are used for further evaluation. The first experiment is to classify first ten frog species (No.1-10); the second is to classify the first fourteen frog species (No.1-14) (see Table 4.1). The wavelet packet tree for classifying ten and fourteen frog species is shown in Figure 4.8, which is different from the tree for classifying eighteen frog species. However, the Mel-scaled wavelet packet tree is the same for all experiments (see Figure 4.9). The classification results are shown in Table 4.8. Since the classification accuracy with averaged AWSCCs is very high for classifying ten and fourteen frog species, the delta-AWSCCs is not included in this experiment. Table 4.8 shows that averaged AWSCCs can achieve the highest classification accuracy for classifying different numbers of frog species. Since the averaged AWSCCs is adaptively extracted based on the data, more frog species do not cause a large decrease in the classification accuracy.

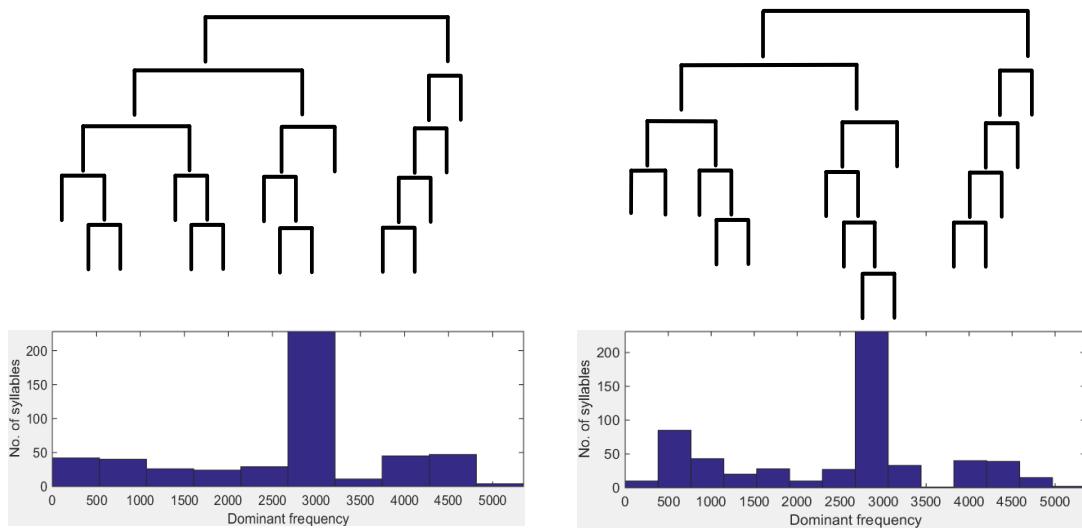

**Figure 4.8:** Wavelet packet tree based on adaptive frequency scale for classifying ten and fifteen frog species.

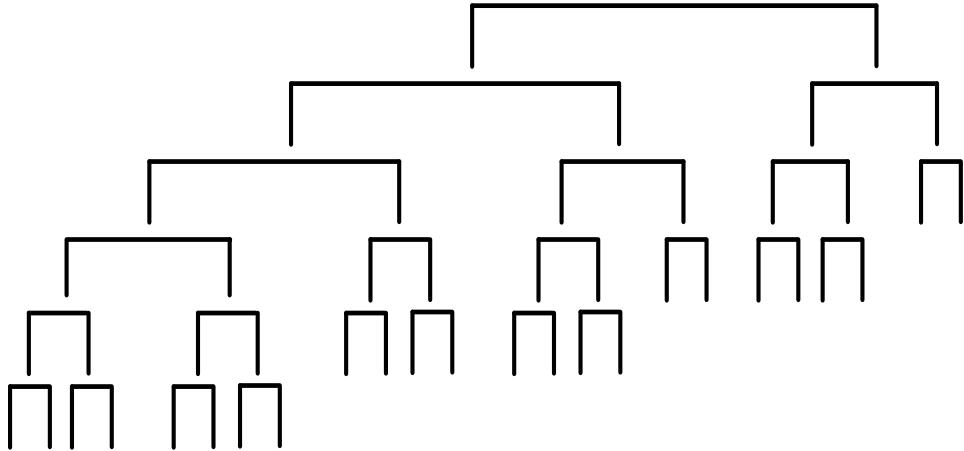

**Figure 4.9:** Mel-scaled wavelet packet tree for frog call classification.

**Table 4.8:** Classification accuracy (%) for classifying different number of frog species with four feature sets.


Number of frog species	SFs	MFCCs	MWSCCs	Averaged AWSCCs
18 frog species	$84.2 \pm 10.5$	$92.8 \pm 11.0$	$97.6 \pm 5.7$	$99.0 \pm 3.6$
14 frog species	$89.6 \pm 9.7$	$94.4 \pm 8.5$	$99.2 \pm 2.6$	$100.0 \pm 0.0$
10 frog species	$94.6 \pm 8.7$	$95.8 \pm 8.6$	$100.0 \pm 0.0$	$100.0 \pm 0.0$

#### 4.3.4 Comparison under different SNRs

To further evaluate the robustness of the proposed feature, a Gaussian noise signal, with SNR of 40 dB, 30 dB, 20 dB, and 10 dB, is added to the original signal. The noise is added after syllable segmentation, because this chapter focuses on the development of novel features for classification rather than the segmentation method. The classification accuracy with five features under different SNRs is shown in Figure 4.10. Compared with MFCCs and MWSCCs, SFs has a stronger anti-noise performance, because the dominant frequency of SFs has a small variation under low SNR. Correspondingly, the adaptive frequency scale also has a small variation, because it is generated by means of applying the k-means clustering algorithm to the dominant frequency. Therefore, our proposed feature has a stronger anti-noise performance than other cepstral features (MFCCs and MWSCCs).

#### 4.3.5 Feature evaluation using the real world recordings

Table 4.9 shows the classification accuracy comparison using our proposed feature to classify eight frog species obtained from the JCU recordings. Since calls of some frog species in the

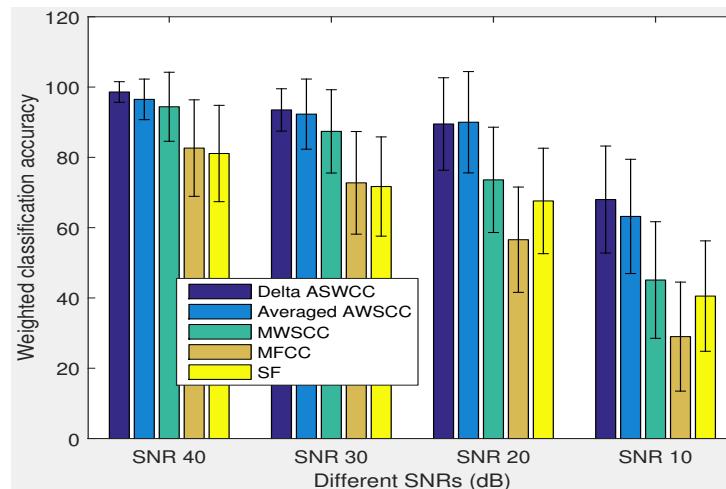

**Figure 4.10:** Sensitivity of five features for different levels of noise contamination.

JCU recordings do not have oscillation structure, SFs are not included for the comparison. Compared with other referred features, our proposed feature also achieves the best classification performance. Since the JCU recordings often have multiple calls from different frog species, spectral peak track occasionally can not capture the specific frog species (labelled species for that syllable), but other frog species to be classified; however, applying k-mean clustering to the dominant frequency calculated from the spectral peak track can reduce this deviation. Therefore, the frequency scale used for the WPD can be accurately achieved, which still leads to a high classification accuracy with the proposed feature.

**Table 4.9:** Classification accuracy using the JCU recordings.

Feature set	Classification accuracy (%)	
	kNN	SVM
MFCCs	$67.5 \pm 13.2$	$70.8 \pm 14.1$
MWSCCs	$90.4 \pm 9.2$	$91.6 \pm 8.7$
Averaged AWSCCs	$94.1 \pm 6.3$	$94.5 \pm 5.8$
Delta-AWSCCs	$97.0 \pm 5.2$	<b><math>97.4 \pm 5.4</math></b>

## 4.4 Summary and limitations

In this chapter, a novel feature extraction method for frog call classification is developed using the adaptive frequency scaled WPD. With segmented syllables, spectral peak track is first extracted from each syllable. Then, track duration, dominant frequency, and oscillation rate are calculated based on each track. Next, a k-means clustering algorithm is applied to the dominant

frequency, which generates the frequency scale for WPD. Finally, a new feature, AWSCCs, is calculated. Since the feature extraction method is developed based on the data itself, the wavelet packet tree varies according to the frog species to be classified. Compared with the Mel-scaled WPD tree, the proposed adaptive wavelet packet tree can better fit the dominant frequency distribution of the frog species to be classified. With the proposed frequency scale, the call characteristics of those frog species to be classified can be enhanced, while the background noise and calls from other animals will be suppressed. Therefore, the proposed feature sets can achieve a higher accuracy for the classification of frog calls than others. Meanwhile, since the frequency scale is calculated based on the dominant frequency of those frog species to be classified, our proposed wavelet tree structure is more accurate and efficient in classifying the frog calls when compared with Mel-scale (Figure 4.8 and Figure 4.9).

Although both high and low SNR recordings are used in this chapter, all the recordings are assumed to have only one frog species per recording. In the next chapter, this limitation will be solved.



# Chapter 5

## Multiple-instance multiple-label learning for the classification of frog calls with acoustic event detection

---

### 5.1 Overview


This chapter presents a method for the classification of simultaneously vocalising frog species in low signal-to-noise ratio (SNR) recordings. In Chapters 3 and 4, frog call classification is solved using a SISL framework, which cannot reflect the nature of automatically collected environmental recordings. Most automatically collected field recordings have low SNR and consist of multiple simultaneous animal vocal activities including frogs, birds, crickets, and so on. This character of environmental acoustic recordings makes the MIML learning a suitable classification framework. To be specific, individual frog syllables in one audio clip are regarded as *multiple instance*, and the frog species included in that audio clip denote *multiple labels*. The key part of this MIML classification framework for studying frog calls is to detect individual syllables in environmental recordings with multiple simultaneously vocalising frog species. After syllable detection, standard acoustic features and MIML classifiers can be used to perform the MIML classification.

To evaluate our proposed MIML classification framework, a representative sample of 342 10-second recordings was exported from the database and split into training and testing sets. The performance is evaluated based on the MIML learning measures. A validation dataset of 10 10-second recordings for each frog species is constructed for parameter tuning. Experimental

results demonstrate that the MIML classification framework can be successfully adopted to classify multiple simultaneously vocalising frog species in low SNR recordings.

## 5.2 Materials and methods

Our frog call classification system consists of four steps: signal processing, acoustic event detection, feature extraction, and classification (Fig. 5.1). Detailed description of each step is listed in the following sections.

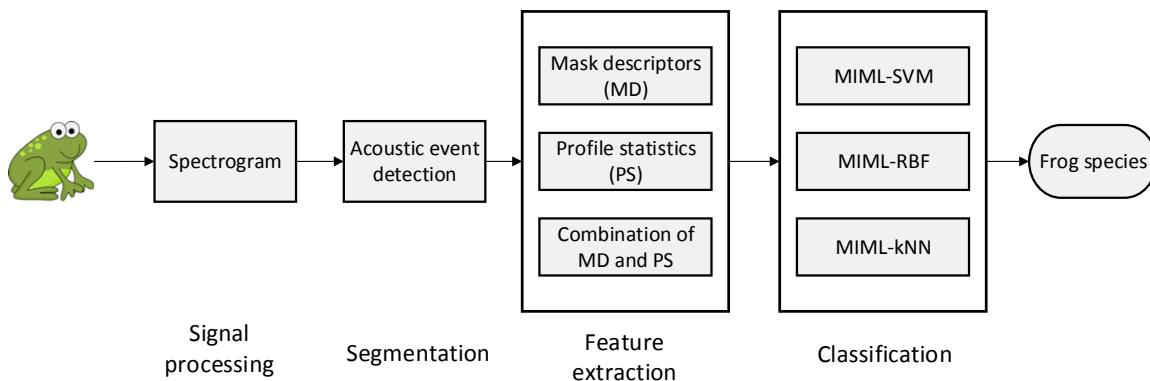

**Figure 5.1:** Flowchart of a frog call classification system using MIML learning

### 5.2.1 Materials

All recordings selected for this chapter were obtained from three sites in Queensland, Australia: *Kiyomi dam*, *Stony creek dam* and *BG creek dam*, using a battery-powered acoustic sensor (stored in a weather proof metal box) with an external microphone. The recordings were stored on 16 GB SD cards in 64 kbps MP3 mono format. All recordings were collected from February, 2014 to April, 2014, because it is the breeding season in Queensland when male frogs make calls to attract females for the purpose of reproducing. All recordings started around sunset, finished around sunrise every day and have a duration of 12 hours. In this chapter, a representative sample of 342 10-second recordings was selected to train and test our proposed algorithm for predicting which frog species are present in a 10-second recording. All the 10-second recordings were manually labelled by an ecologist with eight frog species. The acoustic parameters of eight frog species averaged for ten randomly selected syllables of each frog species are shown in table 5.1. It is worth noting that the parameters of table 5.1 are slightly different from table 4.2 with an acceptable variation.

**Table 5.1:** Dominant frequency ( $F_0$ ) and syllable duration ( $T_s$ ) of eight frog species averaged for ten randomly selected syllables.

Frog species	Code	Dominant frequency (Hz)	Syllable duration(ms)
<i>Canetoad</i>	CAD	560	NA
<i>Cyclorana novaehollandiae</i>	CNE	610	400
<i>Limnodynastes terraereginae</i>	LTE	610	100
<i>Litoria fallax</i>	LFX	4000	280
<i>Litoria nasuta</i>	LNA	2800	160
<i>Litoria rothii</i>	LRI	1800	500
<i>Litoria rubella</i>	LRA	2300	580
<i>Uperolela mimula</i>	UMA	2400	120

Each recording includes between one and five frog species. Following the prior work of [Briggs et al., 2012], we assume that recordings without frog vocalisations can be filtered out during the acoustic event detection process.

### 5.2.2 Signal processing

All the recordings were first re-sampled at 16 kHz. A spectrogram was then generated by applying short-time Fourier transform (STFT) to each recording. Specifically, each recording was divided into frames of 512 samples with 50% frame overlap. A fast Fourier transform was then performed on each frame with a Hamming window, which yielded amplitude values for 256 frequency bins, each spanning 31.25 Hz. The final decibel values (S) were generated as

$$S_{tf} = 20 * \log_{10}(A_{tf}) \quad (5.1)$$

where  $A$  denotes the amplitude value,  $t = 0, \dots, T - 1$  and  $f = 0, \dots, F - 1$  represent time and frequency index,  $T$  and  $F$  are 256 frequency bins and 625 frames, respectively.

### 5.2.3 Acoustic event detection for syllable segmentation

The aim of AED is to detect a specified acoustic event in audio data. In this chapter, we use AED for frog syllable segmentation. Since all the recordings are collected from the field, there are many overlapping vocal activities from different sources. Traditional methods for frog syllable segmentation are based on time domain information [Huang et al., 2009, Somervuo et al., 2004], which cannot address those recordings. Here, we modified the AED method developed by Towsey et al. [Towsey et al., 2012] for syllable segmentation. The detail of our AED method is

described as follows:

**Step 1:** Wiener filtering

A 2-dimensional Wiener filter is applied to the spectrogram image over a  $5 \times 5$  time-frequency grid to reduce the background graininess, where the filter size is selected after the consideration of trade-off between removing the background graininess and blurring the acoustic events.

$$\hat{S}_{tf} = \mu + \frac{(\sigma^2 - \nu^2)}{\sigma^2} (S_{tf} - \nu) \quad (5.2)$$

where  $\mu$  and  $\sigma^2$  are local mean and variance, respectively;  $\nu^2$  is the noise variance estimated by averaging all local variances.

**Step 2:** Spectral subtraction

Wiener filtering can successfully remove the graininess, but some noises, such as wind, insect, motor engine that cover the whole recording can not be addressed using Wiener filtering. Here, a modified spectral subtraction method is employed to deal with those noises.

---

**Algorithm 2:** Spectral Subtraction

---

**Data:**  $\hat{S}_{tf}$ , spectrogram after Wiener filtering.

**Result:**  $\hat{S}'_{tf} = \hat{S}_{tf}$ , noise reduced spectrogram.

**begin**

**Construct** an array of the modal noise values for all frequency bins;

**for**  $f \in F$  **do**

1. calculate the histogram of the intensity value over each frequency bin

2. smooth the histogram array with a moving average window of size 7

3. regard the modal noise intensity at the position of maximal bin in the left-side of the histogram

**Smooth** the array with a moving average filter with window of size 5;

**for**  $f \in F$  **do**

1. subtract the modal noise intensity

2. truncated negative decibel values to zero

---

**Step 3:** Adaptive thresholding

After noise reduction, the next step is to convert a noise reduced spectrogram  $\hat{S}'_{tf}$  into the binary spectrogram  $S'_{tf}^b$  for the event detection. Here, an adaptive thresholding method named *Otsu thresholding* [Otsu, 1975] is employed to find an optimal threshold.

$$\phi_b^2(k) = w_1(k)w_2(k)[\mu_1(k) - \mu_2(k)]^2 \quad (5.3)$$

where  $w_1(k) = \sum_0^k p(j)$  is calculated from the histogram as  $k$ ,  $p(j) = n(j)/N$  are the values of the normalised gray level histogram,  $n(j)$  is the number of values in level  $j$ ,  $N$  is the total number of values over the whole spectrogram image,  $\mu_1(k) = [\sum_0^k p(j)x(j)]/w_1$ ,  $x(j)$  is the value at the center of the  $j$ th histogram bin. Then, the threshold,  $T_0$ , is calculated as

$$T_0 = (\phi_{b1}^2(k) + \phi_{b2}^2(k))/2 \quad (5.4)$$

#### Step 4: Events filtering using dominant frequency and event area

Since not all detected events correspond to frog vocalisations, to further remove those events that are not from the listed frog species in section 5.2.1, dominant frequency ( $F_0$ ) and area of the event ( $Ar$ ) are used for filtering.

---

#### Algorithm 3: Event filtering based on dominant frequency and event area

---

**Data:**  $S_{tf}^b$ , spectrogram;  $t_s(n), t_e(n), f_l(n), f_h(n)$ , location of each acoustic event  $n$ ;  $F_0(i)$ , dominant frequency of frog species  $i$ .

**Result:**  $\tilde{S}_{tf}$ , spectrogram after events filtering.

**begin**

**Calculate** the area of each acoustic event  $n$ .

$Area(n) = (t_e(n) - t_s(n)) * (f_h(n) - f_l(n))$

**for**  $n \in N_{e1}$  **do**

**if**  $Ar(n) \geq Ar_l$  **then**

split event  $n$  into small events

where  $Ar_l$  is set as 3000 pixels.

**Filter** events using dominant frequency  $f_d(n) = \sum_{t=t_s(n)}^{t_e(n)} F(t)/t_e(n) - t_s(n)$

where  $F(t)$  is the peak frequency of each frame within the event area

**for**  $n \in N_{e2}$  **do**

**for**  $i \in I$  **do**

**if**  $f_d(n) \geq F_0(i) + \theta; f_d(n) \leq F_0(i) - \theta$  **then**

$f_d(n) = 0;$

where  $\theta$  is frequency range and set as 300 Hz.

**Remove** small acoustic events except frequency band between  $\theta_l$  and  $\theta_h$

**for**  $n \in N_{e2}$  **do**

**if**  $Ar(n) \leq Ar_s$  **then**

remove event  $n$

where  $Ar_s$  is set as 300 pixels,  $\theta_l$  and  $\theta_h$  are set as 300 Hz and 800 Hz, respectively.


Because the area of LTE is smaller than  $Ar_s$ .

---


#### Step 5: Region growing

A region growing algorithm is used to obtain the contour of the particular acoustic event [Mallawaarachchi et al., 2008]. To get the accurate boundary of each acoustic event and improve

the discrimination of extracted features, a 2-dimensional region growing algorithm is applied to obtain the accurate event shape within each segmented event. First, the point having the maximal intensity value within the event area is selected as the seed. Then, the neighbourhood pixels of the seed(s) above the threshold are located and assigned to the output image, and new added pixels are used as seeds for further processing. Finally, when all the pixels that satisfy the criteria are added to the output image, the recursive algorithm will stop and get the final results (Figure 5.3). Here, the threshold value is empirically set as 5 dB.

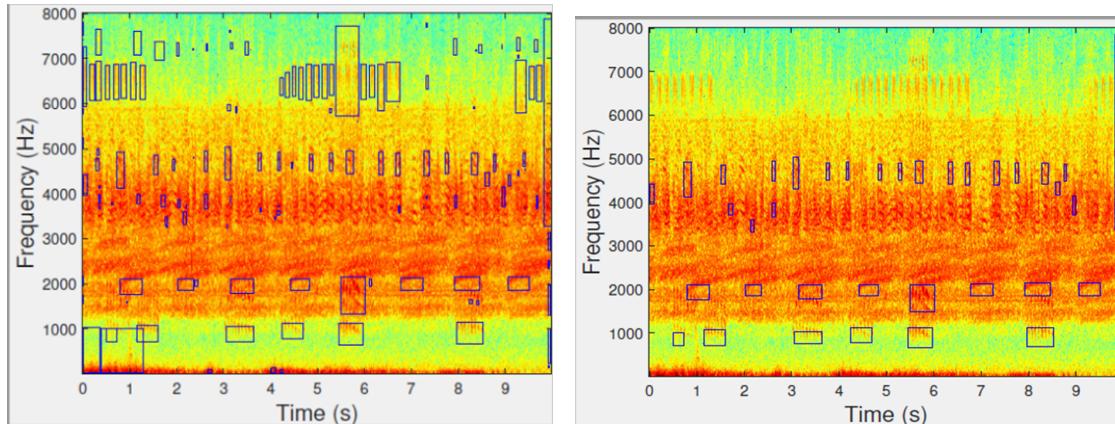

**Figure 5.2:** Acoustic event detection results before (Left) and after (Right) event filtering based on dominant frequency. Here, blue rectangle means the time and frequency boundary of each detected event.

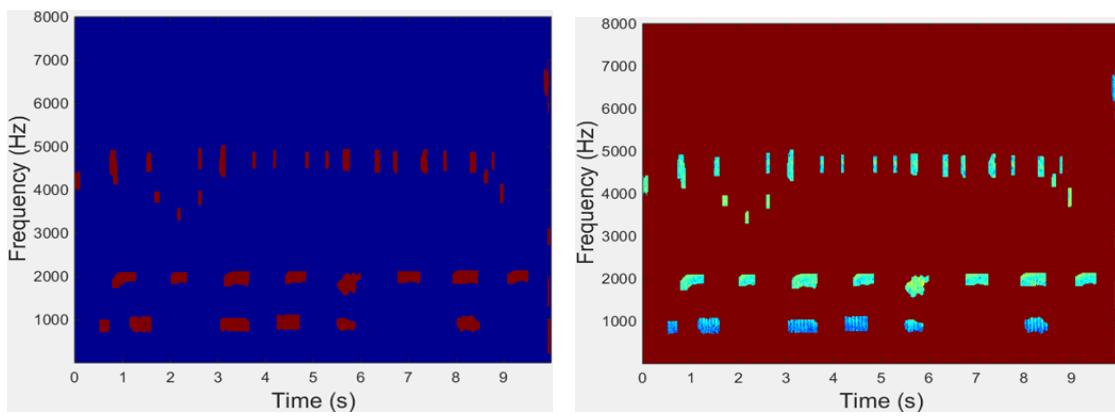

**Figure 5.3:** Acoustic event detection results after region growing. Left: binary segmentation results; Right: segmented frog syllables.

#### 5.2.4 Feature extraction

Based on acoustic event detection results, two feature sets are first calculated to describe each event (syllable): mask descriptors and profile statistics [Briggs et al., 2012]. Here, we exclude *histogram of orientation (HOG)* from our feature set, because the previous studies have

already demonstrated its poor classification accuracy [Briggs et al., 2012, Ruiz-Munoz et al., 2015]. For mask descriptors, it is used to describe the syllable shape including minimum frequency, maximum frequency, bandwidth, duration, area, perimeter, non-compactness, rectangularity. For profile statistics, there are time-Gini, frequency-Gini, frequency-mean, frequency-variance, frequency-skewness, frequency-kurtosis, frequency-max, time-max, mask-mean, and mask standard deviation. A third feature set consists of all features.

### 5.2.5 Multiple-instance multiple-label classifiers

After feature extraction, three MIML learning algorithms are evaluated for the classification of multiple simultaneous vocalising frog species: MIML-SVM, MIML-RBF, and MIML-kNN. With the form of event-level distance measure, the MIML problem can be reduced to a single-instance multiple-label problem by associating each event with an event-level feature [Briggs et al., 2012]. Here, the maximal and average Hausdorff distances between two syllables are used by MIML-SVM and MIML-RBF, respectively. For MIML-kNN, the nearest neighbour is used to assign syllable-level features.

## 5.3 Experiment results

### 5.3.1 Parameter tuning

There are three modules, the parameters of which need to be discussed: signal processing, acoustic event detection, and classification. For signal processing, the window size and overlap are 512 samples and 50%, respectively. During the process of acoustic event detection, four thresholds for event filtering need to be determined, which are small and large area threshold, and frequency boundary for events filtering. All those thresholds were determined empirically by applying various combinations of thresholds to the constructed validation dataset. For MIML-SVM classifiers, the parameters used are  $(C, \gamma, r)$  and set as  $(0.1, 0.6, 0.2)$  experimentally. For MIML-RBF, the parameters are  $(r, \mu)$  and set as  $(0.1, 0.6)$ . For MIML-kNN, the number of references ( $k$ ) and citers ( $k'$ ) are 10 and 20, respectively.

### 5.3.2 Classification

In this chapter, all the algorithms were programmed in Matlab 2014b. Each MIML algorithm is evaluated with five-fold cross-validation on the collection of 342 species-labelled recordings. Five evaluation rules are used for comparing the performance with the combination of three feature sets and three ML algorithms: Hamming loss, Rank loss, Average precision, One error, Exampled based  $F_1$ , and Micro  $F_1$  [Madjarov et al., 2012, Zhou et al., 2008]. The value range of all five evaluation rules is between 0 to 1. The definition of each evaluation rule is described as follows:

**(1)** Hamming loss is defined as the fraction of labels that are incorrectly predicted for an instance and the normalised Hamming loss which is normalised over instances is reported. This metric is defined as

$$\text{hammingLoss} = \frac{1}{N} \sum_{i=1}^N \frac{1}{Q} |h(x_i) \Delta y_i| \quad (5.5)$$

where  $\Delta$  denotes the symmetric difference between two instances,  $N$  is the number of instances and  $Q$  is the total number of possible labels.  $y_i$  denotes the ground truth of instance  $x_i$ , and  $h(x_i)$  denotes the predictions for the same instance.

**(2)** Ranking loss evaluates the average fraction of label pairs that are reversely ordered for the particular instance given by

$$\text{rankingLoss} = \frac{1}{N} \sum_{i=1}^N \frac{|D_i|}{|y_i||\bar{y}_i|} \quad (5.6)$$

where  $D_i = (\lambda_m, \lambda_n) | f(x_i, \lambda_m) \leq f(x_i, \lambda_n), (\lambda_m, \lambda_n) \in y_i \times \hat{y}_i$ , while  $\bar{y}$  denotes the complementary set of  $y$  in  $L$ , and  $L = \lambda_1, \lambda_2, \lambda_3, \dots, \lambda_Q$ ,  $\lambda$  represents the label.

**(3)** One error evaluates how many times the top-ranked label is not in the set of relevant labels of the instance. This evaluation metric is defined as

$$\text{oneError} = \frac{1}{N} \sum_{i=1}^N [[\text{argmax}_{\lambda \in y} f(x_i, \lambda)] \notin y_i] \quad (5.7)$$

**(4)** Coverage evaluates how far, on average, we need to go down the list of ranked labels in

order to cover all the relevant labels of the example. The definition of this metric is shown as

$$\text{coverage}(f) = \frac{1}{N} \sum_{i=1}^N \maxrank_f(x_i, \lambda) - 1 \quad (5.8)$$

where  $\text{rank}_f(x_i, \lambda)$  maps the outputs of  $f(x_i, \lambda)$  for any  $\lambda \in L$  to  $\lambda_1, \lambda_2, \dots, \lambda_Q$ , so that  $f(x_i, \lambda_m) \leq f(x_i, \lambda_n)$  implies  $\text{rank}_f(x_i, \lambda_m) \leq \text{rank}_f(x_i, \lambda_n)$

**(5)** Micro-AUC is defined as each point on the ROC curve corresponds to a pair (TPR, FPR) for one threshold. The area under this ROC curve is called Micro-AUC. Here, the definition of TPR and FPR can be found in Equation (2.3) and (2.6)

The values for Hamming loss, Rank loss, One-error, Coverage, and Micro-AUC range from 0 to 1. For Hamming loss, Rank loss, one-error and coverage, 0 denotes the perfect result, and 1 means the wrong prediction of all labels over every instance, whereas for micro-AUD, the values have the completely opposite meanings.

The  $\frac{\text{positive}}{\text{negative}}$  is defined as  $1 - \text{hammingLoss}$  and it is 0.818 for MIML-RBF with Mask descriptors (MD). MD and profile statistical (PS), and all features (AF) are put into the three classifiers, respectively. The accuracy measure for each MIML classifier is shown in Table 5.2. Here, the best classification accuracy is achieved using MIML-RBF with MD. For each classifier, the classification accuracy of MD is higher than PS and AF, which indicates that the event shape has a better discriminability than the event content. To give a concrete view of predictions, the results of five randomly selected recordings using MIML-RBF are shown in Table 5.3. From the table, we can see that recordings of No.1 and No.3 are accurately predicted.

**Table 5.2:** Accuracy measures for MIML classifiers with different feature sets. Here,  $\downarrow$  indicates that smaller values imply higher accuracy, while  $\uparrow$  has the completely opposite meanings.

Feature	Algorithm	Hamming loss $\downarrow$	Rank loss $\downarrow$	One-error $\downarrow$	Coverage $\downarrow$	Micro-AUC $\uparrow$
MD	MIML-SVM	0.253	0.186	0.308	3.147	0.745
MD	MIML-kNN	0.205	0.153	0.298	2.647	0.771
MD	MIML-RBF	<b>0.182</b>	<b>0.132</b>	<b>0.223</b>	<b>2.352</b>	<b>0.828</b>
PS	MIML-SVM	0.239	0.208	0.323	3.544	0.728
PS	MIML-kNN	0.211	0.153	0.298	2.647	0.777
PS	MIML-RBF	0.186	0.161	0.338	3.161	0.746
AF (MD+PS)	MIML-SVM	0.261	0.199	0.279	3.588	0.761
AF (MD+PS)	MIML-kNN	0.205	0.160	0.264	2.735	0.787
AF (MD+PS)	MIML-RBF	0.191	0.142	0.220	2.632	0.821
<b>Baseline</b>		0.313	0.500	0.687	7.000	0.500

**Table 5.3:** Example predictions with MIML-RBF.

No.	Ground truth	Predicted labels
1	UMA	UMA
2	LNA, LRI, UMA	LNA, LRA, UMA
3	LNA, UMA	LNA, UMA
4	LNA, LFX, LRA	LNA, LFX, LRI, LRA
5	LNA, LFX, LRA	LNA, LRA

## 5.4 Discussion

Since most recordings used in this chapter contain multiple simultaneously vocalising frog species, the traditional single-instance single-label classification framework is no longer suitable. A novel framework for the classification of multiple simultaneous vocalising frog species in environmental recordings is proposed, which is adopted from [Briggs et al., 2012], a study on birds. Differently from that work, this research designs a new acoustic event detection method for syllable segmentation rather than using a supervised learning algorithm. It is because there are few annotated frog recordings. As for the classification results, our proposed framework can achieve an acceptable classification accuracy. All the features used in this study are calculated from the segmented syllables. The accuracy of the segmentation therefore directly affects the final classification performance.

## 5.5 Summary and limitations

In this chapter, we propose a novel framework for the classification of multiple simultaneous vocalising frog species in environmental recordings. To the best of our knowledge, this is the first study that focuses on the frog recordings using the MIML algorithm. Since multiple frog species tend to call simultaneously, the MIML algorithm is more suitable for dealing with those recordings than single-instance single-label classification. Individual frog syllables are first segmented using AED. Then, three feature sets, MD, PS, and AF, are calculated from those segmented syllables. Next, a bag generator is used to construct a feature set with extracted features from each syllables. Finally, three MIML classifiers are used for the classification of frog calls with the best true positive/negatives of 81.8%. Future work will focus on the study of novel features and MIML classifiers to further improve the classification performance. Current

classification results are highly affected by the syllable segmentation results, and the use of AED cannot accurately segment all the syllables. One solution is to prepare an annotated dataset and apply supervised learning algorithms for the segmentation task. Another is to use a different classification framework, which does not need the segmentation process, and we examine this option in the next chapter



# **Chapter 6**

## **Estimating frog calling activity and species richness based on acoustic event detection and multi-label learning**

---

### **6.1 Overview**


This chapter describes the research conducted for estimating frog calling activity and species richness. Different from Chapter 5 that use AED for estimating frog species richness, AED is used to estimate the frog calling activity in this chapter. In Chapter 5, acoustic features are calculated based on the results of AED to estimate frog species richness, but the accuracy of AED results directly affect the MIML classification performance. To reduce the bias introduced by AED, this research presents global feature representations for the classification of recordings with multiple frog species. The feature representation is extracted from the whole recording without the syllable segmentation. Therefore, the classification process can be framed as a ML learning task.

Three global feature representations are calculated to classify each 10-second recording: LPCs, MFCCs, and PWSCCs. Both MFCCs and PWSCCs are similar to the features used in Chapter 4. The difference is that each 10-second recording is divided into three equal parts, and both MFCCs and PWSCCs are calculated from each part and combined as the final feature, which can obtain more temporal information.

Furthermore, this proposed classification framework is conducted for a long-term analysis. Both frog calling activity and species richness during the breeding season are estimated. Also,

the correlations between frog calling activity/species richness with weather variables are studied to reflect the relationship between them.

The architecture of this frog calling activity and species richness estimation system is shown in Figure 6.1. The system contains three parts: frog calling activity estimation, frog species richness estimation, and correlation analysis. Each part is discussed in detail in the following subsections.

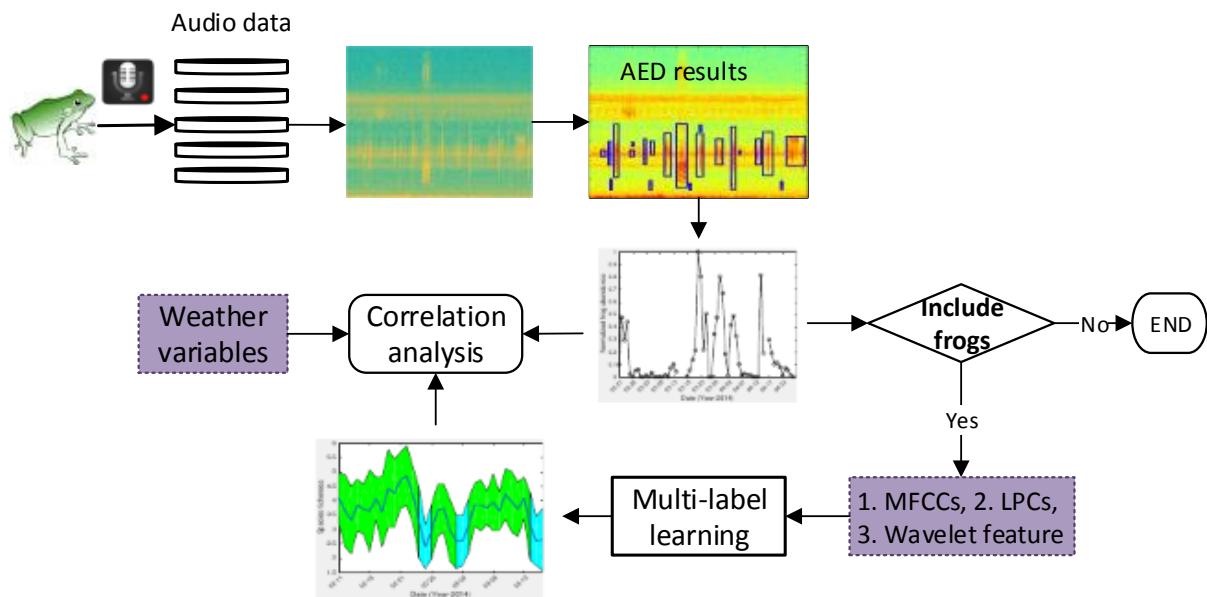

**Figure 6.1:** Flowchart of a frog call classification system using AED and ML learning

## 6.2 Acquisition of frog call recordings

To evaluate the proposed algorithm, the same dataset with Chapter 5 is used. The description of this dataset can be found in Chapter 5.2.1. Besides the representative dataset, this study sampled 10-second recordings every 10 minutes from continuous recordings over three months. Finally, there are 4170, 4908, and 1544 10-second recordings for *Kiyomi dam*, *Stony Creek dam* and *BG Creek dam*, respectively, which are used for long-term acoustic monitoring. Here, the number of recordings of these sites is different due to the data loss in some days.

We first manually inspect spectrograms of ten randomly selected call examples for each frog species. Two parameters, dominant frequency and syllable duration, are measured and averaged, as listed in Table 5.1, which are used as prior information for subsequent analysis.

## 6.3 Experiment setup

Each 10-second recording is divided into frames of 512 samples and 50% frame overlap for STFT.  $A_{large}$  and  $A_{small}$ , which are used for area filtering in AED, are empirically set at 3000 pixels and 300 pixels, respectively. Allowed fluctuations in both sides of dominant frequency are 300 Hz for dominant frequency filtering. For WP-based feature, window size and overlap are 512 samples and 50%, the window function is a Hamming window. All algorithms were programmed in Matlab 2014b except ML learning, which was implemented in Meka 1.7.7<sup>4</sup>.

## 6.4 Frog calling activity

### 6.4.1 Frog calling activity of each 10-second recording

Frog calling activity is estimated through the detection of acoustic events in a spectrogram image. Here, the spectrogram is generated by applying short-time Fourier transform (STFT) to each 10-second recording. The description of the AED method is shown in Chapter 5.2.3.

The frog calling activity of each 10-second recording is estimated as

$$F_{abun} = \sum_{n=1}^N \sum_{i=1}^I \sum_{j=1}^J A_{i,j}(n)^2 \quad (6.1)$$


Here,  $A_{i,j}$  represents the decibel value of location  $(i, j)$  within each acoustic event  $n$  in the spectrogram,  $i$  is the temporal index,  $j$  is the frequency index,  $I$  and  $J$  are the height and width of each acoustic event.

### 6.4.2 Long-term monitoring of frog calling activity

Figure 6.3 shows the frog calling activity results of three selected sites over the whole frog breeding season. It can be found that the frog calling activity of the same site changes a great deal over time. In the *Kiyomi dam*, frog calling activity is relatively high from February 21 to February 25. However, frog calling activity is quite low in two periods, which are February 26 to March 11 and April 07 to April 12. The highest calling activity of this site is achieved on March 22. However, the highest calling activity for *Stony Creek dam* and *BG Creek dam*


---

<sup>4</sup><http://meka.sourceforge.net/>

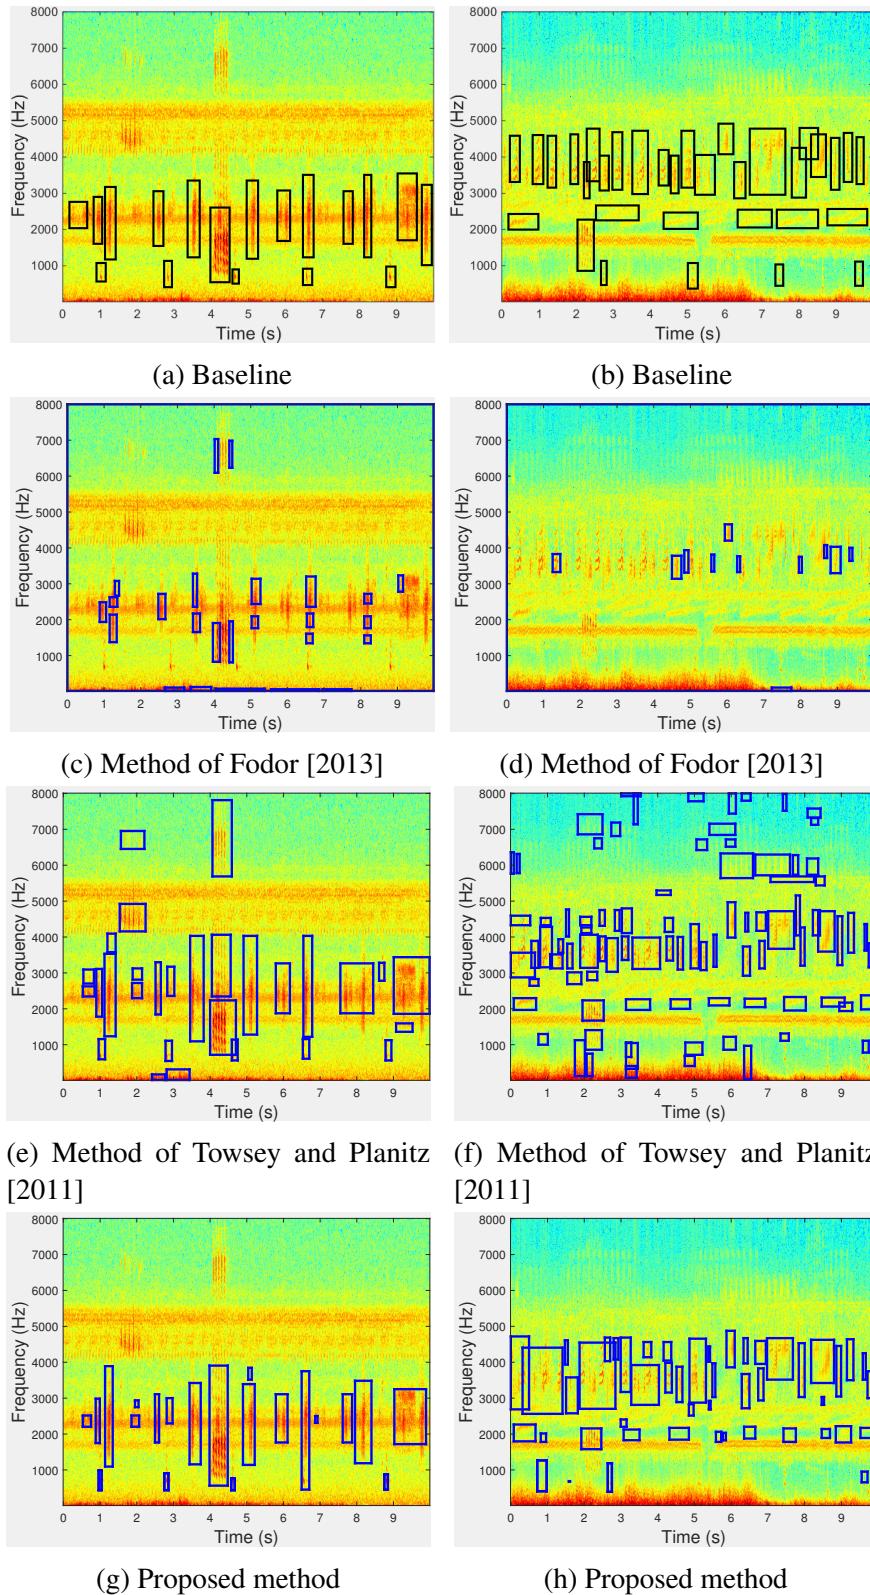

**Figure 6.2:** AED for frog calling activity estimation using different methods. For each row, different methods are applied to the same recordings. The baseline of the detection results is shown in the first row; detected frog calls are drawn using a blue rectangle. For each column, different methods are used for the same recording.

is obtained in February, which shows that frog calling activity of different sites often varies a lot for different environments. Recordings of 47 days of all three sites do not record any frog calls. In the subsequent analysis, only those recordings with frog calls are used for frog species richness estimation.

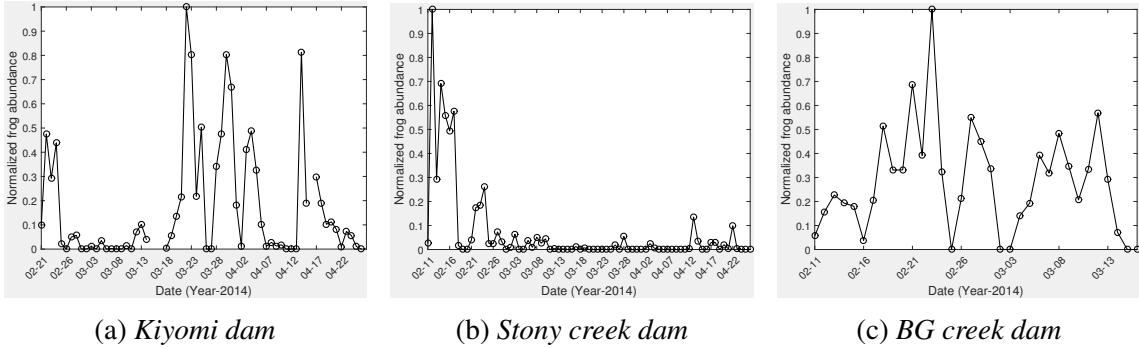

**Figure 6.3:** Frog calling activity estimation of different sites: *Kiyomi dam*, *Stony Creek dam* and *BG Creek dam*. For *Kiyomi dam*, three days do not record any acoustic data and then there is no value in those particular days. All the frog calling activity value is normalised to [0 1].

## 6.5 Frog species richness

Frog species richness is estimated by predicting the species presence/absence of each sampled recording. Since many sampled recordings consist of multiple frog species, one direct solution is to assign each recording with a set of labels (frog species) for explicitly expressing its semantics [Zhang and Zhou, 2014]. Therefore, ML learning is adopted to classify each sampled recording.

Extracting discriminating features, which maximise between-group (inter-specie) dissimilarity and minimise within-group (intra-specie) dissimilarity, is very important for achieving high classification performance [Bedoya et al., 2014, Huang et al., 2009]. In this chapter, feature extraction is performed based on WPD using a modified version of the method introduced in Chapter 4 and detailed below.

For feature extraction, constructing a suitable frequency scale for a WP tree based on the dominant frequency of each frog species is the first step, because different frog species tend to have different dominant frequencies [Gingras and Fitch, 2013]. In Chapter 4, k-means clustering was first applied to the extracted dominant frequencies of training data. Then, the frequency scale was built by sorting clustering centroids to construct the WP tree. In this

chapter, the prior information on dominant frequency ( $F_0$ ) obtained from Table 5.1 is directly used to construct the WP tree. We iteratively detect each WP tree sub-band node until the frequency range of each node includes more than one dominant frequency  $F_0$ . Then, the WP tree of that particular sub-band node will be further split until each sub-band node has only one dominant frequency value or none. After constructing the frequency scale, adaptive frequency scaled WPD is applied to each sampled recording for feature extraction. The detailed description for extracting the features is shown in Chapter 4.2.8.

The difference is that the recording is first split into frames using a Hamming window. Then, all frames are divided into three equal parts, and the WP-feature within each part is averaged, respectively, because different frog species within similar frequency bands may exist in one 10-second recording, splitting each recording into small parts might be able to keep the information of different frog species in the same frequency band. Besides the WP-based feature, two other acoustic features, LPCs and MFCCs, are calculated for the comparison.

### 6.5.1 Multi-label classification for species richness estimation

Since many sampled recordings consist of calls from multiple frog species, frog call classification can be framed as a ML learning problem. However, previous studies have not adopted ML learning to classify frog calls. Therefore, it is worth investigating different ML learning algorithms for the classification of multiple vocalising frog species. In this chapter, four ML learning algorithms, whose base classifier is a C4.5 decision tree, are employed: binary relevance (BR), classifier chains (CC), random k-label sets (RAKEL and RAKEL1) [Zhang and Zhou, 2014]. The default parameter settings of those four ML learning algorithms are used. The trained classifier, which achieves the best classification performance, is then used to predict the presence/absence of the rest recordings. Lastly, frog species richness can be estimated as

$$F_{rich} = \frac{\sum_{k=1}^K f_{rich}(k)}{K} \quad (6.2)$$

where  $f_{rich}(k)$  is the number of frog species of each 10-second recording with predicted labels,  $K$  is the number of 10-second recording for each day.

### 6.5.2 Frog species richness analysis

Different ML learning algorithms are applied on 342 selected recordings to compare different feature sets. Then, five evaluation rules are used to compare the performance with the combination of four feature sets and four ML learning algorithms: hamming loss, rank loss, one error, example based F1, and micro F1 [Madjarov et al., 2012, Zhang and Zhou, 2014]. The descriptions of hamming loss, rank loss, and one error can be found in Chapter 5.3.2. The descriptions of example based F1 and micro F1 are shown as follows.

**(1)** Example based  $F_1$  is the average of the harmonic mean of instance-precision and instance-recall for every instance. The instance-precision is defined for an instance as the size of the intersection of the set of its predicted labels and the set of its ground truth labels divided by the size of the set of its predicted labels. The instance-recall is defined for an instance as the size of the intersection of the set of its predicted labels and the set of its ground truth labels divided by the size of the set of its ground truth labels.

$$macroF_1 = \frac{1}{Q} \sum_{j=1}^Q \frac{2 \times p_j \times r_j}{p_j + r_j} \quad (6.3)$$

where  $p_j$  and  $r_j$  are the precision and recall for all  $\lambda_h \in h(x_i)$  from  $\lambda_j \in y_j$ .

**(2)** Micro  $F_1$  is the harmonic mean of micro-precision and micro-recall, where micro-precision and micro-recall are the precision and the recall which are averaged over all instances and label pairs.

$$microF_1 = \frac{2 \times microPrecision \times microRecall}{microPrecision + microRecall} \quad (6.4)$$


Experiment results are shown in Table 6.1.

The combination of multi-stage PWSCCs + LPCs and the RAKEL1 method achieves the best performance. Therefore, this combination is used for the testing data. Figure 6.4 shows the frog species richness of the three selected sites. For all the three sites, the variation of species richness is not high, which shows that species richness of the same area is relatively stable. However, frog species richness of *BG Creek dam* has a smaller variation over the time than *Kiyomi dam* and *Stony Creek dam*. The comparison of the species richness for the three sites is shown in Figure 6.5. In contrast to other sites, the species richness in *BG Creek dam* is the highest. This might be that *BG Creek dam* is closer to a river and farther away from the human

**Table 6.1:** Classification results based on four feature sets and four ML learning algorithms. Here the methods for ML learning algorithms are in accordance to the name in the *Meka* software. The base classifier of all methods is decision tree. For a metric, the best value is in bold. Here,  $\downarrow$  indicates that smaller values imply higher accuracy, while  $\uparrow$  has the completely opposite meanings. The description of each evaluation metric can be found in Chapter 5.3.2.

Features	Method	Hamming loss $\downarrow$	Rank loss $\downarrow$	One error $\downarrow$	Example based F1 $\uparrow$	Micro F1 $\uparrow$
MFCCs+LPCs	BR	$0.155 \pm 0.015$	$0.171 \pm 0.037$	$0.246 \pm 0.063$	$0.699 \pm 0.03$	$0.749 \pm 0.024$
	CC	$0.147 \pm 0.018$	$0.147 \pm 0.02$	$0.199 \pm 0.042$	$0.722 \pm 0.035$	$0.756 \pm 0.029$
	RAKEL	$0.167 \pm 0.038$	$0.122 \pm 0.026$	$0.194 \pm 0.063$	$0.721 \pm 0.044$	$0.752 \pm 0.041$
	RAKEL1	$0.134 \pm 0.012$	$0.099 \pm 0.025$	<b><math>0.147 \pm 0.056</math></b>	$0.74 \pm 0.044$	$0.783 \pm 0.022$
Multi-stage MFCCs + LPCs	BR	$0.155 \pm 0.016$	$0.169 \pm 0.035$	$0.249 \pm 0.064$	$0.7 \pm 0.03$	$0.75 \pm 0.024$
	CC	$0.147 \pm 0.018$	$0.147 \pm 0.021$	$0.199 \pm 0.042$	$0.722 \pm 0.034$	$0.756 \pm 0.028$
	RAKEL	$0.166 \pm 0.035$	$0.124 \pm 0.027$	$0.194 \pm 0.069$	$0.724 \pm 0.048$	$0.754 \pm 0.04$
	RAKEL1	$0.134 \pm 0.013$	$0.101 \pm 0.026$	$0.15 \pm 0.063$	$0.737 \pm 0.05$	$0.783 \pm 0.023$
PWSCCs + LPCs	BR	$0.148 \pm 0.025$	$0.139 \pm 0.033$	$0.254 \pm 0.063$	$0.708 \pm 0.046$	$0.762 \pm 0.036$
	CC	$0.168 \pm 0.031$	$0.168 \pm 0.045$	$0.272 \pm 0.061$	$0.684 \pm 0.054$	$0.723 \pm 0.048$
	RAKEL	$0.155 \pm 0.023$	$0.103 \pm 0.022$	$0.178 \pm 0.031$	$0.729 \pm 0.032$	$0.763 \pm 0.030$
	RAKEL1	$0.14 \pm 0.027$	$0.094 \pm 0.018$	$0.193 \pm 0.063$	$0.727 \pm 0.053$	$0.773 \pm 0.042$
Multi-stage PWSCCs + LPCs	BR	$0.153 \pm 0.014$	$0.147 \pm 0.022$	$0.266 \pm 0.037$	$0.689 \pm 0.035$	$0.75 \pm 0.025$
	CC	$0.142 \pm 0.029$	$0.146 \pm 0.023$	$0.254 \pm 0.094$	$0.714 \pm 0.042$	$0.764 \pm 0.045$
	RAKEL	$0.154 \pm 0.022$	$0.11 \pm 0.012$	$0.196 \pm 0.062$	$0.739 \pm 0.022$	$0.768 \pm 0.025$
	RAKEL1	<b><math>0.131 \pm 0.012</math></b>	<b><math>0.09 \pm 0.014</math></b>	$0.173 \pm 0.03$	<b><math>0.743 \pm 0.026</math></b>	<b><math>0.787 \pm 0.018</math></b>
Baseline		0.313	0.500	0.687	NA	NA
MIML		0.182	0.132	0.223	NA	NA


community.

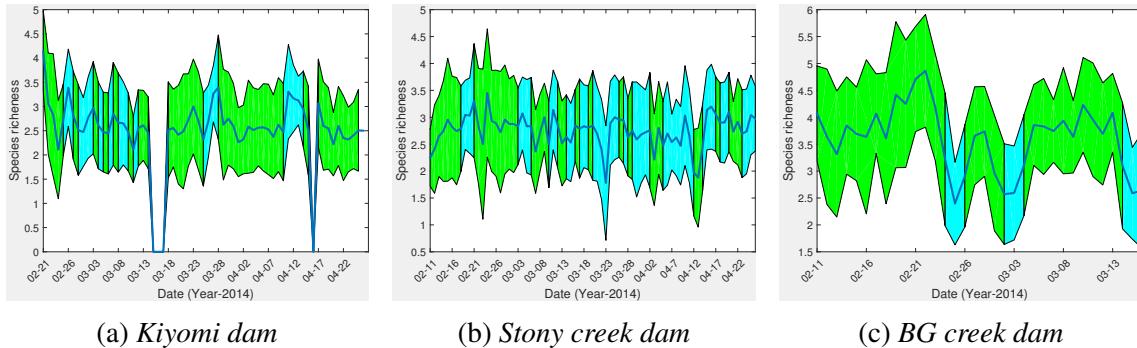

**Figure 6.4:** Frog species richness distribution of three selected sites. Here green bar represents the species variation, blue bar means there is no frog calls, zero value denotes the data loss of those particular days.

### 6.5.3 Comparison with MIML

In this chapter, ML learning is used to classify frog calls without syllable segmentation. Compared with the MIML learning (Table 5.2 in chapter 5), the ML classification has a better classification performance. Although extracting global features for the ML classification will lose some detailed information, most frog vocalisations can still be successfully described

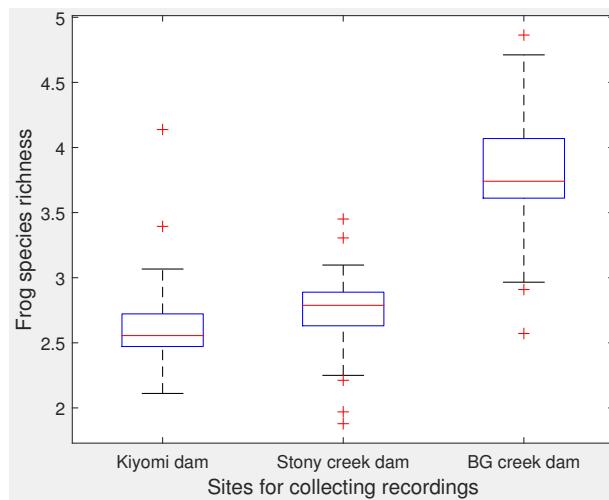

**Figure 6.5:** Averaged frog species richness of different sites.

when using cepstral features. Compared with other features, global cepstral features are often calculated from each windowed signal. Then, the statistical results, such as mean and standard deviation, of all the windowed signals are calculated, this process will compress the information in the time domain but keep the information of the frequency domain. Since most frogs tend to continuously make calls, the compression of the time domain information will not greatly affect the discriminability of the cepstral features. In contrast, MIML classification needs to conduct the syllable segmentation before feature extraction. However, the use of AED often cannot accurately segment frog calls with low energies, which greatly affects the performance.

## 6.6 Statistical analysis

Multiple regression analysis is used to explore the relationship between frog calling activity/species richness with weather variables (mean temperature and rainfall)<sup>5</sup>. Both frog calling activity and species richness are found to be highly correlated with mean temperature ( $F=5.18$ ,  $P<0.05$  for calling activity, and  $F=10.7$ ,  $P<0.01$  for species richness). To calculate the correlation between rainfall and frog calling activity/species richness, we first set the rainfall value as the dummy variable. Then, the correlation between frog calling activity/species richness and rainfall value is also studied with multiple regression analysis ( $F=4.63$ ,  $P<0.05$  for calling activity, and  $F=4.64$ ,  $P<0.05$  for species richness). The statistical analysis results indicate that frogs tend to make calls in the warm and humid environment, which is in accordance to previous studies [Akmentins et al., 2015, Canavero et al., 2008].

<sup>5</sup><http://www.bom.gov.au/?ref=hdr>

## 6.7 Summary and limitations

Acoustic sensors are more widely used to monitor frog calling activity and species richness than the traditional field survey method. However, the use of acoustic sensors generates large volumes of audio data, which makes it necessary to develop automated methods. This paper proposes a novel method for detecting frog calling activity and species richness based on AED and ML learning. Specifically, AED is the first step to calculate frog calling activity. Meanwhile, those 10-second recordings without frog calls are filtered out. For those recordings with frog calls, ML learning is further used for estimating frog species richness with multi-stage PWSCCs and LPCs. Finally, statistical analysis is utilised to reflect the relationship between frog calling activity/species richness with weather variables (mean temperature and rainfall). Experimental results show that our proposed method can accurately estimate frog calling activity/species richness and reflect their relationship with weather variables. Future work will focus on a wider frog call database, including a larger number of frog species, and frog calls collected over a longer period.

## **Chapter 7**

### **Acoustic monitoring of frog calling activity and species richness over long term**

---



# **Chapter 8**

## **Conclusion and future work**

---

This thesis has addressed frog call classification using both high and low SNR recordings. For high SNR recordings, an enhanced feature set using temporal, perceptual and cepstral features is first proposed. Also, a cepstral feature with a good anti-noise ability based on wavelet packet decomposition is proposed. To classify multiple simultaneously vocalising frog species in low SNR recordings, a spectrum of machine learning algorithms were explored including SISL classification, MIML classification, and ML classification.

Many challenges of this thesis lie in the designing and identifying the effective feature extraction algorithms and adopting novel classification frameworks that can successfully classify low SNR recordings with multiple simultaneously vocalising frog species. Key contributions of this research to the challenges are summarised in this chapter. Furthermore, useful avenues of inquiry for improving the methods described in this thesis are explored.

### **8.1 Summary of contributions**

The contributions of this research are mainly two folds.

1. Feature representation: Identifying characteristics of Australian frog vocalisations and developing corresponding novel features.
2. System integration: Designing a novel framework that combines signal processing and machine learning techniques into a unified and effective system to classify frogs using acoustics.

Below is the summary of the contributions of this thesis:

**1) An enhanced acoustic feature set for frog call classification in high SNR recordings.**

A systematic scheme was developed towards the goal of automatic classification of frog calls. The performances of various classifiers such as LDA, K-NN, SVM, RF, MLP were evaluated together with different feature sets. The experience gained and experimental results demonstrate that: 1) Compared with previous feature sets, an enhanced feature set including temporal, perceptual, and cepstral features can achieve the best classification performance. 2) The best classification performance is achieved by SVM and RF, in comparison with LDA, K-NN, and MLP. 3) The cepstral feature is very sensitive to the background noise, but can achieve high classification accuracy for high SNR recordings.

**2) A novel feature via adaptive wavelet packet decomposition for frog call classification in both high and low SNR recordings.**

To improve the anti-noise ability of cepstral features, wavelet packet decomposition is utilised to design a novel cepstral feature. Compared with other cepstral features such as MFCCs and Mel-scale wavelet packet decomposition coefficients, our proposed feature shows both better classification performance and anti-noise ability.

**3) Design a MIML classification framework for frog call classification in low SNR recordings.**

Since most field recordings contain multiple simultaneously vocalising frog species, both MIML and ML classification frameworks are first introduced to focus on frog calls. For MIML learning, a novel AED algorithm is designed to segment acoustic events using event filtering. Then, different MIML classifiers are evaluated with various acoustic feature sets based on the content and shape of segmented events. Experimental results show that MIML-RBF achieves the best classification results with shape based feature sets.

**4) Design a ML classification framework for long-term monitoring of frogs in low SNR recordings.**

Different from Chapter 5, acoustic event detection is used for different purposes, which is to filter out those recordings without frog calls. Meanwhile, frog calling activity is estimated based on the shape and content of segmented acoustic events. Then, those recordings with frog calls are classified via ML learning. Three global features, LPCs, MFCCs, and PWSCCs, are calculated to construct four feature sets. Compared with MIML classification, ML classification

can achieve better performance, because MIML classification results are greatly affected by the syllable segmentation process. Although our proposed syllable segmentation method can achieve better results when compared with other methods, the AED result is still not satisfied for classifying frog species. Lastly, the correlation between frog calling activity/species richness and weather variables (mean temperature and rainfall) are studied.

## 8.2 Limitations and future work

Although our proposed frog call classification system shows promising classification performance, there is still much work that can be done to help scientists and researchers in data collection and analysis in the bioacoustics communities.


- One of the most important issues when dealing with frog recordings is the need for the standardised species-specific data with behavioural labels. Therefore, the algorithms we developed for frog call classification can be evaluated on a larger dataset. Consequently, researchers can use the outcomes of such automatic call classification methods for field studies effectively and precisely. However, it is very time-consuming to perform manual labelling. It is necessary to develop automatic or semi-automatic methods to perform the labelling.
- Another aspect that requires tremendous improvement is the need for an advanced frog syllable segmentation method for the field recordings so as to extract more accurate event-based features and conduct more thorough analysis on frog vocalisations. The problem of syllable segmentation is very complicated, because there are many simultaneous overlapping calling activities from birds, frogs, insects, and many other sources.
- Since collected low SNR recordings often contain much background noise, it is important to develop effective noise reduction algorithms to improve the classification performance.
- In addition, the *adaptive WPD sub-band cepstral coefficients* feature has been successfully used for frog call classification, which is used to capture the frequency domain information. The time-varying information has been attempted heuristically but there is still a lack of systematic exploration.


- Chapters 3 and 4 focus on the classification of segmented frog syllables using SISL algorithms. In Chapters 5 and 6, the classification is realised by tagging the small audio clip (10-second recording) with MIML/ML algorithms. There is no direct comparison between MIML/ML and SISL, because MIML/ML and SISL algorithms make different types of predictions, and are evaluated according to different performance measures.
- Our developed frog call classification system aims to help ecologists to study frogs over larger spatial and temporal scales. However, there is still no a generic platform for running the frog calls recordings. It is necessary to develop a toolbox with an easy user interface for frog call classification, and then ecologists can conduct the analysis on their own. We focus on efficacy in this research, however efficiency is also very important in big data analysis. For this purpose, the MATLAB code corresponding to feature extractors and classifiers needs to be optimised to perform real-time frog call classification in the field.

## Appendix A

### Waveform, spectrogram and SNR of frog species from David Stewart's CD

**Table A.1:** Waveform, spectrogram, and SNR of selected six frog species from David Stewart's CD. The SNR is calculated as  $SNR = 10 \times \log_{10} \left( \frac{\sum_{i=m}^{m+L} S_i^2}{\sum_{j=n}^{n+L} N_j^2} \right)$ , where  $L$  is the length of the signal and noise used for calculating SNR, and set at 6000 samples,  $n$  and  $m$  are manually selected start location in the waveform for noise and signal, respectively.

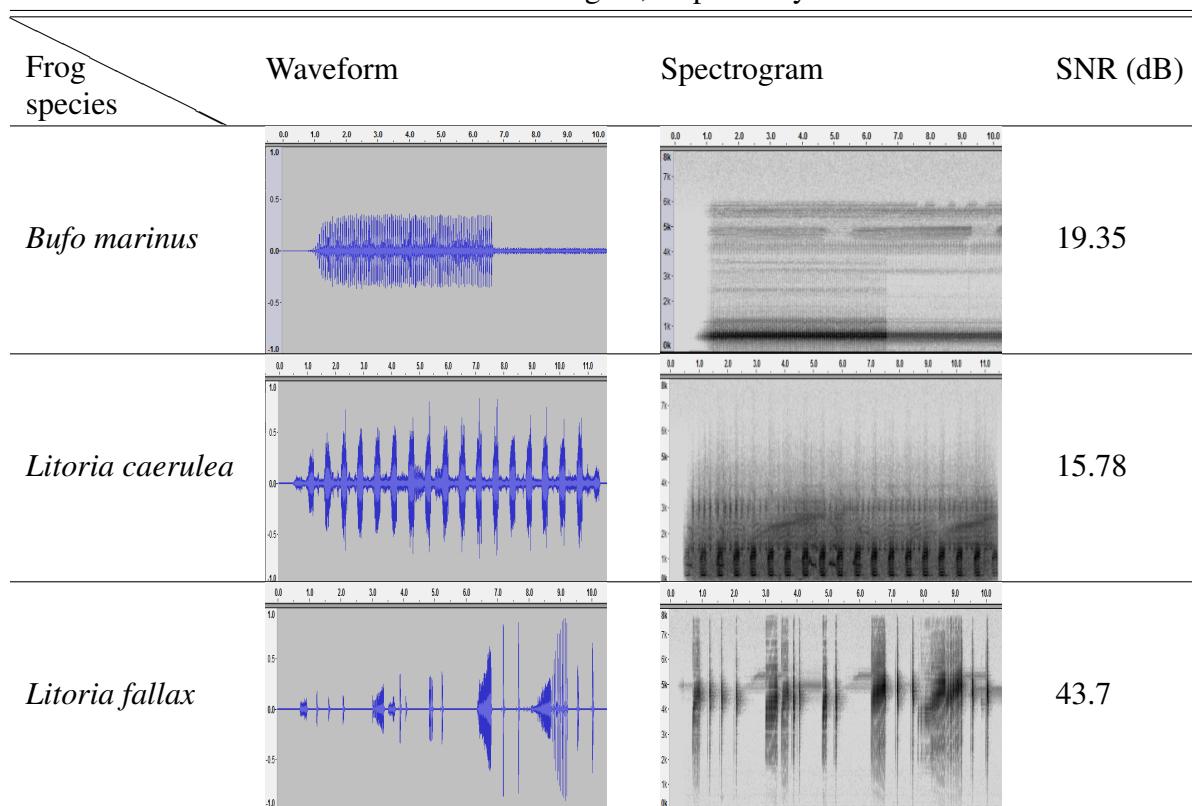

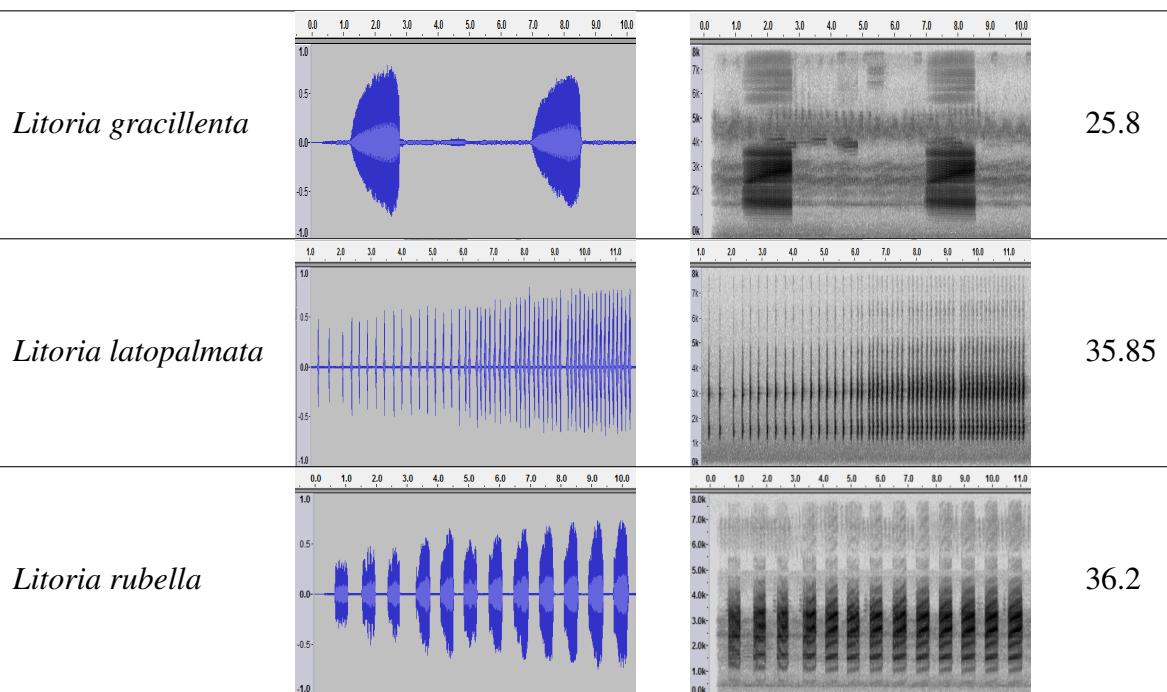


## Appendix B

### Waveform, spectrogram and SNR of six frog species from JCU recordings

**Table B.1:** Waveform, spectrogram, and SNR of eight frog species (recordings from JCU)

	Waveform	Spectrogram	SNR (dB)
<i>Bufo marinus</i>			1.86
<i>Cyclorana novaehollandiae</i>			-0.13
<i>Limnodynastes terraereginae</i>			-2.88
<i>Litoria fallax</i>			1.52

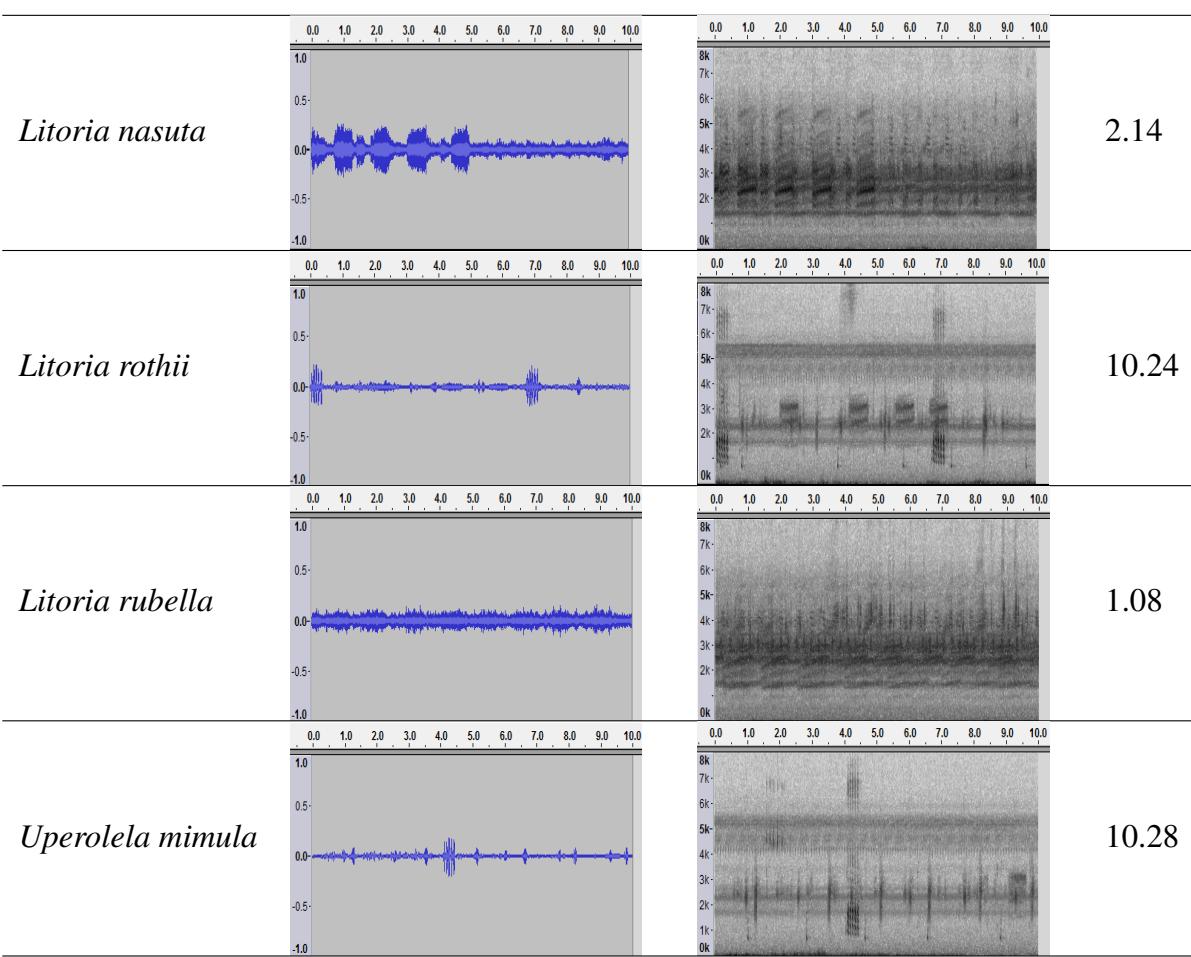

## References

---

- Acevedo, M. A., Corrada-Bravo, C. J., Corrada-Bravo, H., Villanueva-Rivera, L. J., and Aide, T. M. (2009). Automated classification of bird and amphibian calls using machine learning: A comparison of methods. *Ecological Informatics*, 4(4):206–214.
- Akmentins, M., Pereyra, L., Sanabria, E., and Vaira, M. (2015). Patterns of daily and seasonal calling activity of a direct-developing frog of the subtropical andean forests of argentina. *Bioacoustics*, 24(2):89–99.
- Bao, L. and Cui, Y. (2005). Prediction of the phenotypic effects of non-synonymous single nucleotide polymorphisms using structural and evolutionary information. *Bioinformatics*, 21(10):2185–2190.
- Bedoya, C., Isaza, C., Daza, J. M., and López, J. D. (2014). Automatic recognition of anuran species based on syllable identification. *Ecological Informatics*, 24:200–209.
- Biswas, A., Sahu, P., and Chandra, M. (2014). Admissible wavelet packet features based on human inner ear frequency response for hindi consonant recognition. *Computers & Electrical Engineering*, 40(4):1111 – 1122.
- Böll, S., Schmidt, B., Veith, M., Wagner, N., Rödder, D., Weinmann, C., Kirschen, T., and Loetters, S. (2013). Amphibians as indicators of changes in aquatic and terrestrial ecosystems following gm crop cultivation: a monitoring guideline. *BioRisk*, 8:39.
- Brandes, T. S. (2008). Feature vector selection and use with hidden markov models to identify frequency-modulated bioacoustic signals amidst noise. *Audio, Speech, and Language Processing, IEEE Transactions on*, 16(6):1173–1180.
- Brandes, T. S., Naskrecki, P., and Figueiroa, H. K. (2006). Using image processing to detect and

- classify narrow-band cricket and frog calls. *The Journal of the Acoustical Society of America*, 120(5):2950–2957.
- Briggs, F., Lakshminarayanan, B., Neal, L., Fern, X. Z., Raich, R., Hadley, S. J., Hadley, A. S., and Betts, M. G. (2012). Acoustic classification of multiple simultaneous bird species: A multi-instance multi-label approach. *The Journal of the Acoustical Society of America*, 131(6):4640–4650.
- Camacho, A., García-Rodríguez, A., and Bolaños, F. (2011). Automatic detection of vocalizations of the frog diasporus hylaeformis in audio recordings. In *Proceedings of Meetings on Acoustics*, volume 14, page 010003. Acoustical Society of America.
- Canavero, A., Arim, M., Naya, D. E., Camargo, A., Da Rosa, I., and Maneyro, R. (2008). Calling activity patterns in an anuran assemblage: the role of seasonal trends and weather determinants. *North-Western Journal of Zoology*, 4(1):29–41.
- Carey, C. and Alexander, M. A. (2003). Climate change and amphibian declines: is there a link? *Diversity and distributions*, 9(2):111–121.
- Chen, W., Zhao, G., and Li, X. (2013). A novel approach based on ensemble learning to nips4b challenge. In *proc. of int. symp. Neural Information Scaled for Bioacoustics, sabiod.org/nips4b, joint to NIPS, Nevada*.
- Chen, W.-P., Chen, S.-S., Lin, C.-C., Chen, Y.-Z., and Lin, W.-C. (2012). Automatic recognition of frog calls using a multi-stage average spectrum. *Computers & Mathematics with Applications*, 64(5):1270–1281.
- Chen, Z. and Maher, R. C. (2006). Semi-automatic classification of bird vocalizations using spectral peak tracks. *The Journal of the Acoustical Society of America*, 120(5):2974–2984.
- Colombia, C. and del Cauca, V. (2009). Frogs species classification using lpc and classification algorithms on wireless sensor network platform.
- Colonna, J., Ribas, A., dos Santos, E., and Nakamura, E. (2012a). Feature subset selection for automatically classifying anuran calls using sensor networks. In *Neural Networks (IJCNN), The 2012 International Joint Conference on*, pages 1–8.

- Colonna, J. G., Cristo, M., Junior, M. S., and Nakamura, E. F. (2015). An incremental technique for real-time bioacoustic signal segmentation. *Expert Systems with Applications*, 42(21):7367 – 7374.
- Colonna, J. G., Ribas, A. D., dos Santos, E. M., and Nakamura, E. F. (2012b). Feature subset selection for automatically classifying anuran calls using sensor networks. In *Neural Networks (IJCNN), The 2012 International Joint Conference on*, pages 1–8. IEEE.
- Cortes, C. and Vapnik, V. (1995). Support-vector networks. *Machine learning*, 20(3):273–297.
- Croker, B. and Kotteege, N. (2012). Using feature vectors to detect frog calls in wireless sensor networks. *The Journal of the Acoustical Society of America*, 131(5):EL400–EL405.
- Dang, T., Bulusu, N., and Hu, W. (2008). Lightweight acoustic classification for cane-toad monitoring. In *Signals, Systems and Computers, 2008 42nd Asilomar Conference on*, pages 1601–1605. IEEE.
- Dayou, J., Han, N. C., Mun, H. C., Ahmad, A. H., Muniandy, S. V., and Dalimin, M. N. (2011). Classification and identification of frog sound based on entropy approach. In *International Conference on Life Science and Technology*, volume 3, pages 184–187.
- Dorcas, M. E., Price, S. J., Walls, S. C., and Barichivich, W. J. (2009). Auditory monitoring of anuran populations. *Amphibian ecology and conservation: a hand book of techniques*. Oxford University Press, Oxford, pages 281–298.
- Dufour, O., Glotin, H., Artires, T., Bas, Y., and Giraudet, P. (2013). Multi-instance multi-label acoustic classification of plurality of animals: birds, insects & amphibian. *Workshop on Neural Information Processing Scaled for Bioacoustics*, pages 164–174.
- Farooq, O. and Datta, S. (2001). Mel filter-like admissible wavelet packet structure for speech recognition. *IEEE Signal Processing Letters*, 8(7):196–198.
- Fodor, G. (2013). The ninth annual mlsp competition: first place. In *Machine Learning for Signal Processing (MLSP), 2013 IEEE International Workshop on*, pages 1–2. IEEE.
- Fox, E. J. (2008). A new perspective on acoustic individual recognition in animals with limited call sharing or changing repertoires. *Animal Behaviour*, 75(3):1187 – 1194.

- Gingras, B. and Fitch, W. T. (2013). A three-parameter model for classifying anurans into four genera based on advertisement calls. *The Journal of the Acoustical Society of America*, 133(1):547–559.
- Glotin, H., Sueur, J., Artières, T., Adam, O., and Razik, J. (2013). Sparse coding for scaled bioacoustics: From humpback whale songs evolution to forest soundscape analyses. *The Journal of the Acoustical Society of America*, 133(5):3311–3311.
- Gordon, L., Chervonenkis, A. Y., Gammerman, A. J., Shahmuradov, I. A., and Solovyev, V. V. (2003). Sequence alignment kernel for recognition of promoter regions. *Bioinformatics*, 19(15):1964–1971.
- Grigg, G., Taylor, A., Mc Callum, H., and Watson, G. (1996). Monitoring frog communities: an application of machine learning. In *Proceedings of Eighth Innovative Applications of Artificial Intelligence Conference, Portland Oregon*, pages 1564–1569.
- Han, N. C., Muniandy, S. V., and Dayou, J. (2011). Acoustic classification of australian anurans based on hybrid spectral-entropy approach. *Applied Acoustics*, 72(9):639–645.
- Han, W., Chan, C.-F., Choy, C.-S., and Pun, K.-P. (2006). An efficient mfcc extraction method in speech recognition. In *Circuits and Systems, 2006. ISCAS 2006. Proceedings. 2006 IEEE International Symposium on*, pages 4–pp. IEEE.
- Harma, A. (2003). Automatic identification of bird species based on sinusoidal modeling of syllables. In *Acoustics, Speech, and Signal Processing, 2003. Proceedings.(ICASSP'03). 2003 IEEE International Conference on*, volume 5, pages V–545. IEEE.
- Heller, J. R. and Pinezich, J. D. (2008). Automatic recognition of harmonic bird sounds using a frequency track extraction algorithm. *The Journal of the Acoustical Society of America*, 124(3):1830–1837.
- Hsu, C.-W., Chang, C.-C., Lin, C.-J., et al. (2003). A practical guide to support vector classification.
- Huang, C.-J., Chen, Y.-J., Chen, H.-M., Jian, J.-J., Tseng, S.-C., Yang, Y.-J., and Hsu, P.-A. (2014). Intelligent feature extraction and classification of anuran vocalizations. *Applied Soft Computing*, 19(0):1 – 7.

- Huang, C.-J., Yang, Y.-J., Yang, D.-X., and Chen, Y.-J. (2009). Frog classification using machine learning techniques. *Expert Systems with Applications*, 36(2):3737–3743.
- Huang, C.-J., Yang, Y.-J., Yang, D.-X., Chen, Y.-J., and Wei, H.-Y. (2008). Realization of an intelligent frog call identification agent. In *Agent and Multi-Agent Systems: Technologies and Applications*, pages 93–102. Springer.
- Jaafar, H. and Ramli, D. (2013a). Automatic syllables segmentation for frog identification system. In *Signal Processing and its Applications (CSPA), 2013 IEEE 9th International Colloquium on*, pages 224–228.
- Jaafar, H. and Ramli, D. A. (2013b). Automatic syllables segmentation for frog identification system. In *Signal Processing and its Applications (CSPA), 2013 IEEE 9th International Colloquium on*, pages 224–228. IEEE.
- Jaafar, H., Ramli, D. A., and Shahrudin, S. (2013a). A comparative study of classification algorithms and feature extractions for frog identification system.
- Jaafar, H., Ramli, D. A., and Shahrudin, S. (2013b). Mfcc based frog identification system in noisy environment. In *Signal and Image Processing Applications (ICSIPA), 2013 IEEE International Conference on*, pages 123–127. IEEE.
- Jancovic, P. and Kokuer, M. (2015). Acoustic recognition of multiple bird species based on penalized maximum likelihood. *Signal Processing Letters, IEEE*, 22(10):1585–1589.
- Juan Mayor, L. M. M. (2009). Frogs species classification using lpc and classification algorithms on wireless sensor network platform. In *XVII General Assembly, Ibero-American Conference on Trends in Engineering Education and Collaboration, ISTEC, 2009*.
- Kular, D., Hollowood, K., Ommojaro, O., Smart, K., Bush, M., and Ribeiro, E. (2015). Classifying frog calls using gaussian mixture models. In *Advances in Visual Computing*, pages 347–354. Springer.
- Lasseck, M. (2013.). Bird song classification in field recordings: winning solution for nips4b 2013 competition. In *Proc. of int. symp. Neural Information Scaled for Bioacoustics, sabiod.org/nips4b, joint to NIPS, Nevada*.

- Lee, C.-H., Chou, C.-H., Han, C.-C., and Huang, R.-Z. (2006). Automatic recognition of animal vocalizations using averaged mfcc and linear discriminant analysis. *Pattern Recognition Letters*, 27(2):93–101.
- Lei, B., Rahman, S. A., and Song, I. (2014). Content-based classification of breath sound with enhanced features. *Neurocomputing*, 141:139–147.
- Litvin, Y. and Cohen, I. (2011). Single-channel source separation of audio signals using bark scale wavelet packet decomposition. *Journal of Signal Processing Systems*, 65(3):339–350.
- Madjarov, G., Kocev, D., Gjorgjevikj, D., and D?eroski, S. (2012). An extensive experimental comparison of methods for multi-label learning. *Pattern Recognition*, 45(9):3084 – 3104.
- Mallawaarachchi, A., Ong, S., Chitre, M., and Taylor, E. (2008). Spectrogram denoising and automated extraction of the fundamental frequency variation of dolphin whistles. *The Journal of the Acoustical Society of America*, 124(2):1159–1170.
- Massaron, L. (2013). Ensemble logistic regression and gradient boosting classifiers for multilabel bird song classification in noise (nips4b challenge). *Proc of Neural Information Processing Scaled for Bioacoustics, joint to NIPS*.
- Mellinger, D. K., Martin, S. W., Morrissey, R. P., Thomas, L., and Yosco, J. J. (2011). A method for detecting whistles, moans, and other frequency contour sounds. *The Journal of the Acoustical Society of America*, 129(6):4055–4061.
- Melter, R. A. (1987). Some characterizations of city block distance. *Pattern Recognition Letters*, 6(4):235 – 240.
- Mencia, E. L., Nam, J., and Lee, D.-H. (2013). Learning multi-labeled bioacoustic samples with an unsupervised feature learning approach. *Proc of Neural Information Processing Scaled for Bioacoustics, joint to NIPS*, 2013:184–189.
- Mutschmann, F. (2015). Chytridiomycosis in amphibians. *Journal of Exotic Pet Medicine*, 24(3):276–282.
- Noda, J. J., Travieso, C. M., and S?nchez-Rodr?guez, D. (2016). Methodology for automatic bioacoustic classification of anurans based on feature fusion. *Expert Systems with Applications*, 50:100 – 106.

- Otsu, N. (1975). A threshold selection method from gray-level histograms. *Automatica*, 11(285-296):23–27.
- Potamitis, I. (2015). Unsupervised dictionary extraction of bird vocalisations and new tools on assessing and visualising bird activity. *Ecological Informatics*, 26:6–17.
- Razik, J., Hoeberichts, M., Doh, Y., et al. (2015). Sparse coding for efficient bioacoustic data mining: Preliminary application to analysis of whale songs. In *2015 IEEE International Conference on Data Mining Workshop (ICDMW)*, pages 780–787. IEEE.
- Ren, Y., Johnson, M. T., and Tao, J. (2008). Perceptually motivated wavelet packet transform for bioacoustic signal enhancement. *The Journal of the Acoustical Society of America*, 124(1):316–327.
- Roch, M. A., Brandes, T. S., Patel, B., Barkley, Y., Baumann-Pickering, S., and Soldevilla, M. S. (2011). Automated extraction of odontocete whistle contours. *The Journal of the Acoustical Society of America*, 130(4):2212–2223.
- Ruiz-Munoz, J., Orozco-Alzate, M., and Castellanos-Dominguez, G. (2015). Multiple instance learning-based birdsong classification using unsupervised recording segmentation. *Proceedings of the Twenty-Fourth International Joint Conference On Artificial Intelligence (IJCAI 2015)*.
- Selin, A., Turunen, J., and Tanttu, J. T. (2007). Wavelets in recognition of bird sounds. *EURASIP Journal on Applied Signal Processing*, 2007(1):141–141.
- Somervuo, P. et al. (2004). Classification of the harmonic structure in bird vocalization. In *Acoustics, Speech, and Signal Processing, 2004. Proceedings.(ICASSP'04). IEEE International Conference on*, volume 5, pages V–701. IEEE.
- Stewart, D. (1999). Australian frog calls: subtropical east. Audio CD.
- Stowell, D. and Plumley, M. D. (2013). Feature design for multilabel bird song classification in noise (nips4b challenge). *Proceedings of NIPS4b: neural information processing scaled for bioacoustics, from neurons to big data*.
- Tan, W., Jaafar, H., Ramli, D., Rosdi, B., and Shahrudin, S. (2014). Intelligent frog species identification on android operating system. *International journal of circuits, systems and signal processing*.

- Tanton, J. S. (2005). *Encyclopedia of mathematics*. Facts On File.
- Tjahja, T. V., Fern, X. Z., Raich, R., and Pham, A. T. (2015). Supervised hierarchical segmentation for bird song recording. In *Acoustics, Speech and Signal Processing (ICASSP), 2015 IEEE International Conference on*, pages 763–767. IEEE.
- Towsey, M., Planitz, B., Nantes, A., Wimmer, J., and Roe, P. (2012). A toolbox for animal call recognition. *Bioacoustics*, 21(2):107–125.
- Towsey, M. W. and Planitz, B. (2011). Technical report : acoustic analysis of the natural environment. 2011.
- Vaca-Castano, G. and Rodriguez, D. (2010). Using syllabic mel cepstrum features and k-nearest neighbors to identify anurans and birds species. In *Signal Processing Systems (SIPS), 2010 IEEE Workshop on*, pages 466–471. IEEE.
- Wei, B., Yang, M., Rana, R. K., Chou, C. T., and Hu, W. (2012). Distributed sparse approximation for frog sound classification. In *Proceedings of the 11th international conference on Information Processing in Sensor Networks*, pages 105–106. ACM.
- Xie, J. (2016). Song meter (sm2) widelife acoustic. <http://www.wildlifeacoustics.com/products/song-meter-sm2-birds>.
- Xie, J., Towsey, M., Eichinski, P., Zhang, J., and Roe, P. (2015a). Acoustic feature extraction using perceptual wavelet packet decomposition for frog call classification. *11th IEEE International Conference on eScience*.
- Xie, J., Towsey, M., Truskinger, A., Eichinski, P., Zhang, J., and Roe, P. (2015b). Acoustic classification of australian anurans using syllable features. In *2015 IEEE Tenth International Conference on Intelligent Sensors, Sensor Networks and Information Processing (IEEE ISSNIP 2015)*, Singapore, Singapore.
- Xie, J., Towsey, M., Zhang, J., Dong, X., and Roe, P. (2015c). Application of image processing techniques for frog call classification. *International Conference on Image Processing*.
- Yen, G. G. and Fu, Q. (2002). Automatic frog call monitoring system: a machine learning approach. In *AeroSense 2002*, pages 188–199. International Society for Optics and Photonics.

- Yuan, C. L. T. and Ramli, D. A. (2012). Frog sound identification system for frog species recognition. In *Context-Aware Systems and Applications*, pages 41–50. Springer.
- Zhang, M.-L. and Zhou, Z.-H. (2014). A review on multi-label learning algorithms. *Knowledge and Data Engineering, IEEE Transactions on*, 26(8):1819–1837.
- Zhang, X. and Li, Y. (2015). Adaptive energy detection for bird sound detection in complex environments. *Neurocomputing*, 155(0):108 – 116.
- Zhou, Z.-H., Zhang, M.-L., Huang, S.-J., and Li, Y.-F. (2008). Miml: a framework for learning with ambiguous objects. *CORR abs/0808.3231*.





