

Interruption Aware Writing Helper

A profile-based AI writing system that treats interruptions as evidence for writing preferences.
Jerry

TAKEAWAY
Stopping is feedback.
Interruption becomes an inspectable signal for writing preferences.

Motivation

Prompt-based personalization asks writers to describe style in advance. This project responds to a more ordinary writing situation: a writer stops, rejects, repairs, or asks for another version because the generated text is close but not right.

Research question

Can interruptions recover preferences about wording, tone, structure, and specificity?


Writing Preference Profile

The profile stores writing preferences: wording, specificity, rhythm, paragraph structure, transitions, and explanation style. It is not meant to infer personality, identity, ability, or private traits.

Inclusion condition

A preference enters the profile only after three similar interruption-and-repair observations, reducing one-click overinterpretation.

The Thing Itself: Multi-Agent Workflow

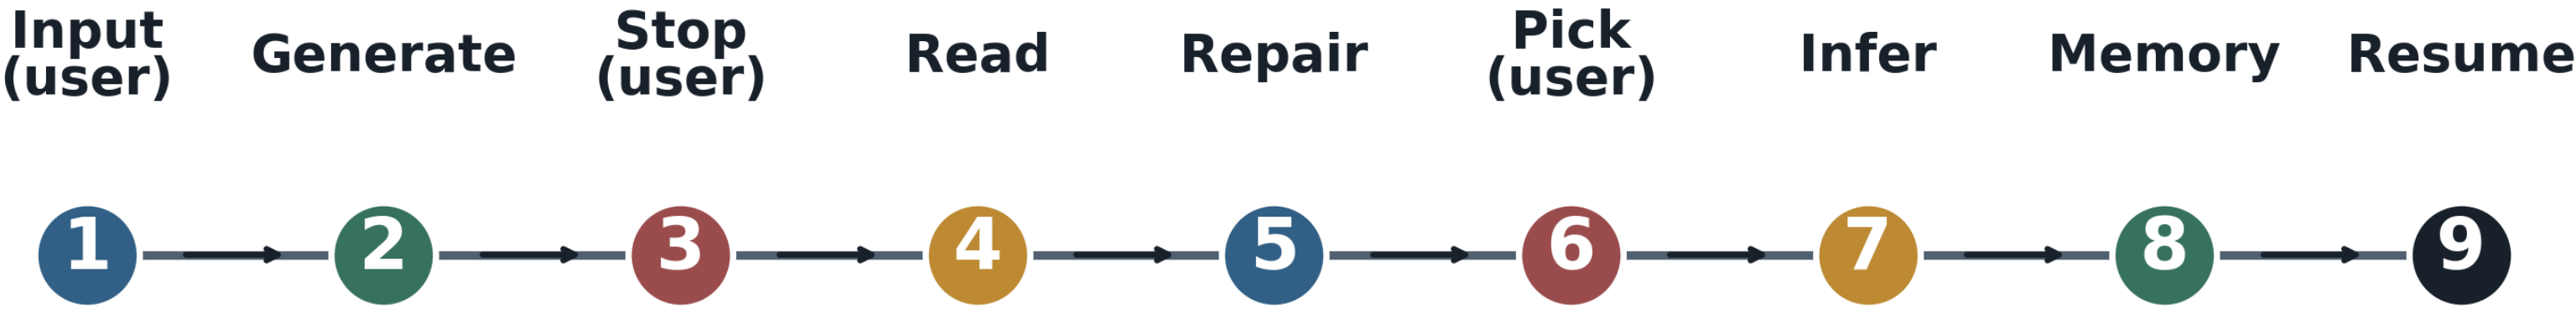

task input (user) -> generate -> stop (user) -> interpret -> repair -> pick (user) -> infer -> memory -> resume

Synthetic Profile Data

150

simulated profiles

50

steps each

5176

interruptions

9–12

target items

Each fake user receives a common, rare personal, or mixed hidden writing-preference profile. The helper observes interruptions and repairs, then tries to recover repeated preferences.

Interpretation

Hidden preferences show the simulated distribution of writing needs across fake users.

Recovered preferences show what the system actually learned after interruption and repair.


The overlap shows that repeated interruptions can recover meaningful writing-preference patterns.

The result supports the design idea, but only for synthetic users and controlled interruption behavior.

Mixed Profile Recovery Rate


The full evaluation includes common, rare personal, and mixed hidden-profile groups. This poster shows the mixed-group result, where each profile combines rare style preferences with common academic-writing preferences.

Mixed Profile Recovery Rate Over 50 Writing Steps

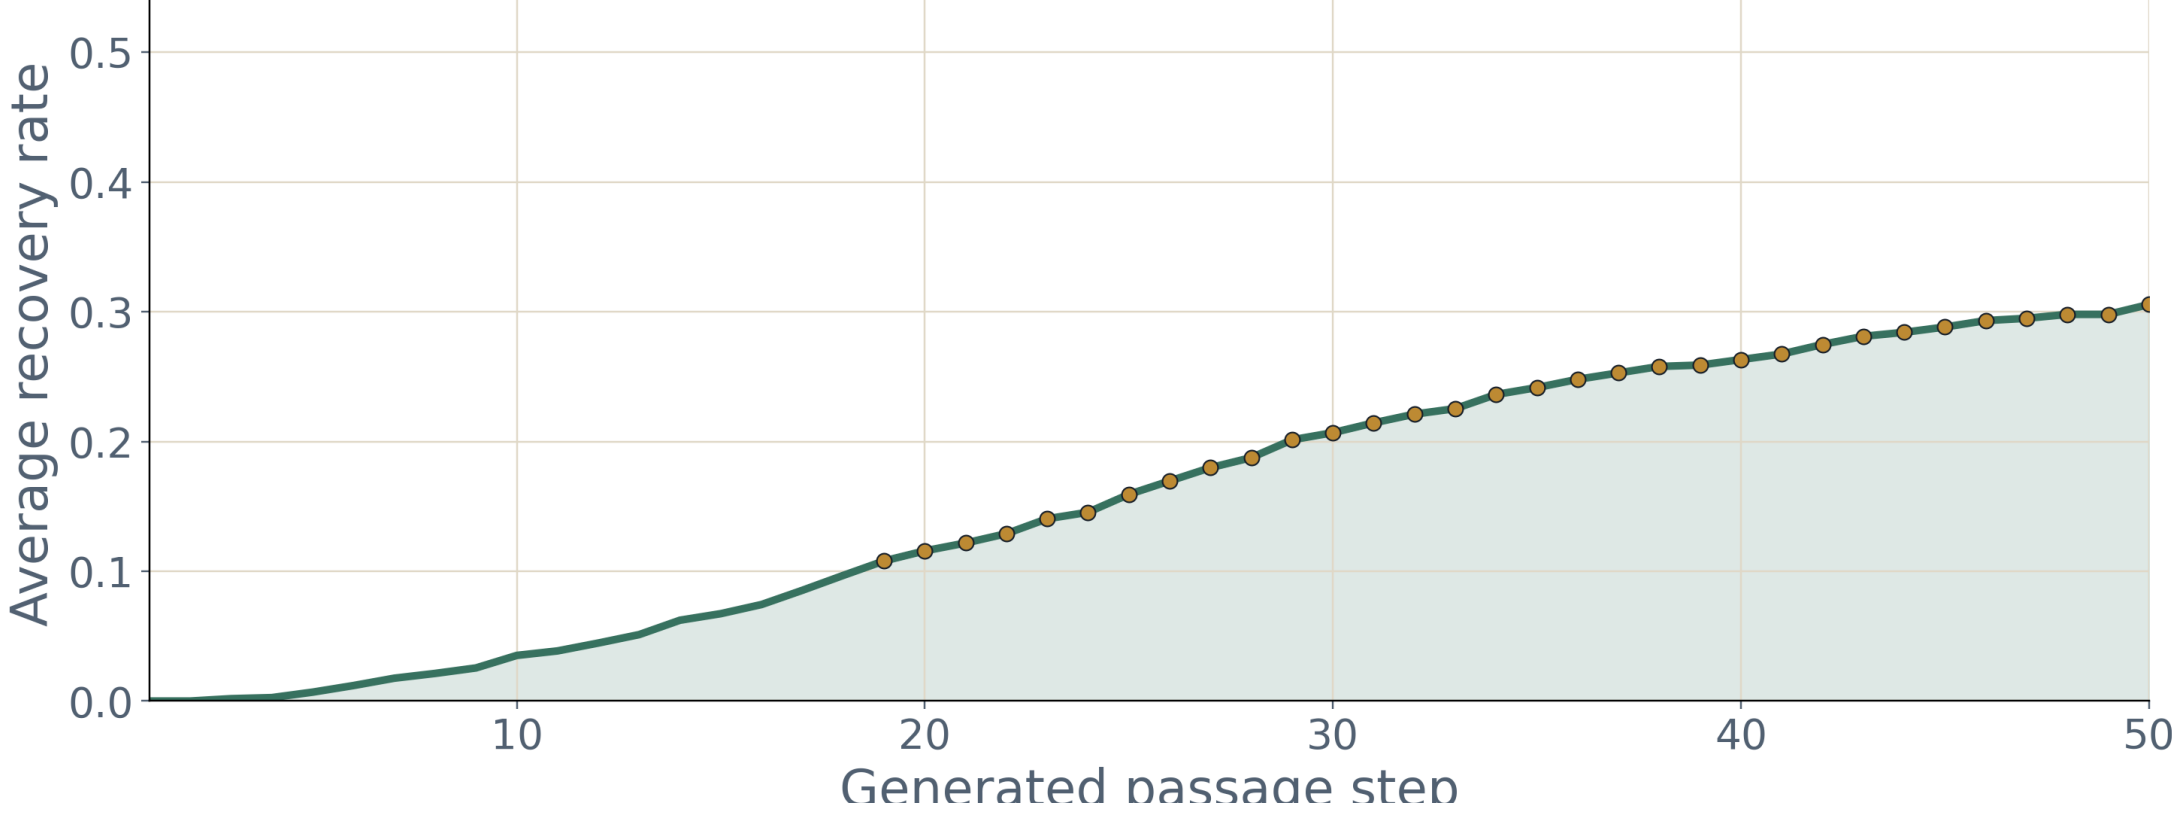


Common Group Recovery

Common Profile Recovery Rate Over 50 Writing Steps

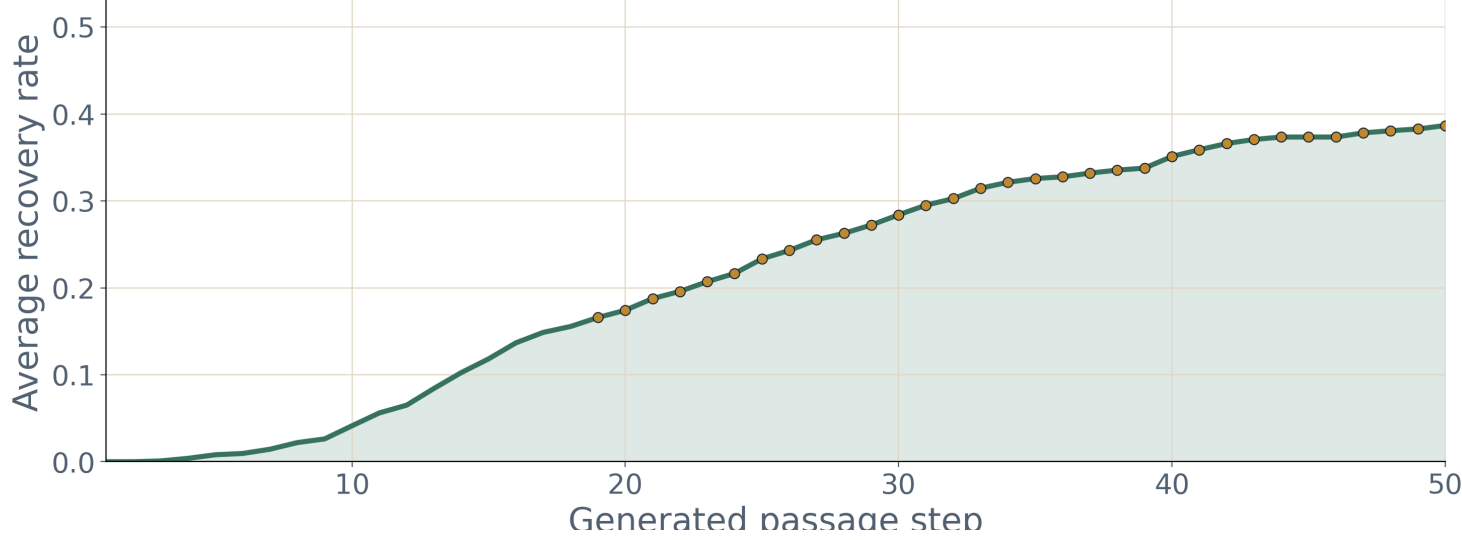

Rare Group Recovery

Rare Personal Profile Recovery Rate Over 50 Writing Steps

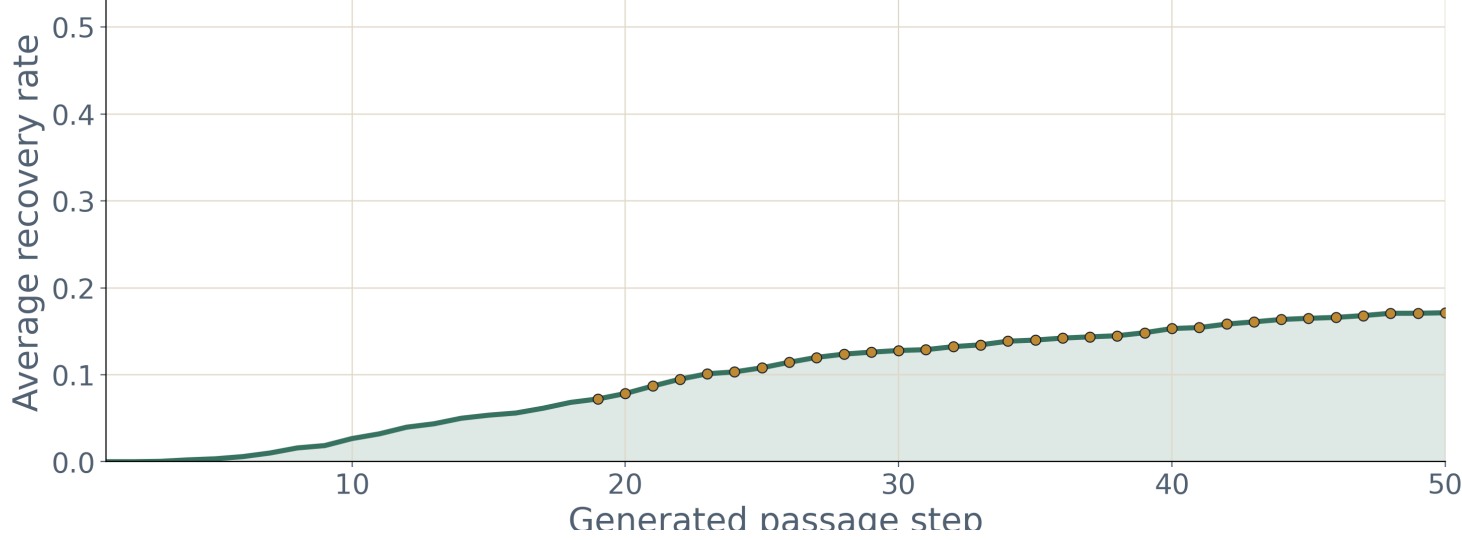

Process Highlights

Iteration 1: I started with a generic writing helper, then made it interpret stopping points and generate replacements.

Iteration 2: I added an interpreter and rejected immediate profile updates, using a three-observation rule to reduce one-click overfitting.

Iteration 3: I generated random profiles and used an LLM to simulate the writing process, then summarized the data and recovery rate.

Reflection

Limit: the simulation shows the mechanism works, but it does not prove real writers interrupt consistently.

Next: test with real writers and add controls to approve, edit, or delete inferred preferences.

AI Disclosure

I designed the main system and used vibe coding for implementation support. AI assistance was used for coding, debugging, and code revision; generated edits were reviewed and approved.

References Leading To This Work

CoAuthor. Lee, M., Liang, P., and Yang, Q. (2022). Interaction traces reveal human-AI writing collaboration. <https://arxiv.org/abs/2201.06796>

GhostWriter. Yeh, C., Ramos, G., Ng, R., Huntington, K., and Banks, R. (2024). Personalization and agency in collaborative AI writing. <https://arxiv.org/abs/2402.08855>