


My Github URL vercel.app

W07-P1: Show classdemo of week 2 and week 6

W2

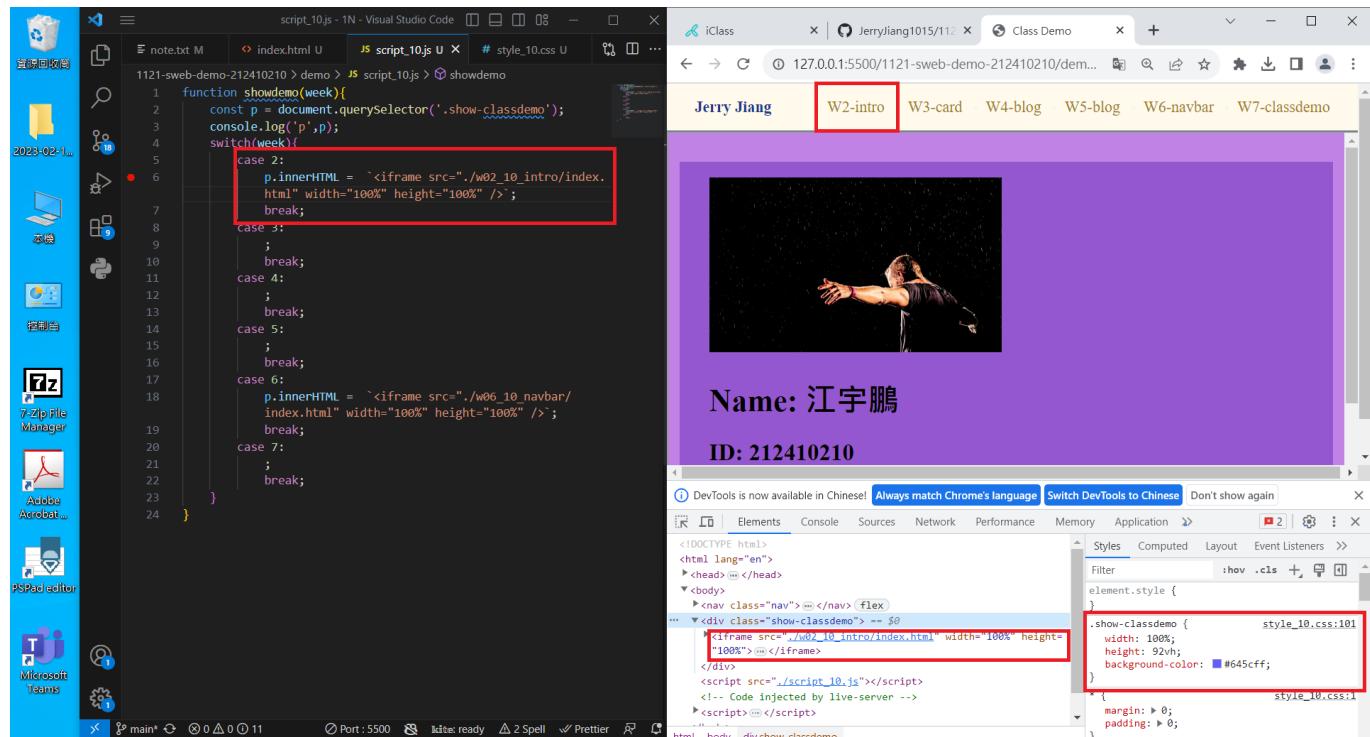


The screenshot shows the Visual Studio Code interface with a file named `script_10.js` open. The code contains a function `showdemo` that uses a switch statement to handle different weeks. A red box highlights the case 2 block, which contains an `iframe` element pointing to `./w02_10_intro/index.html`. To the right, a browser window displays a person in a black shirt with arms outstretched.

```

function showdemo(week){
    const p = document.querySelector('.show-classdemo');
    console.log('p',p);
    switch(week){
        case 2:
            p.innerHTML = `<iframe src="./w02_10_intro/index.html" width="100%" height="100%" />`;
            break;
        case 3:
            ;
            break;
        case 4:
            ;
            break;
        case 5:
            ;
            break;
        case 6:
            p.innerHTML = `<iframe src="./w06_10_navbar/index.html" width="100%" height="100%" />`;
            break;
        case 7:
            ;
            break;
    }
}

```

W6

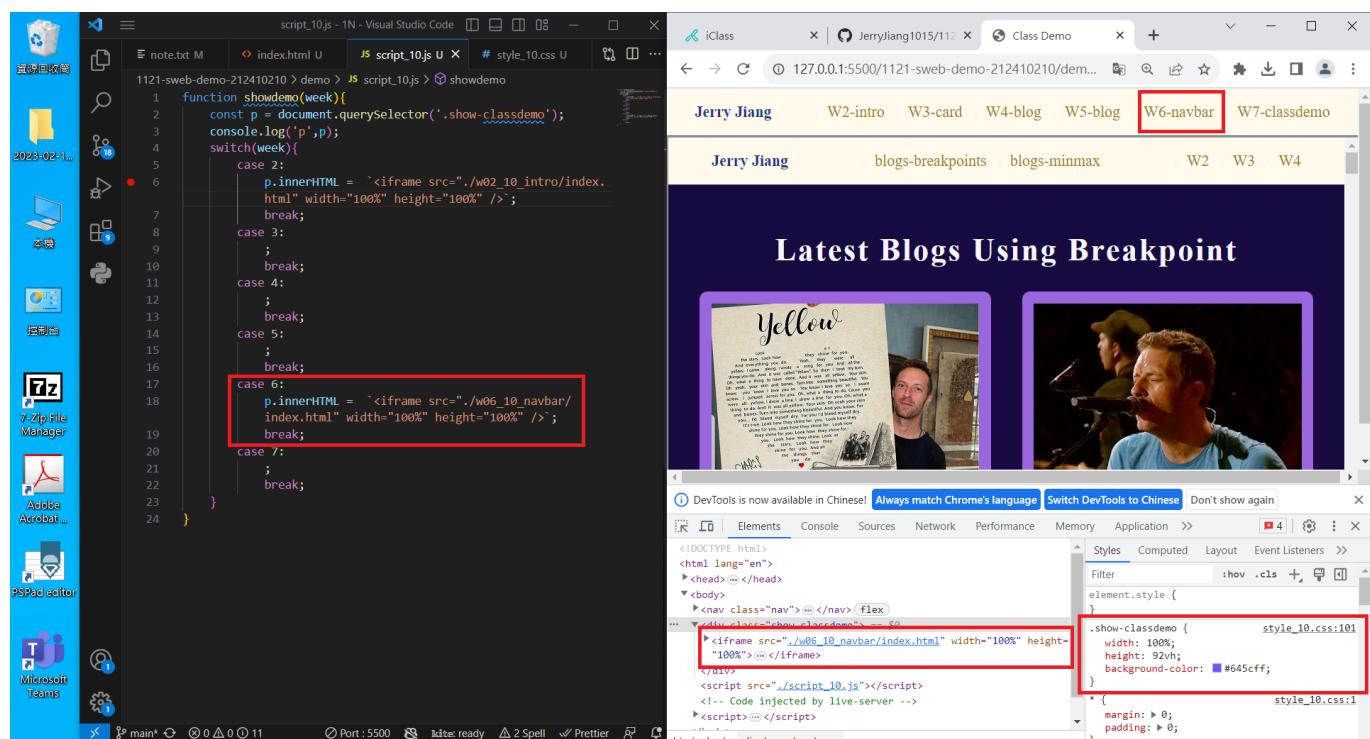

The screenshot shows the Visual Studio Code interface with the same `script_10.js` file. The code is identical to the W2 version, with a red box highlighting the case 6 block. To the right, a browser window displays a blog post titled "Latest Blogs Using Breakpoint" featuring a photo of Bruce Springsteen singing into a microphone.

```

function showdemo(week){
    const p = document.querySelector('.show-classdemo');
    console.log('p',p);
    switch(week){
        case 2:
            p.innerHTML = `<iframe src="./w02_10_intro/index.html" width="100%" height="100%" />`;
            break;
        case 3:
            ;
            break;
        case 4:
            ;
            break;
        case 5:
            ;
            break;
        case 6:
            p.innerHTML = `<iframe src="./w06_10_navbar/index.html" width="100%" height="100%" />`;
            break;
        case 7:
            ;
            break;
    }
}

```

ffc03f6 “JerryJiang1015” Thu Oct 26 19:23:49 2023 +0800 W07-P1: Show classdemo of week 2 and week 6

[vercel.app](#)

W07-P2: Show classdemo of week 7

The screenshot shows a Windows desktop environment. On the left, there's a file explorer with files like 'w07_10.md', 'note.txt', 'index.html', and 'script_10.js'. A taskbar at the bottom has icons for Microsoft Teams, 7-Zip File Manager, Adobe Acrobat, PSPad editor, and Microsoft Edge. The main area shows Visual Studio Code with 'script_10.js' open. The code contains a switch statement that handles cases 1 through 7, each rendering a different index.html page via an iframe. A red box highlights the case 7 logic. To the right, a browser window titled 'iClass' shows a video player with a person in a black shirt. Below the video, the text 'Name: 江宇鹏' is displayed. The browser's developer tools DevTools are open, with the Styles tab selected. A red box highlights the CSS rule for '.show-classdemo' in 'style_10.css'.

```

function showdemo(week){
    const p = document.querySelector('.show-classdemo');
    console.log('p',p);
    switch(week){
        case 1:
            p.innerHTML = `<iframe src="./w02_10_intro/index.html" width="100%" height="100%" />`;
            break;
        case 2:
            p.innerHTML = `<iframe src="./w03_10_card/index.html" width="100%" height="100%" />`;
            break;
        case 3:
            p.innerHTML = `<iframe src="./w04_10_blog/index.html" width="100%" height="100%" />`;
            break;
        case 4:
            p.innerHTML = `<iframe src="./w05_10_blog/index.html" width="100%" height="100%" />`;
            break;
        case 5:
            p.innerHTML = `<iframe src="./w06_10_navbar/index.html" width="100%" height="100%" />`;
            break;
        case 6:
            p.innerHTML = `<iframe src="./index.html" width="100%" height="100%" />`;
            break;
        case 7:
            p.innerHTML = `<iframe src="./index.html" width="100%" height="100%" />`;
            break;
    }
}

```

27f6d19 “JerryJiang1015” Thu Oct 26 19:48:00 2023 +0800 W07-P2: Show classdemo of week 7

[vercel.app](#)

W07-P3: add index.html as home page with links of class demo, my Github and my Vercel

The screenshot shows a Windows desktop environment. On the left, there's a file explorer with files like 'w07_10.md', 'note.txt', 'index.html', and 'script_10.js'. A taskbar at the bottom has icons for Microsoft Teams, 7-Zip File Manager, Adobe Acrobat, PSPad editor, and Microsoft Edge. The main area shows Visual Studio Code with 'index.html' open. The page contains a navigation menu with three items: 'Class Demo', 'My Github', and 'My Vercel'. A red box highlights the menu items. To the right, a browser window titled 'iClass' shows the same menu. The browser's developer tools DevTools are open, with the Styles tab selected. A red box highlights the CSS rules for the menu items in 'style_10.css'.

```


<ul class="nav-links">
    <li>
        <a href="#/demo/index.html">Class Demo</a>
    </li>
    <li>
        <a href="https://github.com/JerryJiang1015/w07_10_sweb-demo-212410210.git">My Github</a>
    </li>
    <li>
        <a href="https://w07_10_sweb-demo-212410210.vercel.app/">My Vercel</a>
    </li>
</ul>

```

22e676f "JerryJiang1015" Thu Oct 26 20:26:29 2023 +0800 W07-P3: add index.html as home page with links of class demo, my Github and my Vercel

[vercel.app](#)

W07-P4: implement tiles layout as below

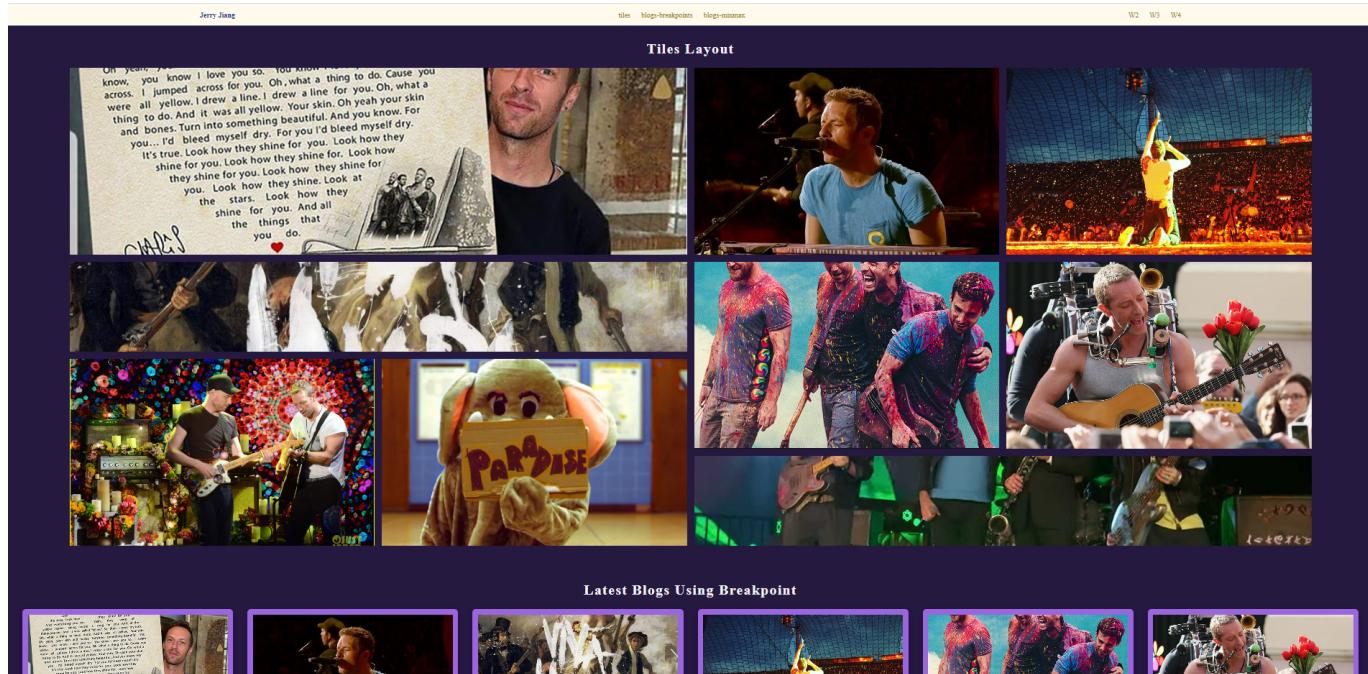

```
# style_10.css
demo > w07_10_tile > css > # style_10.css > tiles-center
114 /*
115
116 .tiles {
117   padding: 2rem 0 ;
118 }
119
120 .tiles-center {
121   width: 90vw;
122   display: grid;
123   margin: 0 auto;
124   grid-template-columns: repeat(4, 1fr);
125   grid-template-rows: repeat(5, 12.5rem);
126   gap: 1rem;
127   grid-template-areas:
128     'a a b d'
129     'a a b d'
130     'c c e f'
131     'g h e f'
132     'g h i i';
133 }
134
135 .tiles-center img {
136   display: block;
137   width: 100%;
138   height: 100%;
139   object-fit: cover;
140 }
141
142 .tile-1 {
143   grid-area: a;
144 }
145
146 .tile-2 {
147   grid-area: b;
148 }
149
150
151 .tile-3 {
152   grid-area: c;
153 }
154
155 .tile-4 {
156   grid-area: d;
157 }
158
159
160 .tile-5 {
161   grid-area: e;
162 }
163
164
165 .tile-6 {
166   grid-area: f;
167 }
168
169
170 .tile-7 {
171   grid-area: g;
172 }
173
174
175 .tile-8 {
176   grid-area: h;
177 }
178 }
```

1f26752 "JerryJiang1015" Thu Oct 26 21:41:47 2023 +0800 W07-P4: implement tiles layout as below

[vercel.app](#)

W07-O5: W7 git logs

The screenshot shows a GitHub repository interface. At the top, the repository path is `JerryJiang1015 / 1121-sweb-demo-212410210`. Below the header, there are navigation links: Code, Issues, Pull requests, Actions, Projects, Wiki, Security, Insights, and Settings. The 'Code' link is underlined, indicating it is the active tab. The main content area is titled 'Commits' and shows a dropdown menu for the branch, currently set to 'main'. A red box highlights a specific commit from October 26, 2023:

- W07-P4: implement tiles layout as below**
"JerryJiang1015" committed 1 minute ago ✓
- W07-P3: add index.html as home page with links of class demo, my Gith...**
"JerryJiang1015" committed 1 hour ago ✓
- W07-P2: Show classdemo of week 7**
"JerryJiang1015" committed 2 hours ago ✓
- W07-P1: Show classdemo of week 2 and week 6**
"JerryJiang1015" committed 2 hours ago ✓

```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2023-10-25"
1f26752 "JerryJiang1015" Thu Oct 26 21:41:47 2023 +0800 W07-P4: implement tiles
layout as below
22e676f "JerryJiang1015" Thu Oct 26 20:26:29 2023 +0800 W07-P3: add index.html as
home page with links of class demo, my Github and my Vercel
ffc03f6 "JerryJiang1015" Thu Oct 26 19:23:49 2023 +0800 W07-P1: Show classdemo of
week 2 and week 6
27f6d19 "JerryJiang1015" Thu Oct 26 19:48:00 2023 +0800 W07-P2: Show classdemo of
week 7
```