


My Github URL Vercel

W13-P1: 0

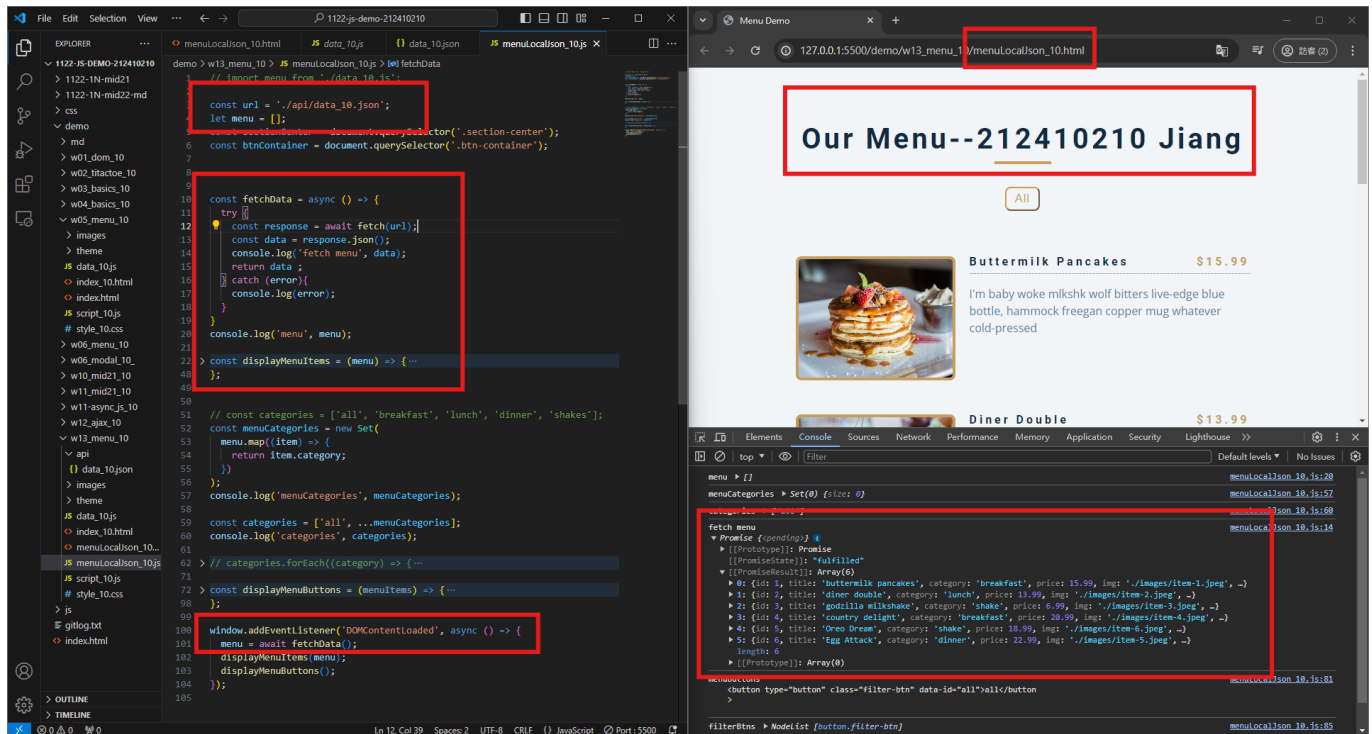

```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2024-05-15"
de90ad4 "JerryJiang1015"      Thu May 16 19:20:20 2024 +0800  Get 3 menu data
                                from /api/data_10.json
```


W13-P2: Create 3 menu data from Supabase

=> create menu_xx table, and add 1 menu data


The screenshot shows the Supabase Table Editor for a table named 'menu_10'. The interface is in dark mode. The top navigation bar shows the URL 'supabase.com/dashboard/project/mcwwroqeninwtvahbgcv/editor/29902'. The left sidebar contains a 'Table Editor' section with a list of tables: 'menu_10' and 'product_10'. The main area displays the table structure and the 'Optional Fields' section. The 'Optional Fields' section contains several fields with their values and a 'Set to NULL' button. The 'remote_img' field is highlighted with a red box, showing the URL 'https://mcwwroqeninwtvahbgcv.supabase.co/storage/v1/object/public/demo/menu_10/item-1.jpeg'. The 'description' field contains the text 'I'm baby woke milkshk wolf bitters live-edge blue hammock freegan copper mug whatever cold-pressed'.

Field	Type	Value	Action
id	int8	1	
created_at	timestampz	2024-05-16 11:32:10.581518+00	
title	varchar	buttermilk pancakes	Set to NULL
category	varchar	breakfast	Set to NULL
price	float4	15.99	
local_img	text	./images/item-1.jpeg	Set to NULL
remote_img	text	https://mcwwroqeninwtvahbgcv.supabase.co/storage/v1/object/public/demo/menu_10/item-1.jpeg	Set to NULL
description	text	I'm baby woke milkshk wolf bitters live-edge blue hammock freegan copper mug whatever cold-pressed	Set to NULL

=> add RLS read policy for public access

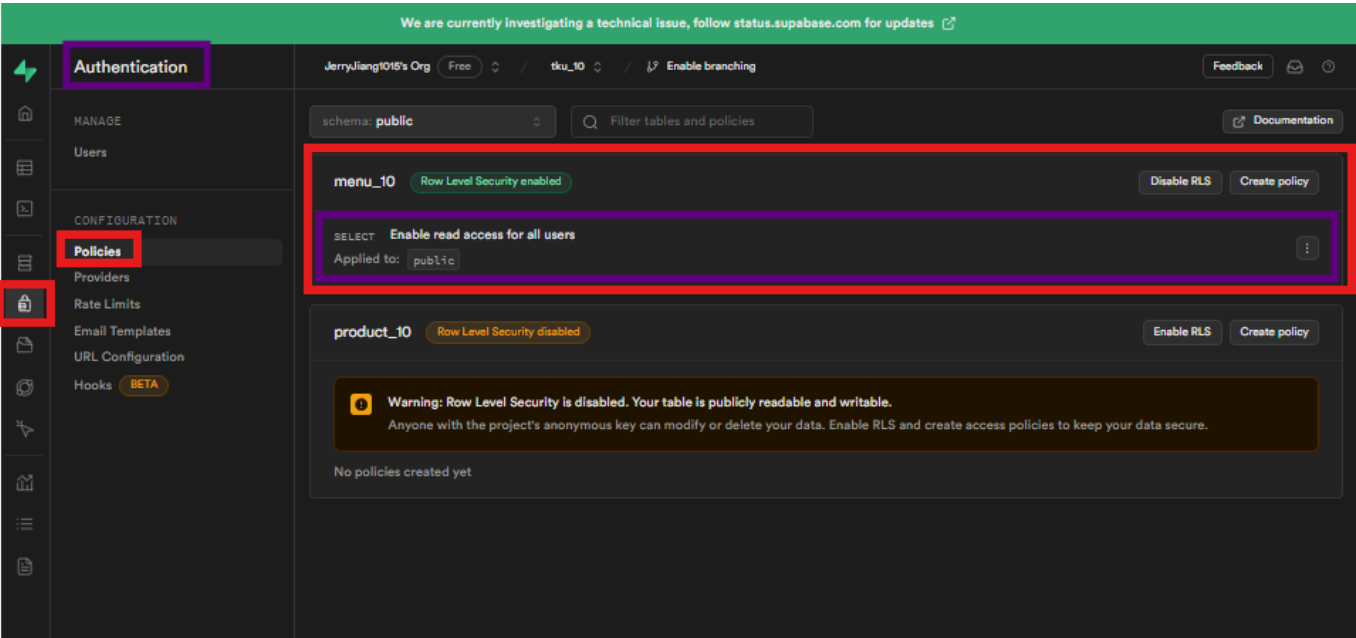

=> add two more menu data from SQL command

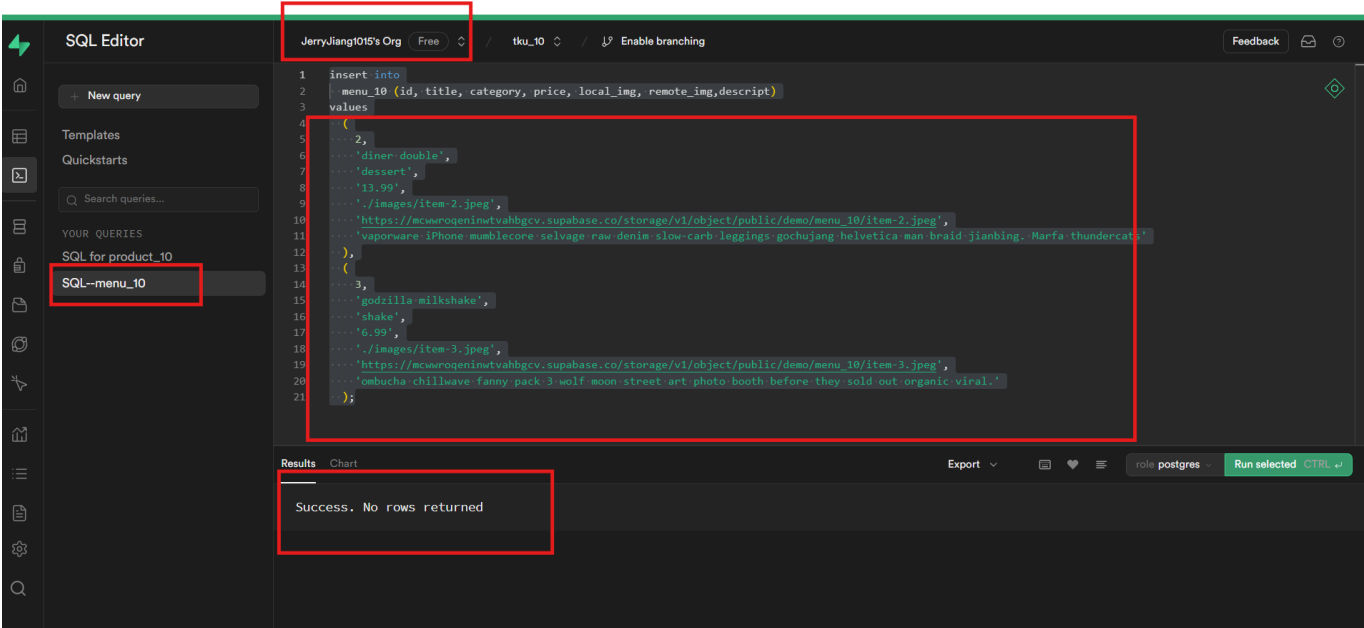

=> show 3 menu data from menu_xx table

We are currently investigating a technical issue, follow status.supabase.com for updates

JerryJiang1015's Org Free tku_10 Enable branching

schema: public Filter Sort Insert Add RLS policy role postgres Realtime off API Docs

	id	int8	title	varchar	category	varchar	price	float4	local_img	text	remote_img	text
	1		buttermilk pancakes		breakfast		15.99		./images/item-1.jpeg		https://mcwwroqeninwt	
	2		diner double		dessert		13.99		./images/item-2.jpeg		https://mcwwroqeninwt	
	3		godzilla milkshake		shake		6.99		./images/item-3.jpeg		https://mcwwroqeninwt	

menu_10 product_10

```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2024-05-15"
f6f7af5 "JerryJiang1015" Thu May 16 20:37:41 2024 +0800 W13-P2: Create 3
menu data from Supabase
de90ad4 "JerryJiang1015" Thu May 16 19:20:20 2024 +0800 Get 3 menu data
from /api/data_10.json
```

W13-P3: Use menuSupa.html, menuSupa.js to get 3 menu data from Supabase

Menu Demo

127.0.0.1:5500/demo/w13_menu_10/menuSupa.html

Our Menu

All Breakfast Lunch Shake Dinner

Buttermilk Pancakes \$15.99

I'm baby woke mlkshk wolf bitters live-edge blue bottle, hammock freegan copper mug whatever cold-pressed

Diner Double \$13.99

menu: Array(3)

- 0: {id: 1, title: 'buttermilk pancakes', category: 'breakfast', price: 15.99, img: './images/item-1.jpeg', ...}
- 1: {id: 2, title: 'diner double', category: 'lunch', price: 13.99, img: './images/item-2.jpeg', ...}
- 2: {id: 3, title: 'godzilla milkshake', category: 'shake', price: 6.99, img: './images/item-3.jpeg', ...}

menuCategories: Set(4)

categories: Array(5)

menuButtons: Array(4)

```
const fetchData = async () => {
  try {
    let {data, error} = await supabase.from('menu_10').select('*');
    console.log('fetch menu', data);
    return data;
  } catch (error) {
    console.log(error);
  }
}

const displayMenuItems = (menu) => {
  let displayMenuItems = menu
  .map((item) => {
    const {id, title, category, price, remote_img, descrpt} = item;
    return `
    <div class="menu-item">
      
      <div class="item-info">
        <h4>${title}</h4>
        <h4 class="price">${price}</h4>
      </div>
      <p class="item-text">
        ${descrpt}
      </p>
    </div>
  `;
  })
  .join('');
  console.log('displayMenu', displayMenuItems);
  sectionCenter.innerHTML = displayMenuItems;
}
```


```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2024-05-15"
f6dfe80 "JerryJiang1015"      Thu May 16 20:45:00 2024 +0800  W13-P3: Use
menuSupa.html, menuSupa.js to get 3 menu data from Supabase
f6f7af5 "JerryJiang1015"      Thu May 16 20:37:41 2024 +0800  W13-P2: Create 3
menu data from Supabase
de90ad4 "JerryJiang1015"      Thu May 16 19:20:20 2024 +0800  Get 3 menu data
from /api/data_10.json
```

W13-P4: Create company_10 and store_10 tables, and insert all data

=> data in store_10 table

	id	created_at	timestamp	name	varchar	email	text	phone	varchar
<input type="checkbox"/>	1	2024-05-16 13:29:43.000854		Ikea		ikea@gmail.com		(02)2120-4569	
<input type="checkbox"/>	2	2024-05-16 13:29:43.000854		Liddy		liddy@gmail.com		(02)2351-4978	
<input type="checkbox"/>	3	2024-05-16 13:29:43.000854		Marcos		marcos@gmail.com		(02)3198-9235	
<input type="checkbox"/>	4	2024-05-16 13:29:43.000854		Caressa		caressa@gmail.com		(02)5288-2563	

=> data in company_10 table

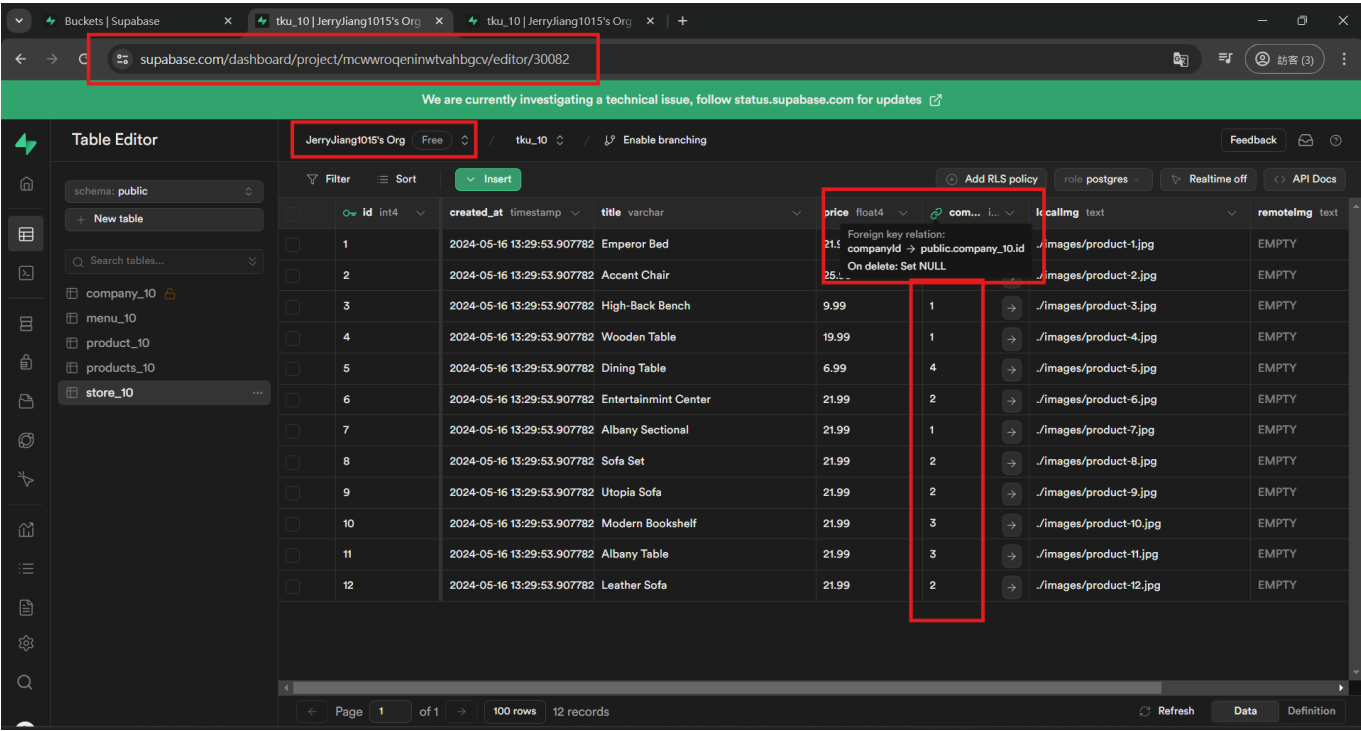

```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2024-05-15"
16bb583 "JerryJiang1015"      Thu May 16 21:36:51 2024 +0800  W13-P4: Create
company_10 and store_10 tables, and insert all data
f6dfe80 "JerryJiang1015"      Thu May 16 20:45:00 2024 +0800  W13-P3: Use
menuSupa.html, menuSupa.js to get 3 menu data from Supabase
f6f7af5 "JerryJiang1015"      Thu May 16 20:37:41 2024 +0800  W13-P2: Create 3
menu data from Supabase
de90ad4 "JerryJiang1015"      Thu May 16 19:20:20 2024 +0800  Get 3 menu data
from /api/data_10.json
```

W13-P5: git logs for W13

