


VISUALIZATION OF ESTIMATED WATERMARK IN LATENT SPACE

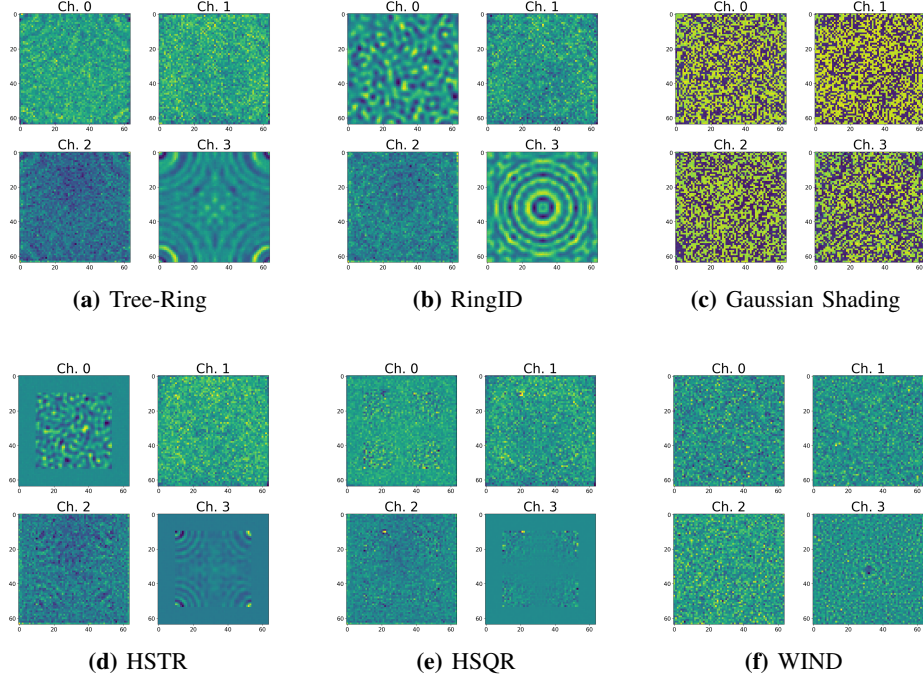

The estimated watermark patterns are located at certain channels in the latent space by averaging. We use Stable Diffusion v2.1 as f_θ and Stable Diffusion v1.1 as f_{ϕ_i} . The number of averaged latents is 1,000. Watermarking methods: (a) Tree-Ring mark [47] is located at channel 3. (b) RingID marks [7] are located at channels 0 and 3. (c) Gaussian Shading mark [51] is at the whole latent. (d) HSTR marks [28] are located at channels 0 and 3. (e) HSQR mark [28] is located at channel 3. (f) WIND mark [2] is located at channel 3.