


ESTIMATED WATERMARKS WITH DIFFERENT NUMBERS OF LATENTS

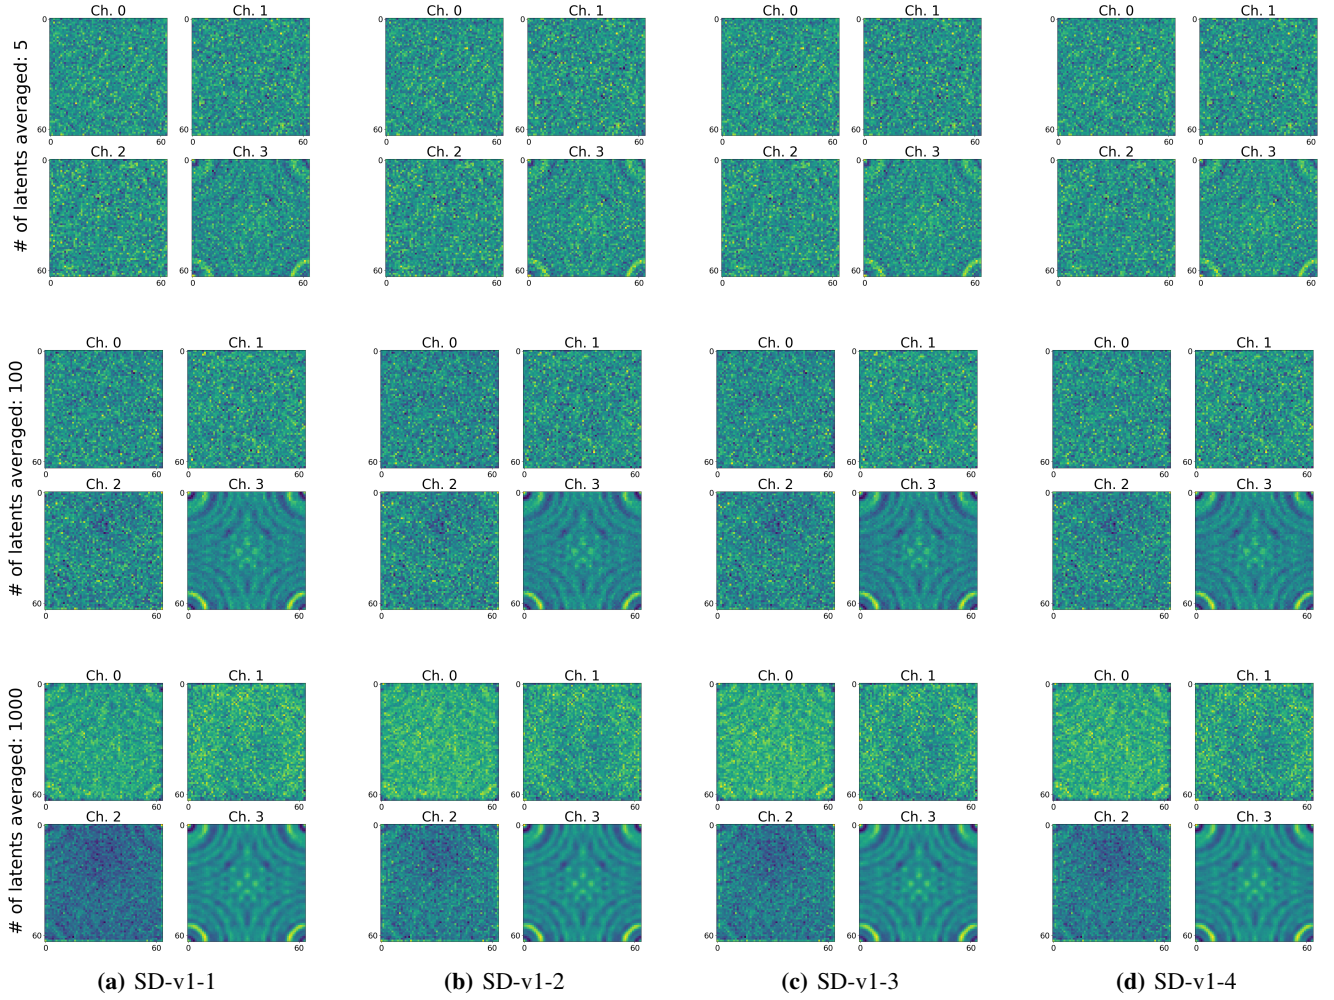

The averaging of latent outputs *with* $T = 50$ through inverse process with four different models (Stable Diffusion v1-1 $\sim$ v1-4 in columns (a) $\sim$ (d), respectively), given a set of samples from the target model (Stable Diffusion v2-1). Each row represents the average of latent outputs with 5, 100, and 1,000 samples. The watermarking method is Tree-Rings (ring) [47] imprinted at channel 3.