


Using a nested subquery, display the names of movies from a 'movies' table that have a higher average rating than the overall average rating of all movies.

Hint: Use a subquery to calculate the overall average rating, then compare each movie's average rating against it in the main query.

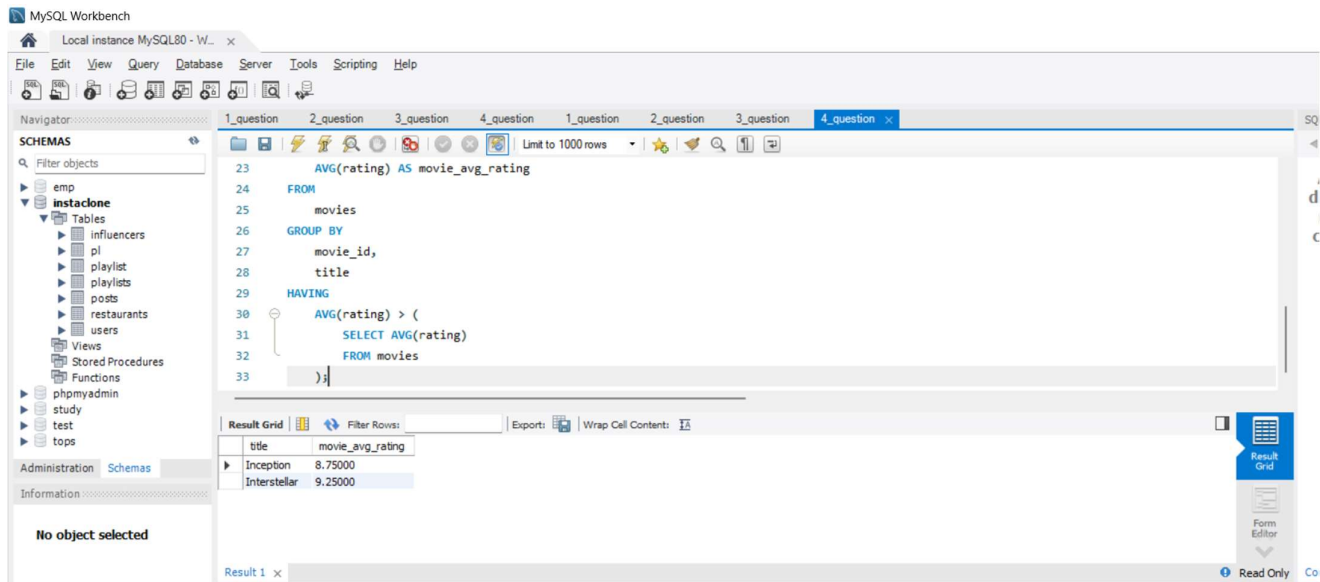

The screenshot shows the MySQL Workbench interface. The left sidebar displays the 'SCHEMAS' panel with a tree view of databases and tables. The main editor window shows a SQL query that filters movies based on their average rating compared to the overall average rating of all movies. The query is as follows:

```
23  AVG(rating) AS movie_avg_rating
24  FROM
25  movies
26  GROUP BY
27  movie_id,
28  title
29  HAVING
30  AVG(rating) > (
31  SELECT AVG(rating)
32  FROM movies
33  )
```

Below the query editor, the 'Result Grid' is visible, showing the results of the query. The results are as follows:

title	movie_avg_rating
Inception	8.75000
Interstellar	9.25000