


Best-checkpoint training vs source-validation balanced accuracy

Source-validation pilot; not held-out test performance or recipe selection.

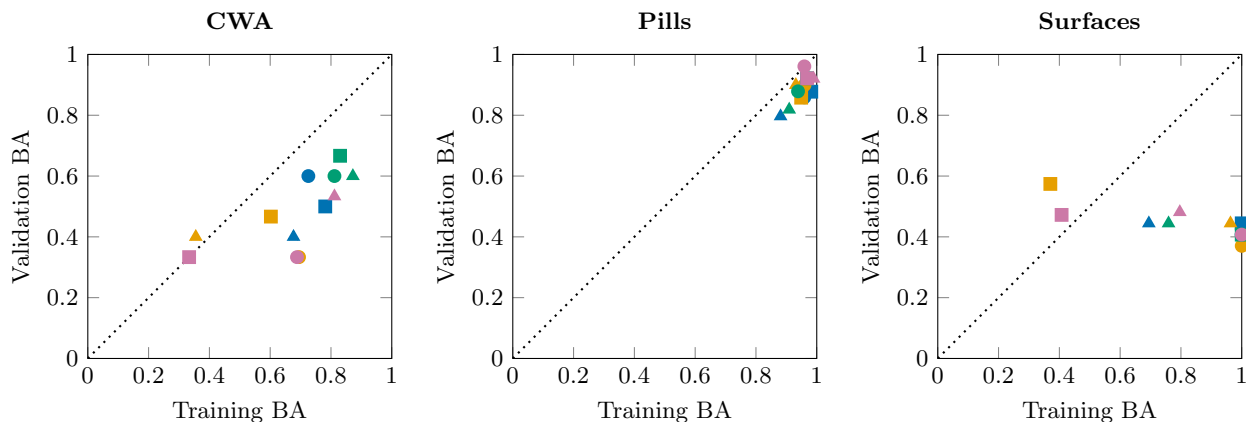

CE = class/master/view-weighted cross entropy; BA = mean recall across the three classes. One metadata-preselected source split per station and three initialization seeds. CWA and Surfaces validate on a source pseudo-instrument; Pills uses source-master CV because the inherited station contexts lack pseudo-domain support. Scatter uses each fit's selected checkpoint; validation never updates weights and is not an outer test. Three seeds show initialization variability, not independent dataset replications. Individual trajectories and points are shown.

— D0-M ordinary classification — D1 chemical similarity
 — D2 matched-sample consistency — D3 both

seed1 circle seed2 square seed3 triangle (marker symbols) dotted black line: identity reference