



Getting start with Runpod and the MCP server

By Jessica Garson Beauchemin



Code and slides for today's presentation is on GitHub



Runpod is the AI Developer Cloud

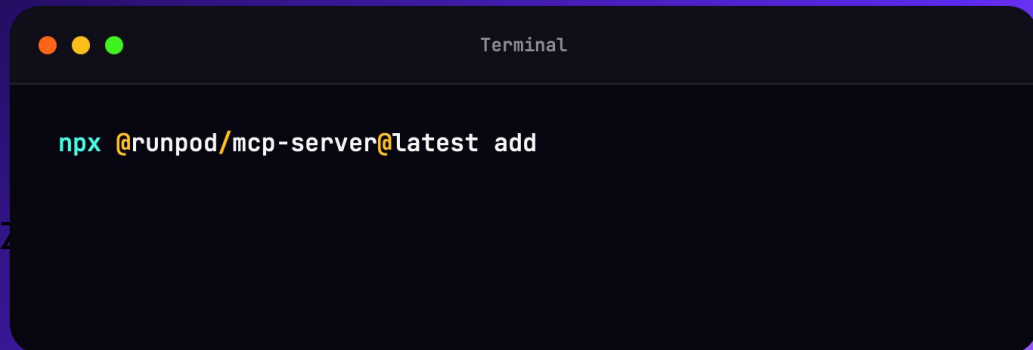
One platform for developers to experiment,
train, fine-tune, deploy and scale



Pointing your
agent at Runpod
used to be hard

You can get started from your coding agent using our MCP server

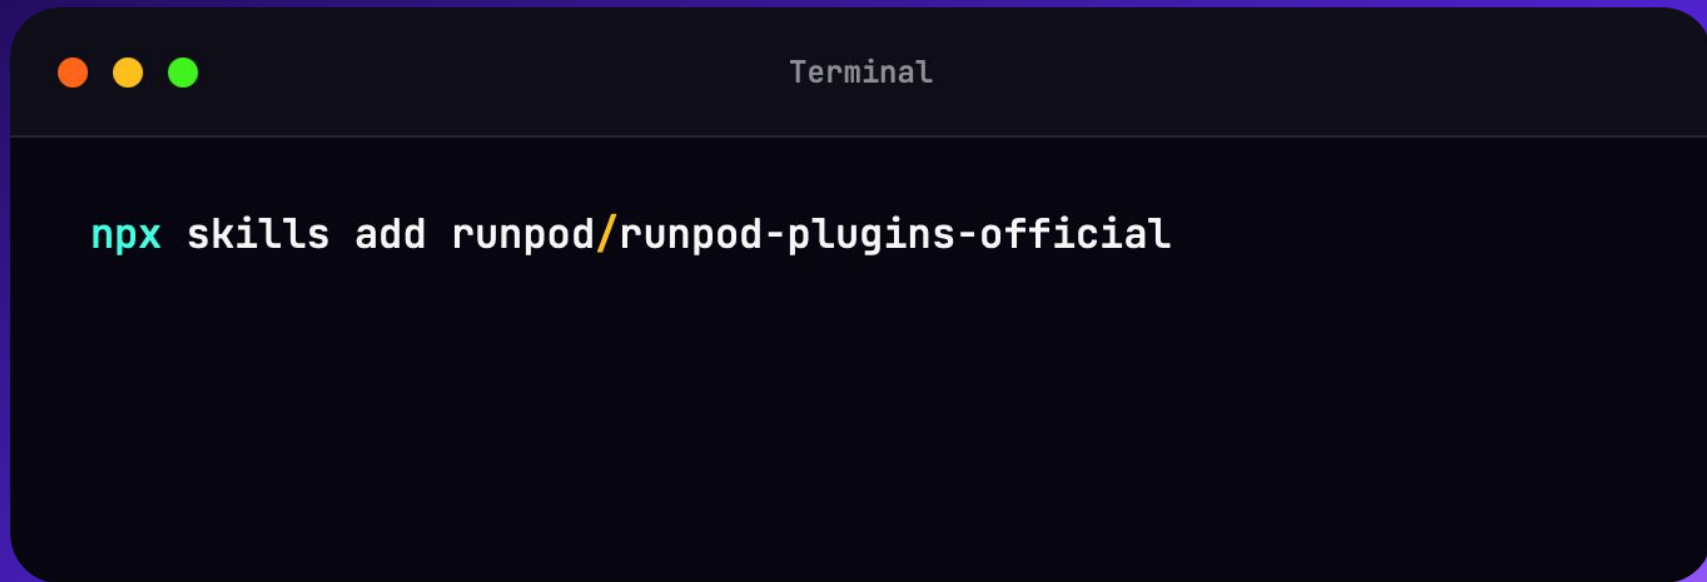
Runpod's official bridge
between AI coding
assistants and your Runpod
infrastructure.

A terminal window with a dark background and light text. The title bar at the top says "Terminal" and has three colored window control buttons (red, yellow, green) on the left. The command `npx @runpod/mcp-server@latest add` is entered in the terminal. The word "npx" is in blue, and the package name "@runpod/mcp-server@latest" is in orange. The word "add" is in white.

```
Terminal

npx @runpod/mcp-server@latest add
```

You can also install the plugin

A terminal window with a dark background and rounded corners. The title bar at the top has three colored window control buttons (red, yellow, green) on the left and the word "Terminal" in the center. The main area of the terminal is dark and contains a single line of text: `npx skills add runpod/runpod-plugins-official`. The word `npx` is highlighted in a light blue color, while the rest of the command is in white. The terminal is set against a solid purple background.

```
Terminal

npx skills add runpod/runpod-plugins-official
```



How do you authenticate?

We host it for you at <https://mcp.getrunpod.io>

Point your client at that URL and sign in with Runpod.
Nothing to install, no API key on disk.



You can also install the plugin

Terminal

```
npx skills add runpod/runpod-plugins-official
```





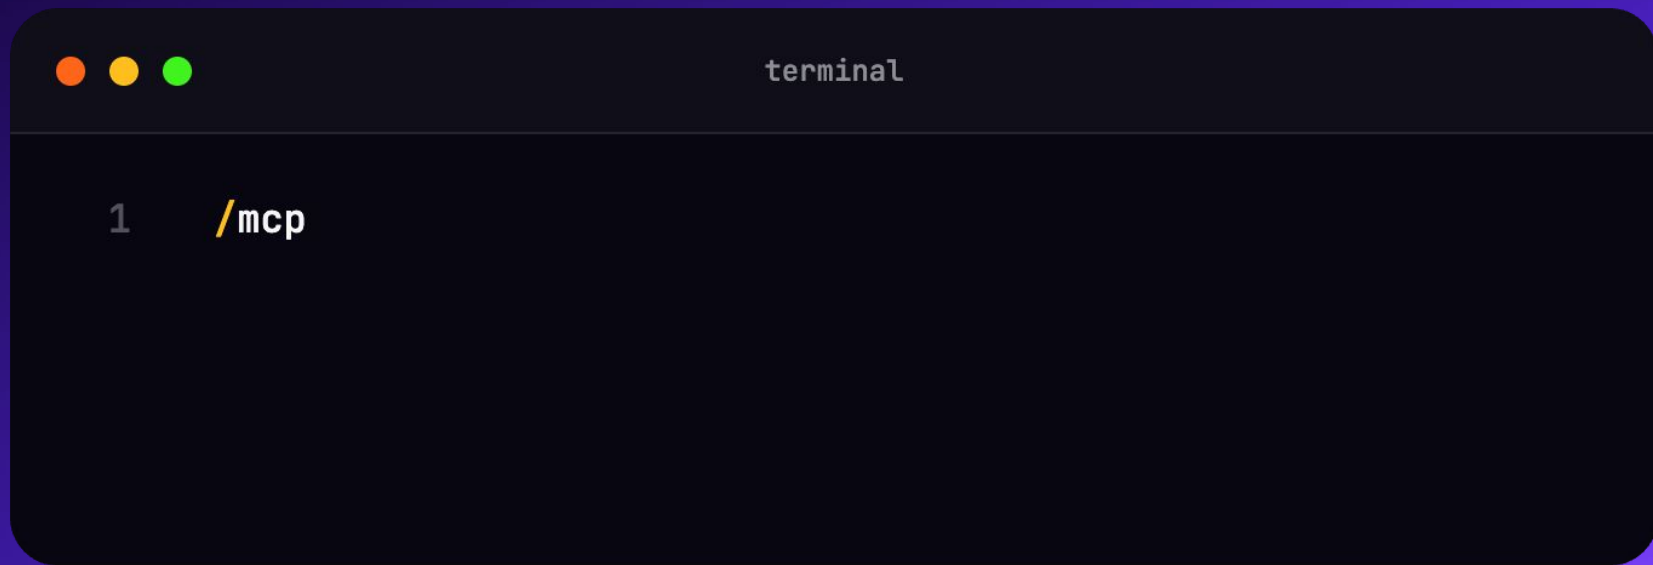
Live Demo



Terminal

codex





- **runpod**
 - Auth: OAuth
 - Tools: cancel-job, create-container-registry-auth, create-endpoint, create-network-volume, create-pod, create-registry-delegation, create-template, delete-container-registry-auth, delete-endpoint, delete-network-volume, delete-pod, delete-registry-delegation, delete-template, deploy-hub-repo, endpoint-health, get-billing, get-capacity, get-container-registry-auth, get-cpu-type, get-data-center, get-endpoint, get-gpu-type, get-job-status, get-network-volume, get-pod, get-template, list-container-registry-auths, list-cpu-types, list-data-centers, list-endpoint-releases, list-endpoint-workers, list-endpoints, list-gpu-types, list-hub-repos, list-network-volumes, list-pods, list-public-endpoints, list-registry-delegations, list-templates, purge-endpoint-queue, restart-pod, retry-job, run-endpoint, runsync-endpoint, set-endpoint-gpus, start-pod, stop-pod, stream-job, stream-pod-logs, stream-worker-logs, update-endpoint, update-network-volume, update-pod, update-template





terminal

Can you start a runpod pod and make a Hello World application that appeals to a developer-focused audience. Please use a secure pod for this.



- The developer-focused Hello World app is live:

Open the application (<https://si7x2rbbb49xcf-8080.proxy.runpod.net/>)

- Pod: si7x2rbbb49xcf
- RunPod Secure Cloud
- Status: running and health endpoint verified (HTTP 200)
- Cost: \$0.24/hour
- Security: HTTPS proxy, only port 8080/http exposed, security headers enabled
- Reusable template: 7wht0klf7n

The pod will continue billing until stopped or terminated.



~/runpod/hello-world

// DEPLOYMENT SUCCESSFUL

Hello, developer.

A tiny web service, running live on a Secure Cloud pod. Minimal dependencies.
Maximum signal.

```
$ curl -s localhost:8080/status  
{  
  "message": "Hello, World!",  
  "runtime": "RunPod Secure Cloud",  
  "status": "healthy"  
}
```

RUNTIME
nginx / alpine

NETWORK
HTTP proxy :8080

HEALTH
● All systems go

Built for developers who ship.

HELLO_WORLD_EXIT_CODE=0



Scan this code for a \$15 credit to build with Runpod



