


# Web API Design with Spring Boot Week 3 Coding Assignment

Points possible: 70

Category	Criteria	% of Grade
Functionality	Does the code work?	25
Organization	Is the code clean and organized? Proper use of white space, syntax, and consistency are utilized. Names and comments are concise and clear.	25
Creativity	Student solved the problems presented in the assignment using creativity and out of the box thinking.	25
Completeness	All requirements of the assignment are complete.	25

**Instructions:** In Eclipse, or an IDE of your choice, write the code that accomplishes the objectives listed below. Ensure that the code compiles and runs as directed. Take screenshots of the code and of the running program (make sure to get screenshots of all required functionality) and paste them in this document where instructed below. Create a new repository on GitHub for this week's assignments and push this document, with your Java project code, to the repository. Add the URL for this week's repository to this document where instructed and submit this document to your instructor when complete.




**Here's a friendly tip:** as you watch the videos, code along with the videos. This will help you with the homework. When a screenshot is required, look for the icon:  You will keep adding to this project throughout this part of the course. When it comes time for the final project, use this project as a starter.

**Project Resources:** <https://github.com/promineotech/Spring-Boot-Course-Student-Resources>

## Coding Steps:

- 1) In the application you've been building add a DAO layer:
  - a) Add the package, `com.promineotech.jeepp.dao`.
  - b) In the new package, create an interface named `JeepSalesDao`.
  - c) In the same package, create a class named `DefaultJeepSalesDao` that implements `JeepSalesDao`.
  - d) Add a method in the DAO interface and implementation that returns a list of Jeep models (class `Jeep`) and takes the model and trim parameters. Here is the method signature:

```
List<Jeep> fetchJeeps(JeepModel model, String trim);
```

- 2) In the Jeep sales service implementation class, inject the DAO interface as an instance variable. The instance variable should be private and should be named `jeepSalesDao`. Call the DAO method from the service method and store the returned value in a local variable named `jeeps`. Return the value in the `jeeps` variable (we will add to this later).
- 3) In the DAO implementation class (`DefaultJeepSalesDao`):
  - a) Add the class-level annotation: `@Service`.
  - b) Add a log statement in `DefaultJeepSalesDao.fetchJeeps()` that logs the model and trim level. Run the integration test. Produce a screenshot showing the DAO implementation class and the log line in the IDE's console. 
  - c) In `DefaultJeepSalesDao`, inject an instance variable of type `NamedParameterJdbcTemplate`.
  - d) Write SQL to return a list of Jeep models based on the parameters: model and trim. Be sure to utilize the SQL Injection prevention mechanism of the `NamedParameterJdbcTemplate` using `:model_id` and `:trim_level` in the query.
  - e) Add the parameters to a parameter map as shown in the video. Don't forget to convert the `JeepModel` enum value to a String (i.e., `params.put("model_id", model.toString());`)
  - f) Call the query method on the `NamedParameterJdbcTemplate` instance variable to return a list of Jeep model objects. Use a `RowMapper` to map each row of the result set. Remember to convert `modelId` to a `JeepModel`. See the video for details. Produce a screenshot to show the complete method in the implementation class. 
- 4) Add a getter in the `Jeep` class for `modelPK`. Add the `@JsonIgnore` annotation to the getter to exclude the `modelPK` value from the returned object.
- 5) Run the test to produce a green status bar. Produce a screenshot showing the test and the green status bar. 

### Screenshots of Code:

Package Explorer x JUnit

jeep-sales [boot] [devtools]

- src/main/java
  - com.promineotech.jee
    - ComponentScamMarker.java
    - jeepSales.java
  - com.promineotech.jee.controller
    - BasicJeepSalesController.java
    - JeepSalesController.java
  - openAPIDefinition.java
    - openAPIDefinition
  - com.promineotech.jee.dao
    - DefaultJeepSalesDao.java
      - DefaultJeepSalesDao
    - JeepSalesDao.java
  - com.promineotech.jee.entity
    - Jeep.java
    - JeepModel.java
  - com.promineotech.jee.service
    - DefaultJeepSalesService.java
    - JeepSalesService.java
- src/main/resources
  - application.yaml
- src/test/java
  - com.promineotech.jee.controller
    - FetchJeepTest.java
  - com.promineotech.jee.controller.support
    - BaseTest.java
    - FetchJeepTestSupport.java
- src/test/resources
  - flyway
    - conf
      - flyway.conf
  - migrations


Boot Dashboard x

Type tags, projects, or working set names to match (incl. \* and ? wildcards)

> local

DefaultJeepSalesService.java

```
1 package com.promineotech.  
2  
3 import java.math.BigDecimal;  
4 import java.sql.ResultSet;  
5 import java.sql.SQLException;  
6 import java.util.HashMap;  
7 import java.util.List;  
8 import java.util.Map;  
9 import org.springframework.  
10 import org.springframework.  
11 import org.springframework.  
12 import org.springframework.  
13 import org.springframework.  
14 import com.promineotech.je  
15 import com.promineotech.je  
16 import lombok.extern.slf4j.S  
17 @Component  
18 @Slf4j  
19  
20 public class DefaultJeepSale  
21  
22 @Autowired  
23 private NamedParameterJdl  
24  
25 @Override  
26 public List<Jeep> fetchJeep  
27     log.debug("DAO: model  
28  
29 String sql = ""  
30     + "SELECT * "  
31     + "FROM models "  
32     + "WHERE model_id = "  
33     Map<String, Object> pa  
34     params.put("model_id",  
35     params.put("trim_level",
```

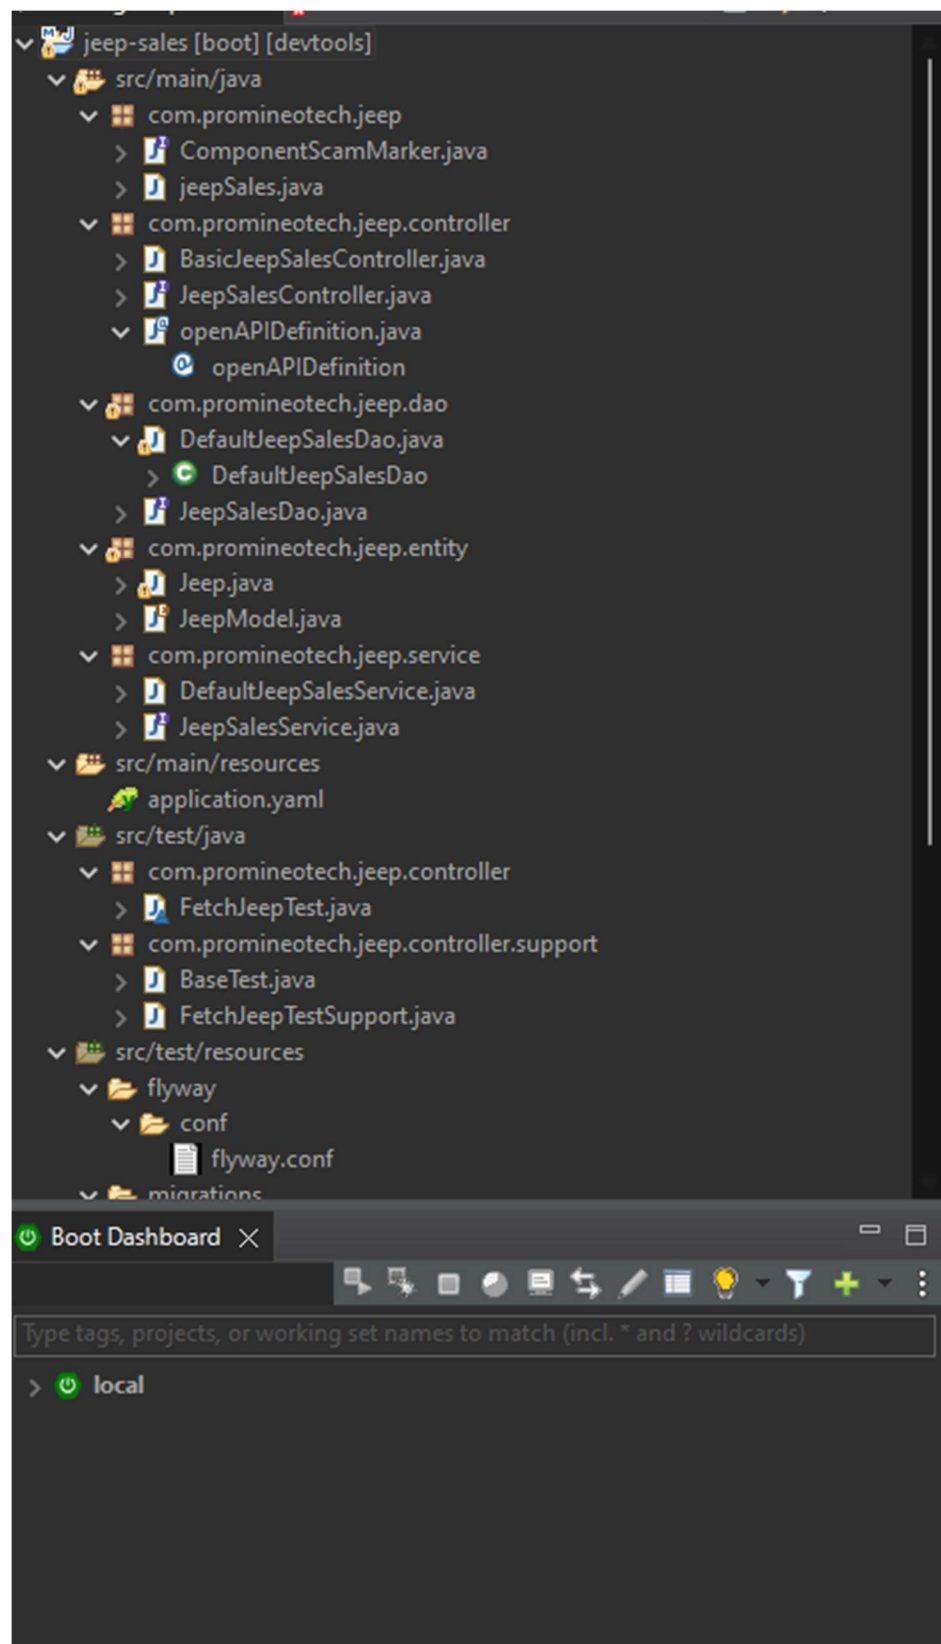

```
25 @Override
26 public List<Jeep> fetchJeep() {
27     log.debug("DAO: model");
28
29     String sql = ""
30         + "SELECT * "
31         + "FROM models "
32         + "WHERE model_id = ?";
33     Map<String, Object> params = new HashMap<>();
34     params.put("model_id", modelId);
35     params.put("trim_level", trimLevel);
36
37     return jdbcTemplate.query(sql,
38         new RowMapper<Jeep>() {
39
40         @Override
41         public Jeep mapRow(ResultSet rs, int rowNum) throws SQLException {
42             // @formatter:off
43             return Jeep.builder()
44                 .basePrice(rs.getDouble("base_price"))
45                 .modelId(rs.getString("model_id"))
46                 .modelPK(rs.getString("model_pk"))
47                 .numDoors(rs.getInt("num_doors"))
48                 .trimLevel(rs.getString("trim_level"))
49                 .wheelSize(rs.getInt("wheel_size"))
50                 .build();
51         }
52
53         // @formatter:on
54     });
55 }
56 }
57 }
58
59
```

## **Screenshots of Running Application:**



terminated> Fetch/jeep test [JUnit] C:\Users\anil\sts-4.14.1.RELEASE\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86\_64\_17.0.2

```
10:07:04.622 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating Cache
10:07:04.632 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating Boo
10:07:04.670 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating Test
10:07:04.681 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
10:07:04.683 [main] DEBUG org.springframework.test.context.support.AbstractContextLoader -
10:07:04.684 [main] DEBUG org.springframework.test.context.support.AbstractContextLoader -
10:07:04.684 [main] INFO org.springframework.test.context.support.AbstractContextLoader - C
10:07:04.684 [main] INFO org.springframework.test.context.support.AnnotationConfigContextLoa
10:07:04.818 [main] DEBUG org.springframework.context.annotation.ClassPathScanningCandidate
10:07:04.819 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
10:07:04.927 [main] DEBUG org.springframework.boot.test.context.SpringBootTestContextBootstrapper
10:07:04.927 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
10:07:04.945 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
10:07:04.947 [main] DEBUG org.springframework.test.context.support.AbstractDirtiesContextTest
10:07:04.961 [main] DEBUG org.springframework.test.context.support.DependencyInjectionTest
```

```

  ____ _
 / ____| | | |
( (___| |_| |_||'_V_||\\
W ____|_|_|_|_|_|_|_|_|_|_|
' |___|_|_|_|_|_|_|_|_|_|_|
=====|_|=====|_|/=/ / / /
:: Spring Boot ::      (v2.7.0)
```

```
2022-06-04 10:07:05.395 INFO 5468 --- [main] c.p.jee.controller.FetchJeepTest : S
2022-06-04 10:07:05.397 INFO 5468 --- [main] c.p.jee.controller.FetchJeepTest : T
2022-06-04 10:07:06.626 INFO 5468 --- [main] o.s.b.w.embedded.tomcat.TomcatWebSe
2022-06-04 10:07:06.638 INFO 5468 --- [main] o.apache.catalina.core.StandardService
2022-06-04 10:07:06.638 INFO 5468 --- [main] org.apache.catalina.core.StandardEngine
2022-06-04 10:07:06.762 INFO 5468 --- [main] o.a.c.c.C.[Tomcat].[localhost].[/] : In
2022-06-04 10:07:06.762 INFO 5468 --- [main] w.s.c.ServletWebServerApplicationConte
2022-06-04 10:07:08.356 INFO 5468 --- [main] o.s.b.w.embedded.tomcat.TomcatWebSe
2022-06-04 10:07:08.367 INFO 5468 --- [main] c.p.jee.controller.FetchJeepTest : S
2022-06-04 10:07:08.402 WARN 5468 --- [main] o.s.test.context.TestContextManager
```

[java.lang.IllegalStateException](#): Failed to execute SQL scripts for test context [DefaultTestContext]
at org.springframework.util.Assert.state([Assert.java:97](#)) ~[spring-core-5.3.20.jar:5.3.20]
at org.springframework.test.context.jdbc.SqlScriptsTestExecutionListener.executeSqlScript

**URL to GitHub Repository:**

[JessicaSmiejan/Week-15-Spring-Boot-Assignment: Week 15 Spring Boot Assignment \(github.com\)](#)