



Cyberscope

# Audit Report

## **AiWallet**

February 2023

Type	BEP20
Network	BSC
Address	0x309d43cb7Bb1E07371eeE4947103AA019121a973
Audited by	© cyberscope

# Table of Contents

<b>Table of Contents</b>	<b>1</b>
<b>Review</b>	<b>3</b>
<b>Audit Updates</b>	<b>3</b>
<b>Source Files</b>	<b>3</b>
<b>Analysis</b>	<b>4</b>
<b>Diagnostics</b>	<b>5</b>
<b>PTRP - Potential Transfer Revert Propagation</b>	<b>6</b>
Description	6
Recommendation	6
<b>L04 - Conformance to Solidity Naming Conventions</b>	<b>7</b>
Description	7
Recommendation	7
<b>L09 - Dead Code Elimination</b>	<b>9</b>
Description	9
Recommendation	9
<b>L14 - Uninitialized Variables in Local Scope</b>	<b>11</b>
Description	11
Recommendation	11
<b>L15 - Local Scope Variable Shadowing</b>	<b>12</b>
Description	12
Recommendation	12
<b>L17 - Usage of Solidity Assembly</b>	<b>13</b>
Description	13
Recommendation	13
<b>L20 - Succeeded Transfer Check</b>	<b>14</b>
Description	14
Recommendation	14
<b>Functions Analysis</b>	<b>15</b>
<b>Inheritance Graph</b>	<b>21</b>
<b>Flow Graph</b>	<b>22</b>
<b>Summary</b>	<b>23</b>

**Disclaimer****24****About Cyberscope****25**

## Review

Contract Name	AiWallet
Compiler Version	v0.8.17+commit.8df45f5f
Optimization	200 runs
Explorer	<a href="https://bscscan.com/address/0x309d43cb7bb1e07371eee4947103aa019121a973">https://bscscan.com/address/0x309d43cb7bb1e07371eee4947103aa019121a973</a>
Address	0x309d43cb7bb1e07371eee4947103aa019121a973
Network	BSC
Symbol	AiWallet
Decimals	18
Total Supply	1,000,000,000

## Audit Updates

Initial Audit	11 Feb 2023
---------------	-------------

## Source Files

Filename	SHA256
AiWallet.sol	3e08fca346948c22441dfa8c8443b3da9cfa45d82425bb71d18ea4eca643a4c0

# Analysis

● Critical ● Medium ● Minor / Informative ● Pass

Severity	Code	Description	Status
●	ST	Stops Transactions	Passed
●	OCTD	Transfers Contract's Tokens	Passed
●	OTUT	Transfers User's Tokens	Passed
●	ELFM	Exceeds Fees Limit	Passed
●	ULTW	Transfers Liquidity to Team Wallet	Passed
●	MT	Mints Tokens	Passed
●	BT	Burns Tokens	Passed
●	BC	Blacklists Addresses	Passed

# Diagnostics

● Critical ● Medium ● Minor / Informative

Severity	Code	Description	Status
●	PTRP	Potential Transfer Revert Propagation	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L09	Dead Code Elimination	Unresolved
●	L14	Uninitialized Variables in Local Scope	Unresolved
●	L15	Local Scope Variable Shadowing	Unresolved
●	L17	Usage of Solidity Assembly	Unresolved
●	L20	Succeeded Transfer Check	Unresolved

## PTRP - Potential Transfer Revert Propagation

Criticality	Minor / Informative
Location	AiWallet.sol#L753
Status	Unresolved

### Description

The contract sends funds to a `marketingWallet` as part of the transfer flow. This address can either be a wallet address or a contract. If the address belongs to a contract then it may revert from incoming payment. As a result, the error will propagate to the token's contract and revert the transfer.

```
payable(marketingWallet).sendValue(newBalance);
```

### Recommendation

The contract should tolerate the potential revert from the underlying contracts when the interaction is part of the main transfer flow. This could be achieved by not allowing set contract addresses or by sending the funds in a non-revertable way.

## L04 - Conformance to Solidity Naming Conventions

<b>Criticality</b>	Minor / Informative
<b>Location</b>	AiWallet.sol#L33,34,51,71,642,650,658,665,722
<b>Status</b>	Unresolved

### Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX\_VALUE, ERROR\_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
function DOMAIN_SEPARATOR() external view returns (bytes32);
function PERMIT_TYPEHASH() external pure returns (bytes32);
function MINIMUM_LIQUIDITY() external pure returns (uint);
function WETH() external pure returns (address);
uint256 _feeOnBuy
uint256 _feeOnSell
uint256 _walletToWalletTransferFee
address _marketingWallet
bool _enabled
```

### Recommendation



By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.

Find more information on the Solidity documentation

<https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention>.

## L09 - Dead Code Elimination

<b>Criticality</b>	Minor / Informative
<b>Location</b>	AiWallet.sol#L227,238,242,250,258,269,273,282,286,295,313,325,499
<b>Status</b>	Unresolved

### Description

In Solidity, dead code is code that is written in the contract, but is never executed or reached during normal contract execution. Dead code can occur for a variety of reasons, such as:

- Conditional statements that are always false.
- Functions that are never called.
- Unreachable code (e.g., code that follows a return statement).

Dead code can make a contract more difficult to understand and maintain, and can also increase the size of the contract and the cost of deploying and interacting with it.

```
function isContract(address account) internal view returns (bool) {
    return account.code.length > 0;
}

function functionCall(address target, bytes memory data) internal returns
(bytes memory) {
    return functionCallWithValue(target, data, 0, "Address: low-level call
failed");
...
function functionCall(
    address target,
    bytes memory data,
    string memory errorMessage
) internal returns (bytes memory) {
    return functionCallWithValue(target, data, 0, errorMessage);
}
...
```

### Recommendation

To avoid creating dead code, it's important to carefully consider the logic and flow of the contract and to remove any code that is not needed or that is never executed. This can help improve the clarity and efficiency of the contract.

## L14 - Uninitialized Variables in Local Scope

<b>Criticality</b>	Minor / Informative
<b>Location</b>	AiWallet.sol#L574
<b>Status</b>	Unresolved

### Description

Using an uninitialized local variable can lead to unpredictable behavior and potentially cause errors in the contract. It's important to always initialize local variables with appropriate values before using them.

```
address router
```

### Recommendation

By initializing local variables before using them, the contract ensures that the functions behave as expected and avoid potential issues.

## L15 - Local Scope Variable Shadowing

<b>Criticality</b>	Minor / Informative
<b>Location</b>	AiWallet.sol#L572
<b>Status</b>	Unresolved

### Description

Local scope variable shadowing occurs when a local variable with the same name as a variable in an outer scope is declared within a function or code block. When this happens, the local variable "shadows" the outer variable, meaning that it takes precedence over the outer variable within the scope in which it is declared.

```
uint256 _totalSupply
```

### Recommendation

It's important to be aware of shadowing when working with local variables, as it can lead to confusion and unintended consequences if not used correctly. It's generally a good idea to choose unique names for local variables to avoid shadowing outer variables and causing confusion.

## L17 - Usage of Solidity Assembly

<b>Criticality</b>	Minor / Informative
<b>Location</b>	AiWallet.sol#L330
<b>Status</b>	Unresolved

### Description

Using assembly can be useful for optimizing code, but it can also be error-prone. It's important to carefully test and debug assembly code to ensure that it is correct and does not contain any errors.

Some common types of errors that can occur when using assembly in Solidity include Syntax, Type, Out-of-bounds, Stack, and Revert.

```
assembly {  
    let returndata_size := mload(returndata)  
    revert(add(32, returndata), returndata_size)  
}
```

### Recommendation

It is recommended to use assembly sparingly and only when necessary, as it can be difficult to read and understand compared to Solidity code.

## L20 - Succeeded Transfer Check

<b>Criticality</b>	Minor / Informative
<b>Location</b>	AiWallet.sol#L626
<b>Status</b>	Unresolved

### Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
ERC20token.transfer(msg.sender, balance)
```

### Recommendation

The contract should check if the result of the transfer methods is successful. The team is advised to check the SafeERC20 library from the [Openzeppelin library](#).

# Functions Analysis

Contract	Type	Bases		
	Function Name	Visibility	Mutability	Modifiers
<b>IUniswapV2Factory</b>	Interface			
	feeTo	External		-
	feeToSetter	External		-
	getPair	External		-
	allPairs	External		-
	allPairsLength	External		-
	createPair	External	✓	-
	setFeeTo	External	✓	-
	setFeeToSetter	External	✓	-
<b>IUniswapV2Pair</b>	Interface			
	name	External		-
	symbol	External		-
	decimals	External		-
	totalSupply	External		-
	balanceOf	External		-
	allowance	External		-
	approve	External	✓	-
	transfer	External	✓	-
	transferFrom	External	✓	-
	DOMAIN_SEPARATOR	External		-
	PERMIT_TYPEHASH	External		-
	nonces	External		-



	permit	External	✓	-
	MINIMUM_LIQUIDITY	External		-
	factory	External		-
	token0	External		-
	token1	External		-
	getReserves	External		-
	price0CumulativeLast	External		-
	price1CumulativeLast	External		-
	kLast	External		-
	mint	External	✓	-
	burn	External	✓	-
	swap	External	✓	-
	skim	External	✓	-
	sync	External	✓	-
	initialize	External	✓	-
<b>IUniswapV2Router01</b>	Interface			
	factory	External		-
	WETH	External		-
	addLiquidity	External	✓	-
	addLiquidityETH	External	Payable	-
	removeLiquidity	External	✓	-
	removeLiquidityETH	External	✓	-
	removeLiquidityWithPermit	External	✓	-
	removeLiquidityETHWithPermit	External	✓	-
	swapExactTokensForTokens	External	✓	-
	swapTokensForExactTokens	External	✓	-
	swapExactETHForTokens	External	Payable	-
	swapTokensForExactETH	External	✓	-


	swapExactTokensForETH	External	✓	-
	swapETHForExactTokens	External	Payable	-
	quote	External		-
	getAmountOut	External		-
	getAmountIn	External		-
	getAmountsOut	External		-
	getAmountsIn	External		-
<b>IUniswapV2Router02</b>	Interface	IUniswapV2Router01		
	removeLiquidityETHSupportingFeeOnTransferTokens	External	✓	-
	removeLiquidityETHWithPermitSupportingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokensSupportingFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupportingFeeOnTransferTokens	External	Payable	-
	swapExactTokensForETHSupportingFeeOnTransferTokens	External	✓	-
<b>IERC20</b>	Interface			
	totalSupply	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
<b>IERC20Metadata</b>	Interface	IERC20		
	name	External		-
	symbol	External		-
	decimals	External		-

<b>Address</b>	Library			
	isContract	Internal		
	sendValue	Internal	✓	
	functionCall	Internal	✓	
	functionCall	Internal	✓	
	functionCallWithValue	Internal	✓	
	functionCallWithValue	Internal	✓	
	functionStaticCall	Internal		
	functionStaticCall	Internal		
	functionDelegateCall	Internal	✓	
	functionDelegateCall	Internal	✓	
	verifyCallResultFromTarget	Internal		
	verifyCallResult	Internal		
	_revert	Private		
<b>Context</b>	Implementation			
	_msgSender	Internal		
	_msgData	Internal		
<b>Ownable</b>	Implementation	Context		
		Public	✓	-
	owner	Public		-
	renounceOwnership	Public	✓	onlyOwner
	transferOwnership	Public	✓	onlyOwner
<b>ERC20</b>	Implementation	Context, IERC20, IERC20Meta data		
		Public	✓	-


	name	Public		-
	symbol	Public		-
	decimals	Public		-
	totalSupply	Public		-
	balanceOf	Public		-
	transfer	Public	✓	-
	allowance	Public		-
	approve	Public	✓	-
	transferFrom	Public	✓	-
	increaseAllowance	Public	✓	-
	decreaseAllowance	Public	✓	-
	_transfer	Internal	✓	
	_mint	Internal	✓	
	_burn	Internal	✓	
	_approve	Internal	✓	
	_beforeTokenTransfer	Internal	✓	
	_afterTokenTransfer	Internal	✓	
<b>AiWallet</b>	Implementation	ERC20, Ownable		
		Public	✓	ERC20
		External	Payable	-
	claimStuckTokens	External	✓	onlyOwner
	excludeFromFees	External	✓	onlyOwner
	isExcludedFromFees	Public		-
	updateBuyFees	External	✓	onlyOwner
	updateSellFees	External	✓	onlyOwner
	updateWalletToWalletTransferFee	External	✓	onlyOwner
	changeMarketingWallet	External	✓	onlyOwner
	_transfer	Internal	✓	

	setSwapEnabled	External	✓	onlyOwner
	setSwapTokensAtAmount	External	✓	onlyOwner
	swapAndSendFee	Private	✓	

# Inheritance Graph

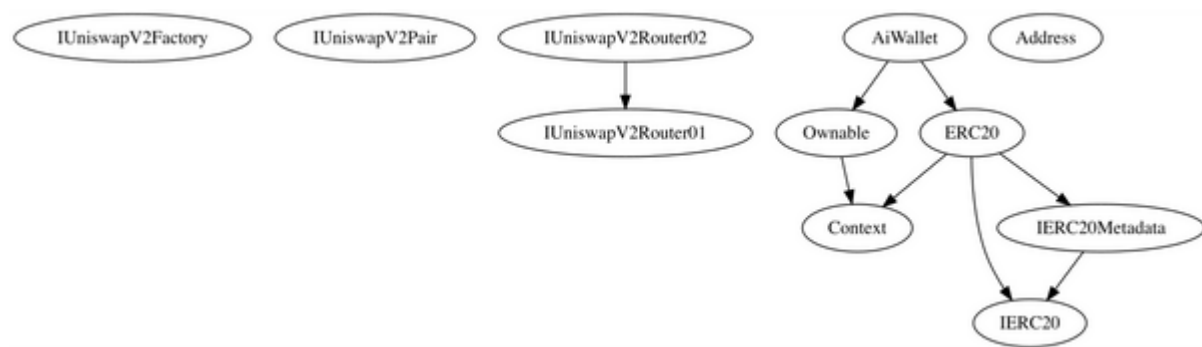

# Flow Graph

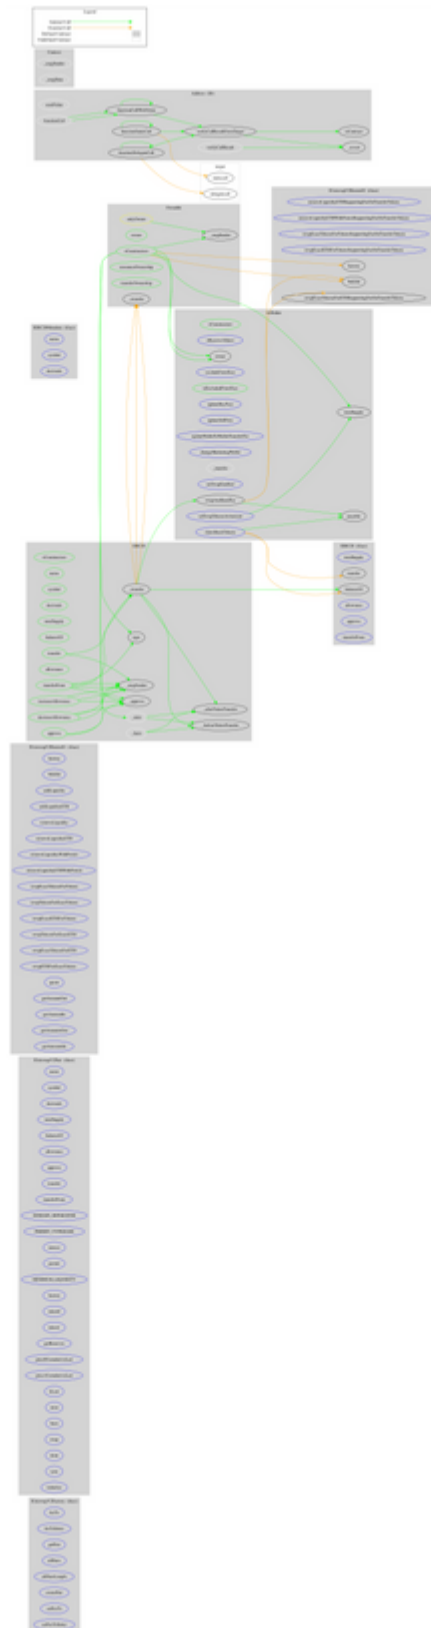

## Summary

AiWallet is an interesting project that has a friendly and growing community. The Smart Contract analysis reported no compiler error or critical issues. The contract Owner can access some admin functions that can not be used in a malicious way to disturb the users' transactions. There is also a limit of max 10% fees.



## Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk. Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security. Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis. Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives, false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

## About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

<https://www.cyberscope.io>