



Cyberscope

Audit Report

Chatchain Coin

March 2023

Type	BEP20
Network	BSC
Address	0x99b99009cbdd6447dc25FB747e89E55D75f414E4
Audited by	© cyberscope

Table of Contents

Table of Contents	1
Review	3
Audit Updates	3
Source Files	3
Analysis	4
OCTD - Transfers Contract's Tokens	5
Description	5
Recommendation	5
ULTW - Transfers Liquidity to Team Wallet	6
Description	6
Recommendation	6
Diagnostics	7
DDP - Decimal Division Precision	8
Description	8
Recommendation	8
RSML - Redundant SafeMath Library	9
Description	9
Recommendation	9
IDI - Immutable Declaration Improvement	10
Description	10
Recommendation	10
L02 - State Variables could be Declared Constant	11
Description	11
Recommendation	11
L04 - Conformance to Solidity Naming Conventions	12
Description	12
Recommendation	12
L05 - Unused State Variable	14
Description	14
Recommendation	14
L09 - Dead Code Elimination	15
Description	15
Recommendation	16
L11 - Unnecessary Boolean equality	17
Description	17
Recommendation	17
L16 - Validate Variable Setters	18

Description	18
Recommendation	18
L17 - Usage of Solidity Assembly	19
Description	19
Recommendation	19
L19 - Stable Compiler Version	20
Description	20
Recommendation	20
L20 - Succeeded Transfer Check	21
Description	21
Recommendation	21
Functions Analysis	22
Inheritance Graph	28
Flow Graph	29
Summary	30
Disclaimer	31
About Cyberscope	32

Review

Contract Name	ChatChain
Compiler Version	v0.8.17+commit.8df45f5f
Optimization	200 runs
Explorer	https://bscscan.com/address/0x99b99009cbdd6447dc25fb747e89e55d75f414e4
Address	0x99b99009cbdd6447dc25fb747e89e55d75f414e4
Network	BSC
Symbol	CCC
Decimals	18
Total Supply	10.000.000

Audit Updates

Initial Audit	08 Mar 2023
----------------------	-------------

Source Files

Filename	SHA256
ChatChain.sol	ef53bab0926a4f7946df72addfac68e83a85d8b5a3755cc6c0d8c4838a569573

Analysis

● Critical ● Medium ● Minor / Informative ● Pass

Severity	Code	Description	Status
●	ST	Stops Transactions	Passed
●	OCTD	Transfers Contract's Tokens	Unresolved
●	OTUT	Transfers User's Tokens	Passed
●	ELFM	Exceeds Fees Limit	Passed
●	ULTW	Transfers Liquidity to Team Wallet	Unresolved
●	MT	Mints Tokens	Passed
●	BT	Burns Tokens	Passed
●	BC	Blacklists Addresses	Passed

OCTD - Transfers Contract's Tokens

Criticality	Minor / Informative
Location	ChatChain.sol#L593
Status	Unresolved

Description

The contract owner has the authority to claim all the balance of the contract. The owner may take advantage of it by calling the `emergencyWithdrawToken` function.

```
function emergencyWithdrawToken(address token, uint256 amount) external  
onlyOwner {  
    IERC20(token).transfer(msg.sender, amount);  
}
```

Recommendation

The team should carefully manage the private keys of the owner's account. We strongly recommend a powerful security mechanism that will prevent a single user from accessing the contract admin functions. Some suggestions are:

- Introduce a time-locker mechanism with a reasonable delay.
- Introduce a multi-sign wallet so that many addresses will confirm the action.
- Introduce a governance model where users will vote about the actions.
- Renouncing the ownership will eliminate the threats but it is non-reversible.

ULTW - Transfers Liquidity to Team Wallet

Criticality	Minor / Informative
Location	ChatChain.sol#L589
Status	Unresolved

Description

The contract owner has the authority to transfer funds without limit to the team wallet. These funds have been accumulated from fees collected from the contract. The owner may take advantage of it by calling the `emergencyWithdraw` method.

```
function emergencyWithdraw() external onlyOwner {  
    payable(owner()).transfer(address(this).balance);  
}
```

Recommendation

The contract could embody a check for the maximum amount of funds that can be swapped. Since a huge amount may volatile the token's price. The team should carefully manage the private keys of the owner's account. We strongly recommend a powerful security mechanism that will prevent a single user from accessing the contract admin functions. Some suggestions are:

- Introduce a time-locker mechanism with a reasonable delay.
- Introduce a multi-sign wallet so that many addresses will confirm the action.
- Introduce a governance model where users will vote about the actions.
- Renouncing the ownership will eliminate the threats but it is non-reversible.

Diagnostics

● Critical ● Medium ● Minor / Informative

Severity	Code	Description	Status
●	DDP	Decimal Division Precision	Unresolved
●	RSML	Redundant SafeMath Library	Unresolved
●	IDI	Immutable Declaration Improvement	Unresolved
●	L02	State Variables could be Declared Constant	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L05	Unused State Variable	Unresolved
●	L09	Dead Code Elimination	Unresolved
●	L11	Unnecessary Boolean equality	Unresolved
●	L16	Validate Variable Setters	Unresolved
●	L17	Usage of Solidity Assembly	Unresolved
●	L19	Stable Compiler Version	Unresolved
●	L20	Succeeded Transfer Check	Unresolved

DDP - Decimal Division Precision

Criticality	Minor / Informative
Location	ChatChain.sol#L496,498,519
Status	Unresolved

Description

Division of decimal (fixed point) numbers can result in rounding errors due to the way that division is implemented in Solidity. Thus, it may produce issues with precise calculations with decimal numbers.

Solidity represents decimal numbers as integers, with the decimal point implied by the number of decimal places specified in the type (e.g. decimal with 18 decimal places). When a division is performed with decimal numbers, the result is also represented as an integer, with the decimal point implied by the number of decimal places in the type. This can lead to rounding errors, as the result may not be able to be accurately represented as an integer with the specified number of decimal places.

Hence, the splitted shares will not have the exact precision and some funds may not be calculated as expected.

The transaction's taxes are subtracted from the transaction amount by dividing the amount with a percentage. As a result, a precision problem will appear.

```
_balances[address(this)] += amount * 20 / 1000;  
  
_balances[destroyAddress] += amount * 10 / 1000;  
  
_amount = amount * 970 / 1000;
```

Recommendation

The contract could calculate the subtraction of the divided funds in the last calculation in order to avoid the division rounding issue.

RSML - Redundant SafeMath Library

Criticality	Minor / Informative
Location	ChatChain.sol
Status	Unresolved

Description

SafeMath is a popular Solidity library that provides a set of functions for performing common arithmetic operations in a way that is resistant to integer overflows and underflows.

Starting with Solidity versions that are greater than or equal to 0.8.0, the arithmetic operations revert on underflow and overflow. As a result, the native functionality of the Solidity operations replaces the SafeMath library. Hence, the usage of the SafeMath library adds complexity, overhead and increases unnecessarily the gas consumption.

```
library SafeMath {...}
```

Recommendation

The team is advised to remove the SafeMath library. Since the version of the contract is greater than `0.8.0` then the pure Solidity arithmetic operations produce the same result.

If the previous functionality is required, then the contract could exploit the `unchecked { ... }` statement.

Read more about the breaking change on

<https://docs.soliditylang.org/en/v0.8.16/080-breaking-changes.html#solidity-v0-8-0-breaking-changes>.

IDI - Immutable Declaration Improvement

Criticality	Minor / Informative
Location	ChatChain.sol#L395
Status	Unresolved

Description

The contract is using variables that initialize them only in the constructor. The other functions are not mutating the variables. These variables are not defined as `immutable`.

```
uniswapV2Pai
```

Recommendation

By declaring a variable as immutable, the Solidity compiler is able to make certain optimizations. This can reduce the amount of storage and computation required by the contract, and make it more gas-efficient.

L02 - State Variables could be Declared Constant

Criticality	Minor / Informative
Location	ChatChain.sol#L366,367,371,372
Status	Unresolved

Description

State variables can be declared as constant using the constant keyword. This means that the value of the state variable cannot be changed after it has been set. Additionally, the constant variables decrease gas consumption of the corresponding transaction.

```
string private _name
string private _symbol
address public usdtAddress = 0x55d398326f99059fF775485246999027B3197955
address public destroyAddress =
0x0000000000000000000000000000000000000000000000000000000000000000dEaD
```

Recommendation

Constant state variables can be useful when the contract wants to ensure that the value of a state variable cannot be changed by any function in the contract. This can be useful for storing values that are important to the contract's behavior, such as the contract's address or the maximum number of times a certain function can be called. The team is advised to add the constant keyword to state variables that never change.

L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	ChatChain.sol#L198,199,213,230,376,465,582
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
function DOMAIN_SEPARATOR() external view returns (bytes32);
function PERMIT_TYPEHASH() external pure returns (address);
function MINIMUM_LIQUIDITY() external pure returns (uint);
function WETH() external pure returns (address);
mapping (address=>bool) public DEXs
address _pair
bool _enabled
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.

Find more information on the Solidity documentation

<https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention>.

L05 - Unused State Variable

Criticality	Minor / Informative
Location	ChatChain.sol#L366,367
Status	Unresolved

Description

An unused state variable is a state variable that is declared in the contract, but is never used in any of the contract's functions. This can happen if the state variable was originally intended to be used, but was later removed or never used.

Unused state variables can create clutter in the contract and make it more difficult to understand and maintain. They can also increase the size of the contract and the cost of deploying and interacting with it.

```
string private _name  
string private _symbol
```

Recommendation

To avoid creating unused state variables, it's important to carefully consider the state variables that are needed for the contract's functionality, and to remove any that are no longer needed. This can help improve the clarity and efficiency of the contract.

L09 - Dead Code Elimination

Criticality	Minor / Informative
Location	ChatChain.sol#L135,141,145,148,151,154,158
Status	Unresolved

Description

In Solidity, dead code is code that is written in the contract, but is never executed or reached during normal contract execution. Dead code can occur for a variety of reasons, such as:

- Conditional statements that are always false.
- Functions that are never called.
- Unreachable code (e.g., code that follows a return statement).

Dead code can make a contract more difficult to understand and maintain, and can also increase the size of the contract and the cost of deploying and interacting with it.

```
function isContract(address account) internal view returns (bool) {
    bytes32 codehash;
    bytes32 accountHash =
0xc5d2460186f7233c927e7db2dcc703c0e500b653ca82273b7bfad8045d85a470;
    assembly { codehash := extcodehash(account) }
    return (codehash != accountHash && codehash != 0x0);
}

...

require(address(this).balance >= amount, "Address: insufficient
balance"); (bool success, ) = to.call{ value: amount }("");
require(success, "Address: unable to send value, to may have
reverted");
}

function functionCall(address target, bytes memory data) internal
returns (bytes memory) {
    return functionCall(target, data, "Address: low-level call
failed");
}

...
```


Recommendation

To avoid creating dead code, it's important to carefully consider the logic and flow of the contract and to remove any code that is not needed or that is never executed. This can help improve the clarity and efficiency of the contract.

L11 - Unnecessary Boolean equality

Criticality	Minor / Informative
Location	ChatChain.sol#L574
Status	Unresolved

Description

Boolean equality is unnecessary when comparing two boolean values. This is because a boolean value is either true or false, and there is no need to compare two values that are already known to be either true or false.

it's important to be aware of the types of variables and expressions that are being used in the contract's code, as this can affect the contract's behavior and performance. The comparison to boolean constants is redundant. Boolean constants can be used directly and do not need to be compared to true or false.

```
isExcludeds[addr] == true
```

Recommendation

Using the boolean value itself is clearer and more concise, and it is generally considered good practice to avoid unnecessary boolean equalities in Solidity code.

L16 - Validate Variable Setters

Criticality	Minor / Informative
Location	ChatChain.sol#L475
Status	Unresolved

Description

The contract performs operations on variables that have been configured on user-supplied input. These variables are missing of proper check for the case where a value is zero. This can lead to problems when the contract is executed, as certain actions may not be properly handled when the value is zero.

```
marketAddress = to
```

Recommendation

By adding the proper check, the contract will not allow the variables to be configured with zero value. This will ensure that the contract can handle all possible input values and avoid unexpected behavior or errors. Hence, it can help to prevent the contract from being exploited or operating unexpectedly.

L17 - Usage of Solidity Assembly

Criticality	Minor / Informative
Location	ChatChain.sol#L138,164
Status	Unresolved

Description

Using assembly can be useful for optimizing code, but it can also be error-prone. It's important to carefully test and debug assembly code to ensure that it is correct and does not contain any errors.

Some common types of errors that can occur when using assembly in Solidity include Syntax, Type, Out-of-bounds, Stack, and Revert.

```
assembly { codehash := extcodehash(account) }

assembly {
    let returndata_size := mload(returndata)
    revert(add(32, returndata), returndata_size)
}
```

Recommendation

It is recommended to use assembly sparingly and only when necessary, as it can be difficult to read and understand compared to Solidity code.

L19 - Stable Compiler Version

Criticality	Minor / Informative
Location	ChatChain.sol#L6
Status	Unresolved

Description

The `^` symbol indicates that any version of Solidity that is compatible with the specified version (i.e., any version that is a higher minor or patch version) can be used to compile the contract. The version lock is a mechanism that allows the author to specify a minimum version of the Solidity compiler that must be used to compile the contract code. This is useful because it ensures that the contract will be compiled using a version of the compiler that is known to be compatible with the code.

```
pragma solidity ^0.8.0;
```

Recommendation

The team is advised to lock the pragma to ensure the stability of the codebase. The locked pragma version ensures that the contract will not be deployed with an unexpected version. An unexpected version may produce vulnerabilities and undiscovered bugs. The compiler should be configured to the lowest version that provides all the required functionality for the codebase. As a result, the project will be compiled in a well-tested LTS (Long Term Support) environment.

L20 - Succeeded Transfer Check

Criticality	Minor / Informative
Location	ChatChain.sol#L594
Status	Unresolved

Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
IERC20(token).transfer(msg.sender, amount)
```

Recommendation

The contract should check if the result of the transfer methods is successful. The team is advised to check the SafeERC20 library from the [Openzeppelin library](#).

Functions Analysis

Contract	Type	Bases		
	Function Name	Visibility	Mutability	Modifiers
IERC20	Interface			
	totalSupply	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
IERC20Metad ata	Interface	IERC20		
	name	External		-
	symbol	External		-
	decimals	External		-
SafeMath	Library			
	add	Internal		
	sub	Internal		
	sub	Internal		
	mul	Internal		
	div	Internal		
	div	Internal		
	mod	Internal		
	mod	Internal		

Context	Implementation			
	_msgSender	Internal		
	_msgData	Internal		
Ownable	Implementation	Context		
		Public	✓	-
	owner	Public		-
	renounceOwnership	Public	✓	onlyOwner
	transferOwnership	Public	✓	onlyOwner
	_transferOwnership	Internal	✓	
Address	Library			
	isContract	Internal		
	sendValue	Internal	✓	
	functionCall	Internal	✓	
	functionCall	Internal	✓	
	functionCallWithValue	Internal	✓	
	functionCallWithValue	Internal	✓	
	_functionCallWithValue	Private	✓	
IPancakeSwap V2Factory	Interface			
	feeTo	External		-
	feeToSetter	External		-
	getPair	External		-
	allPairs	External		-
	allPairsLength	External		-
	createPair	External	✓	-
	setFeeTo	External	✓	-
	setFeeToSetter	External	✓	-

IPancakeSwap V2Pair	Interface			
	name	External		-
	symbol	External		-
	decimals	External		-
	totalSupply	External		-
	balanceOf	External		-
	allowance	External		-
	approve	External	✓	-
	transfer	External	✓	-
	transferFrom	External	✓	-
	DOMAIN_SEPARATOR	External		-
	PERMIT_TYPEHASH	External		-
	nonces	External		-
	permit	External	✓	-
	MINIMUM_LIQUIDITY	External		-
	factory	External		-
	token0	External		-
	token1	External		-
	getReserves	External		-
	price0CumulativeLast	External		-
	price1CumulativeLast	External		-
	kLast	External		-
	mint	External	✓	-
	burn	External	✓	-
	swap	External	✓	-
	skim	External	✓	-
	sync	External	✓	-
	initialize	External	✓	-

IPancakeSwap V2Router01	Interface			
	factory	External		-
	WETH	External		-
	addLiquidity	External	✓	-
	addLiquidityETH	External	Payable	-
	removeLiquidity	External	✓	-
	removeLiquidityETH	External	✓	-
	removeLiquidityWithPermit	External	✓	-
	removeLiquidityETHWithPermit	External	✓	-
	swapExactTokensForTokens	External	✓	-
	swapTokensForExactTokens	External	✓	-
	swapExactETHForTokens	External	Payable	-
	swapTokensForExactETH	External	✓	-
	swapExactTokensForETH	External	✓	-
	swapETHForExactTokens	External	Payable	-
	quote	External		-
	getAmountOut	External		-
	getAmountIn	External		-
	getAmountsOut	External		-
	getAmountsIn	External		-
IPancakeSwap V2Router02	Interface	IPancakeSw apV2Router 01		
	removeLiquidityETHSupportingFeeO nTransferTokens	External	✓	-
	removeLiquidityETHWithPermitSupp ortingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokensSupporti ngFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupporting FeeOnTransferTokens	External	Payable	-


	swapExactTokensForETHSupporting FeeOnTransferTokens	External	✓	-
ChatChain	Implementation	Context, IERC20, IERC20Met adata, Ownable		
		Public	✓	-
	name	Public		-
	symbol	Public		-
	decimals	Public		-
	totalSupply	Public		-
	balanceOf	Public		-
	transfer	Public	✓	-
	allowance	Public		-
	approve	Public	✓	-
	transferFrom	Public	✓	-
	increaseAllowance	Public	✓	-
	decreaseAllowance	Public	✓	-
	addDex	External	✓	onlyOwner
	setMarket	Public	✓	onlyOwner
	_transfer	Internal	✓	
	_mint	Internal	✓	
	_burn	Internal	✓	
	burn	External	✓	-
	_approve	Internal	✓	
	swapTokensForUsdt	Public	✓	lockTheSwap
	setExcludeds	Public	✓	onlyOwner
	setSwapAndLiquifyEnabled	Public	✓	onlyOwner
		External	Payable	-
	emergencyWithdraw	External	✓	onlyOwner

	emergencyWithdrawToken	External	✓	onlyOwner
--	------------------------	----------	---	-----------

Inheritance Graph



Flow Graph

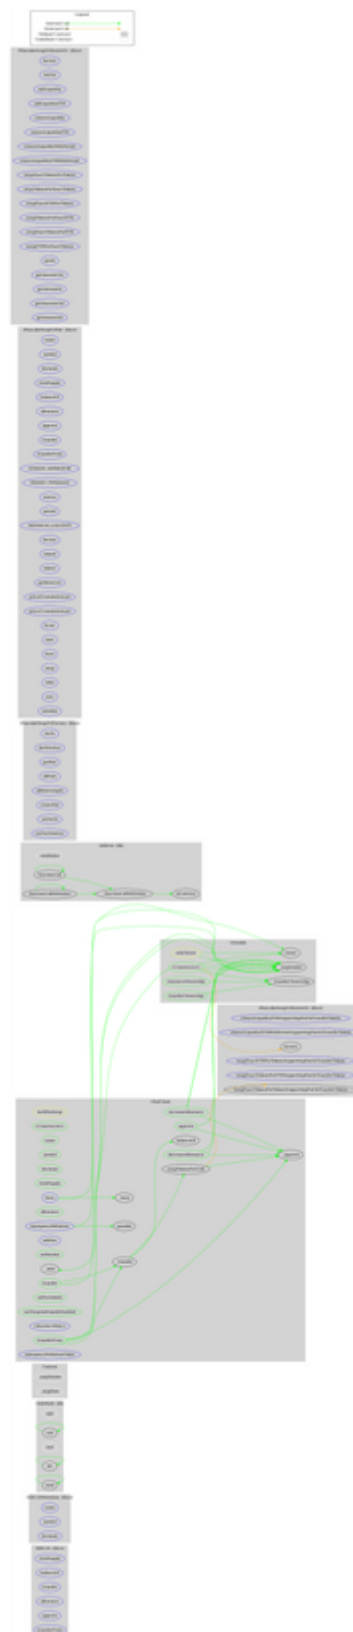

Summary

Chatchain Coin contract implements a token mechanism. This audit investigates security issues, business logic concerns and potential improvements. There are some functions that can be abused by the owner like drain the contract's tokens and transfer funds to the team's wallet. A multi-wallet signing pattern will provide security against potential hacks. Temporarily locking the contract or renouncing ownership will eliminate all the contract threats. There is also a fixed limit of 3% fees.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk. Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security. Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis. Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives, false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

<https://www.cyberscope.io>