



Cyberscope

# Audit Report

## **Vestor**

October 2022

Github <https://github.com/vestor-co/vestor-contracts>

Commit [bef94d34a23e9cfe76a88259e2abf5a7f52b18db](#)

Audited by © cyberscope

# Table of Contents

<b>Table of Contents</b>	<b>1</b>
<b>Contract Review</b>	<b>3</b>
<b>Audit Updates</b>	<b>3</b>
<b>Source Files</b>	<b>4</b>
<b>Introduction</b>	<b>5</b>
<b>Roles</b>	<b>5</b>
<b>Contract Diagnostics</b>	<b>6</b>
<b>RM - Redundant Mapping</b>	<b>7</b>
<b>Description</b>	<b>7</b>
<b>Recommendation</b>	<b>8</b>
<b>STC - Succeeded Transfer Check</b>	<b>9</b>
<b>Description</b>	<b>9</b>
<b>Recommendation</b>	<b>9</b>
<b>CO - Code Optimization</b>	<b>10</b>
<b>Description</b>	<b>10</b>
<b>Recommendation</b>	<b>11</b>
<b>MC - Missing Check</b>	<b>12</b>
<b>Description</b>	<b>12</b>
<b>Recommendation</b>	<b>13</b>
<b>L01 - Public Function could be Declared External</b>	<b>14</b>
<b>Description</b>	<b>14</b>
<b>Recommendation</b>	<b>14</b>
<b>L04 - Conformance to Solidity Naming Conventions</b>	<b>15</b>
<b>Description</b>	<b>15</b>
<b>Recommendation</b>	<b>15</b>
<b>L11 - Unnecessary Boolean equality</b>	<b>16</b>

<b>Description</b>	<b>16</b>
<b>Recommendation</b>	<b>16</b>
<b>L13 - Divide before Multiply Operation</b>	<b>17</b>
<b>Description</b>	<b>17</b>
<b>Recommendation</b>	<b>17</b>
<b>Contract Functions</b>	<b>18</b>
<b>Contract Flow</b>	<b>20</b>
<b>Summary</b>	<b>21</b>
<b>Disclaimer</b>	<b>22</b>
<b>About Cyberscope</b>	<b>23</b>

## Contract Review

<b>Contract Name</b>	vestor
<b>Compiler Version</b>	v0.8.17+commit.8df45f5f
<b>Github</b>	<a href="https://github.com/vestor-co/vestor-contracts">https://github.com/vestor-co/vestor-contracts</a>
<b>Commit</b>	bef94d34a23e9cfe76a88259e2abf5a7f52b18db

## Audit Updates

<b>Initial Audit</b>	12th October 2022 <a href="https://github.com/cyberscope-io/audits/blob/main/vestor/v1/vestor.pdf">https://github.com/cyberscope-io/audits/blob/main/vestor/v1/vestor.pdf</a>
<b>Corrected</b>	24th October 2022

## Source Files

Filename	SHA256
@openzeppelin/contracts-upgradeable/proxy/utils/Initializable.sol	cd823c76cbf5f5b6ef1bda565d58be66c843c37707cd93eb8fb5425deebd6756
@openzeppelin/contracts-upgradeable/utils/AddressUpgradeable.sol	35fb271561f3dc72e91b3a42c6e40c2bb2e788cd8ca58014ac43f6198b8d32ca
@openzeppelin/contracts-upgradeable/utils/CountersUpgradeable.sol	5c1ac829a429b0c2ca9b4c9ed8b78d412320e9175e45f088c4e9056ef95fbf21
@openzeppelin/contracts/security/ReentrancyGuard.sol	aa73590d5265031c5bb64b5c0e7f84c44cf5f8539e6d8606b763adac784e8b2e
@openzeppelin/contracts/token/ERC20/IERC20.sol	94f23e4af51a18c2269b355b8c7cf4db8003d075c9c541019eb8dcf4122864d5
contracts/vestor.sol	cc4d3ae79ee2f7ff97575fa809b20cf47c73b809878ced156d58337df19a4521

# Introduction

The Vestor contract is responsible for keeping the vesting amount and sharing it with the investors proportionally to the time that has elapsed.

## Roles

Any user can execute the claim function but the claim function provides the vesting funds only to the beneficial addresses.

# Contract Diagnostics

● Critical   ● Medium   ● Minor / Informative

Severity	Code	Description	Status
●	RM	Redundant Mapping	Unresolved
●	STC	Succeeded Transfer Check	Unresolved
●	CO	Code Optimization	Unresolved
●	MC	Missing Check	Unresolved
●	L01	Public Function could be Declared External	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L11	Unnecessary Boolean equality	Unresolved
●	L13	Divide before Multiply Operation	Unresolved

## RM - Redundant Mapping

<b>Criticality</b>	critical
<b>Location</b>	contract.sol
<b>Status</b>	Unresolved

### Description

The contract uses a contract counter in order to determine the vesting contract order. Even the methods accept the contract counter variable, internally they access merely the first index. Additionally, since the cloned contracts are initialized as minimal proxies, they are not upgradeable. As a result, the `CountersUpgradeable.Counter private contractid;` and all the contract counter mappings are redundant.

```
function gettotalamountunlocked(address _address) public view returns(uint256){  
    vest storage c = vestcontracts[0];
```

Hence, all the mappings from id to address should be flattened and the methods should erase the contractid argument.

```
mapping (uint256 => vest) vestcontracts;  
  
function isWhitelisted(address _user,uint256 _Contractid) public view returns (bool) {  
    vest storage c = vestcontracts[_Contractid];  
  
function claimtokens(uint256 _contractid,address _address) public nonReentrant {  
    vest storage c = vestcontracts[_contractid];  
  
function getContract(uint256 _contractId) public view returns (...) {  
    vest storage c = vestcontracts[_contractId];  
  
string memory _name = vestcontracts[_id].name;
```



## Recommendation

It is recommended to implement a version that does not use the multiple contracts logic.

```
mapping (uint256 => vest) vestcontracts; => vest vestcontracts;
```

## STC - Succeeded Transfer Check

<b>Criticality</b>	minor / informative
<b>Location</b>	contract.sol#L131
<b>Status</b>	Unresolved

### Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
IERC20(c._tokencontractaddress).transfer(_address,gettotalamountunlocked(_address));
```

### Recommendation

The contract should check if the result of the transfer methods is successful.

## CO - Code Optimization

<b>Criticality</b>	minor / informative
<b>Location</b>	contract.sol#L125,159,184,205,183
<b>Status</b>	Unresolved

### Description

There are code segments that could be optimized. A segment may be optimized so that it becomes a smaller size, consumes less memory, executes more rapidly, or performs fewer operations.

### Precondition

The contract checks if an address is whitelisted for a claiming. A user that is applicable to claim tokens is also checked by the amountofinvestorsbyindex mapping. Since, these two preconditions create a tautology, one of them could be eliminated.

```
function claimtokens(uint256 _contractid,address _address)public nonReentrant {  
    vest storage c = vestcontracts[_contractid];  
  
    require(isWhitelisted( _address,_contractid)!=false,"you are not eligible for the claim");  
    require(block.timestamp >= c._startPeriod , "vesting has not yet began");  
    require(amountofinvestorsbyindex[ _address][_contractid] > 0,"all of your tokens have been  
    claimed");
```

### Storage keyword

Wrong utilization of storage keyword in multiple sections. The storage keyword should not be used in view methods and case where the variable is not indented be used as a state variable.

```
vest storage c = vestcontracts[_contractid];
```

The contract could avoid executing code segments when it is not required. For instance, if the first require statement fails, then the initial assignment will be executed unnecessarily.

```
vest storage c = vestcontracts[_contractid];  
  
require(isWhitelisted( _address,_contractid)!=false,"you are not eligible for  
the claim");  
require(block.timestamp >= c._startPeriod , "vesting has not yet began");
```

## Recommendation

The contract could rewrite some code segments so the runtime will be more performant.

The function `isWhitelisted` could be removed from the implementation.

It is recommended to remove storage keywords from variables that are not used as storage. For instance `vest c = vestcontracts[_contractid];`

## MC - Missing Check

<b>Criticality</b>	minor / informative
<b>Location</b>	contract.sol#L43
<b>Status</b>	Unresolved

### Description

The contract is processing variables that have not properly sanitized and checked that they form the proper shape. These variables may produce vulnerability issues. To be more specific the variable `startperiod` and `cliffperiod` are not properly sanitized

```
function initialize(
    string memory name,
    address tokencontractaddress,
    address[] calldata investors,
    uint256 vestingPeriod,
    uint256[] calldata amountperinvestors,
    uint256 startperiod, uint256 cliffperiod
) initializer public {
    vestTokens(
        name,
        tokencontractaddress,
        investors,
        vestingPeriod,
        amountperinvestors,
        startperiod,
        cliffperiod
    );
}
```

The method `gettime` could underflow and revert. If the variable `userclaimingstart[_address][0]` is greater than the `block.timestamp`.

```
function gettime(address _address) internal view returns (uint256) {
    uint256 total = block.timestamp - userclaimingstart[_address][0];
    return total;
}
```

The contract does check if it has the available total balance to start the vesting.

```
int256 totalamount = addforinvestors(amountperinvestors,vestingPeriod,cliffperiod);
```

## Recommendation

The contract should properly check the variables according to the required specifications.

- Startperiod should be greater than zero.
- Cliffperiod should be greater than zero.
- Block.timestamp should be greater than userclaimingstart[\_address][0].
- The contract should check if it has the totalamount in tokens.

## L01 - Public Function could be Declared External

<b>Criticality</b>	minor / informative
<b>Location</b>	contracts/vestor.sol#L124,234,43,244,147,278
<b>Status</b>	Unresolved

### Description

Public functions that are never called by the contract should be declared external to save gas.

```
claimtokens  
fetchcontractswitelisted  
initialize  
getamount  
getContract  
addforamount
```

### Recommendation

Use the external attribute for functions never called from the contract.

## L04 - Conformance to Solidity Naming Conventions

<b>Criticality</b>	minor / informative
<b>Location</b>	contracts/vestor.sol#L147,291,124,186,196,244,207,23,278,234,10,222
<b>Status</b>	Unresolved

### Description

Solidity defines a naming convention that should be followed. Rule exceptions:

- Allow constant variable name/symbol/decimals to be lowercase.
- Allow `_` at the beginning of the mixed\_case match for private variables and unused parameters.

```
_contractId  
_numbers  
_address  
_Contractid  
_vestingperiod  
vest  
_user  
_id  
_contractid  
...
```

### Recommendation

Follow the Solidity naming convention.

<https://docs.soliditylang.org/en/v0.4.25/style-guide.html#naming-conventions>.



## L11 - Unnecessary Boolean equality

<b>Criticality</b>	minor / informative
<b>Location</b>	contracts/vestor.sol#L147,124
<b>Status</b>	Unresolved

### Description

The comparison to boolean constants is redundant. Boolean constants can be used directly and do not need to be compared to true or false.

```
haveContract(_contractId) == false  
require(bool,string)(isWhitelisted(_address,_contractid) != false,you are not eligible for the claim)
```

### Recommendation

Remove the equality to the boolean constant.

## L13 - Divide before Multiply Operation

<b>Criticality</b>	minor / informative
<b>Location</b>	contracts/vestor.sol#L207
<b>Status</b>	Unresolved

### Description

Performing divisions before multiplications may cause lose of prediction.

```
total = timesclaimablebyinvestors[_address][0] * (gettime(_address) / c.cliffperiod)
```

### Recommendation


The multiplications should be prior to the divisions.

# Contract Functions

Contract	Type	Bases		
	Function Name	Visibility	Mutability	Modifiers
<b>Initializable</b>	Implementation			
	_disableInitializers	Internal	✓	
<b>AddressUpgradable</b>	Library			
	isContract	Internal		
	sendValue	Internal	✓	
	functionCall	Internal	✓	
	functionCall	Internal	✓	
	functionCallWithValue	Internal	✓	
	functionCallWithValue	Internal	✓	
	functionStaticCall	Internal		
	functionStaticCall	Internal		
	verifyCallResult	Internal		
<b>CountersUpgradable</b>	Library			
	current	Internal		
	increment	Internal	✓	
	decrement	Internal	✓	
	reset	Internal	✓	
<b>ReentrancyGuard</b>	Implementation			
	<Constructor>	Public	✓	-
<b>IERC20</b>	Interface			
	totalSupply	External		-
	balanceOf	External		-

	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
<b>vestor</b>	Implementation	Initializable, Reentrancy Guard		
	initialize	Public	✓	initializer
	vestTokens	Internal	✓	
	claimtokens	Public	✓	nonReentrant
	getContract	Public		-
	isWhitelisted	Public		-
	gettime	Internal		
	gettotalamountunlocked	Public		-
	haveContract	Internal		
	fetchcontractswitelisted	Public		-
	getamount	Public		-
	addforamount	Public		-
	addforinvestors	Public		-

# Contract Flow

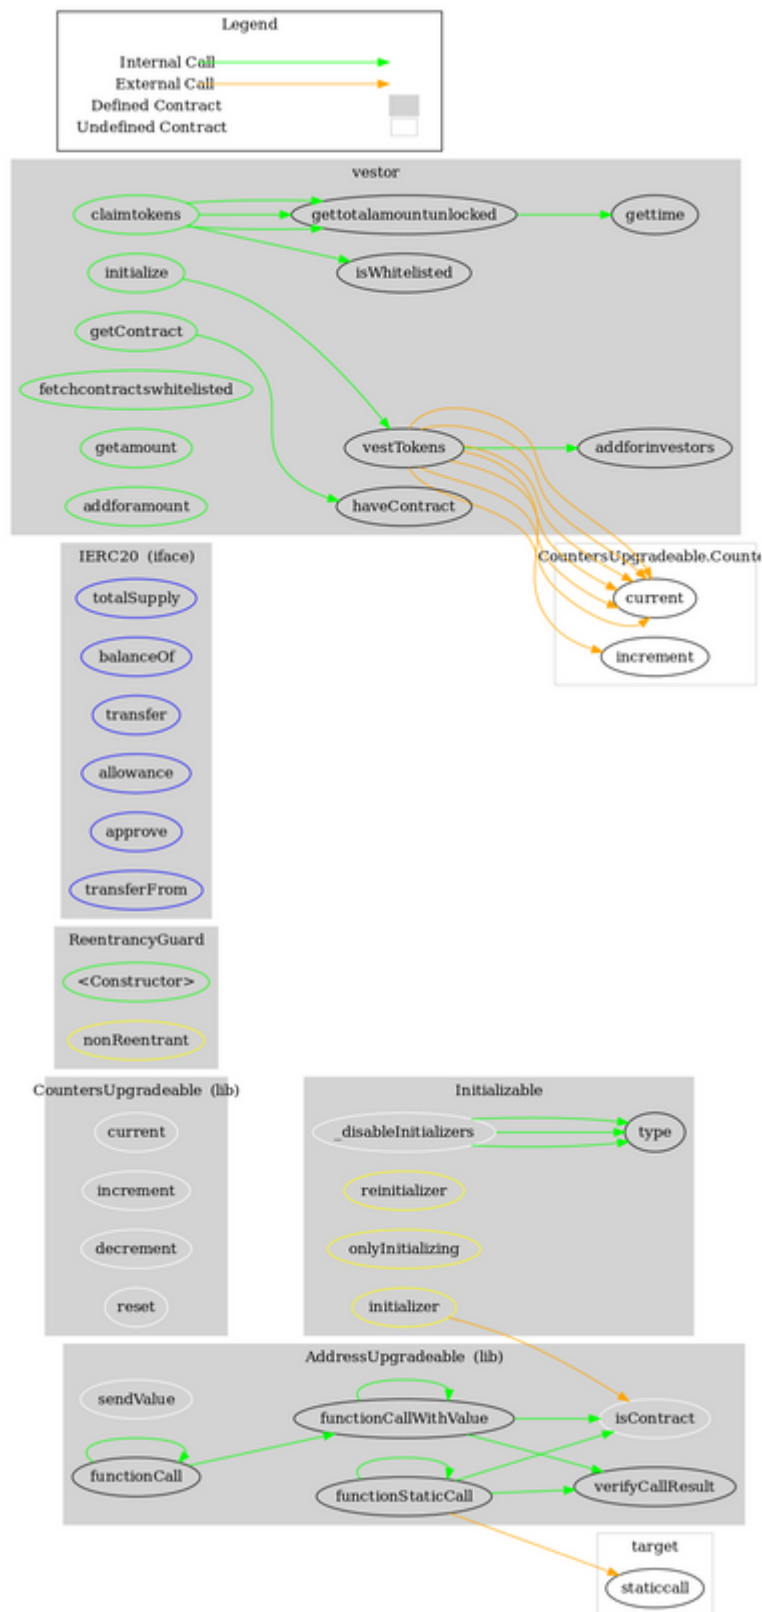

# Summary

The Vestor contract implements a tokens vestor mechanism. This audit investigates security issues, mentions business logic concerns, and potential improvements.

# Disclaimer

All the content provided in this document is for general information only and should not be used as financial advice or a reason to buy any investment.

Cyberscope team provides no guarantees against the sale of team tokens or the removal of liquidity by the project audited in this document. Always Do your own research and protect yourselves from being scammed.

The Cyberscope team has audited this project for general information and only expresses their opinion based on similar projects and checks from popular diagnostic tools. Under no circumstances did Cyberscope receive a payment to manipulate those results or change the awarding badge that we will be adding in our website.

Always Do your own research and protect yourselves from scams. This document should not be presented as a reason to buy or not buy any particular token.

The Cyberscope team disclaims any liability for the resulting losses.

# About Cyberscope

Coinscope audit and K.Y.C. service has been rebranded to Cyberscope.

Coinscope is the leading early coin listing, voting and auditing authority firm. The audit process is analyzing and monitoring many aspects of the project. That way, it gives the community a good sense of security using an informative report and a generic score.

Cyberscope and Coinscope are aiming to make crypto discoverable and efficient globally. They provide all the essential tools to assist users draw their own conclusions.



The Cyberscope team

<https://www.cyberscope.io>