



Cyberscope

# Audit Report

# **Supermusk**

June 2023

SHA256 1e376941229b2b7d435b85640850e61b8e64ede9c54204a1d1aecb7ba3fdd3d0

Audited by © cyberscope

# Analysis

● Critical   ● Medium   ● Minor / Informative   ● Pass

Severity	Code	Description	Status
●	ST	Stops Transactions	Passed
●	OTUT	Transfers User's Tokens	Passed
●	ELFM	Exceeds Fees Limit	Passed
●	MT	Mints Tokens	Passed
●	BT	Burns Tokens	Passed
●	BC	Blacklists Addresses	Passed

# Diagnostics

● Critical ● Medium ● Minor / Informative

Severity	Code	Description	Status
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L07	Missing Events Arithmetic	Unresolved
●	L13	Divide before Multiply Operation	Unresolved
●	L14	Uninitialized Variables in Local Scope	Unresolved
●	L16	Validate Variable Setters	Unresolved
●	L20	Succeeded Transfer Check	Unresolved

# Table of Contents

<b>Analysis</b>	<b>1</b>
<b>Diagnostics</b>	<b>2</b>
<b>Table of Contents</b>	<b>3</b>
<b>Review</b>	<b>4</b>
Audit Updates	4
Source Files	4
<b>Findings Breakdown</b>	<b>5</b>
L04 - Conformance to Solidity Naming Conventions	6
Description	6
Recommendation	6
L07 - Missing Events Arithmetic	7
Description	7
Recommendation	7
L13 - Divide before Multiply Operation	8
Description	8
Recommendation	8
L14 - Uninitialized Variables in Local Scope	9
Description	9
Recommendation	9
L16 - Validate Variable Setters	10
Description	10
Recommendation	10
L20 - Succeeded Transfer Check	11
Description	11
Recommendation	11
<b>Functions Analysis</b>	<b>12</b>
<b>Inheritance Graph</b>	<b>17</b>
<b>Flow Graph</b>	<b>18</b>
<b>Summary</b>	<b>19</b>
<b>Disclaimer</b>	<b>20</b>
<b>About Cyberscope</b>	<b>21</b>

## Review

Contract Name	supermusk
Testing Deploy	<a href="https://testnet.bscscan.com/address/0xcfbcd858ff5e1cbe6b8c8adde1939e840f2b50b">https://testnet.bscscan.com/address/0xcfbcd858ff5e1cbe6b8c8adde1939e840f2b50b</a>
Symbol	SUPERM
Decimals	9
Total Supply	420,690,000,000,000

## Audit Updates

Initial Audit	22 Jun 2023
---------------	-------------

## Source Files

Filename	SHA256
contracts/supermusk.sol	1e376941229b2b7d435b85640850e61b8e64ede9c54204a1d1aecb7ba3fdd3d0

## Findings Breakdown



● Critical	0
● Medium	0
● Minor / Informative	6

Severity	Unresolved	Acknowledged	Resolved	Other
● Critical	0	0	0	0
● Medium	0	0	0	0
● Minor / Informative	6	0	0	0

## L04 - Conformance to Solidity Naming Conventions

<b>Criticality</b>	Minor / Informative
<b>Location</b>	contracts/supermusk.sol#L33,98,112,113,114,115,116,132,138,147,161
<b>Status</b>	Unresolved

### Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX\_VALUE, ERROR\_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
function WETH() external pure returns (address);  
  
...
```

### Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.

Find more information on the Solidity documentation

<https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention>.

## L07 - Missing Events Arithmetic

<b>Criticality</b>	Minor / Informative
<b>Location</b>	contracts/supermusk.sol#L392,402
<b>Status</b>	Unresolved

### Description

Events are a way to record and log information about changes or actions that occur within a contract. They are often used to notify external parties or clients about events that have occurred within the contract, such as the transfer of tokens or the completion of a task.

It's important to carefully design and implement the events in a contract, and to ensure that all required events are included. It's also a good idea to test the contract to ensure that all events are being properly triggered and logged.

```
swapThreshold = (_tTotal * thresholdPercent) / thresholdDivisor  
piSwapPercent = priceImpactSwapPercent
```

### Recommendation

By including all required events in the contract and thoroughly testing the contract's functionality, the contract ensures that it performs as intended and does not have any missing events that could cause issues with its arithmetic.



## L13 - Divide before Multiply Operation

<b>Criticality</b>	Minor / Informative
<b>Location</b>	contracts/supermusk.sol#L680,681
<b>Status</b>	Unresolved

### Description

It is important to be aware of the order of operations when performing arithmetic calculations. This is especially important when working with large numbers, as the order of operations can affect the final result of the calculation. Performing divisions before multiplications may cause loss of precision.

```
uint256 feeAmount = (tAmount * currentFee) / masterTaxDivisor  
values.tFee = (feeAmount * ratios.reflection) / total
```

### Recommendation

To avoid this issue, it is recommended to carefully consider the order of operations when performing arithmetic calculations in Solidity. It's generally a good idea to use parentheses to specify the order of operations. The basic rule is that the multiplications should be prior to the divisions.

## L14 - Uninitialized Variables in Local Scope

<b>Criticality</b>	Minor / Informative
<b>Location</b>	contracts/supermusk.sol#L331,538,659
<b>Status</b>	Unresolved

### Description

Using an uninitialized local variable can lead to unpredictable behavior and potentially cause errors in the contract. It's important to always initialize local variables with appropriate values before using them.

```
address constructorLP
address router
uint256 initThreshold
uint256 initSwapAmount
ExtraValues memory values
```

### Recommendation

By initializing local variables before using them, the contract ensures that the functions behave as expected and avoid potential issues.

## L16 - Validate Variable Setters

<b>Criticality</b>	Minor / Informative
<b>Location</b>	contracts/supermusk.sol#L239
<b>Status</b>	Unresolved

### Description

The contract performs operations on variables that have been configured on user-supplied input. These variables are missing of proper check for the case where a value is zero. This can lead to problems when the contract is executed, as certain actions may not be properly handled when the value is zero.

```
operator = newOperator
```

### Recommendation

By adding the proper check, the contract will not allow the variables to be configured with zero value. This will ensure that the contract can handle all possible input values and avoid unexpected behavior or errors. Hence, it can help to prevent the contract from being exploited or operating unexpectedly.

## L20 - Succeeded Transfer Check

<b>Criticality</b>	Minor / Informative
<b>Location</b>	contracts/supermusk.sol#L557
<b>Status</b>	Unresolved

### Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
TOKEN.transfer(_owner, TOKEN.balanceOf(address(this)))
```

### Recommendation

The contract should check if the result of the transfer methods is successful. The team is advised to check the SafeERC20 library from the [Openzeppelin library](#).

## Functions Analysis

Contract	Type	Bases		
	Function Name	Visibility	Mutability	Modifiers
<b>IERC20</b>	Interface			
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
<b>IFactoryV2</b>	Interface			
	getPair	External		-
	createPair	External	✓	-
<b>IV2Pair</b>	Interface			
	factory	External		-

	getReserves	External		-
	sync	External	✓	-
<b>IRouter01</b>	Interface			
	factory	External		-
	WETH	External		-
	addLiquidityETH	External	Payable	-
	addLiquidity	External	✓	-
	swapExactETHForTokens	External	Payable	-
	getAmountsOut	External		-
	getAmountsIn	External		-
<b>IRouter02</b>	Interface	IRouter01		
	swapExactTokensForETHSupportingFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupportingFeeOnTransferTokens	External	Payable	-
	swapExactTokensForTokensSupportingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokens	External	✓	-
<b>Initializer</b>	Interface			
	setLaunch	External	✓	-
	getConfig	External	✓	-
	getInits	External	✓	-
	setLpPair	External	✓	-


<b>supermusk</b>	Implementation	IERC20		
		Public	Payable	-
	transferOwner	External	✓	onlyOwner
	renounceOwnership	External	✓	onlyOwner
	setOperator	Public	✓	-
	renounceOriginalDeployer	External	✓	-
		External	Payable	-
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	allowance	External		-
	balanceOf	Public		-
	transfer	Public	✓	-
	approve	External	✓	-
	_approve	Internal	✓	
	approveContractContingency	External	✓	onlyOwner
	transferFrom	External	✓	-
	setNewRouter	External	✓	onlyOwner
	setLpPair	External	✓	onlyOwner
	setInitializer	Public	✓	onlyOwner

	isExcludedFromFees	External		-
	setExcludedFromFees	Public	✓	onlyOwner
	isExcludedFromProtection	External		-
	setExcludedFromProtection	External	✓	onlyOwner
	getCirculatingSupply	Public		-
	lockTaxes	External	✓	onlyOwner
	setTaxes	External	✓	onlyOwner
	setRatios	External	✓	onlyOwner
	setWallets	External	✓	onlyOwner
	getTokenAmountAtPriceImpact	External		-
	setSwapSettings	External	✓	onlyOwner
	setPriceImpactSwapAmount	External	✓	onlyOwner
	setContractSwapEnabled	External	✓	onlyOwner
	excludePresaleAddresses	External	✓	onlyOwner
	_hasLimits	Internal		
	_transfer	Internal	✓	
	contractSwap	Internal	✓	inSwapFlag
	_checkLiquidityAdd	Internal	✓	
	enableTrading	Public	✓	onlyOwner
	sweepContingency	External	✓	onlyOwner
	sweepExternalTokens	External	✓	onlyOwner
	multiSendTokens	External	✓	onlyOwner
	isExcludedFromReward	Public		-




	setExcludedFromReward	Public	✓	onlyOwner
	tokenFromReflection	Public		-
	finalizeTransfer	Internal	✓	
	takeTaxes	Internal	✓	
	_getRate	Internal		

## Inheritance Graph

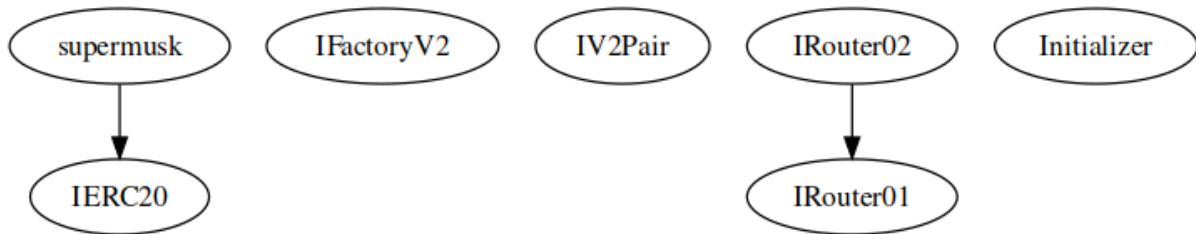

## Flow Graph

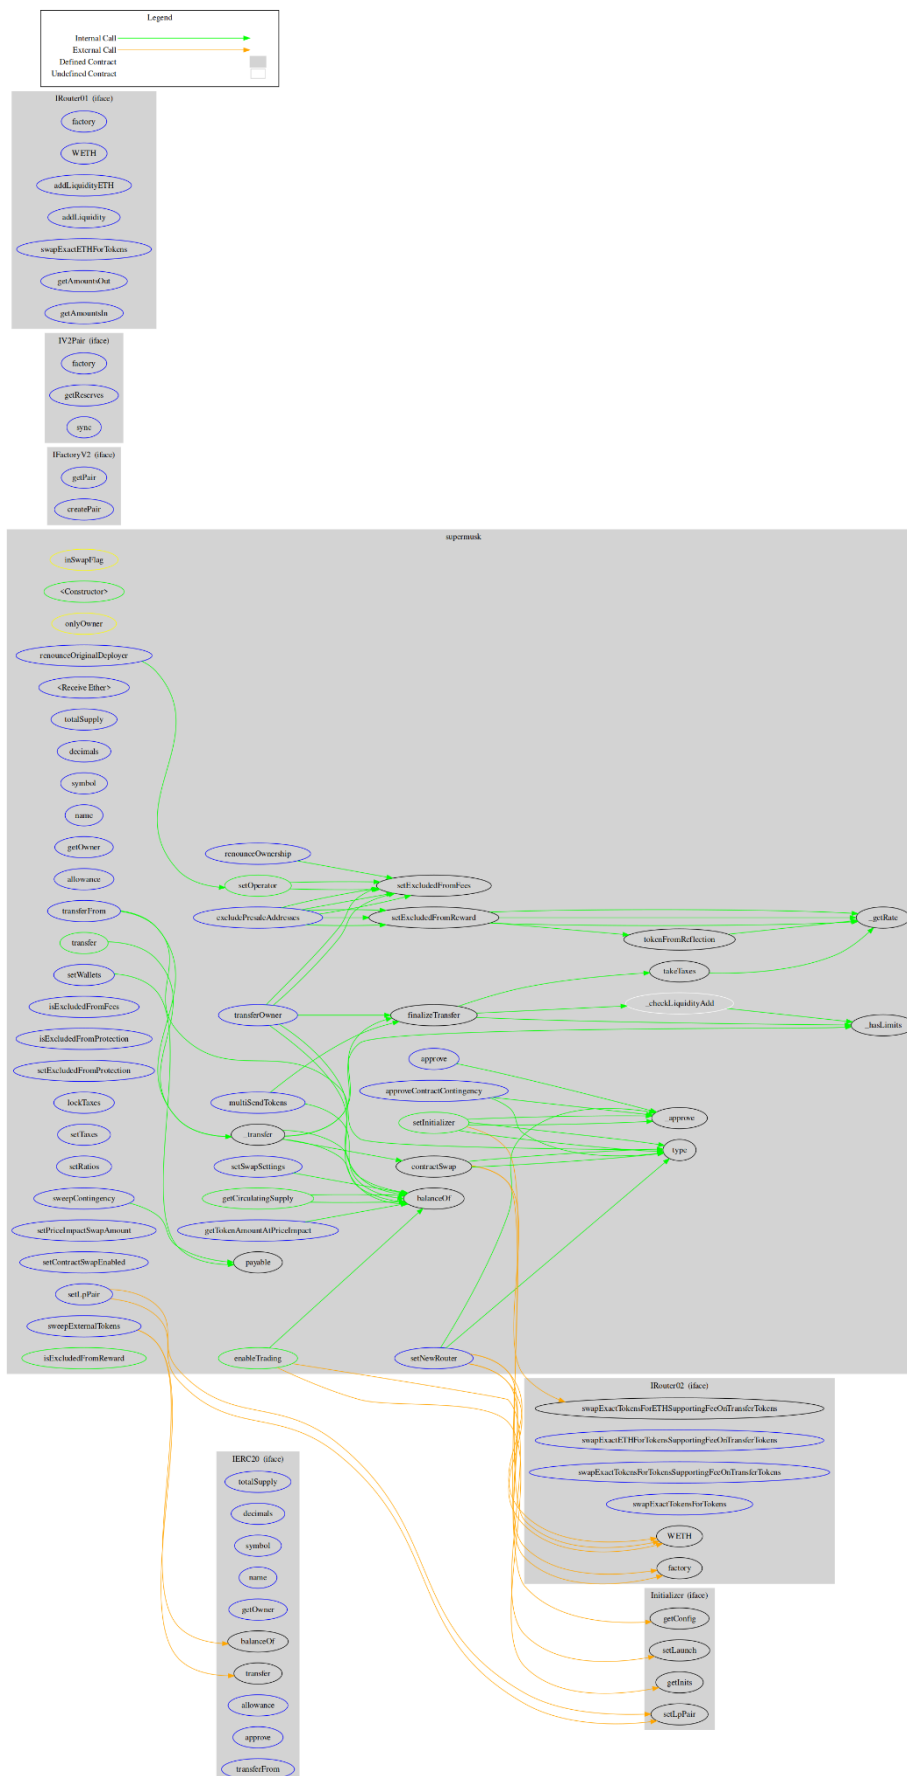

## Summary

Supermusk contract implements a token mechanism. This audit investigates security issues, business logic concerns and potential improvements. Supermusk is an interesting project that has a friendly and growing community. The Smart Contract analysis reported no compiler error or critical issues. The contract Owner can access some admin functions that can not be used in a malicious way to disturb the users' transactions. There is also a limit of max 10% fees.

## Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk. Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security. Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis. Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives, false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

## About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



**The Cyberscope team**

<https://www.cyberscope.io>