



Cyberscope

Audit Report

Floppa

May 2023

Network ETH

Address 0x993247236c4b1b8474b586b55440046e9ee6ec76

Audited by © cyberscope

Analysis

● Critical ● Medium ● Minor / Informative ● Pass

Severity	Code	Description	Status
●	ST	Stops Transactions	Passed
●	OCTD	Transfers Contract's Tokens	Passed
●	OTUT	Transfers User's Tokens	Passed
●	ELFM	Exceeds Fees Limit	Passed
●	ULTW	Transfers Liquidity to Team Wallet	Passed
●	MT	Mints Tokens	Passed
●	BT	Burns Tokens	Passed
●	BC	Blacklists Addresses	Passed

Diagnostics

● Critical ● Medium ● Minor / Informative

Severity	Code	Description	Status
●	RSK	Redundant Storage Keyword	Unresolved
●	L02	State Variables could be Declared Constant	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L05	Unused State Variable	Unresolved
●	L09	Dead Code Elimination	Unresolved
●	L13	Divide before Multiply Operation	Unresolved
●	L15	Local Scope Variable Shadowing	Unresolved
●	L17	Usage of Solidity Assembly	Unresolved
●	L18	Multiple Pragma Directives	Unresolved
●	L19	Stable Compiler Version	Unresolved

Table of Contents

Analysis	1
Diagnostics	2
Table of Contents	3
Review	5
Audit Updates	5
Source Files	5
Findings Breakdown	6
RSK - Redundant Storage Keyword	7
Description	7
Recommendation	7
L02 - State Variables could be Declared Constant	8
Description	8
Recommendation	8
L04 - Conformance to Solidity Naming Conventions	9
Description	9
Recommendation	10
L05 - Unused State Variable	11
Description	11
Recommendation	11
L09 - Dead Code Elimination	12
Description	12
Recommendation	12
L13 - Divide before Multiply Operation	14
Description	14
Recommendation	14
L15 - Local Scope Variable Shadowing	15
Description	15
Recommendation	15
L17 - Usage of Solidity Assembly	16
Description	16
Recommendation	16
L18 - Multiple Pragma Directives	17
Description	17
Recommendation	17
L19 - Stable Compiler Version	18
Description	18
Recommendation	18
Functions Analysis	20
Inheritance Graph	26

Flow Graph	27
Summary	28
Disclaimer	29
About Cyberscope	30

Review

Contract Name	FLOPPA
Compiler Version	v0.8.18+commit.87f61d96
Optimization	200 runs
Explorer	https://etherscan.io/address/0x993247236c4b1b8474b586b55440046e9ee6ec76
Address	0x993247236c4b1b8474b586b55440046e9ee6ec76
Network	ETH
Symbol	FLOP
Decimals	18
Total Supply	420,690,000,000,000


Audit Updates

Initial Audit	28 May 2023
---------------	-------------

Source Files

Filename	SHA256
FLOPPA.sol	69831df1434403a4e724bc32a865e9a19d4267a7c0cefccffec26e96c1339b3e

Findings Breakdown



● Critical	0
● Medium	0
● Minor / Informative	10

Severity	Unresolved	Acknowledged	Resolved	Other
● Critical	0	0	0	0
● Medium	0	0	0	0
● Minor / Informative	10	0	0	0

RSK - Redundant Storage Keyword

Criticality	Minor / Informative
Location	FLOPPA.sol#L96
Status	Unresolved

Description

The contract uses the `storage` keyword in a view function. The `storage` keyword is used to persist data on the contract's storage. View functions are functions that do not modify the state of the contract and do not perform any actions that cost gas (such as sending a transaction). As a result, the use of the `storage` keyword in view functions is redundant.

```
Counter storage counter
```

Recommendation

It is generally considered good practice to avoid using the `storage` keyword in view functions because it is unnecessary and can make the code less readable.

L02 - State Variables could be Declared Constant

Criticality	Minor / Informative
Location	FLOPPA.sol#L1578
Status	Unresolved

Description

State variables can be declared as constant using the constant keyword. This means that the value of the state variable cannot be changed after it has been set. Additionally, the constant variables decrease gas consumption of the corresponding transaction.

```
private _PERMIT_TYPEHASH_DEPRECATED_SLOT;
```

Recommendation

Constant state variables can be useful when the contract wants to ensure that the value of a state variable cannot be changed by any function in the contract. This can be useful for storing values that are important to the contract's behavior, such as the contract's address or the maximum number of times a certain function can be called. The team is advised to add the constant keyword to state variables that never change.

L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	FLOPPA.sol#L785,786,787,789,790,791,920,1578,1622
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
private immutable _CACHED_DOMAIN_SEPARATOR;  
  
private immutable _CACHED_CHAIN_ID;  
  
...  
  
private immutable _HASHED_VERSION;  
  
private immutable _TYPE_HASH;  
  
...
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.

Find more information on the Solidity documentation

<https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention>.

L05 - Unused State Variable

Criticality	Minor / Informative
Location	FLOPPA.sol#L1578
Status	Unresolved

Description

An unused state variable is a state variable that is declared in the contract, but is never used in any of the contract's functions. This can happen if the state variable was originally intended to be used, but was later removed or never used.

Unused state variables can create clutter in the contract and make it more difficult to understand and maintain. They can also increase the size of the contract and the cost of deploying and interacting with it.

```
private _PERMIT_TYPEHASH_DEPRECATED_SLOT;
```

Recommendation

To avoid creating unused state variables, it's important to carefully consider the state variables that are needed for the contract's functionality, and to remove any that are no longer needed. This can help improve the clarity and efficiency of the contract.

L09 - Dead Code Elimination

Criticality	Minor / Informative
Location	FLOPPA.sol#L106,114,139,146,154,165,175,260,278,314,325,367,378,416,429,459,485,510,519,534,594,627,640,655,722,736
Status	Unresolved

Description

In Solidity, dead code is code that is written in the contract, but is never executed or reached during normal contract execution. Dead code can occur for a variety of reasons, such as:

- Conditional statements that are always false.
- Functions that are never called.
- Unreachable code (e.g., code that follows a return statement).

Dead code can make a contract more difficult to understand and maintain, and can also increase the size of the contract and the cost of deploying and interacting with it.

```
function decrement(Counter storage counter) internal {
    uint256 value = counter._value;
    require(value > 0, "Counter: decrement overflow");
    unchecked {
        counter._value = value - 1;
    }
}
...
function reset(Counter storage counter) internal {
    counter._value = 0;
}

function max(uint256 a, uint256 b) internal pure returns (uint256) {
    return a > b ? a : b;
}
...
```

Recommendation

To avoid creating dead code, it's important to carefully consider the logic and flow of the contract and to remove any code that is not needed or that is never executed. This can help improve the clarity and efficiency of the contract.

L13 - Divide before Multiply Operation

Criticality	Minor / Informative
Location	FLOPPA.sol#L222,225,237,241,242,243,244,245,246,252
Status	Unresolved

Description

It is important to be aware of the order of operations when performing arithmetic calculations. This is especially important when working with large numbers, as the order of operations can affect the final result of the calculation. Performing divisions before multiplications may cause loss of prediction.

```
denominator := div(denominator, twos)
inverse *= 2 - denominator * inverse
```

Recommendation

To avoid this issue, it is recommended to carefully consider the order of operations when performing arithmetic calculations in Solidity. It's generally a good idea to use parentheses to specify the order of operations. The basic rule is that the multiplications should be prior to the divisions.

L15 - Local Scope Variable Shadowing

Criticality	Minor / Informative
Location	FLOPPA.sol#L1585
Status	Unresolved

Description

Local scope variable shadowing occurs when a local variable with the same name as a variable in an outer scope is declared within a function or code block. When this happens, the local variable "shadows" the outer variable, meaning that it takes precedence over the outer variable within the scope in which it is declared.

```
string memory name
```

Recommendation

It's important to be aware of shadowing when working with local variables, as it can lead to confusion and unintended consequences if not used correctly. It's generally a good idea to choose unique names for local variables to avoid shadowing outer variables and causing confusion.

L17 - Usage of Solidity Assembly

Criticality	Minor / Informative
Location	FLOPPA.sol#L186,491,602
Status	Unresolved

Description

Using assembly can be useful for optimizing code, but it can also be error-prone. It's important to carefully test and debug assembly code to ensure that it is correct and does not contain any errors.

Some common types of errors that can occur when using assembly in Solidity include Syntax, Type, Out-of-bounds, Stack, and Revert.

```
assembly {  
    let mm := mulmod(x, y, not(0))  
    prod0 := mul(x, y)  
    prod1 := sub(sub(mm, prod0), lt(mm, prod0))  
}  
  
assembly {  
    ptr := add(buffer, add(32, length))  
}  
  
...
```

Recommendation

It is recommended to use assembly sparingly and only when necessary, as it can be difficult to read and understand compared to Solidity code.

L18 - Multiple Pragma Directives

Criticality	Minor / Informative
Location	FLOPPA.sol#L78,124,472,544,759,865,928,955,1040,1125,1155,1546,1643,1683
Status	Unresolved

Description

If the contract includes multiple conflicting pragma directives, it may produce unexpected errors. To avoid this, it's important to include the correct pragma directive at the top of the contract and to ensure that it is the only pragma directive included in the contract.

```
pragma solidity ^0.8.0;  
pragma solidity ^0.8.0;  
pragma solidity ^0.8.0;  
pragma solidity ^0.8.0;  
...
```

Recommendation

It is important to include only one pragma directive at the top of the contract and to ensure that it accurately reflects the version of Solidity that the contract is written in.

By including all required compiler options and flags in a single pragma directive, the potential conflicts could be avoided and ensure that the contract can be compiled correctly.

L19 - Stable Compiler Version

Criticality	Minor / Informative
Location	FLOPPA.sol#L78,124,472,544,759,865,928,955,1040,1125,1155,1546,1643,1683
Status	Unresolved

Description

The `^` symbol indicates that any version of Solidity that is compatible with the specified version (i.e., any version that is a higher minor or patch version) can be used to compile the contract. The version lock is a mechanism that allows the author to specify a minimum version of the Solidity compiler that must be used to compile the contract code. This is useful because it ensures that the contract will be compiled using a version of the compiler that is known to be compatible with the code.

```
pragma solidity ^0.8.0;  
pragma solidity ^0.8.0;  
pragma solidity ^0.8.0;  
pragma solidity ^0.8.0;  
...
```

Recommendation

The team is advised to lock the pragma to ensure the stability of the codebase. The locked pragma version ensures that the contract will not be deployed with an unexpected version. An unexpected version may produce vulnerabilities and undiscovered bugs. The compiler should be configured to the lowest version that provides all the required functionality for the codebase. As a result, the project will be compiled in a well-tested LTS (Long Term Support) environment.

Functions Analysis

Contract	Type	Bases		
	Function Name	Visibility	Mutability	Modifiers
Counters	Library			
	current	Internal		
	increment	Internal	✓	
	decrement	Internal	✓	
	reset	Internal	✓	
Math	Library			
	max	Internal		
	min	Internal		
	average	Internal		
	ceilDiv	Internal		
	mulDiv	Internal		
	mulDiv	Internal		
	sqrt	Internal		
	sqrt	Internal		
	log2	Internal		
	log2	Internal		
	log10	Internal		
	log10	Internal		

	log256	Internal		
	log256	Internal		
Strings	Library			
	toString	Internal		
	toHexString	Internal		
	toHexString	Internal		
	toHexString	Internal		
ECDSA	Library			
	_throwError	Private		
	tryRecover	Internal		
	recover	Internal		
	tryRecover	Internal		
	recover	Internal		
	tryRecover	Internal		
	recover	Internal		
	toEthSignedMessageHash	Internal		
	toEthSignedMessageHash	Internal		
	toTypedDataHash	Internal		
EIP712	Implementation			
		Public	✓	-


	_domainSeparatorV4	Internal		
	_buildDomainSeparator	Private		
	_hashTypedDataV4	Internal		
IERC20Permit	Interface			
	permit	External	✓	-
	nonces	External		-
	DOMAIN_SEPARATOR	External		-
Context	Implementation			
	_msgSender	Internal		
	_msgData	Internal		
Ownable	Implementation	Context		
		Public	✓	-
	owner	Public		-
	_checkOwner	Internal		
	renounceOwnership	Public	✓	onlyOwner
	transferOwnership	Public	✓	onlyOwner
	_transferOwnership	Internal	✓	
IERC20	Interface			
	totalSupply	External		-

	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
IERC20Metadata	Interface	IERC20		
	name	External		-
	symbol	External		-
	decimals	External		-
ERC20	Implementation	Context, IERC20, IERC20Meta data		
		Public	✓	-
	name	Public		-
	symbol	Public		-
	decimals	Public		-
	totalSupply	Public		-
	balanceOf	Public		-
	transfer	Public	✓	-
	allowance	Public		-
	approve	Public	✓	-
	transferFrom	Public	✓	-


	increaseAllowance	Public	✓	-
	decreaseAllowance	Public	✓	-
	_transfer	Internal	✓	
	_mint	Internal	✓	
	_burn	Internal	✓	
	_approve	Internal	✓	
	_spendAllowance	Internal	✓	
	_beforeTokenTransfer	Internal	✓	
	_afterTokenTransfer	Internal	✓	
ERC20Permit	Implementation	ERC20, IERC20Permit, EIP712		
		Public	✓	EIP712
	permit	Public	✓	-
	nonces	Public		-
	DOMAIN_SEPARATOR	External		-
	_useNonce	Internal	✓	
ERC20Burnable	Implementation	Context, ERC20		
	burn	Public	✓	-
	burnFrom	Public	✓	-
FLOPPA	Implementation	ERC20, ERC20Burnable,		

		ERC20Permi t, Ownable		
		Public	✓	ERC20 ERC20Permit

Inheritance Graph

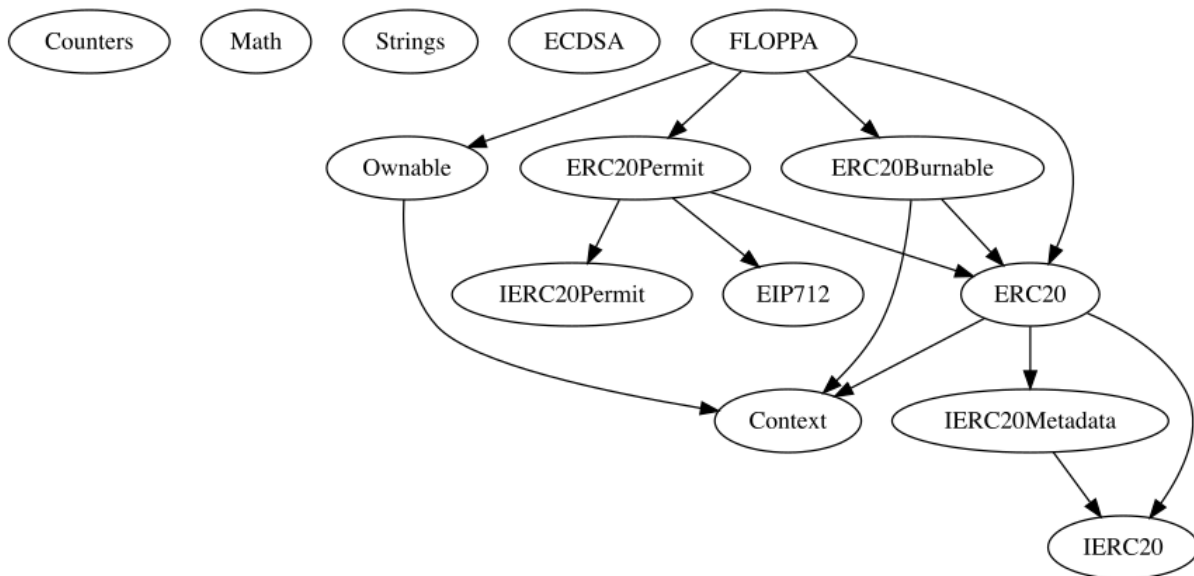

Flow Graph

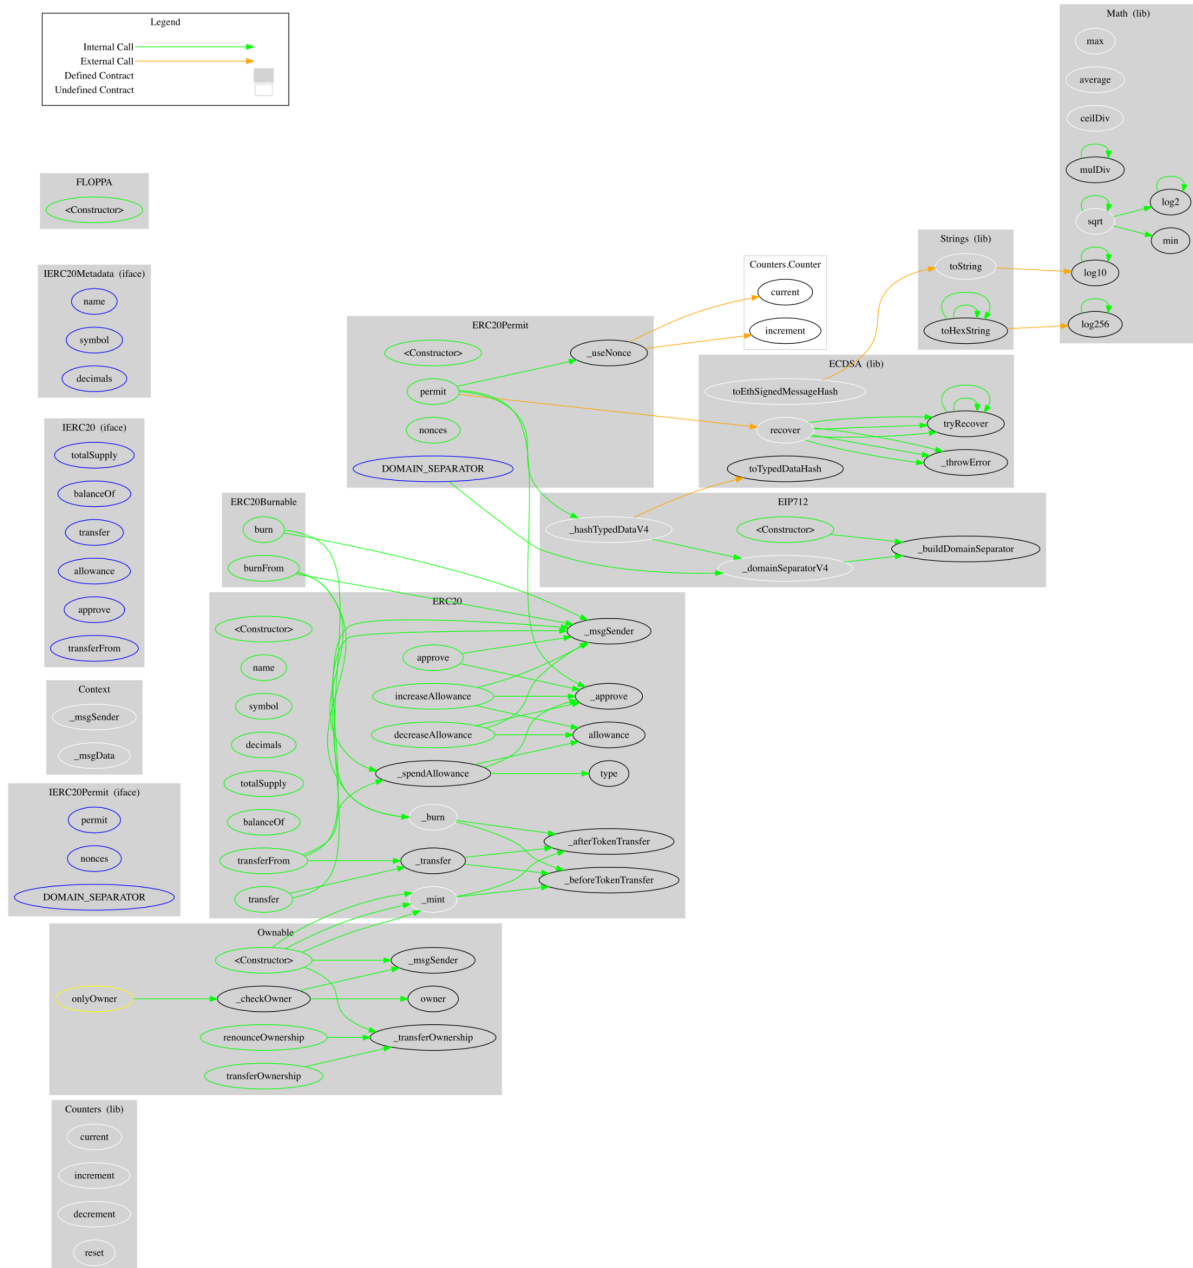

Summary

Floppa contract implements a token mechanism. This audit investigates security issues, business logic concerns and potential improvements. floppa is an interesting project that has a friendly and growing community. The Smart Contract analysis reported no compiler error or critical issues. The contract Owner can access some admin functions that can not be used in a malicious way to disturb the users' transactions.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk. Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security. Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis. Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives, false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

<https://www.cyberscope.io>