

Audit Report BRICS Token

March 2023

Type BEP20

Network BSC

Address 0x4856f6C8083c12E4E0321CB67fE24B7104aF8892

Audited by © cyberscope



Table of Contents

Table of Contents	1
Review	2
Audit Updates	2
Source Files	2
Analysis	3
MT - Mints Tokens	4
Description	4
Recommendation	4
Team Update 4 March	4
Diagnostics	5
L04 - Conformance to Solidity Naming Conventions	6
Description	6
Recommendation	6
L09 - Dead Code Elimination	8
Description	8
Recommendation	8
Functions Analysis	10
Inheritance Graph	13
Flow Graph	14
Summary	15
Team Update 4 March	15
Disclaimer	16
About Cyberscope	17



Review

Contract Name	BRICS
Compiler Version	v0.5.16+commit.9c3226ce
Optimization	200 runs
Explorer	https://bscscan.com/address/0x4856f6c8083c12e4e0321cb67fe24b710 4af8892
Address	0x4856f6c8083c12e4e0321cb67fe24b7104af8892
Network	BSC
Symbol	BRICS
Decimals	18
Total Supply	1.000.000.000

Audit Updates

Initial Audit	01 Mar 2023	
Ilitiai Audit	01 Wai 2023	

Source Files

Filename	SHA256
BRICS.sol	34eb2a9a65b5d890352aa019ef3097de8 6f84604628174afe659ff2e1332706f

Analysis

CriticalMediumMinor / InformativePass

Severity	Code	Description	Status
•	ST	Stops Transactions	Passed
•	OCTD	Transfers Contract's Tokens	Passed
•	OTUT	Transfers User's Tokens	Passed
•	ELFM	Exceeds Fees Limit	Passed
•	ULTW	Transfers Liquidity to Team Wallet	Passed
•	MT	Mints Tokens	Renounced
•	ВТ	Burns Tokens	Passed
•	ВС	Blacklists Addresses	Passed

MT - Mints Tokens

Criticality	Critical
Location	BRICS.sol#L501
Status	Renounced

Description

The contract owner has the authority to mint tokens. The owner may take advantage of it by calling the mint function. As a result, the contract tokens will be highly inflated.

```
function mint(uint256 amount) public onlyOwner returns (bool) {
   _mint(_msgSender(), amount);
   return true;
}
```

Recommendation

The team should carefully manage the private keys of the owner's account. We strongly recommend a powerful security mechanism that will prevent a single user from accessing the contract admin functions. That risk can be prevented by temporarily locking the contract or renouncing ownership.

Team Update 4 March

The team has renounced the ownership, hence the mint can not be executed from now on.

Diagnostics

CriticalMediumMinor / Informative

Severity	Code	Description	Status
•	L04	Conformance to Solidity Naming Conventions	Unresolved
•	L09	Dead Code Elimination	Unresolved



L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	BRICS.sol#L346,347,348,349
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

- 1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
- 2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
- 3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
- 4. Use indentation to improve readability and structure.
- 5. Use spaces between operators and after commas.
- 6. Use comments to explain the purpose and behavior of the code.
- 7. Keep lines short (around 120 characters) to improve readability.

```
uint256 public _totalSupply
uint8 public _decimals
string public _symbol
string public _name
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.



Find more information on the Solidity documentation https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention.



L09 - Dead Code Elimination

Criticality	Minor / Informative
Location	BRICS.sol#L553,588
Status	Unresolved

Description

In Solidity, dead code is code that is written in the contract, but is never executed or reached during normal contract execution. Dead code can occur for a variety of reasons, such as:

- Conditional statements that are always false.
- Functions that are never called.
- Unreachable code (e.g., code that follows a return statement).

Dead code can make a contract more difficult to understand and maintain, and can also increase the size of the contract and the cost of deploying and interacting with it.

```
function _burn(address account, uint256 amount) internal {
    require(account != address(0), "BEP20: burn from the zero
address");

    _balances[account] = _balances[account].sub(amount, "BEP20: burn
amount exceeds balance");
    _totalSupply = _totalSupply.sub(amount);
    emit Transfer(account, address(0), amount);
}

function _burnFrom(address account, uint256 amount) internal {
    _burn(account, amount);
    _approve(account, _msgSender(),
    _allowances[account][_msgSender()].sub(amount, "BEP20: burn amount
exceeds allowance"));
}
```

Recommendation



To avoid creating dead code, it's important to carefully consider the logic and flow of the contract and to remove any code that is not needed or that is never executed. This can help improve the clarity and efficiency of the contract.



Functions Analysis


Contract	Туре	Bases		
	Function Name	Visibility	Mutability	Modifiers
IBEP20	Interface			
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	balanceOf	External		-
	transfer	External	1	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
Context	Implementation			
		Internal	1	
	_msgSender	Internal		
	_msgData	Internal		
SafeMath	Library			
	add	Internal		
	sub	Internal		
	sub	Internal		
	mul	Internal		
	div	Internal		
	div	Internal		



	mod	Internal		
	mod	Internal		
Ownable	Implementation	Context		
		Internal	1	
	owner	Public		-
	renounceOwnership	Public	1	onlyOwner
	transferOwnership	Public	1	onlyOwner
	_transferOwnership	Internal	✓	
BRICS	Implementation	Context, IBEP20, Ownable		
		Public	1	-
	getOwner	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	totalSupply	External		-
	balanceOf	External		-
	transfer	External	1	-
	allowance	External		-
	approve	External	1	-
	transferFrom	External	1	-
	increaseAllowance	Public	1	-
	decreaseAllowance	Public	1	-
	mint	Public	1	onlyOwner
	_transfer	Internal	1	
	_mint	Internal	1	
	_burn	Internal	1	
	_approve	Internal	1	


|--|

Inheritance Graph

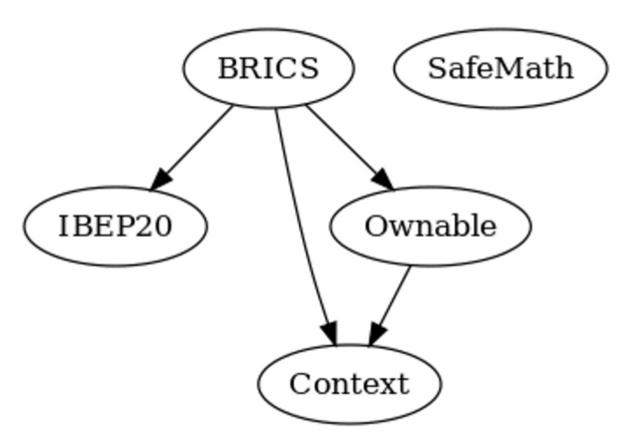



Flow Graph

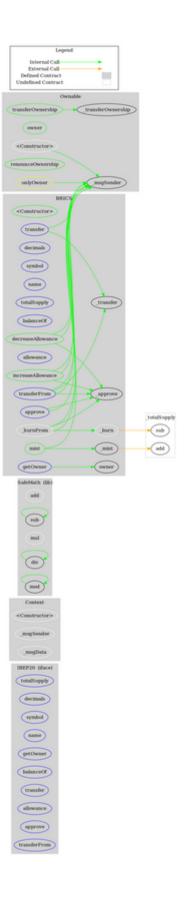

Summary

There are some functions that can be abused by the owner like mint tokens. if the contract owner abuses the mint functionality, then the contract will be highly inflated. A multi-wallet signing pattern will provide security against potential hacks. Temporarily locking the contract or renouncing ownership will eliminate all the contract threats.

Team Update 4 March

The team has renounced the ownership, hence the mint can not be executed from now on.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

https://www.cyberscope.io