

1D CNN — Architecture Variant Comparison

Generated 2026-05-19 21:59:23

Configuration (full)

Every parameter from the configuration cell is reproduced verbatim below. Copy the values back into the notebook config cell to regenerate this run. Derived counts (trials / channels / classes) are shown in *italics* in the Derived quantities section.

Data locations & class filter

DATA_PATHS[0]	/home/jestin/ThesisRepo/ML/NewTrainingData/NewNewDynamic
DATA_ROOT (legacy)	None
BATCH_TEST_ROOT	/home/jestin/ThesisRepo/ML/NewTestData/8_Jestin/NewNewDynamic
TEST_USER	8_Jestin
INCLUDE_LABELS	None
ReportPostfix	seed44

Sensor selection

Selection mode	SENSOR_GRID dict (fine-grained per-sensor)
USE_LEFT_HAND	True
USE_RIGHT_HAND	True
INCLUDE_SEGMENTS	['thumb', 'index', 'middle', 'ring', 'pinky', 'wrist']
SENSORS enabled (n)	44
SENSORS disabled (n)	0

SENSOR_GRID (✓ enabled, X disabled, — not present)

Hand / Segment	IMU_mid	IMU_prox	Flex_MCP	Flex_PIP
left palm	✓	—	—	—
left thumb	✓	✓	✓	✓
left index	✓	✓	✓	✓
left middle	✓	✓	✓	✓
left ring	✓	✓	✓	✓
left pinky	✓	✓	✓	✓
left wrist	✓	—	—	—
right palm	✓	—	—	—
right thumb	✓	✓	✓	✓
right index	✓	✓	✓	✓
right middle	✓	✓	✓	✓
right ring	✓	✓	✓	✓
right pinky	✓	✓	✓	✓
right wrist	✓	—	—	—

IMU channel modalities

USE_YPR	True
USE_QUAT	False
USE_ACCEL	True
USE_FLEX	False

Preprocessing

RESAMPLE_TO_N_STEPS	90
APPLY_BUTTERWORTH	True
BUTTERWORTH_CUTOFF_HZ	10.0
BUTTERWORTH_ORDER	4
SAMPLING_RATE_HZ	30.0
NORMALISATION	per_trial_zscore

Train / test split

TEST_SIZE	0.1
RANDOM_STATE	42
STRATIFY_SPLIT	True

Cross-validation

RUN_CROSS_VALIDATION	True
CV_FOLDS	7
CV_SHUFFLE	True

Augmentation (master switches)

AUGMENT_TRAINING_DATA	True
-----------------------	------

AUGMENTATION_COPIES_PER_SAMPLE	6
AUGMENTATION_RANDOM_SEED	42

AUGMENT_CONFIG (per transform)

Transform	Enabled	apply_prob	Other params
time_shift	✓	1.0	max_shift_steps=3, fill_mode=edge
time_warp	✓	1.0	speed_range=(0.95, 1.05)
time_mask	✓	1.0	max_masks=2, max_mask_size=3, fill_mode=zero
gaussian_noise	✗	1.0	std_ratio=0.02
amplitude_scale	✓	1.0	scale_range=(0.95, 1.05)
baseline_offset	✓	1.0	offset_std_ratio=0.02
channel_dropout	✓	1.0	drop_fraction=0.03, fill_mode=zero
left_right_swap	✗	0.5	—

Training hyperparameters

TRAIN_EPOCHS	60
TRAIN_BATCH_SIZE	16
TRAIN_VALIDATION_SPLIT	0.2
TRAIN_VERBOSE	1

Early stopping

EARLY_STOPPING_ENABLED	True
EARLY_STOPPING_MONITOR	val_loss
EARLY_STOPPING_PATIENCE	8
EARLY_STOPPING_MIN_DELTA	0.0
EARLY_STOPPING_RESTORE_BEST	True
EARLY_STOPPING_VERBOSE	1

Output paths

MODEL_OUTPUT_DIR	/home/jestin/ThesisRepo/ML/NewReports/NewDynamicReports/NN_Models
EXPERIMENT_LOG_PATH	/home/jestin/ThesisRepo/ML/NewReports/NewDynamicReports/NN_Models/experiment_results.csv

Variants in this run

Name	Builder	Description
Baseline	build_baseline	Conv1D(32,k=4)→Pool→Conv1D(64,k=4)→Pool→Flatten→Dense(64)→Dropout(0.3)→Softmax
Shallow	build_shallow	Single Conv block: Conv1D(32,k=5)→Pool→Flatten→Dense(32)→Dropout(0.3)→Softmax
Deep	build_deep	Three Conv blocks: Conv1D(32,4)→Conv1D(64,4)→Conv1D(128,3)→Flatten→Dense(128)→Dropout(0.4)→Softmax
BN_GAP	build_bn_gap	Conv+BN+ReLU ×3 with GlobalAveragePooling1D head — fewer params, less overfit
WideKernel	build_wide_kernel	Conv1D(32,k=8)→Pool→Conv1D(64,k=8)→Pool→Flatten→Dense(64)→Dropout(0.3)→Softmax
CNN_LSTM	build_cnn_lstm	Conv1D(32,4)→Pool→Conv1D(64,4)→Pool→Dropout→LSTM(64)→Dense(64)→Dropout→Softmax
CNN_BiLSTM	build_cnn_bilstm	Conv1D(32,4)→Pool→Conv1D(64,4)→Pool→Dropout→BiLSTM(64)→Dense(64)→Dropout→Softmax
Model_I_1D	build_model_i_1d	1-D adaptation of published Model I: Conv1D(32,k=5,s=3)→Pool→BN→Conv1D(64,k=2)→Conv1D(64,k=2)→Pool→Flatten→Dense(64)→Drop(0.5)→Softmax
Model_II_1D	build_model_ii_1d	1-D adaptation of published Model II (CNN+LSTM): Conv1D(32,k=5,s=3)→Conv1D(32,k=3)→BN→Pool→Drop→LSTM(64,seq)→Drop→LSTM(64)→Drop→Dense(128)→BN→Drop→Softmax

Derived quantities (read-only — computed from data)


Total trials (X.shape[0])	720
Train pool size	648
Hold-out size	72
Sequence length	90
Sensor channels	144
Number of classes	6
Class names	Double_ClosedHand_Flip_OpenHand, Double_FingerTips, Double_Okay_Ring_Middle_Pinky, Double_OpenHand_Flip_ClosedHand, Double_OpenHand_LPunch_R_Punch, Double_Snap
len(SENSOR_COLS)	144

Variant comparison (summary)


Variant	Params	CV mean (k=7)	CV std	Hold-out acc	Hold-out loss	Batch acc	Batch n
Baseline	109,094	0.9938	0.0079	1.0000	0.0005	0.9000	108/120
Shallow	67,334	0.9984	0.0038	1.0000	0.0000	0.8833	106/120
Deep	199,782	0.9907	0.0158	1.0000	0.0000	0.8750	105/120
BN_GAP	53,094	1.0000	0.0000	1.0000	0.0000	0.8500	102/120
WideKernel	123,430	0.9969	0.0049	1.0000	0.0000	0.9000	108/120
CNN_LSTM	64,294	1.0000	0.0000	1.0000	0.0000	0.8667	104/120
CNN_BiLSTM	101,414	0.9984	0.0038	1.0000	0.0000	0.8917	107/120
Model_I_1D	118,438	0.9953	0.0079	1.0000	0.0000	0.8917	107/120

Model_II_1D	93,766	0.9969	0.0049	1.0000	0.0000	0.9083	109/120
-------------	--------	--------	--------	--------	--------	--------	---------

Best on hold-out: **Baseline** · Best on CV: **BN_GAP**

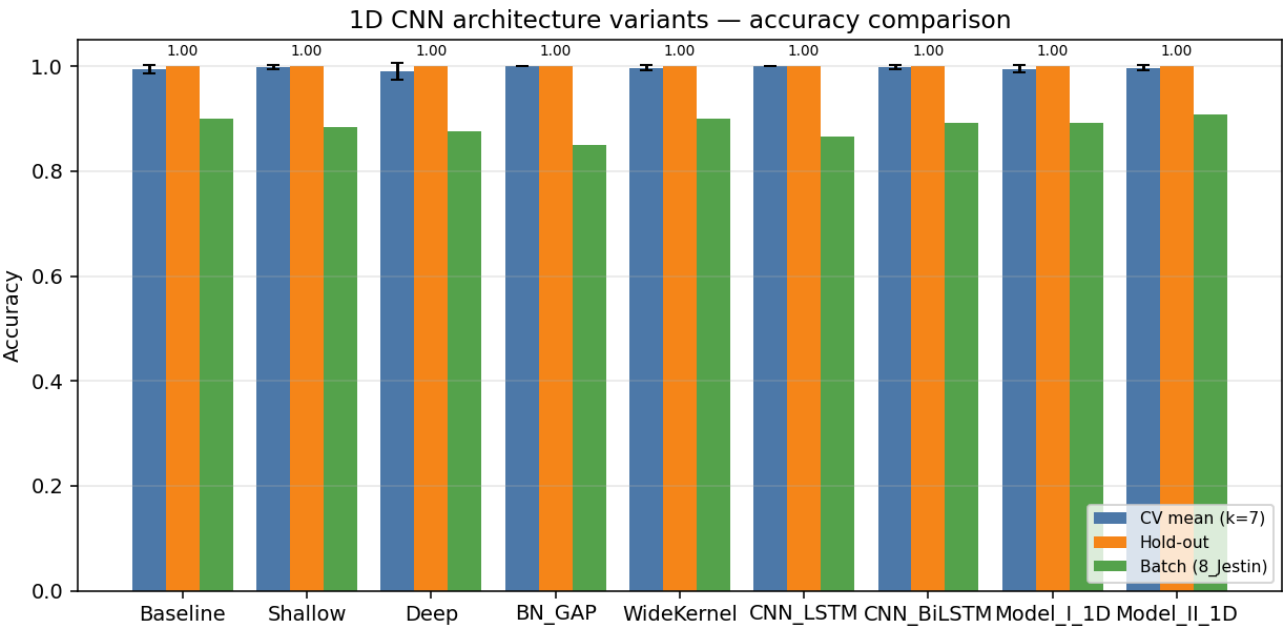

Training curves (final retrain on full training pool)

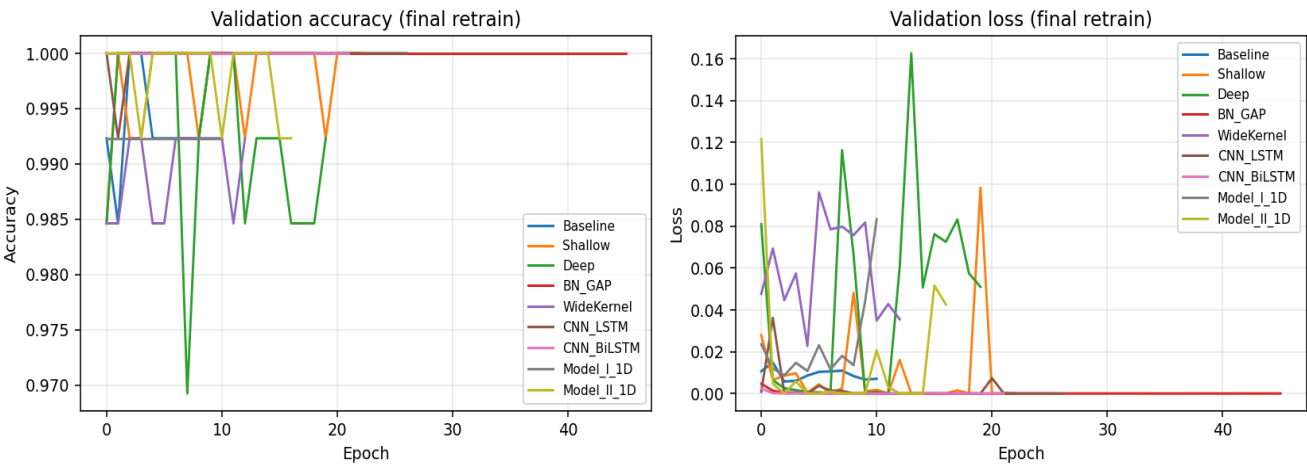

Variant: Baseline

Conv1D(32,k=4)→Pool→Conv1D(64,k=4)→Pool→Flatten→Dense(64)→Dropout(0.3)→Softmax

Trainable params	109,094
CV mean ± std	0.9938 ± 0.0079
Hold-out test acc / loss	1.0000 · 0.0005
Batch-test acc	0.9000 (108/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	1.0000
2	3885	93	0.9892	0.9892	0.9892
3	3885	93	1.0000	1.0000	1.0000
4	3885	93	1.0000	1.0000	1.0000
5	3892	92	1.0000	1.0000	0.9674
6	3892	92	0.9783	0.9891	0.9783
7	3892	92	0.9891	0.9891	0.9891

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72



Hold-out confusion matrix

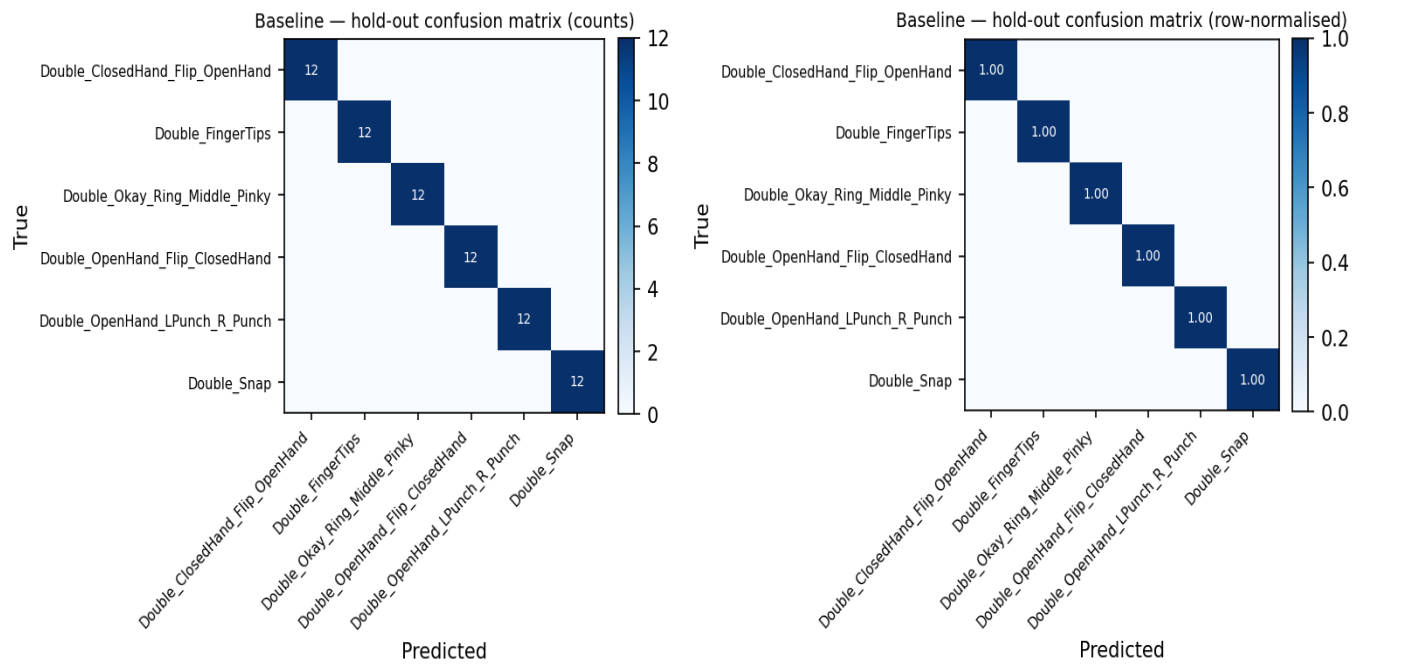

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	20	20	1.000
Double_FingerTips	17	20	0.850
Double_Okay_Ring_Middle_Pinky	14	20	0.700
Double_OpenHand_Flip_ClosedHand	20	20	1.000
Double_OpenHand_LPunch_R_Punch	18	20	0.900
Double_Snap	19	20	0.950
Overall	108	120	0.900

Batch confusion matrix (8_Jestin)

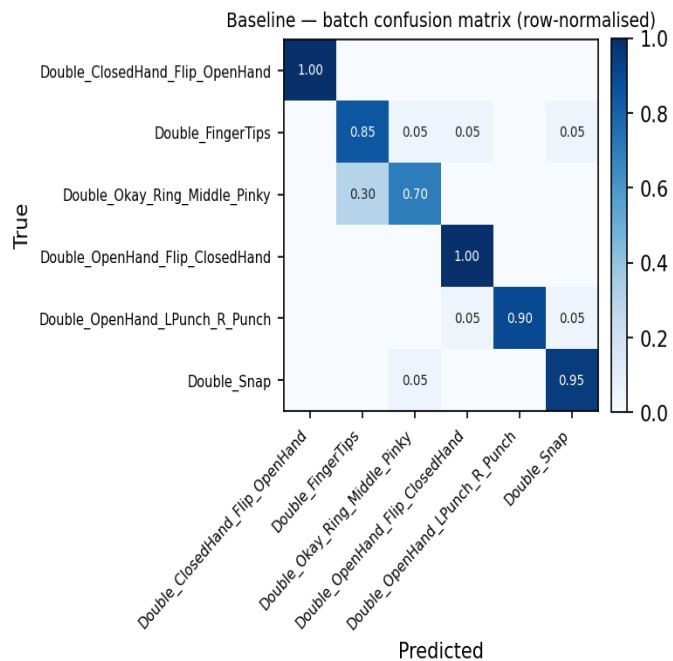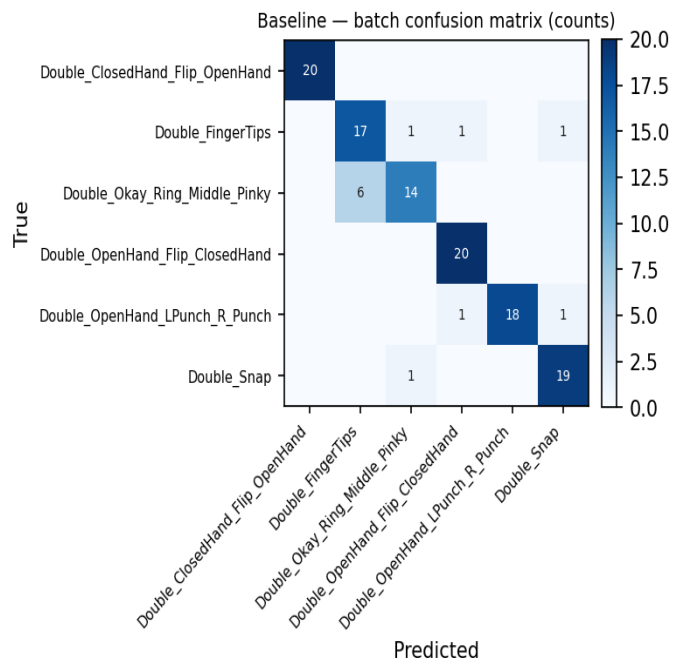

Variant: Shallow

Single Conv block: Conv1D(32,k=5)→Pool→Flatten→Dense(32)→Dropout(0.3)→Softmax

Trainable params	67,334
CV mean ± std	0.9984 ± 0.0038
Hold-out test acc / loss	1.0000 · 0.0000
Batch-test acc	0.8833 (106/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	1.0000
2	3885	93	1.0000	1.0000	0.9785
3	3885	93	1.0000	1.0000	0.9892
4	3885	93	1.0000	1.0000	1.0000
5	3892	92	1.0000	1.0000	0.9891
6	3892	92	0.9891	0.9891	0.9783
7	3892	92	1.0000	1.0000	0.9891

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72



Hold-out confusion matrix

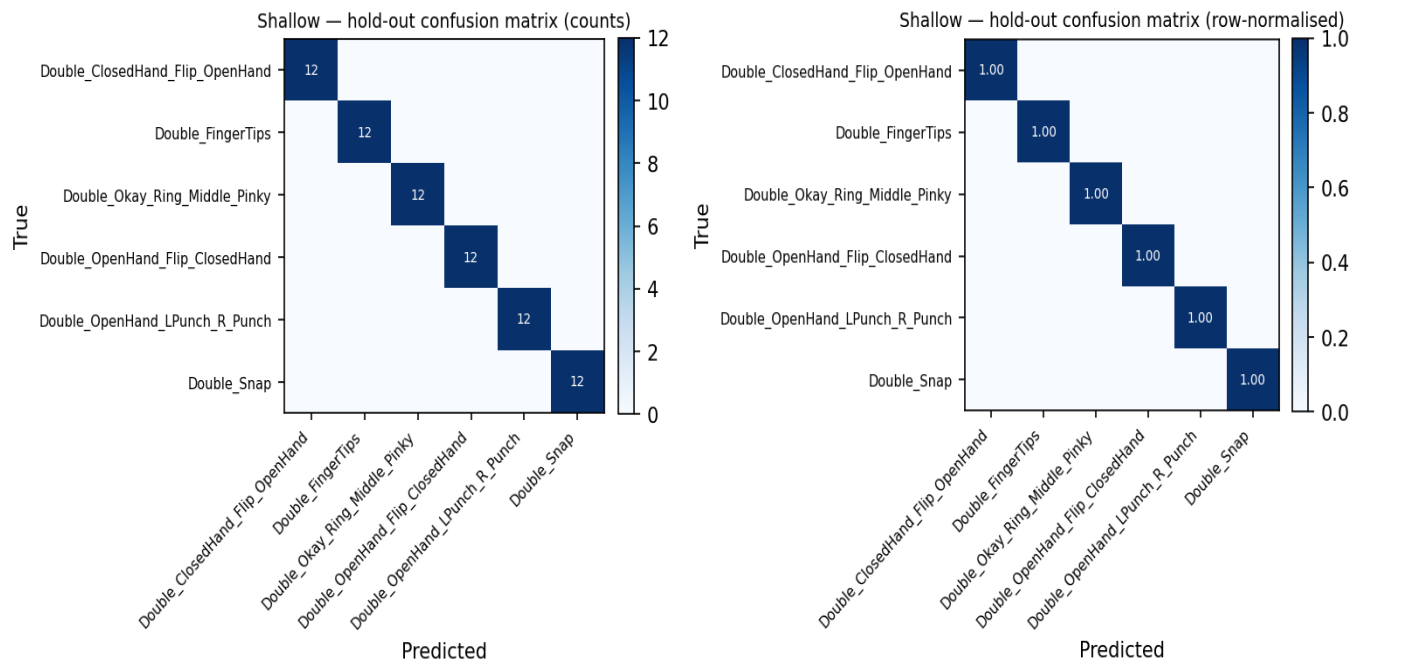

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	20	20	1.000
Double_FingerTips	13	20	0.650
Double_Okay_Ring_Middle_Pinky	16	20	0.800
Double_OpenHand_Flip_ClosedHand	20	20	1.000
Double_OpenHand_LPunch_R_Punch	18	20	0.900
Double_Snap	19	20	0.950
Overall	106	120	0.883

Batch confusion matrix (8_Jestin)

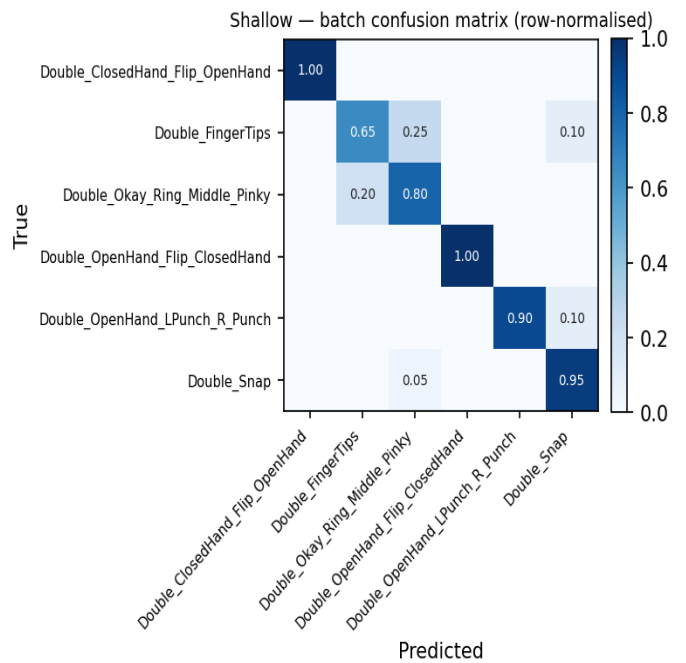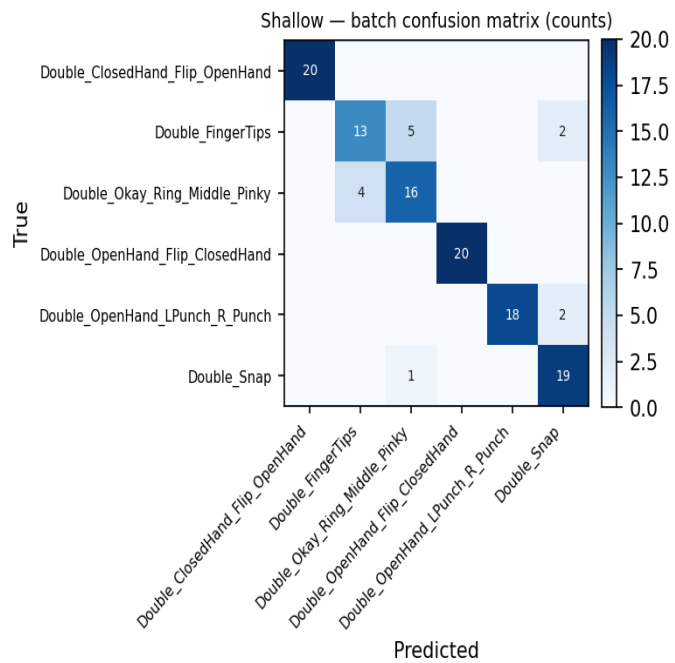

Variant: Deep

Three Conv blocks: Conv1D(32,4)→Conv1D(64,4)→Conv1D(128,3)→Flatten→Dense(128)→Dropout(0.4)→Softmax

Trainable params	199,782
CV mean ± std	0.9907 ± 0.0158
Hold-out test acc / loss	1.0000 · 0.0000
Batch-test acc	0.8750 (105/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	1.0000
2	3885	93	1.0000	1.0000	0.9892
3	3885	93	1.0000	1.0000	1.0000
4	3885	93	1.0000	1.0000	0.9892
5	3892	92	0.9783	0.9891	0.9783
6	3892	92	0.9565	0.9891	0.9891
7	3892	92	1.0000	1.0000	1.0000

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72



Hold-out confusion matrix

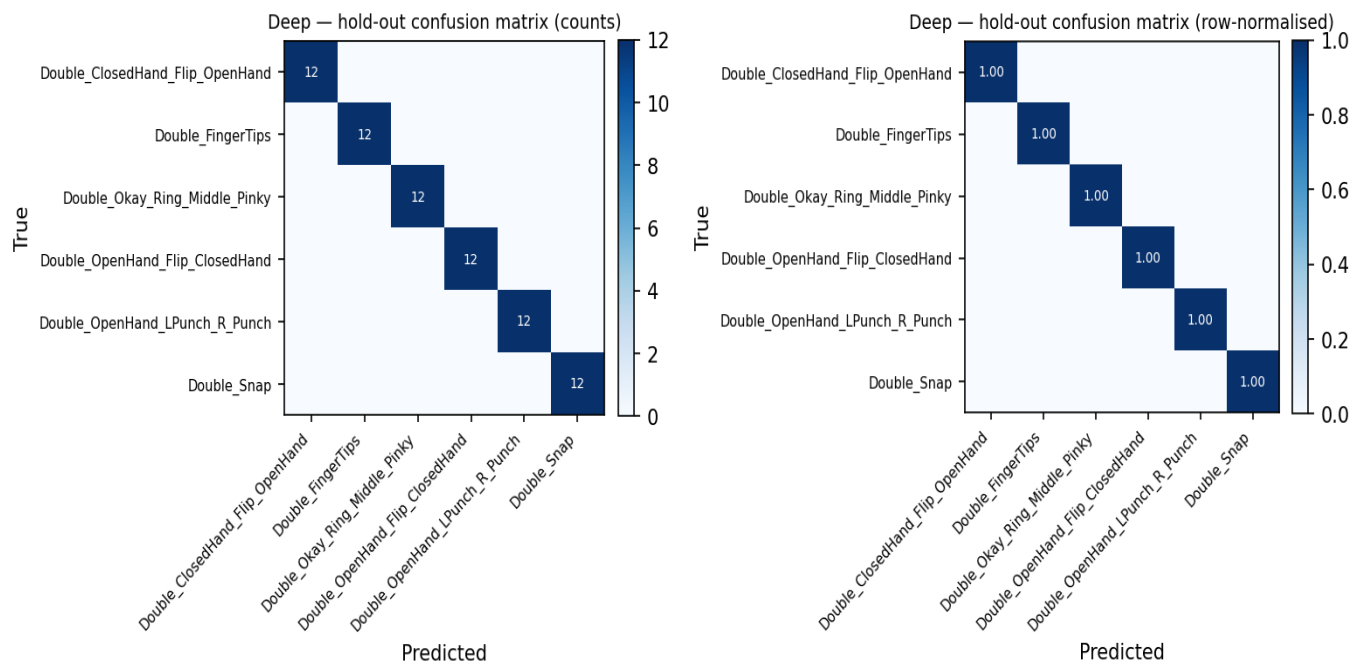

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	20	20	1.000
Double_FingerTips	13	20	0.650
Double_Okay_Ring_Middle_Pinky	14	20	0.700
Double_OpenHand_Flip_ClosedHand	20	20	1.000
Double_OpenHand_LPunch_R_Punch	18	20	0.900
Double_Snap	20	20	1.000
Overall	105	120	0.875

Batch confusion matrix (8_Jestin)

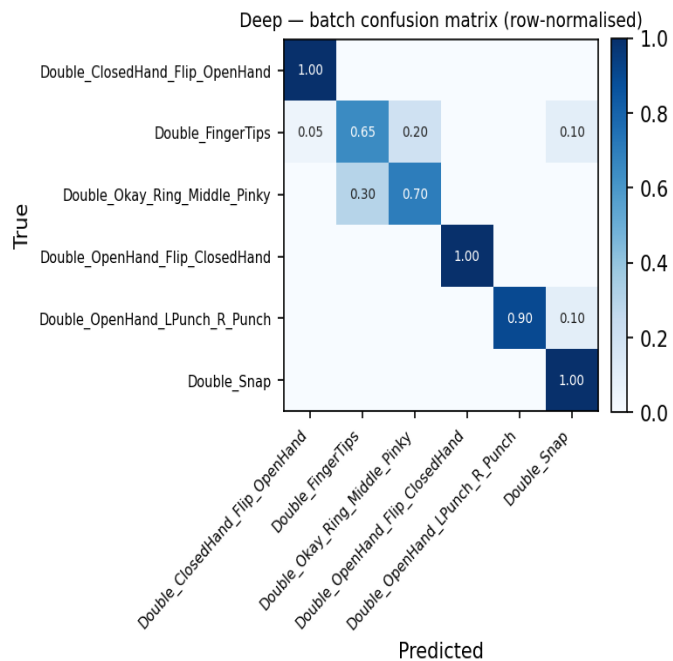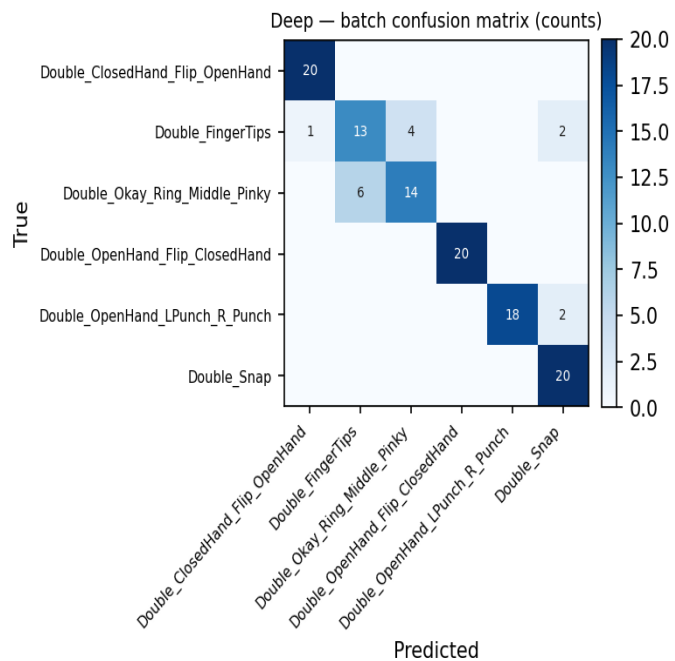

Variant: BN_GAP

Conv+BN+ReLU ×3 with GlobalAveragePooling1D head — fewer params, less overfit

Trainable params	53,094
CV mean ± std	1.0000 ± 0.0000
Hold-out test acc / loss	1.0000 · 0.0000
Batch-test acc	0.8500 (102/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	1.0000
2	3885	93	1.0000	1.0000	1.0000
3	3885	93	1.0000	1.0000	1.0000
4	3885	93	1.0000	1.0000	1.0000
5	3892	92	1.0000	1.0000	1.0000
6	3892	92	1.0000	1.0000	1.0000
7	3892	92	1.0000	1.0000	1.0000

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72



Hold-out confusion matrix

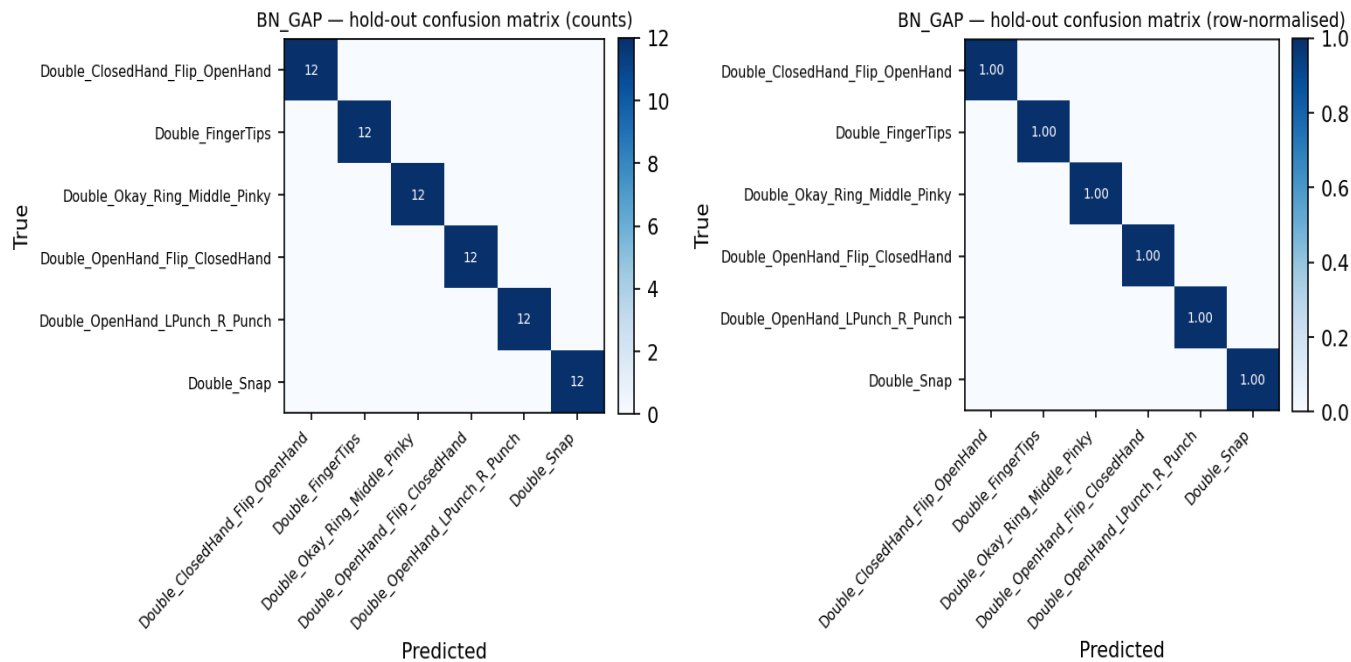

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	20	20	1.000
Double_FingerTips	9	20	0.450
Double_Okay_Ring_Middle_Pinky	20	20	1.000
Double_OpenHand_Flip_ClosedHand	14	20	0.700
Double_OpenHand_LPunch_R_Punch	19	20	0.950
Double_Snap	20	20	1.000
Overall	102	120	0.850

Batch confusion matrix (8_Jestin)

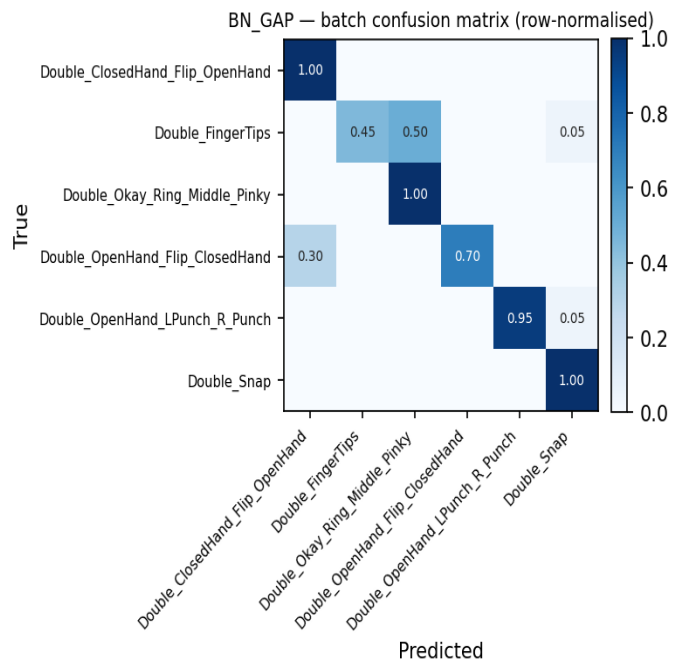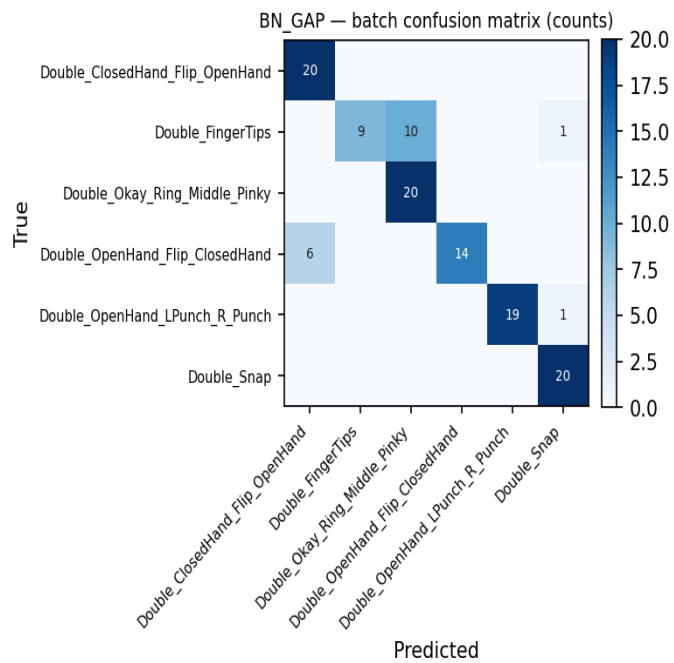

Variant: WideKernel

Conv1D(32,k=8)→Pool→Conv1D(64,k=8)→Pool→Flatten→Dense(64)→Dropout(0.3)→Softmax

Trainable params	123,430
CV mean ± std	0.9969 ± 0.0049
Hold-out test acc / loss	1.0000 · 0.0000
Batch-test acc	0.9000 (108/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	0.9892
2	3885	93	1.0000	1.0000	0.9892
3	3885	93	1.0000	1.0000	1.0000
4	3885	93	1.0000	1.0000	1.0000
5	3892	92	0.9891	0.9891	0.9891
6	3892	92	0.9891	0.9891	0.9457
7	3892	92	1.0000	1.0000	1.0000

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72



Hold-out confusion matrix

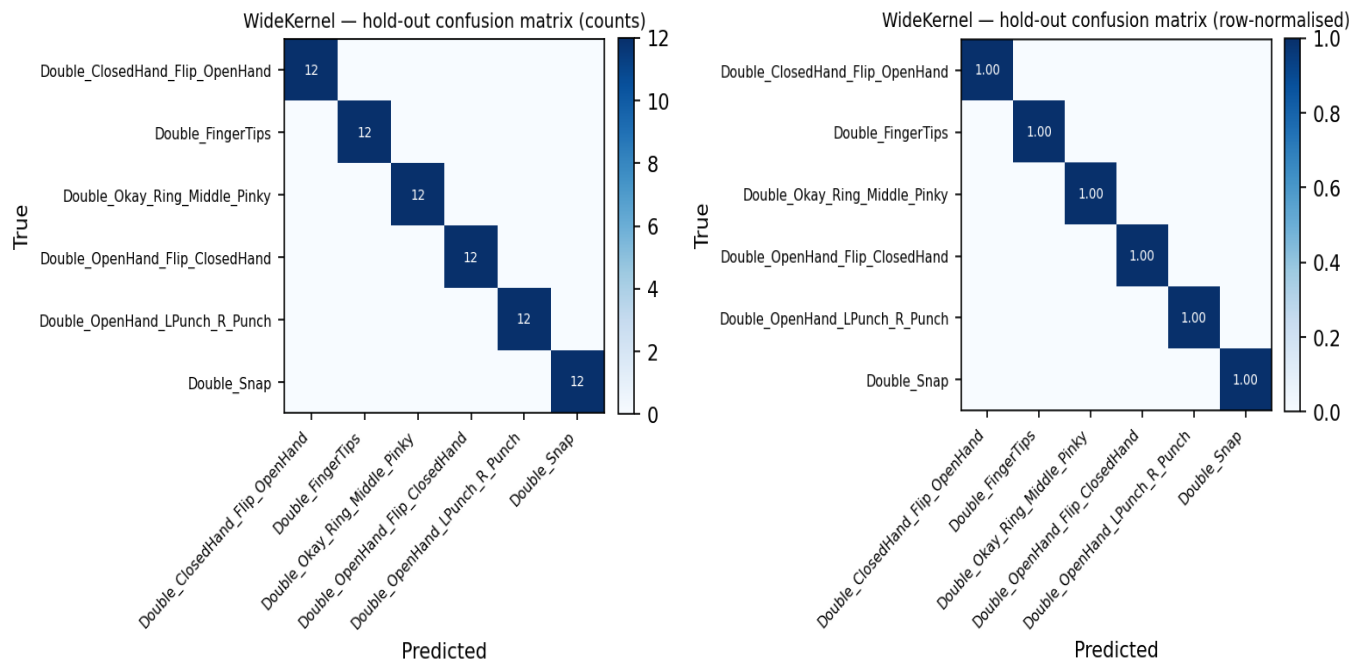

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	19	20	0.950
Double_FingerTips	14	20	0.700
Double_Okay_Ring_Middle_Pinky	16	20	0.800
Double_OpenHand_Flip_ClosedHand	20	20	1.000
Double_OpenHand_LPunch_R_Punch	19	20	0.950
Double_Snap	20	20	1.000
Overall	108	120	0.900

Batch confusion matrix (8_Jestin)

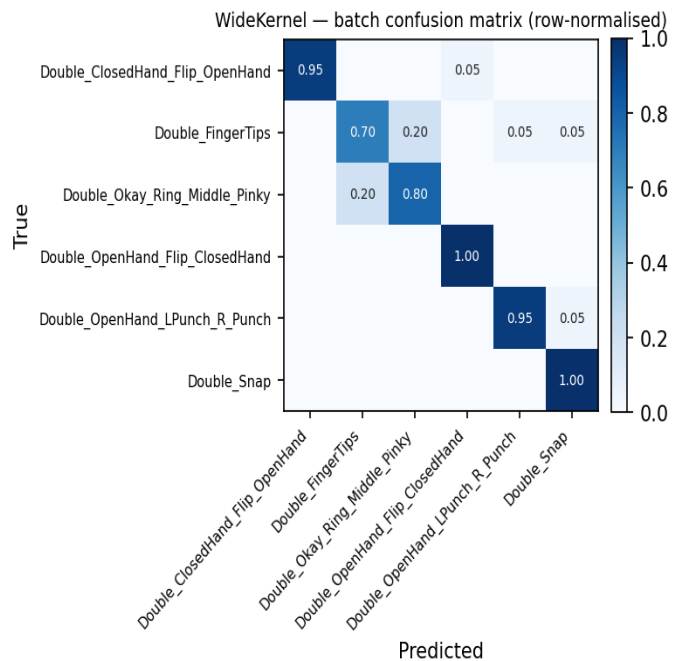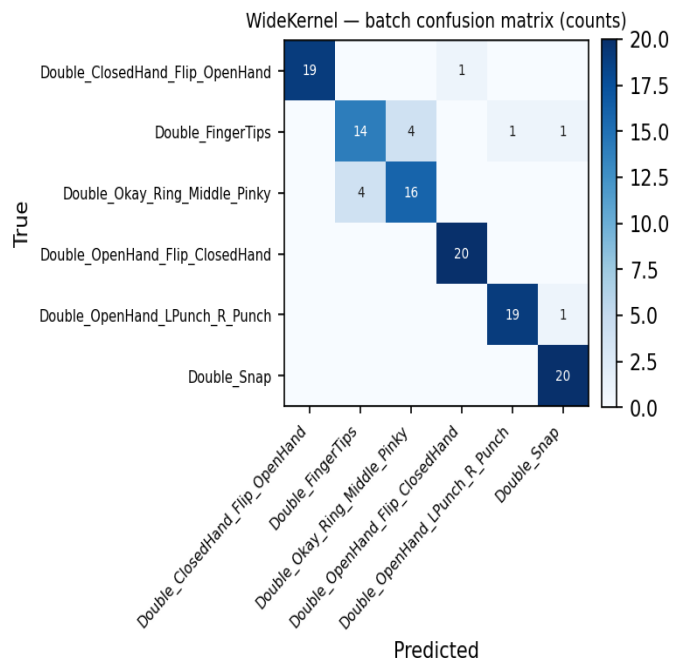

Variant: CNN_LSTM

Conv1D(32,4)→Pool→Conv1D(64,4)→Pool→Dropout→LSTM(64)→Dense(64)→Dropout→Softmax

Trainable params	64,294
CV mean ± std	1.0000 ± 0.0000
Hold-out test acc / loss	1.0000 · 0.0000
Batch-test acc	0.8667 (104/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	1.0000
2	3885	93	1.0000	1.0000	0.9892
3	3885	93	1.0000	1.0000	0.9892
4	3885	93	1.0000	1.0000	1.0000
5	3892	92	1.0000	1.0000	0.9891
6	3892	92	1.0000	1.0000	0.9891
7	3892	92	1.0000	1.0000	1.0000

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72



Hold-out confusion matrix

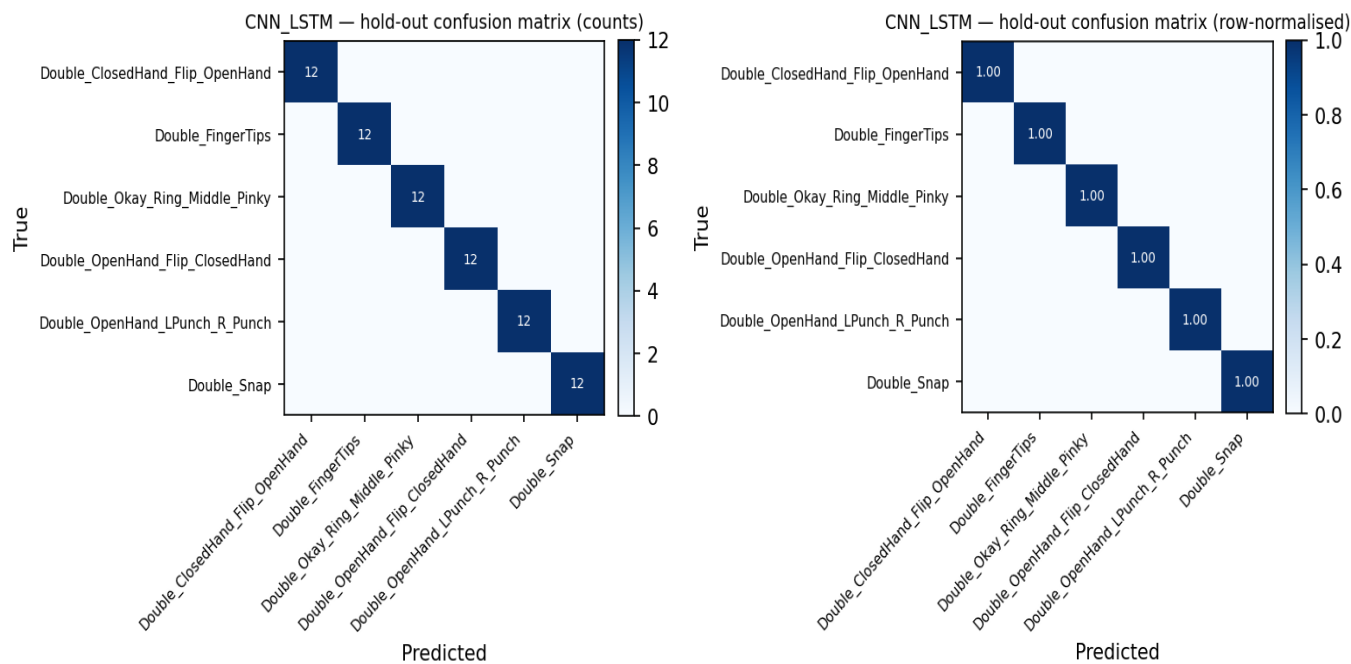

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	19	20	0.950
Double_FingerTips	11	20	0.550
Double_Okay_Ring_Middle_Pinky	16	20	0.800
Double_OpenHand_Flip_ClosedHand	20	20	1.000
Double_OpenHand_LPunch_R_Punch	18	20	0.900
Double_Snap	20	20	1.000
Overall	104	120	0.867

Batch confusion matrix (8_Jestin)

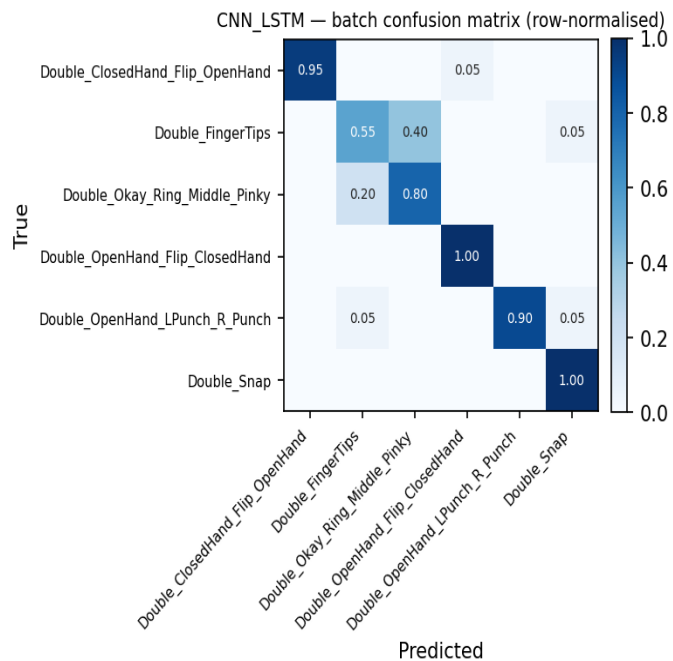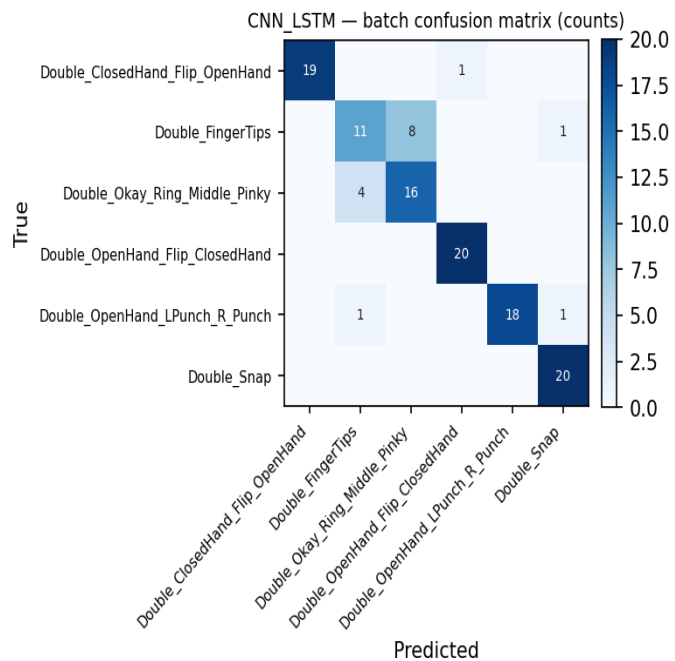

Variant: CNN_BiLSTM

Conv1D(32,4)→Pool→Conv1D(64,4)→Pool→Dropout→BiLSTM(64)→Dense(64)→Dropout→Softmax

Trainable params	101,414
CV mean ± std	0.9984 ± 0.0038
Hold-out test acc / loss	1.0000 · 0.0000
Batch-test acc	0.8917 (107/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	1.0000
2	3885	93	1.0000	1.0000	0.9892
3	3885	93	1.0000	1.0000	1.0000
4	3885	93	1.0000	1.0000	0.9892
5	3892	92	0.9891	0.9891	0.9891
6	3892	92	1.0000	1.0000	1.0000
7	3892	92	1.0000	1.0000	1.0000

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72



Hold-out confusion matrix

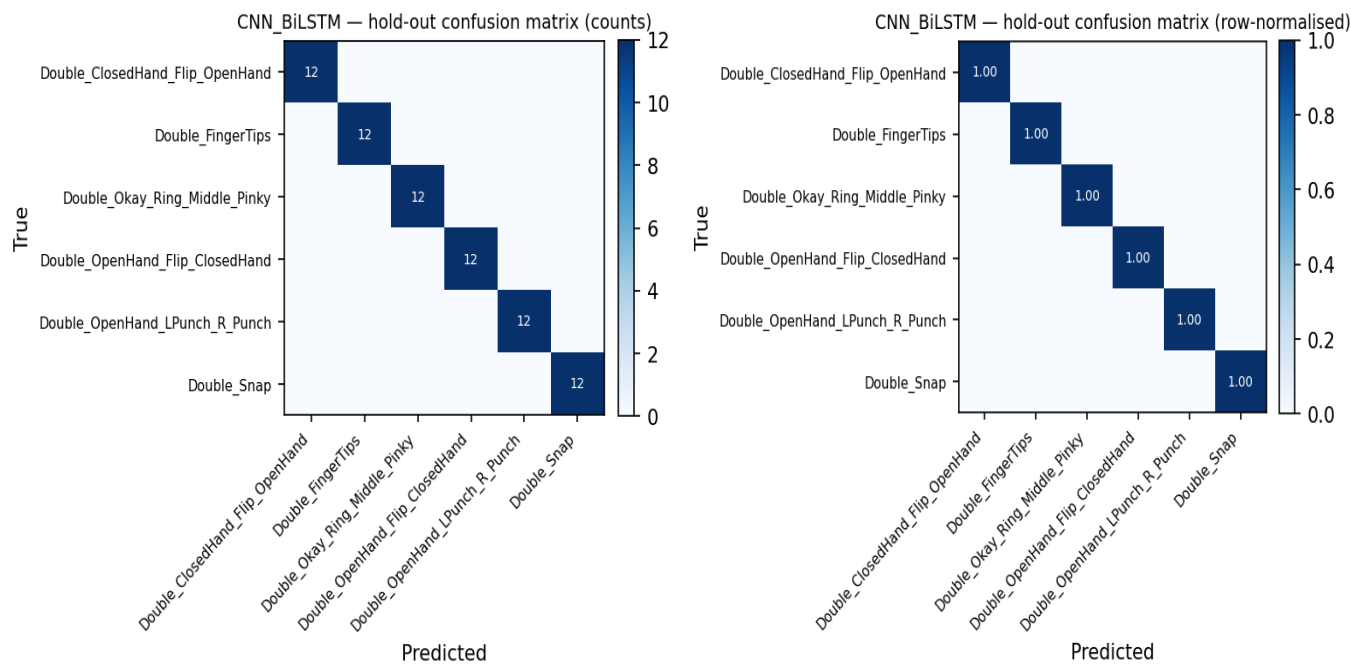

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	19	20	0.950
Double_FingerTips	12	20	0.600
Double_Okay_Ring_Middle_Pinky	17	20	0.850
Double_OpenHand_Flip_ClosedHand	20	20	1.000
Double_OpenHand_LPunch_R_Punch	19	20	0.950
Double_Snap	20	20	1.000
Overall	107	120	0.892

Batch confusion matrix (8_Jestin)

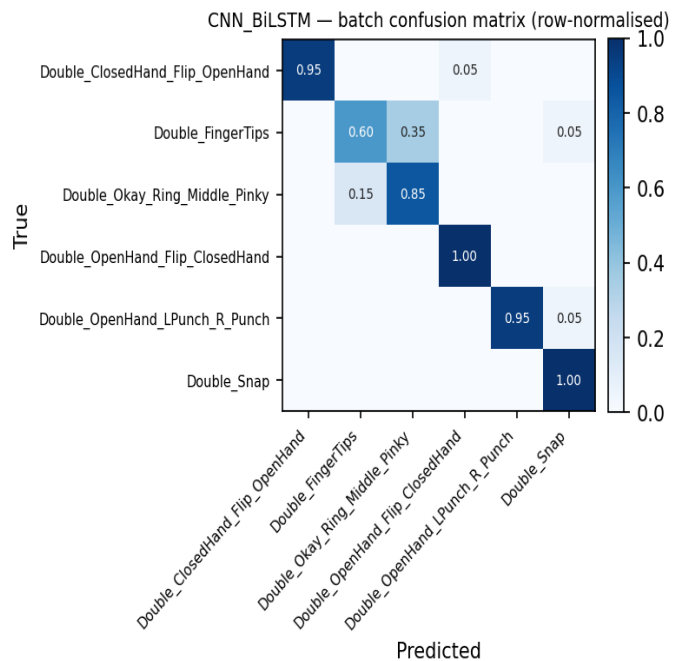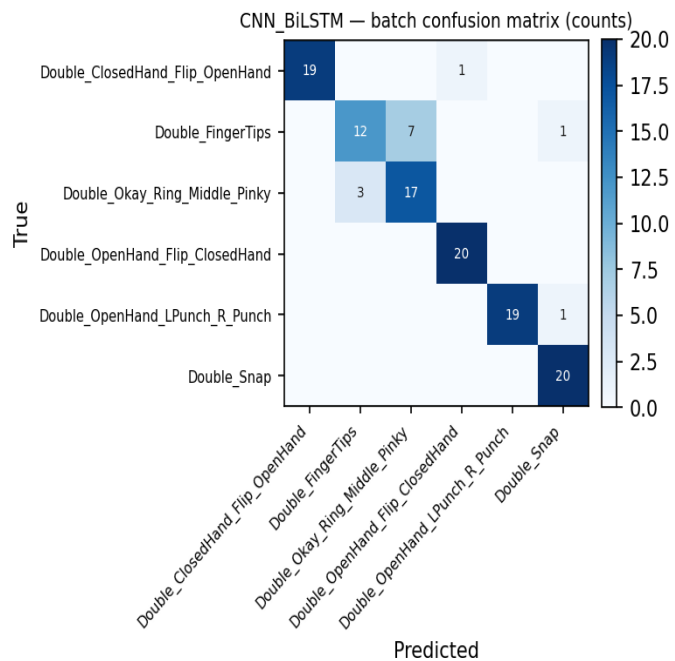

Variant: Model_I_1D

1-D adaptation of published Model I:
Conv1D(32,k=5,s=3)→Pool→BN→Conv1D(64,k=2)→Conv1D(64,k=2)→Pool→Flatten→Dense(64)→Drop(0.5)→Softmax

Trainable params	118,438
CV mean ± std	0.9953 ± 0.0079
Hold-out test acc / loss	1.0000 · 0.0000
Batch-test acc	0.8917 (107/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	1.0000
2	3885	93	1.0000	1.0000	0.9892
3	3885	93	1.0000	1.0000	1.0000
4	3885	93	1.0000	1.0000	1.0000
5	3892	92	0.9891	0.9891	0.9891
6	3892	92	0.9783	0.9891	0.9783
7	3892	92	1.0000	1.0000	1.0000

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72



Hold-out confusion matrix

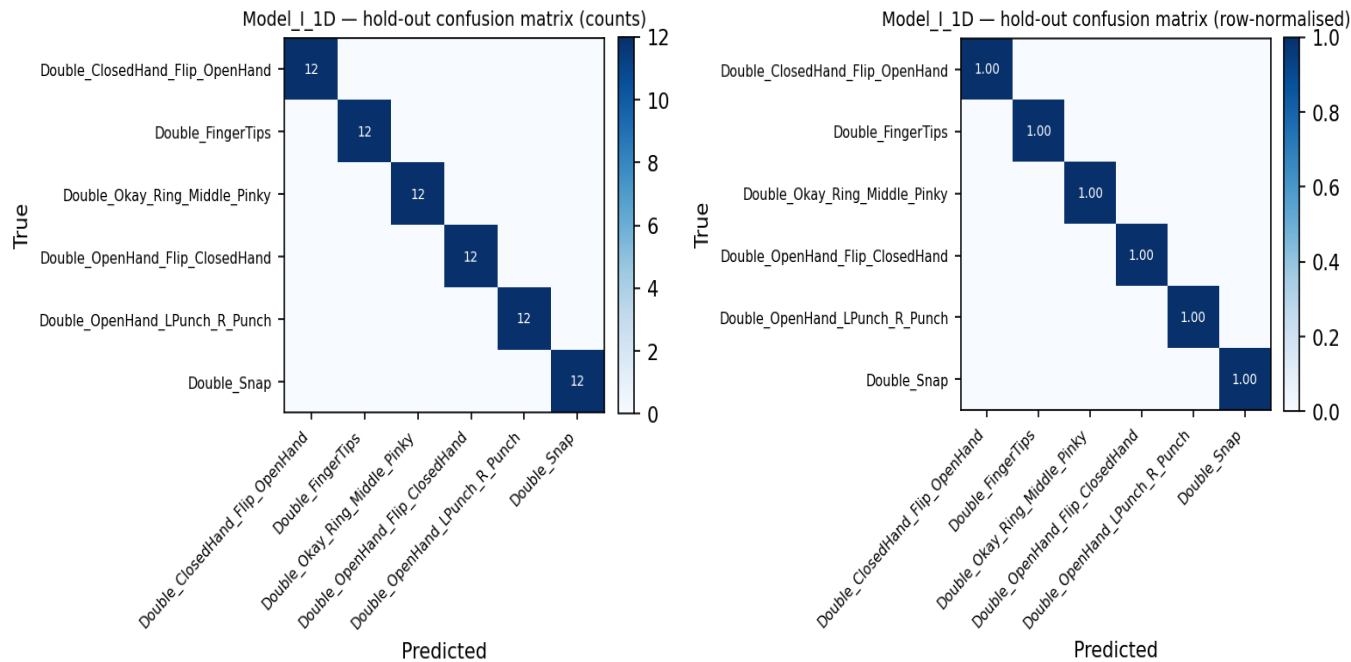

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	19	20	0.950
Double_FingerTips	13	20	0.650
Double_Okay_Ring_Middle_Pinky	16	20	0.800
Double_OpenHand_Flip_ClosedHand	20	20	1.000
Double_OpenHand_LPunch_R_Punch	20	20	1.000
Double_Snap	19	20	0.950
Overall	107	120	0.892

Batch confusion matrix (8_Jestin)

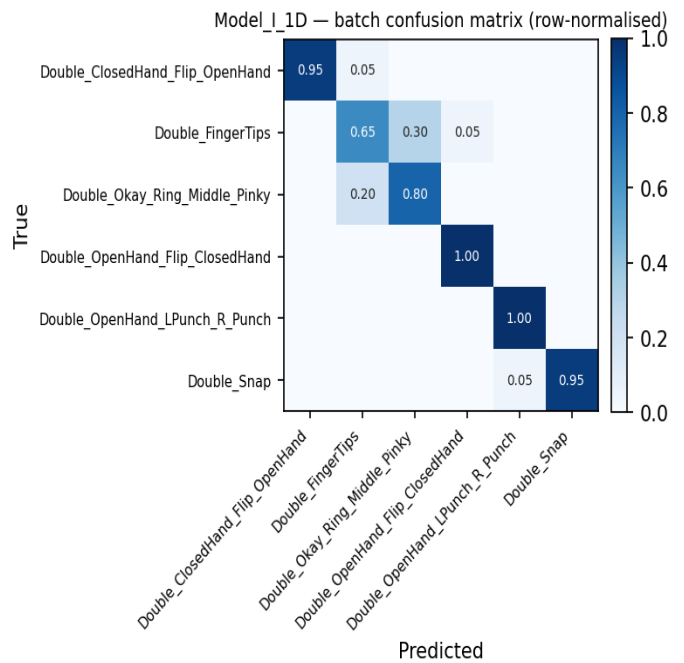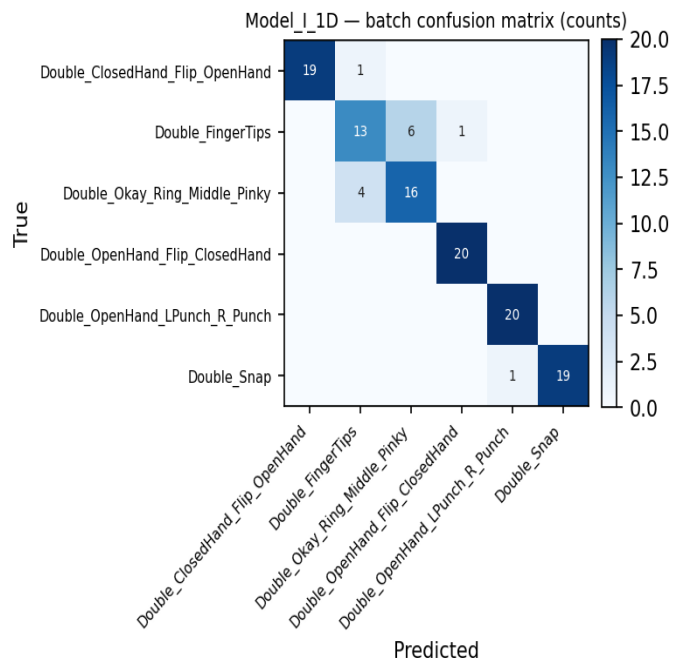

Variant: Model_II_1D

1-D adaptation of published Model II (CNN+LSTM):
Conv1D(32,k=5,s=3)→Conv1D(32,k=3)→BN→Pool→Drop→LSTM(64,seq)→Drop→LSTM(64)→Drop→Dense(128)→BN→Drop→Softmax

Trainable params	93,766
CV mean ± std	0.9969 ± 0.0049
Hold-out test acc / loss	1.0000 · 0.0000
Batch-test acc	0.9083 (109/120)


Cross-validation folds

Fold	Train (post-aug)	Val	Val acc	Best val	Final val
1	3885	93	1.0000	1.0000	1.0000
2	3885	93	1.0000	1.0000	0.9892
3	3885	93	1.0000	1.0000	1.0000
4	3885	93	1.0000	1.0000	1.0000
5	3892	92	0.9891	0.9891	0.9891
6	3892	92	0.9891	0.9891	0.9891
7	3892	92	1.0000	1.0000	1.0000

Per-class hold-out metrics

Class	Precision	Recall	F1	Support
Double_ClosedHand_Flip_OpenHand	1.000	1.000	1.000	12
Double_FingerTips	1.000	1.000	1.000	12
Double_Okay_Ring_Middle_Pinky	1.000	1.000	1.000	12
Double_OpenHand_Flip_ClosedHand	1.000	1.000	1.000	12
Double_OpenHand_LPunch_R_Punch	1.000	1.000	1.000	12
Double_Snap	1.000	1.000	1.000	12
macro avg	1.000	1.000	1.000	72
weighted avg	1.000	1.000	1.000	72

Hold-out confusion matrix

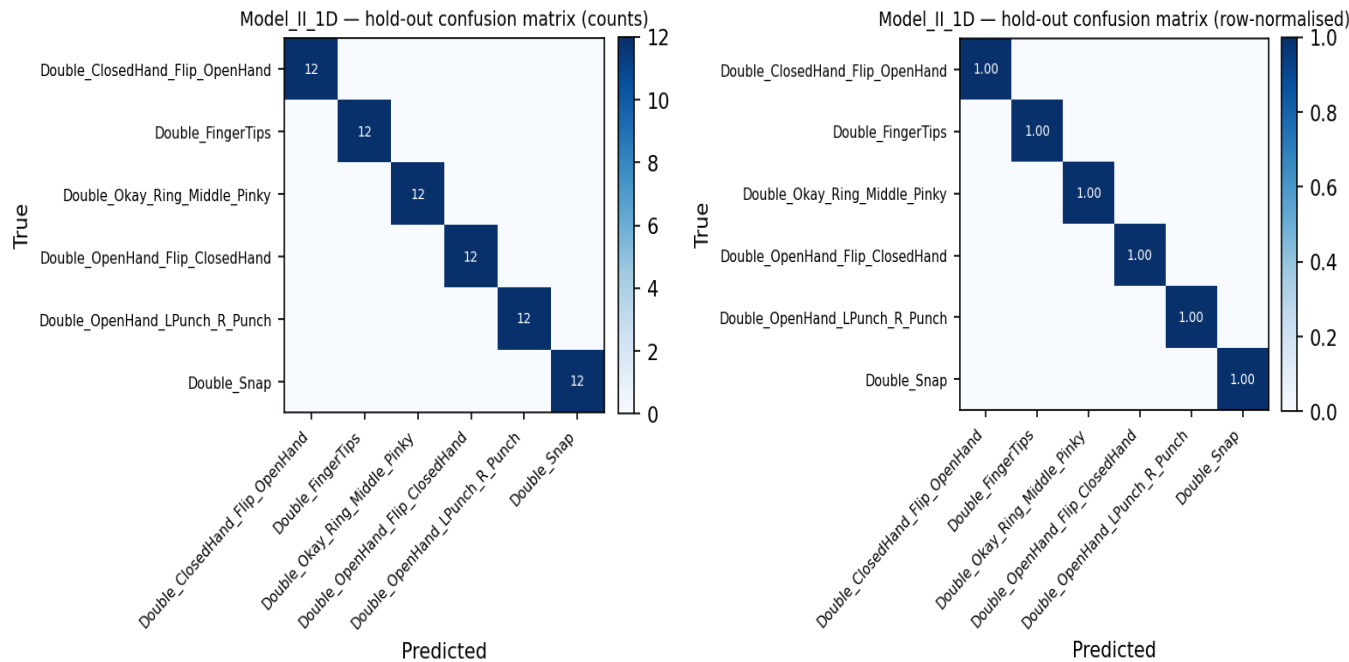

Batch test per class (8_Jestin)

Class	Correct	Total	Accuracy
Double_ClosedHand_Flip_OpenHand	20	20	1.000
Double_FingerTips	12	20	0.600
Double_Okay_Ring_Middle_Pinky	19	20	0.950
Double_OpenHand_Flip_ClosedHand	19	20	0.950
Double_OpenHand_LPunch_R_Punch	19	20	0.950
Double_Snap	20	20	1.000
Overall	109	120	0.908

Batch confusion matrix (8_Jestin)

