




- 1) Open OVA file in VMWare.

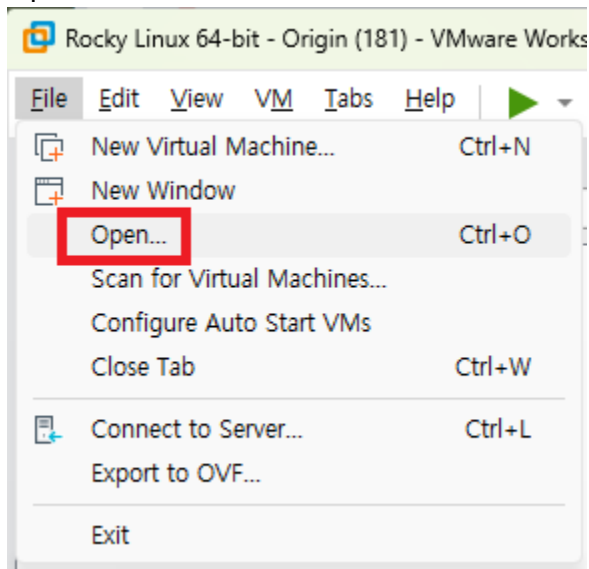


- 2) Select "PasswordlessX1280_for_WordPress.ova" file.

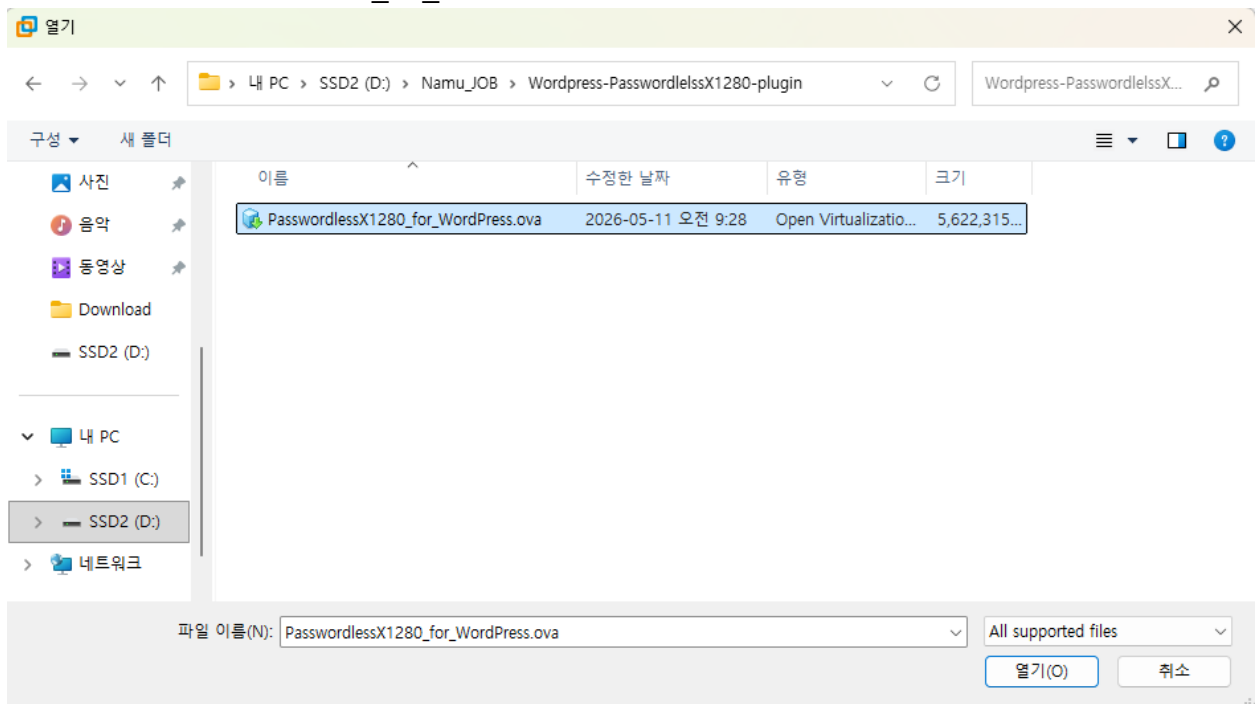


3) Import

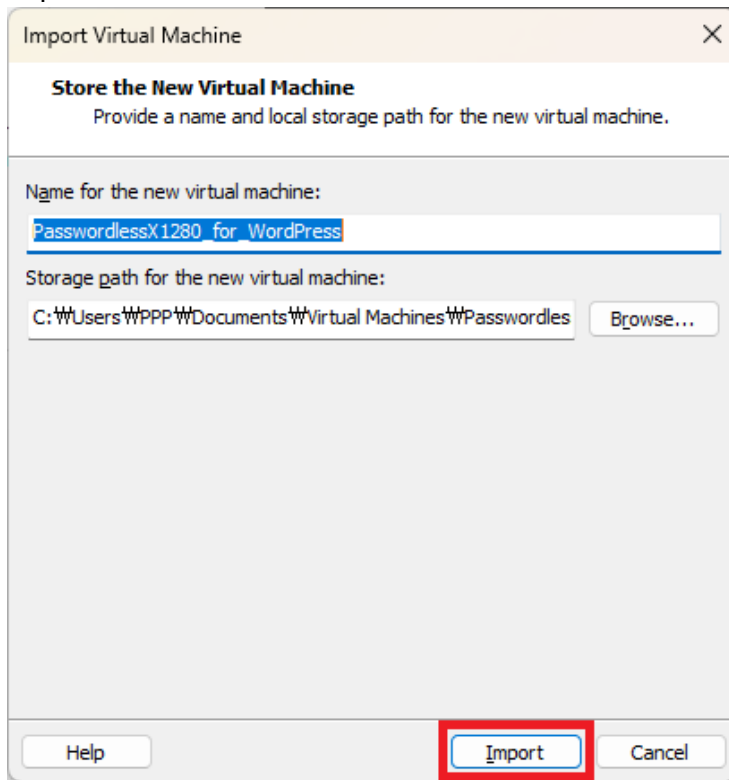


4) Power on the virtual machine.

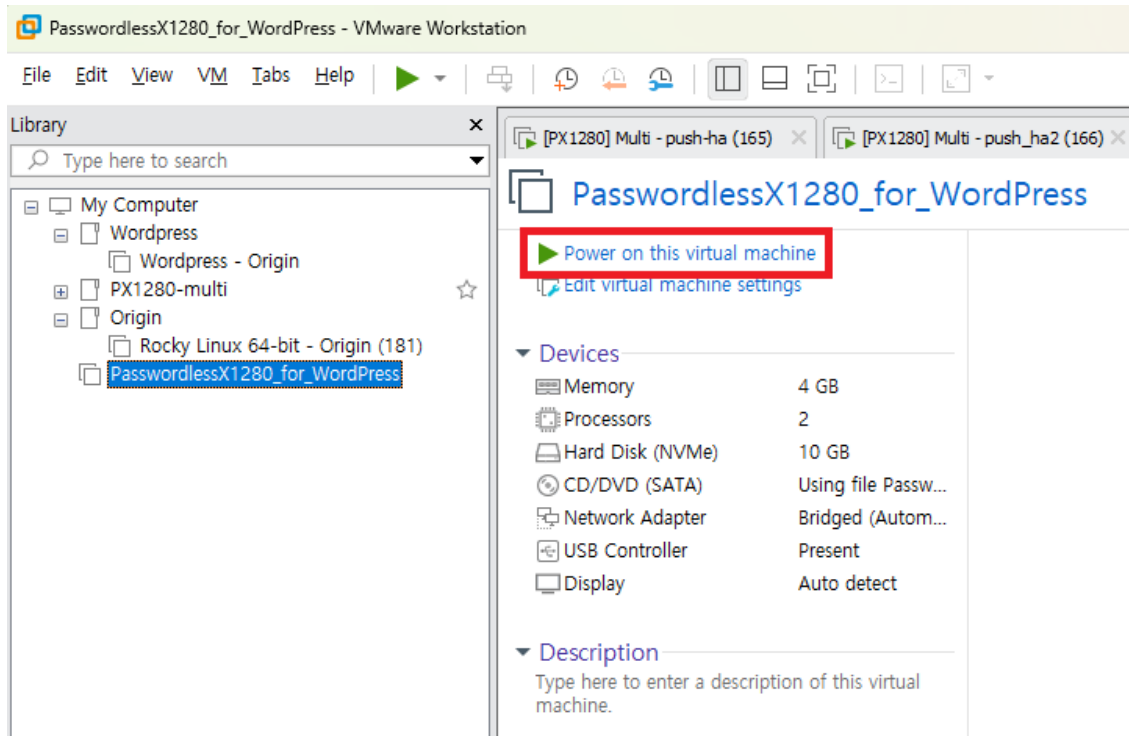


5) Rocky Linux starts automatically.

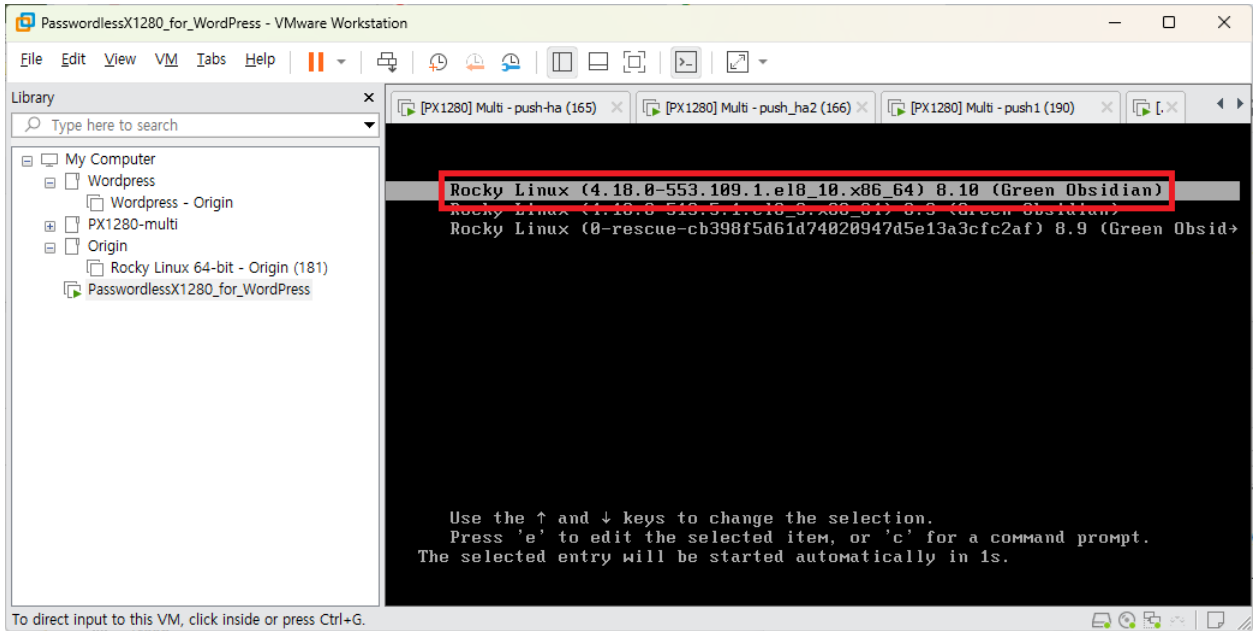

6) Rocky Linux login account : **root / 1qaz@WSX12**

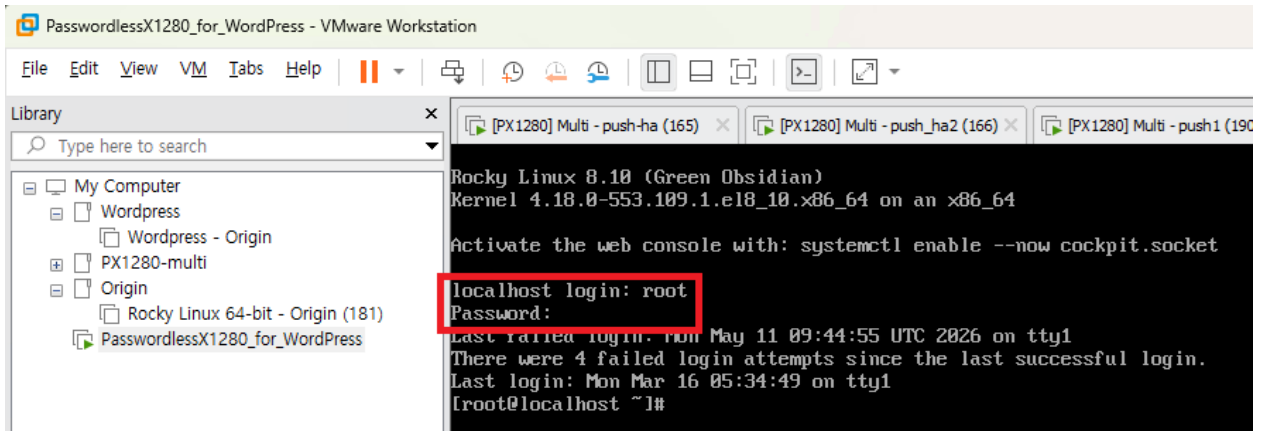

7) VMware Network check

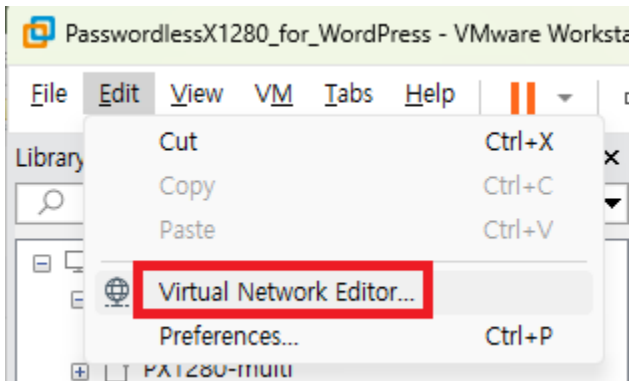

Change Settings

Virtual Network Editor

Name	Type	External Connection	Host Connection	DHCP	Subnet Address
VMnet1	Host-only	-	Connected	Enabled	192.168.199.0
VMnet8	NAT	NAT	Connected	Enabled	192.168.154.0

Add Network... Remove Network Rename Network...

VMnet Information

☐ Bridged (connect VMs directly to the external network)
Bridged to: Automatic Settings...

☐ NAT (shared host's IP address with VMs)
NAT Settings...

☒ Host-only (connect VMs internally in a private network)

☒ Connect a host virtual adapter to this network
Host virtual adapter name: VMware Network Adapter VMnet1

☒ Use local DHCP service to distribute IP address to VMs
DHCP Settings...

Subnet IP: Subnet mask:

⚠ Administrator privileges are required to modify the network configuration. [Change Settings](#)

Restore Defaults Import... Export... OK Cancel Apply Help

Bridged to Automatic

Virtual Network Editor

Name	Type	External Connection	Host Connection	DHCP	Subnet Address
VMnet0	Bridged	Auto-bridging	-	-	-
VMnet1	Host-only	-	Connected	Enabled	192.168.199.0
VMnet8	NAT	NAT	Connected	Enabled	192.168.154.0

Add Network... Remove Network Rename Network...

VMnet Information

☒ Bridged (connect VMs directly to the external network)
Bridged to: Automatic Settings...

☐ NAT (shared host's IP address with VMs)
NAT Settings...

☐ Host-only (connect VMs internally in a private network)

☐ Connect a host virtual adapter to this network
Host virtual adapter name: VMware Network Adapter VMnet0

☐ Use local DHCP service to distribute IP address to VMs
DHCP Settings...

Subnet IP: Subnet mask:

Restore Defaults Import... Export... OK Cancel Apply Help

- 8) Move to the home folder.

`cd /home`

```
[root@localhost ~]# cd /home
[root@localhost home]# ls -l
total 12
-rwxr-xr-x. 1 root root 535 Mar 16 05:00 check_chrony.sh
-rwxr-xr-x. 1 root root 666 Mar 12 07:42 install_PX1280_docker.sh
-rwxr-xr-x. 1 root root 1723 Mar 13 07:56 setup_all.sh
[root@localhost home]#
```

- 9) Execute the script file. (Check the server's IP.)

`./setup_all.sh`

```
[root@localhost home]# ./setup_all.sh
-----
Your IP: 61.97.143.181
-----


Update wordpress URL # http://61.97.143.181
>>>> Check datetime start
chronyd is already running.
200 OK
datetime checking complete <<<<
>>>> DB update start
DB update complete <<<<

>>>> wp-config.php update start
wp-config.php update complete <<<<


>>>> Passwordless X1280 installation start
Emulate Docker CLI using podman. Create /etc/containers/nodocker to quiet msg.
[ 74.728866] evm: overlay not supported
Error: network name some-network already used: network already exists
Emulate Docker CLI using podman. Create /etc/containers/nodocker to quiet msg.
Trying to pull docker.io/dualauth/passwordless-x1280-single:latest...
Getting image source signatures
Copying blob 5e234b975240 done |
Copying blob 9088cbb84e39 done |
Copying blob 801bd7d3f595 done |
Copying blob 31ae8c2ef8b8 done |
Copying blob 3de235203fbb done |
Copying blob 6adef2338bc6 done |
Copying blob c50bafb7f147 done |
Copying blob c2509b3a3d38 done |
Copying blob 0b5107ab6d39 done |
Copying blob a003f611cf64 done |
Copying blob f80284c9b193 done |
Copying blob 827da61c28cf done |
Copying blob c72c0968aff9 done |
Copying blob 2b56fd66696e done |
Copying blob bc71930afcf4 done |
Copying blob 1b26c2106837 done |
Copying blob 7e8aa7ada191 done |
Copying config 2bb0614010 done |
Writing manifest to image destination
[ 113.466716] bridge: filtering via arp/ip/ip6tables is no longer available by default. Update your scripts to load br_netfilter if you need this.
[ 113.489979] IPv6: ADDRCONF(NETDEV_UP): veth6f8b2623: link is not ready
[ 113.491698] cni-podman1: port 1(veth6f8b2623) entered blocking state
[ 113.491766] cni-podman1: port 1(veth6f8b2623) entered disabled state
[ 113.491982] device veth6f8b2623 entered promiscuous mode
[ 113.570698] IPv6: ADDRCONF(NETDEV_UP): eth0: link is not ready
[ 113.570991] IPv6: ADDRCONF(NETDEV_CHANGE): eth0: link becomes ready
[ 113.571108] IPv6: ADDRCONF(NETDEV_CHANGE): veth6f8b2623: link becomes ready
[ 113.571308] cni-podman1: port 1(veth6f8b2623) entered blocking state
[ 113.571368] cni-podman1: port 1(veth6f8b2623) entered forwarding state
5090f4283b6550af30fbf5f9154add5fffc0633d3ed156f8659f911c0c38c90
Passwordless X1280 installation complete <<<<
>>>> Restart apache
Restart apache complete <<<<
[root@localhost home]#
```

- 10) Access the Wordpress home page.


`http://<YOUR-SERVER-IP>`

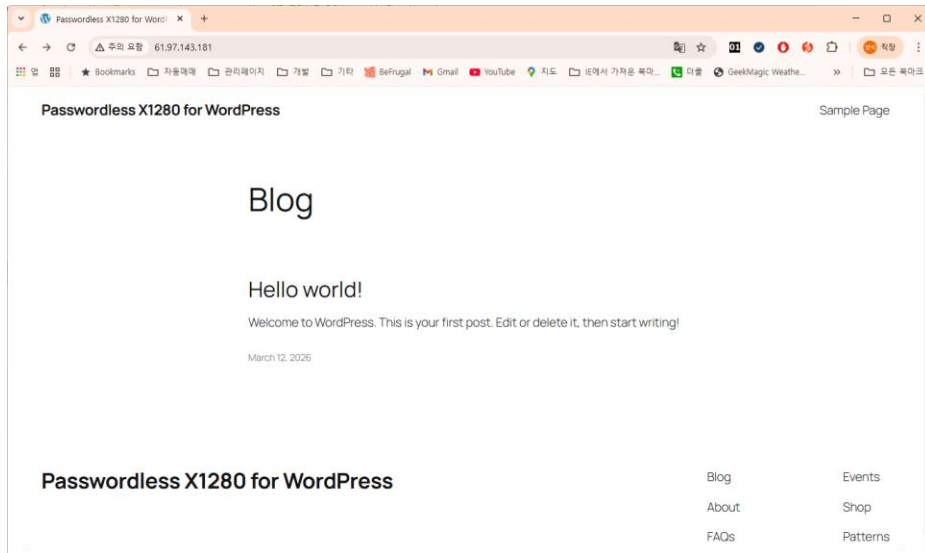


- 11) Install the Passwordless X1280 plugin.
<http://<YOUR-SERVER-IP>/wp-admin>

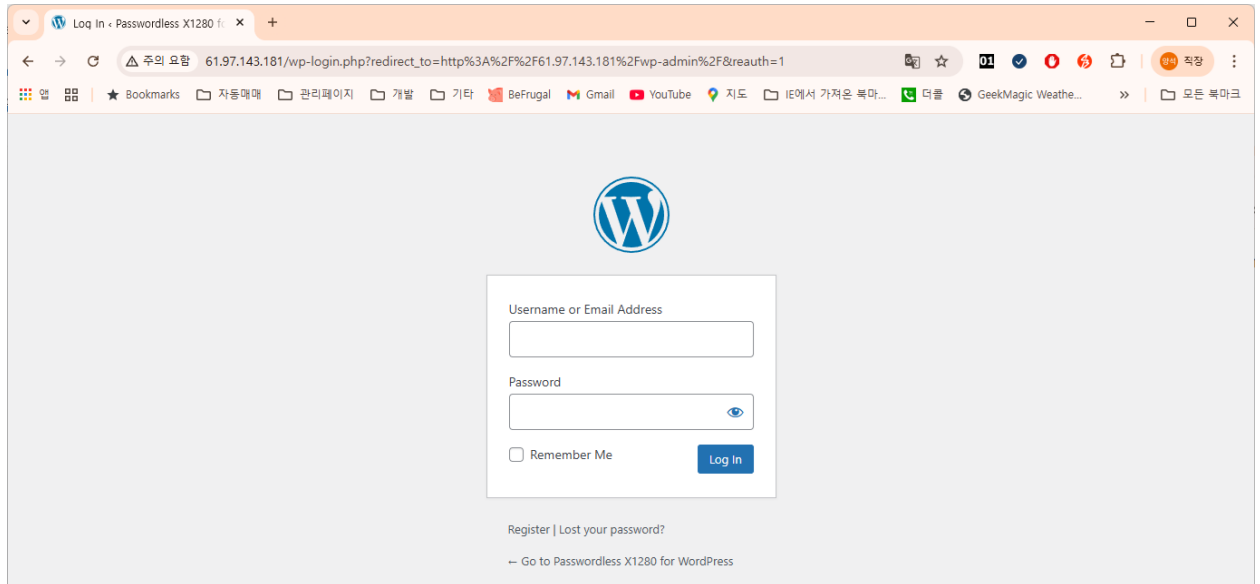


- 12) Log in as an administrator.
The initial account is [admin/admin](#).

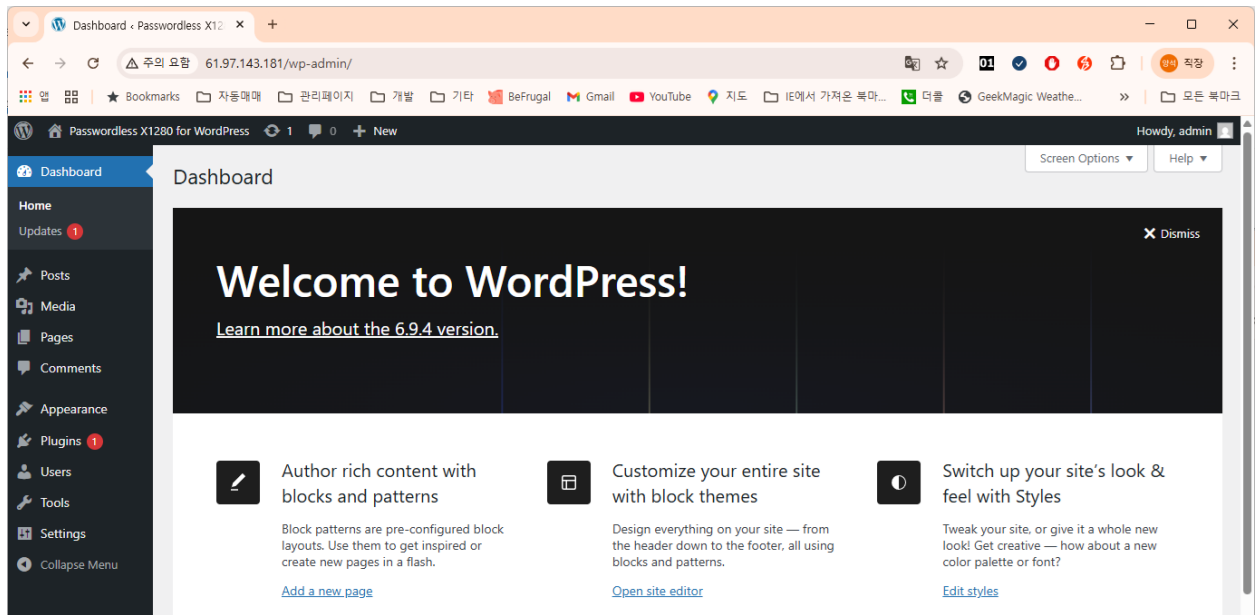


13) Move to the Plugins menu and click “Add Plugin”.

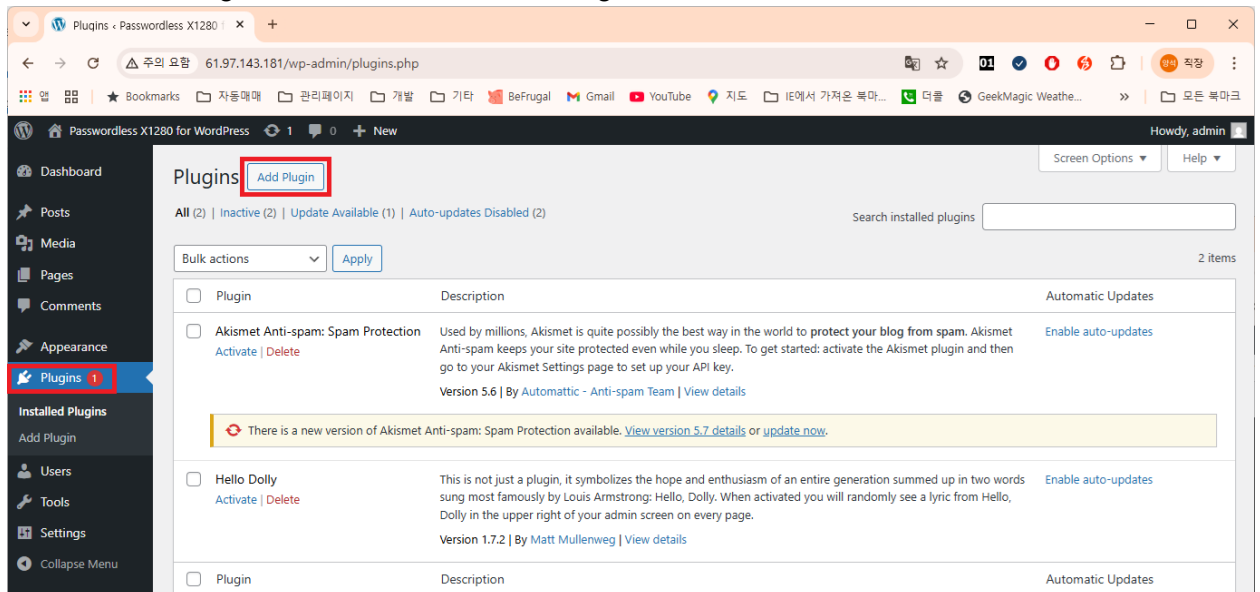


14) Click “Upload Plugin”.

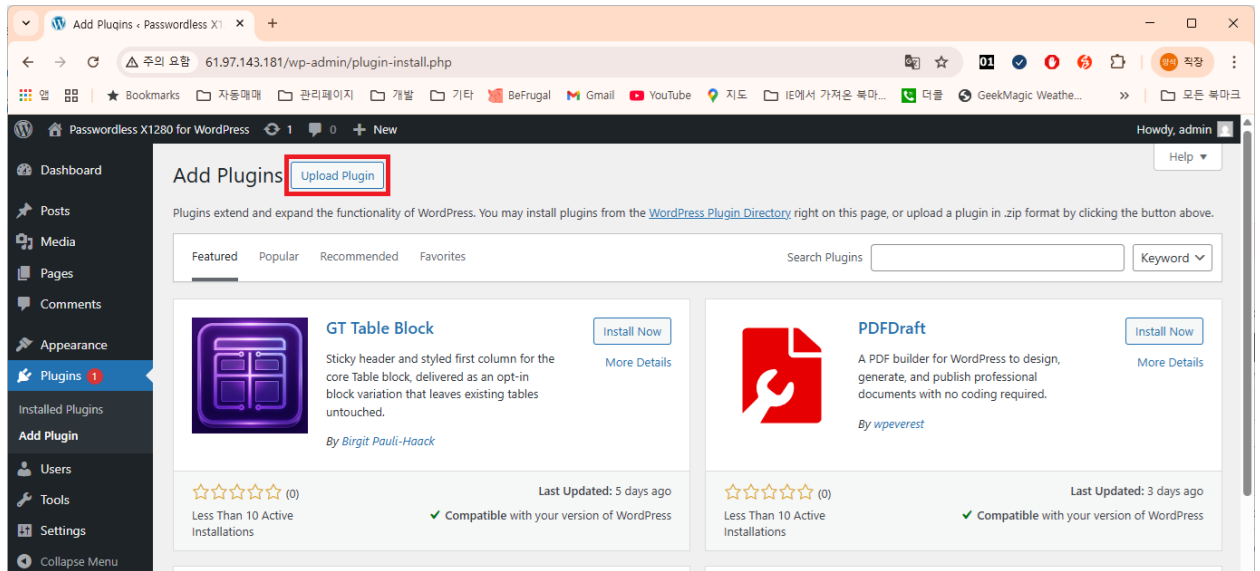


15) Select “passwordless-x1280_20260313.zip” file.

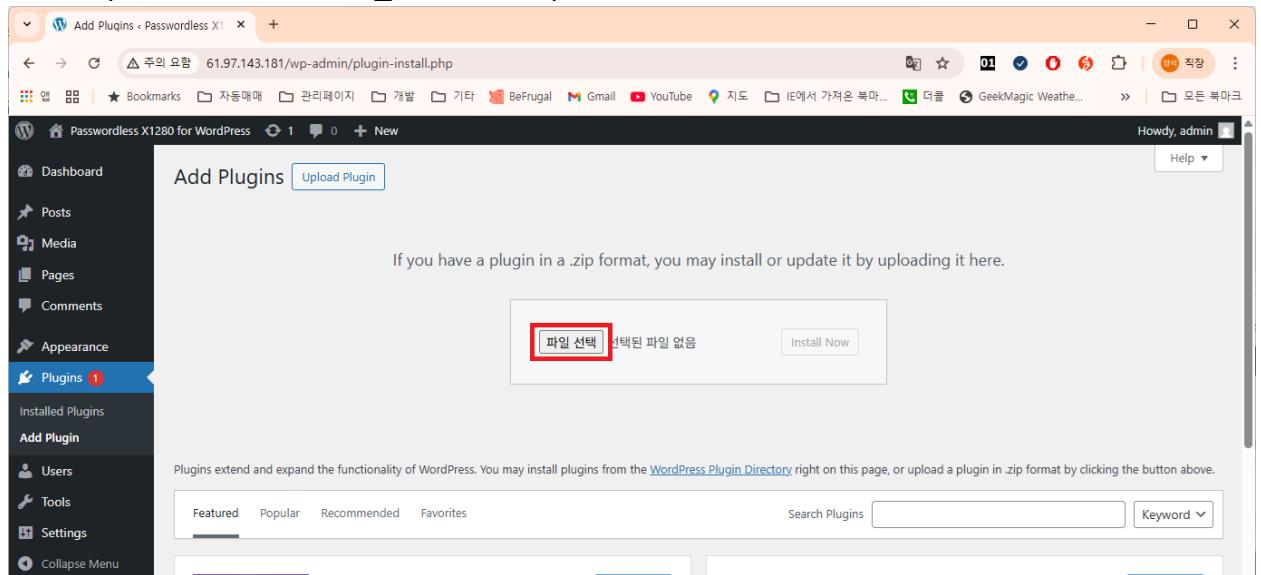


16) Click “Install Now”.

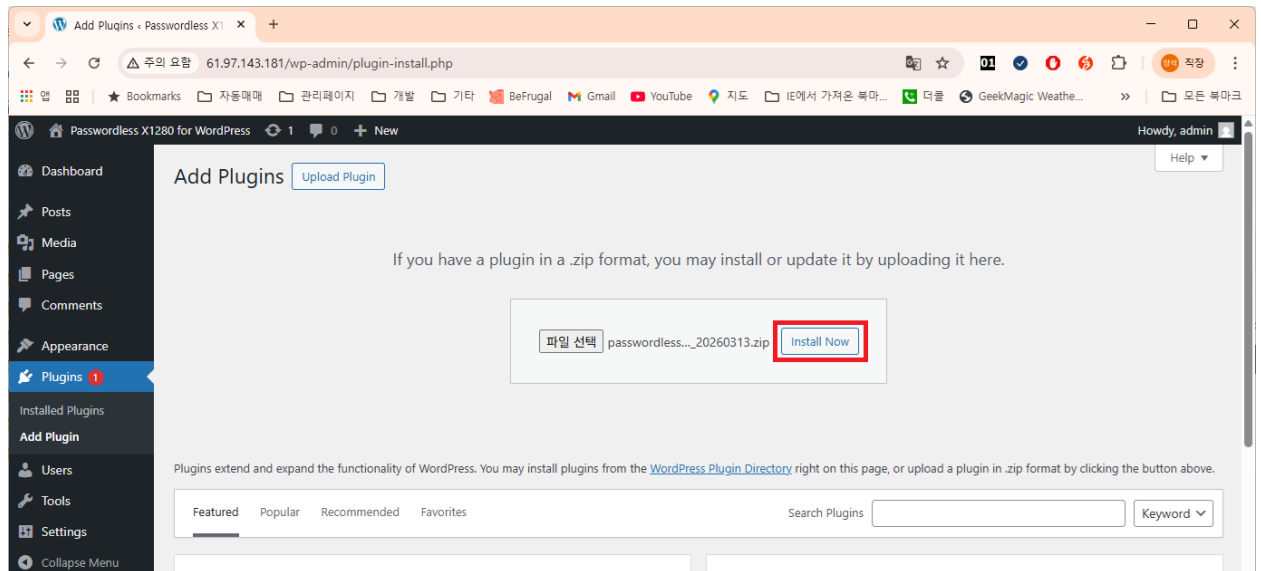

17) Click “Activate Plugin”.

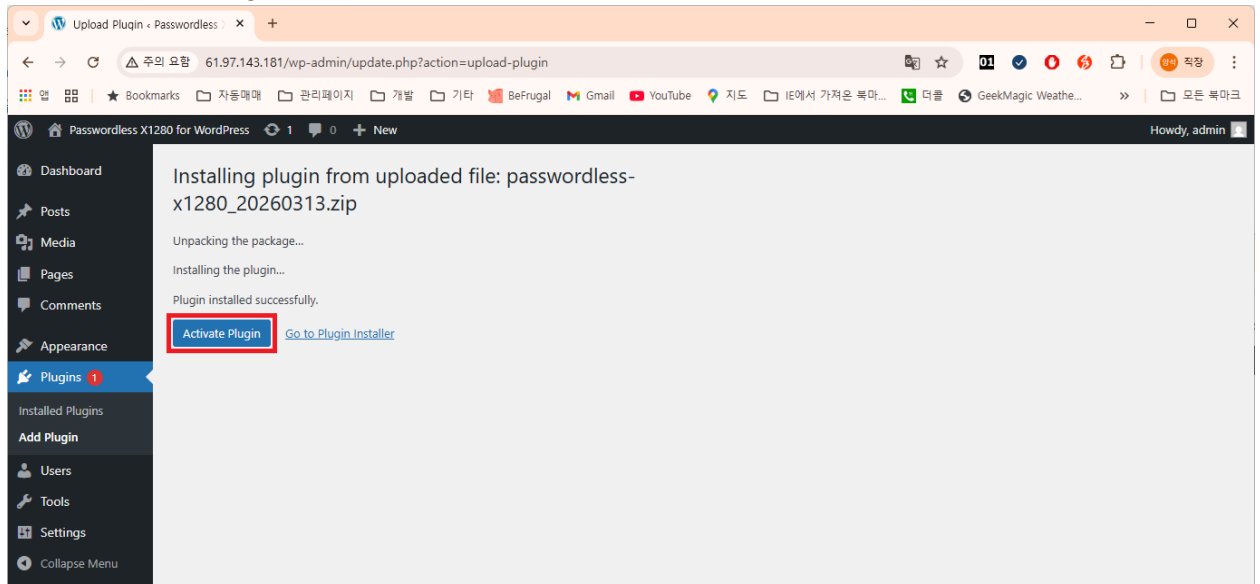

18) The Passwordless X1280 plugin installation is complete.

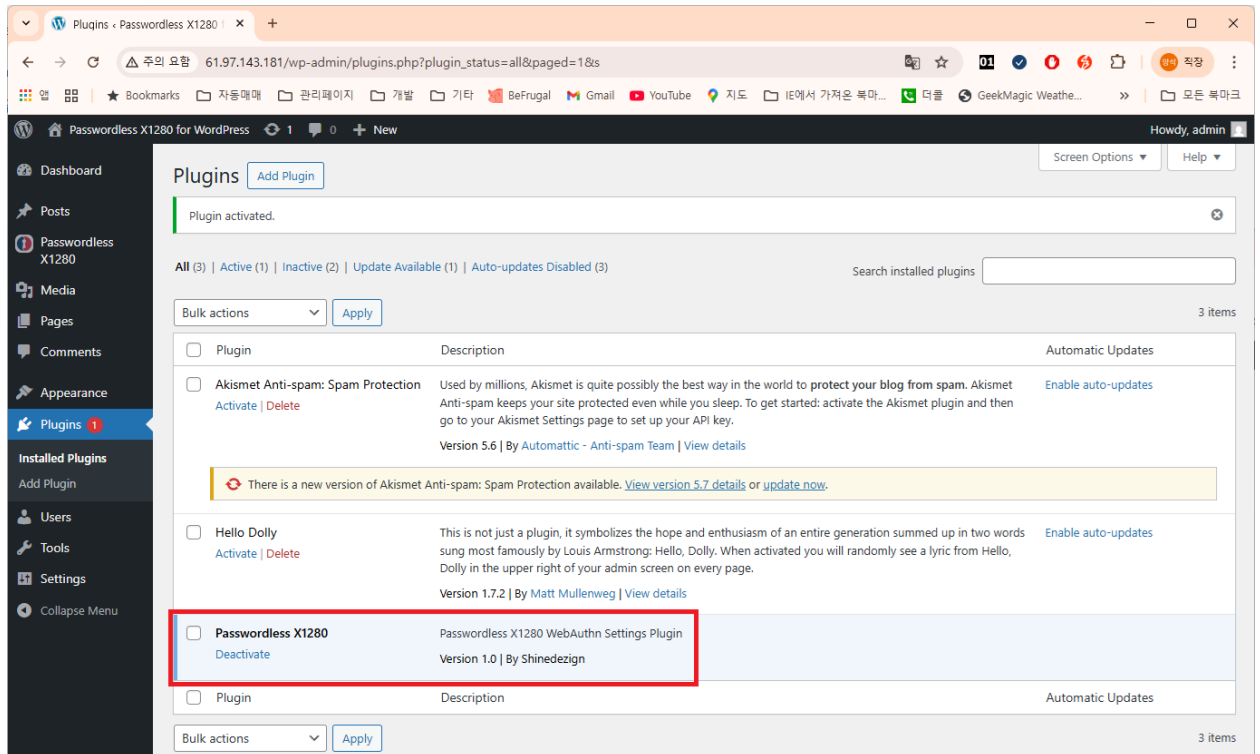

19) Download the license file from members site. (setting.ap)

<https://members.passwordlessalliance.org>

Member Status

Service Management

Confirm service information

▶ Manage service

Service mode

Normal Mode

Service name

Passwordless X1280 for GS Test

Service domain

gs-test.com

Service Private IP

112.220.228.26,192.168.200.134,192.168.200.172,210.104.181.62,210.11

Change

User connection server Domain

210.104.181.61

Service Member Info

ohyangsuk (오양석) / undefined

Business registration certificate

estorm_biz.jpg

Service organization

Asia

Status

In use

Created date

2024-08-02 05:39:17.0

Modified Date

2024-08-09 06:12:25.0



Cancel

Download license key file


Delete

20) Access the Passwordless X1280 admin page.


https://<YOUR-SERVER-IP>:8143

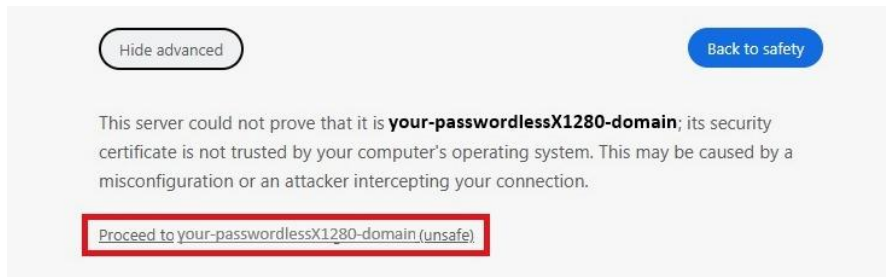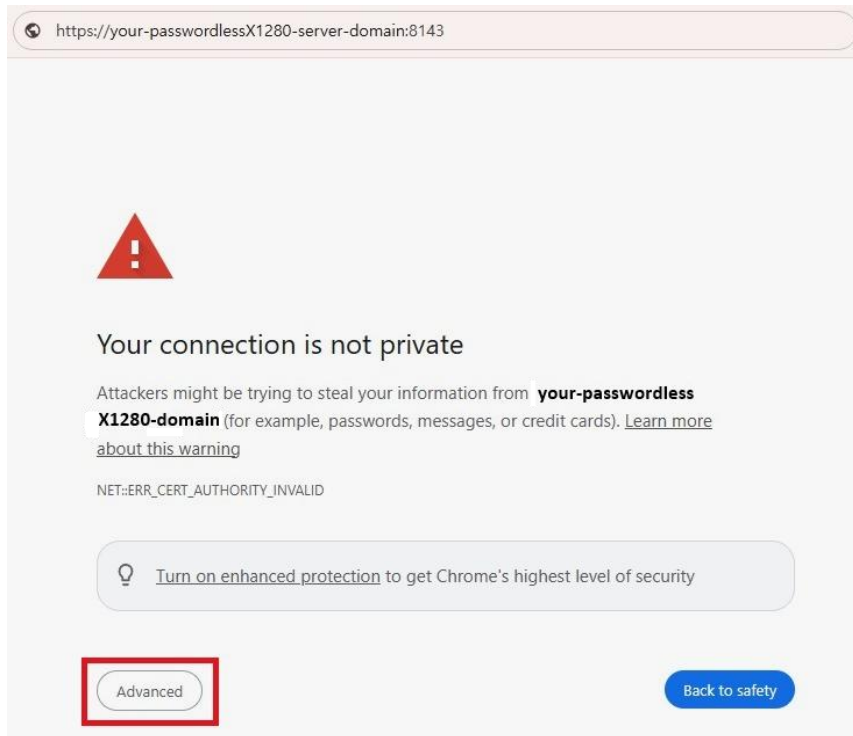

21) Upload [setting.ap](#) file.

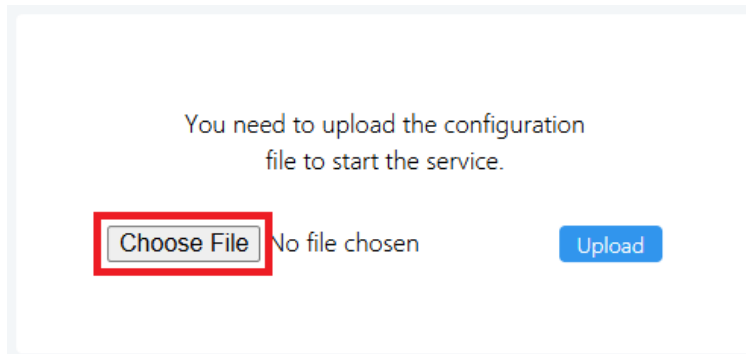


22) Login account : **admin / admin**

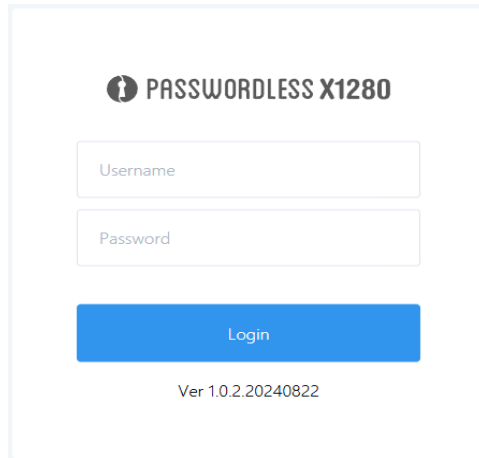

The login form for PASSWORDLESS X1280. It features a title 'PASSWORDLESS X1280' with an information icon. Below the title are two input fields: 'Username' and 'Password'. A blue 'Login' button is positioned below the password field. At the bottom, the version 'Ver 1.0.2.20240822' is displayed.


23) Click “Issue Server Key”.

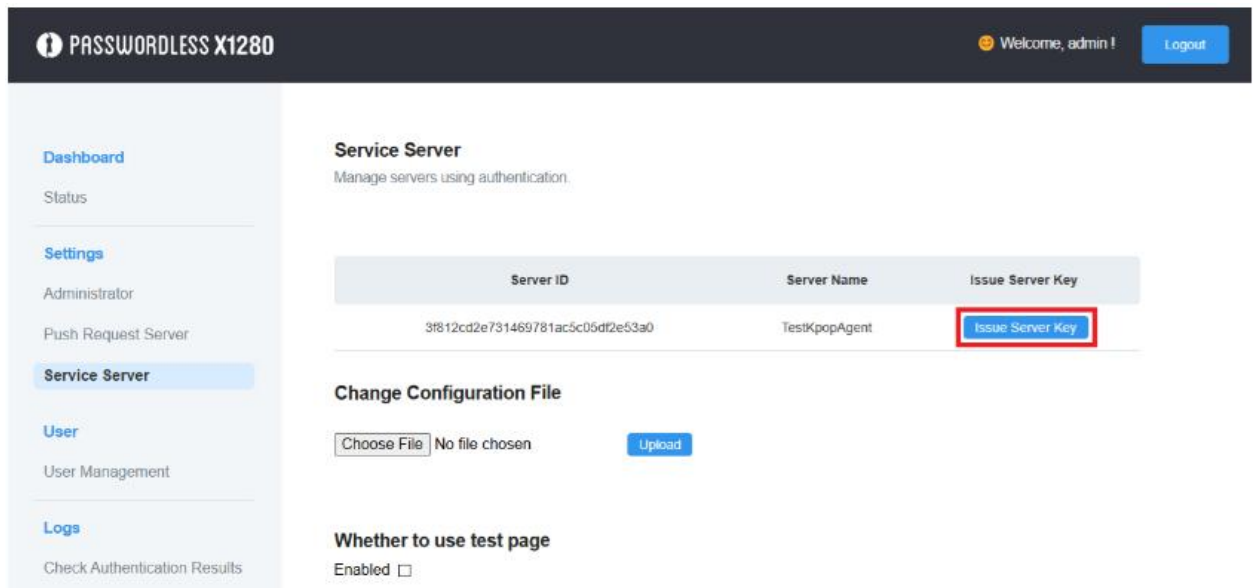

The dashboard for PASSWORDLESS X1280. The top header shows the title 'PASSWORDLESS X1280', a welcome message 'Welcome, admin!', and a 'Logout' button. The left sidebar contains navigation links: 'Dashboard', 'Settings', 'Service Server' (selected), 'User', and 'Logs'. The main content area is titled 'Service Server' with the subtitle 'Manage servers using authentication.' It contains a table with columns 'Server ID', 'Server Name', and 'Issue Server Key'. The table has one row with '3f812cd2e731469781ac5c05df2e53a0' and 'TestKpopAgent'. The 'Issue Server Key' button in the table is highlighted with a red box. Below the table is a 'Change Configuration File' section with a 'Choose File' button, 'No file chosen' text, and an 'Upload' button. At the bottom is a 'Whether to use test page' section with an 'Enabled' checkbox.

Server ID	Server Name	Issue Server Key
3f812cd2e731469781ac5c05df2e53a0	TestKpopAgent	Issue Server Key

Copy Server Key to notepad.

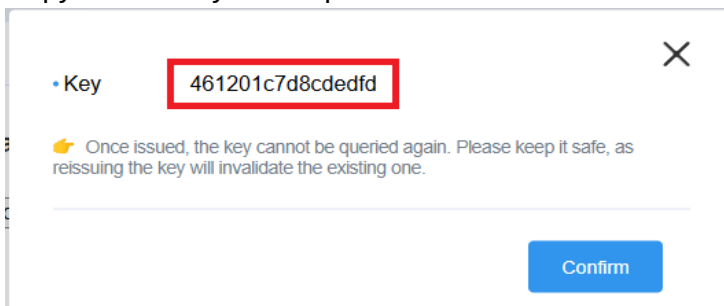

A dialog box for confirming the issuance of a server key. It has a title bar with a close button. The content includes a bullet point '• Key' followed by the key '461201c7d8cdedfd' which is highlighted with a red box. Below this is a warning message: 'Once issued, the key cannot be queried again. Please keep it safe, as reissuing the key will invalidate the existing one.' At the bottom right is a blue 'Confirm' button.

24) Move to the Passwordless X1280 menu and Enter the necessary information.

Settings - Passwordless X1280

61.97.143.181/wp-admin/admin.php?page=passwordless-x1280

Dashboard

Posts

Passwordless X1280

Settings

Statistics - User

Statistics - Login

Media

Pages

Comments

Appearance

Plugins 1

Users

Tools

Settings

Collapse Menu

Passwordless X1280 Settings

Change Password ☒ Change password to a random value after successful login

Prevent login via password ☒ Disable ID/Password login after registering Passwordless X1280 (recommended)

Server Key

Authentication server domain

Port must be 11040


Push request server domain

Port must be 15010


[Save Changes](#)

- Server Key : Server key issued from the Passwordless X1280 administrator page
- Authentication server domain : Passwordless X1280 server domain. (or IP)
The port number must be 11040.
- Push request server domain : Passwordless X1280 server domain. (or IP)
The port number must be 15010.

25) Check that the Passwordless X1280 menu has been created
<http://<YOUR-SERVER-IP>/wp-admin>

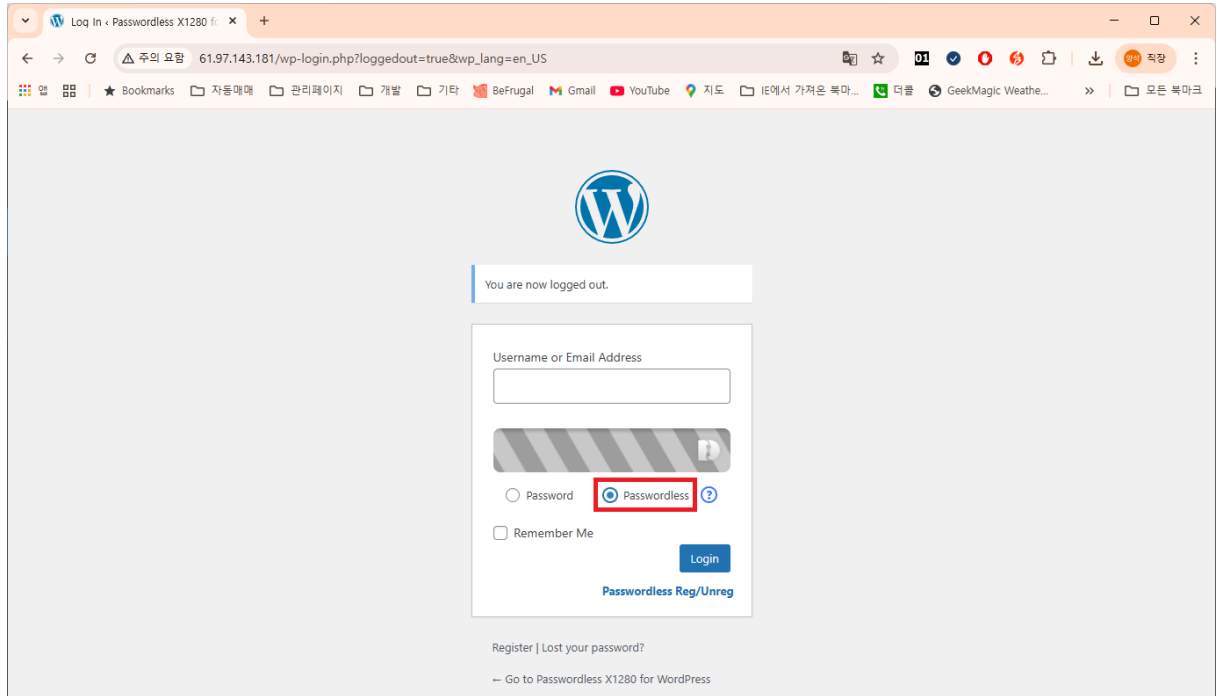

<http://<YOUR-SERVER-IP>>

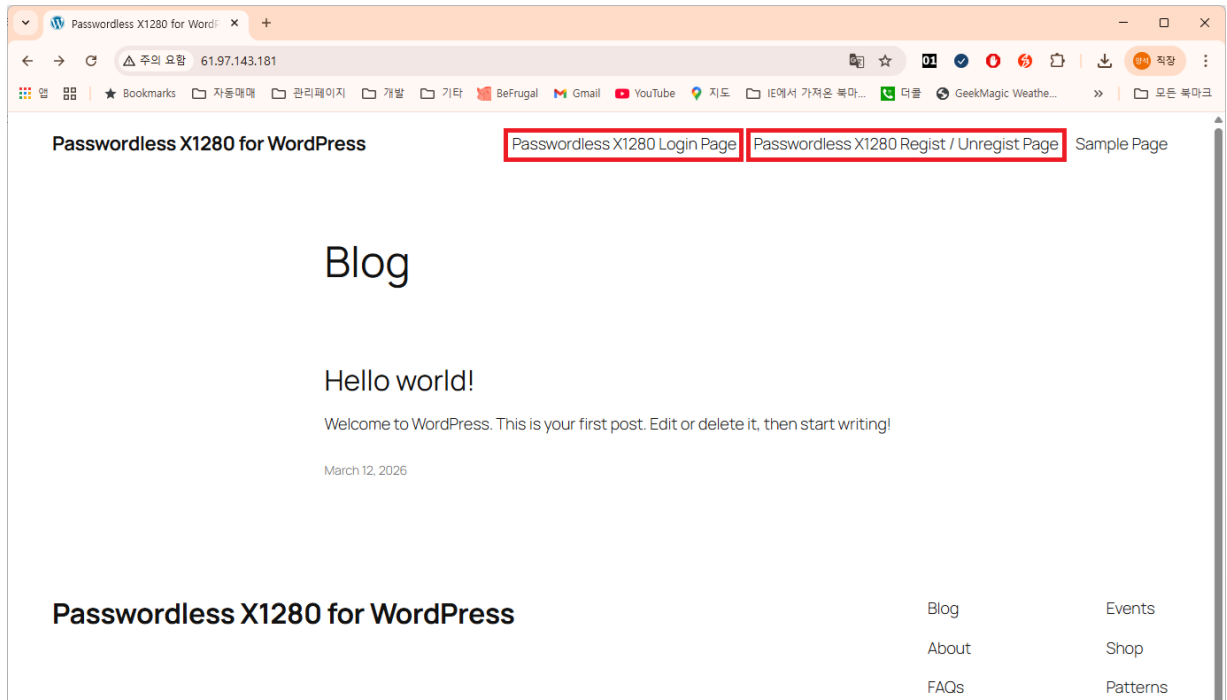

26) Register to Passwordless X1280 service

Sample account : testuser01/testuser01, testuser02/testuser02, testuser03/testuser03

The screenshot shows a web browser window with the address bar displaying "61.97.143.181/passwordless-x1280-regist-unregist-page/". The page title is "Passwordless X1280 for WordPress". The main heading is "Passwordless X1280 Regist / Unregist Page". Below the heading is a form titled "Passwordless Reg/Unreg". The form contains a checkbox for "Remember this ID", a text input field with "testuser01", and a password input field with masked characters. Below the input fields, a message states: "To register/unregister the passwordless service, user verification is required." At the bottom of the form is a blue button labeled "Passwordless Reg/Unreg", which is highlighted with a red rectangle. Below the button are links for "Forgot your password?" and "Login".

Passwordless X1280 for WordPress

Passwordless X1280 Login Page Passwordless X1280 Regist / Unregist Page Sample Page

Passwordless X1280 Regist / Unregist Page

Passwordless Reg/Unreg



☐ Remember this ID

To register/unregister the passwordless service, user verification is required.

Passwordless Reg/Unreg

[Forgot your password?](#) | [Login](#)

Scan the QR code with the camera using the px1280 mobile app.

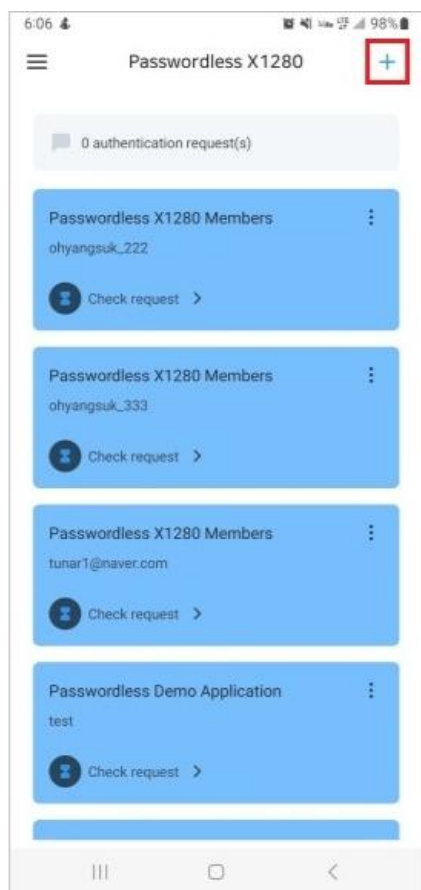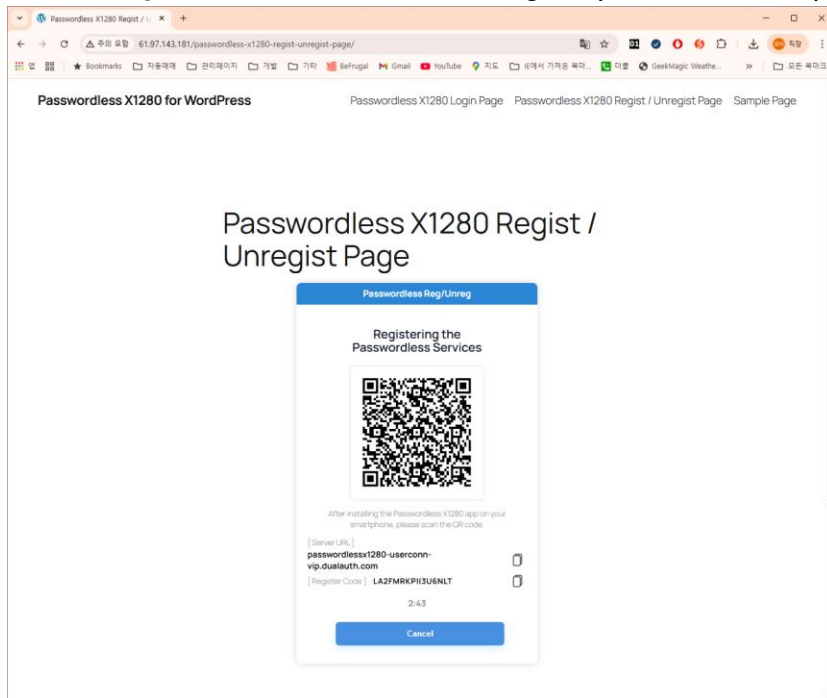

27) Login with Passwordless X1280 service

WordPress Passwordless X1280 Login Page

Navigation: Passwordless X1280 Login Page | Passwordless X1280 Regist / Unregist Page | Sample Page

Passwordless X1280 Login Page

Password Login

☐ Remember this ID

User ID

Password

☒ Password ☐ Passwordless ?

Login

Create Account | Forgot your password?

WordPress Passwordless X1280 Login Page

Navigation: Passwordless X1280 Login Page | Passwordless X1280 Regist / Unregist Page | Sample Page

Passwordless X1280 Login Page

Passwordless Login


☐ Remember this ID

testuser01


☐ Password ☒ Passwordless ?


Login

Create Account | Passwordless Reg/Unreg

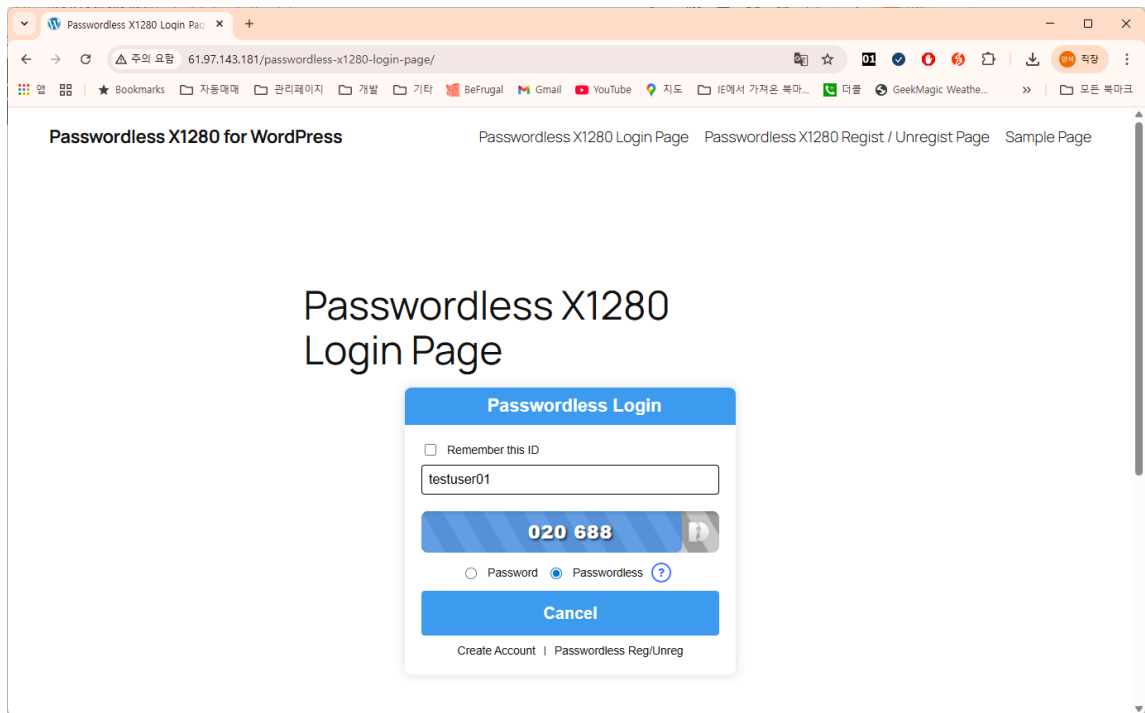

28) Unregister to Password X1280 service #1 (When logged in)

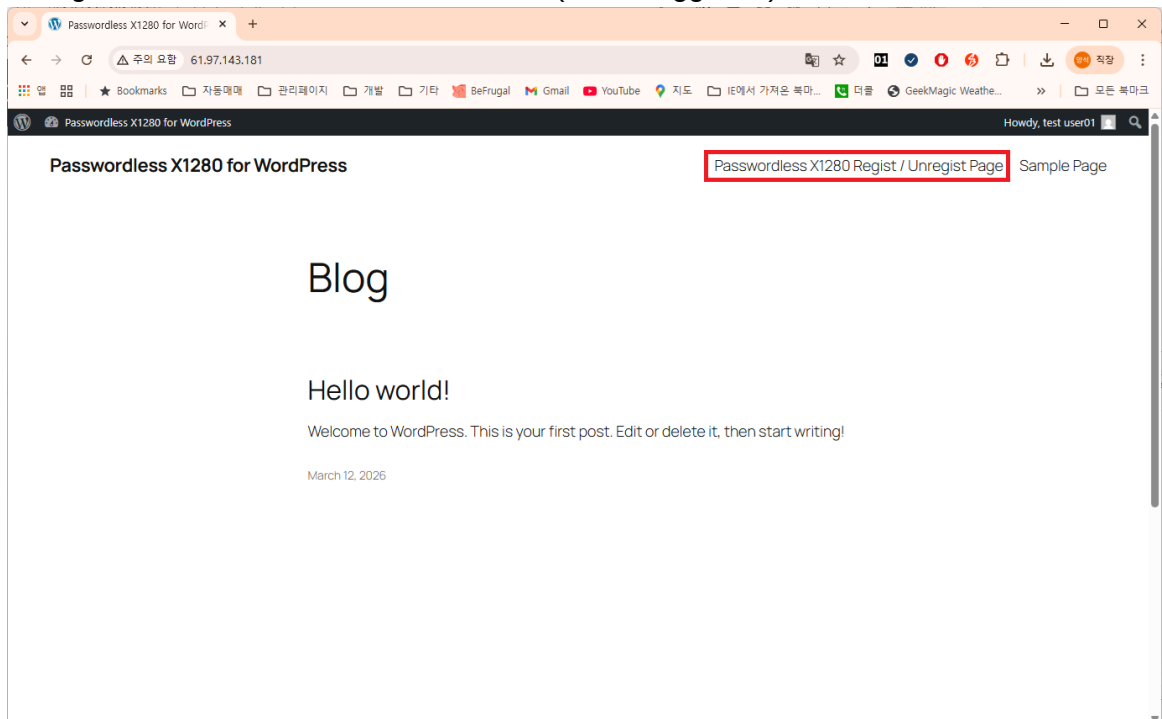

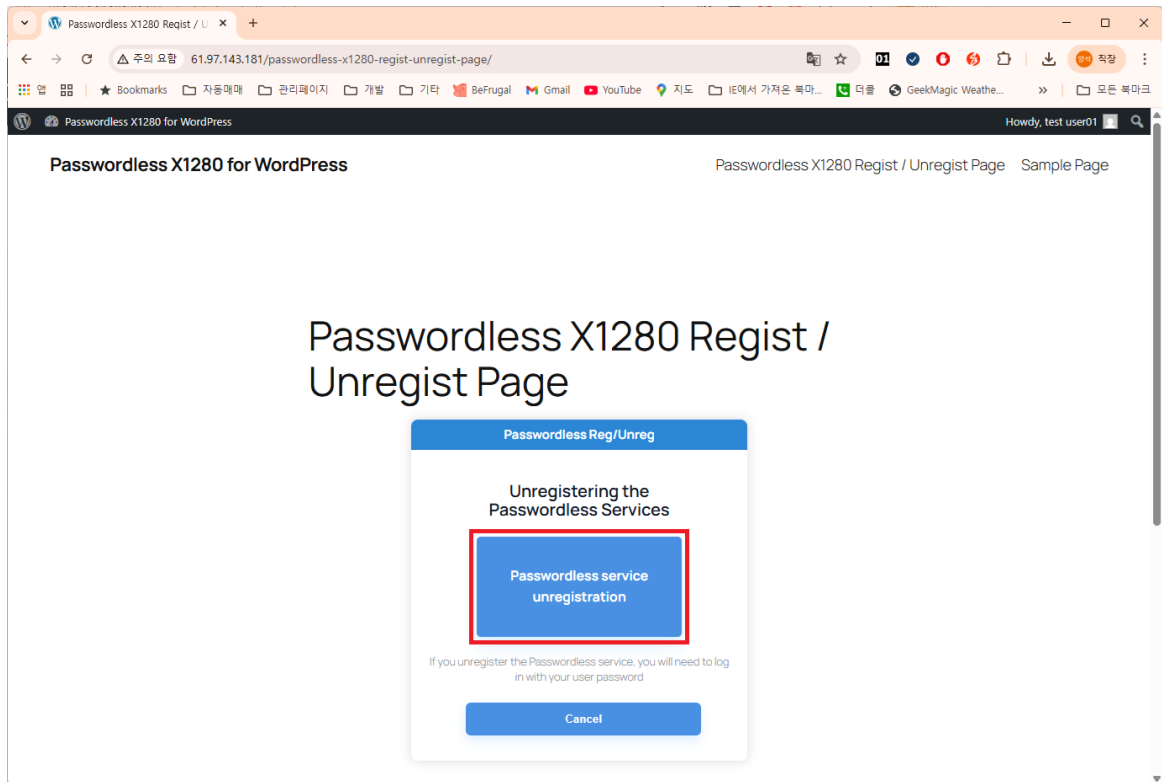

29) Unregister to Password X1280 service #2 (When not logged in)

