

```
MINGW32:/z/cursos/Git/2672/24925340/clase4

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340 (master)
$ git clone https://github.com/JesusA94/clase4.git
Cloning into 'clase4'...
remote: Counting objects: 6, done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0
Unpacking objects: 100% (6/6), done.

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340 (master)
$ cd clase4

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ git branch
* master

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ git log
commit 84ffb5daa4486bb411c3a5eb01fa4b94fe219bad (HEAD -> master, origin/master,
origin/HEAD)
Author: JesusA94 <42987030+JesusA94@users.noreply.github.com>
Date: Tue Sep 18 15:24:08 2018 -0400

    commit nuevo
```

```
MINGW32:/z/cursos/Git/2672/24925340/clase4

commit 84ffb5daa4486bb411c3a5eb01fa4b94fe219bad (HEAD -> master, origin/master,
origin/HEAD)
Author: JesusA94 <42987030+JesusA94@users.noreply.github.com>
Date: Tue Sep 18 15:24:08 2018 -0400

    commit nuevo

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ dir
README.md

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ git branch -a
* master
  remotes/origin/HEAD -> origin/master
  remotes/origin/develop
  remotes/origin/master

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ git branch -r
  origin/HEAD -> origin/master
  origin/develop
  origin/master
```

```
MINGW32:/z/cursos/Git/2672/24925340/clase4

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ dir
README.md

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ git branch -a
* master
  remotes/origin/HEAD -> origin/master
  remotes/origin/develop
  remotes/origin/master

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ git branch -r
  origin/HEAD -> origin/master
  origin/develop
  origin/master

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$ git branch -vv
* master 84ffb5d [origin/master] commit nuevo

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (master)
$
```



```
MINGW32:/z/cursos/Git/2672/24925340/clase4
fatal: unable to auto-detect email address (got 'usuario@A2-PC10.(none)')

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git config --global user.name "jesus mogollon"


usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git config --global user.email "beto-barca10@hotmail.com"

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git config --global user.name
jesus mogollon

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git config --global user.email
beto-barca10@hotmail.com

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git commit -m "cambios en el commit"
[r1 385fb0d] cambios en el commit
1 file changed, 2 insertions(+), 1 deletion(-)

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ gitk --all
```

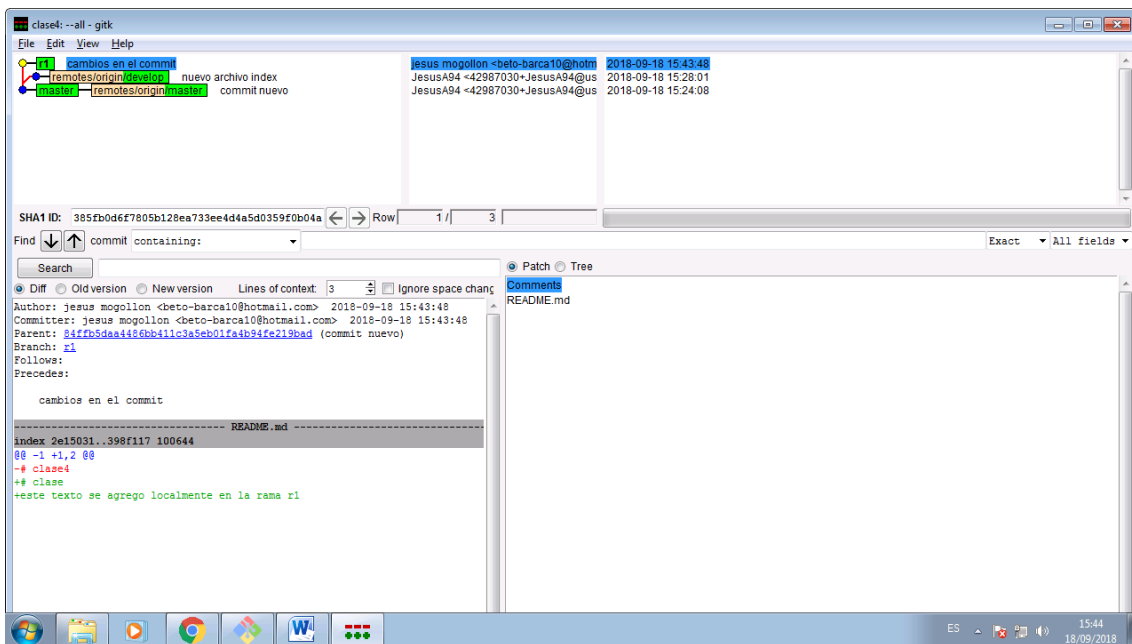

```
MINGW32:/z/cursos/Git/2672/24925340/clase4
fatal: Authentication failed for 'https://github.com/JesusA94/clase4.git/'

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git push origin r1
Username for 'https://github.com': jesusA94
Counting objects: 3, done.
Delta compression using up to 2 threads.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 299 bytes | 74.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0)
remote:
remote: Create a pull request for 'r1' on GitHub by visiting:
remote:   https://github.com/JesusA94/clase4/pull/new/r1
remote:
To https://github.com/JesusA94/clase4.git
 * [new branch]      r1 -> r1

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -vv
* master 84ffb5d [origin/master] commit nuevo
* r1      385fb0d cambios en el commit

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$
```

```
MINGW32:/z/cursos/Git/2672/24925340/clase4
Total 3 (delta 0), reused 0 (delta 0)
remote:
remote: Create a pull request for 'r1' on GitHub by visiting:
remote:   https://github.com/JesusA94/clase4/pull/new/r1
remote:
To https://github.com/JesusA94/clase4.git
 * [new branch]      r1 -> r1

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -vv
  master 84ffb5d [origin/master] commit nuevo
 * r1     385fb0d cambios en el commit

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -u origin/r1
Branch r1 set up to track remote branch r1 from origin.

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -vv
  master 84ffb5d [origin/master] commit nuevo
 * r1     385fb0d [origin/r1] cambios en el commit

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$
```

```
MINGW32:/z/cursos/Git/2672/24925340/clase4
To https://github.com/JesusA94/clase4.git
 * [new branch]      r1 -> r1

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -vv
  master 84ffb5d [origin/master] commit nuevo
 * r1     385fb0d cambios en el commit

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -u origin/r1
Branch r1 set up to track remote branch r1 from origin.

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -vv
  master 84ffb5d [origin/master] commit nuevo
 * r1     385fb0d [origin/r1] cambios en el commit

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git checkout -b develop origin/develop
Switched to a new branch 'develop'
Branch develop set up to track remote branch develop from origin.

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (develop)
$
```

```
MINGW32:/z/cursos/Git/2672/24925340/clase4
 * r1     385fb0d cambios en el commit

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -u origin/r1
Branch r1 set up to track remote branch r1 from origin.

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git branch -vv
  master 84ffb5d [origin/master] commit nuevo
 * r1     385fb0d [origin/r1] cambios en el commit

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (r1)
$ git checkout -b develop origin/develop
Switched to a new branch 'develop'
Branch develop set up to track remote branch develop from origin.

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (develop)
$ git branch -vv
 * develop ba8c692 [origin/develop] nuevo archivo index
  master 84ffb5d [origin/master] commit nuevo
   r1     385fb0d [origin/r1] cambios en el commit

usuario@A2-PC10 MINGW32 /z/cursos/Git/2672/24925340/clase4 (develop)
$
```