
GAT ANDRES BONIFACIO HIGH SCHOOL

Nexora System Manual

Architecture, setup, deployment, recovery, modules, data, contracts, and operations

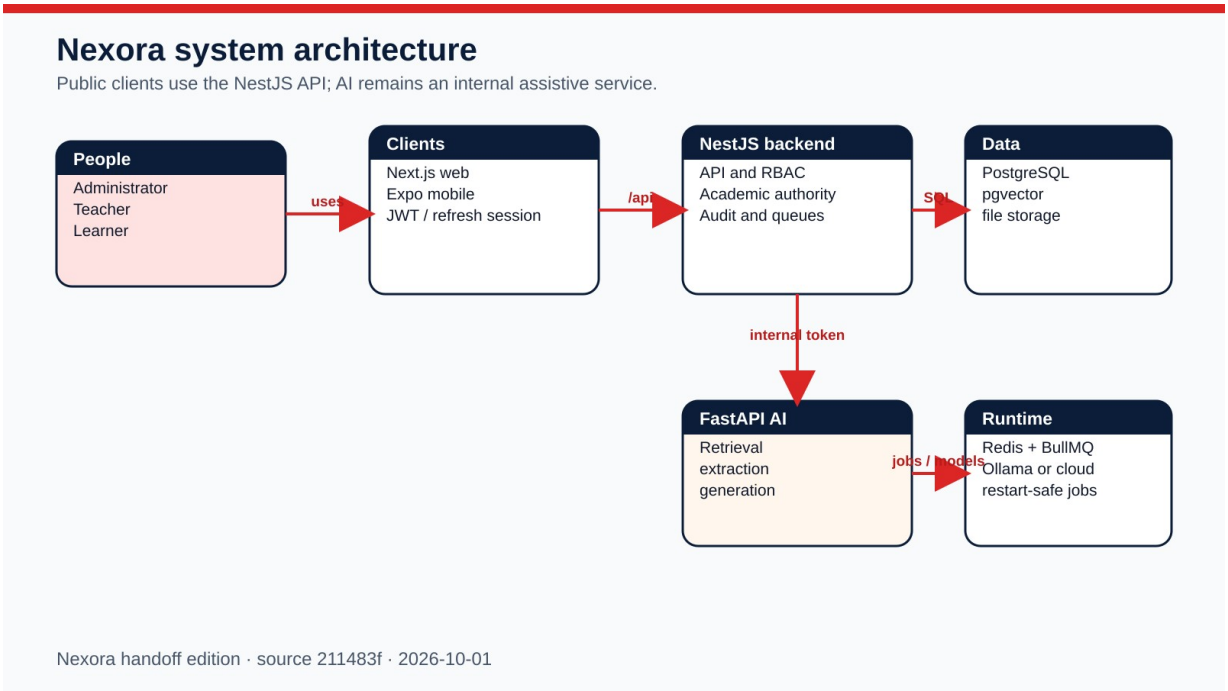

Locked evidence edition

Application snapshot 211483f07b901299b48ae42eda318c7448f1cbfd. Screens use synthetic documentation-only records; no production data or credentials are included.

Prepared 2026-10-01 · English edition · External-drive reference

How to use this book

Start here

Use Chapters 1-6 to run or recover the platform. Use the module and catalog chapters to trace ownership from a screen or incident to source, API, queue, table, and configuration.

Contents


Use search or the Navigation pane to jump to a numbered chapter. Catalog chapters continue across multiple indexed pages.

1. System at a glance
2. First run from an external drive
3. Local development
4. Security and request flow
5. Deployment and release
6. Backup, restore, and disaster recovery
7. Backend module catalog
8. Backend HTTP handler index
9. AI service handler index
10. Queue processors
11. Database catalog
12. Configuration reference
13. Client source catalogs
14. Incident checklist

1. System at a glance

Inventory locked to one commit

43 backend modules · 485 backend HTTP handlers · 63 AI handlers · 116 tables · 98 environment keys.

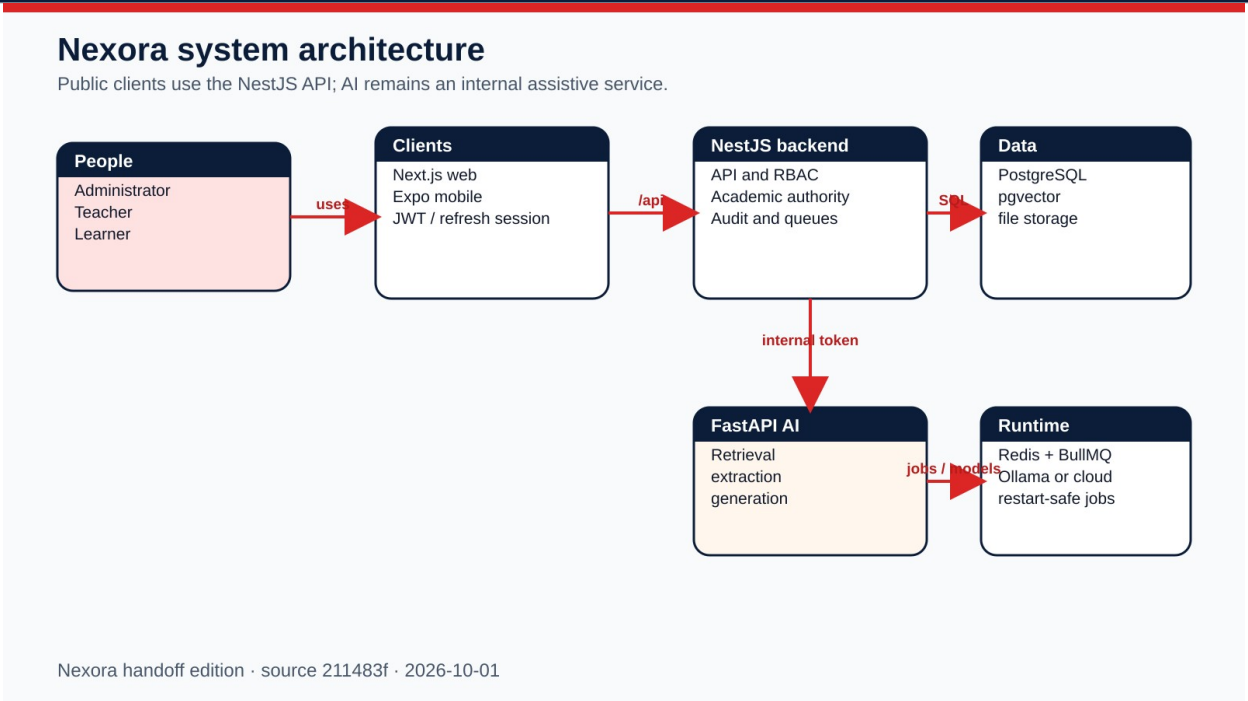

Public boundary: Next.js web and Expo mobile call the NestJS /api only.

Authority: Backend authentication, RBAC, academic policy, audit, and durable orchestration.

Assistive boundary: FastAPI AI receives internal shared-secret calls and returns drafts or retrieval output.

Durable state: PostgreSQL with pgvector, Redis/BullMQ, and configured file/object storage.

2. First run from an external drive

> **Important**
> Copy the package to a local SSD first. Containers, databases, node_modules, and Android builds should not run directly from a removable drive.

1. Install Git, Docker Desktop or Docker Engine with Compose, Node.js 22 LTS, and Python 3.11 or newer.

2. Open README-FIRST.txt and START-HERE.html. Confirm VERSION.txt names the intended snapshot.

3. Copy the source archive into a writable local folder. Keep the original external-drive copy unchanged.

4. Copy the supplied configuration templates. Replace placeholders with unique secrets and environment-specific URLs.

5. Run docker compose up -d --build from the source root. The six core services are postgres, redis, ollama, backend, ai-service, and frontend.

6. Run docker compose ps until required services are healthy. Check backend health and open the frontend over its documented URL.

7. Create or restore only authorized data. Run the role smoke checklist before a real onboarding or import.

Done when

All core health checks are green, the frontend loads over HTTPS or localhost, each role can sign in, and one read-only workflow succeeds without console or API failures.

3. Local development

Backend: Install from backend/package-lock.json, provide DATABASE_URL, REDIS_URL, JWT_SECRET, and JWT_REFRESH_SECRET, then use the backend development script.


Web: Install from next-frontend/package-lock.json, set the backend API URL, then run the Next.js development script.

Mobile: Install from mobile/package-lock.json, set EXPO_PUBLIC_API_URL, then run the Expo development build or install the supplied APK.

AI: Create a Python environment from ai-service requirements, configure database and the matching internal shared secret, then start FastAPI. Materialize the approved Ollama or cloud model separately.

Core rule: Web and mobile never call the AI service directly.


4. Security and request flow

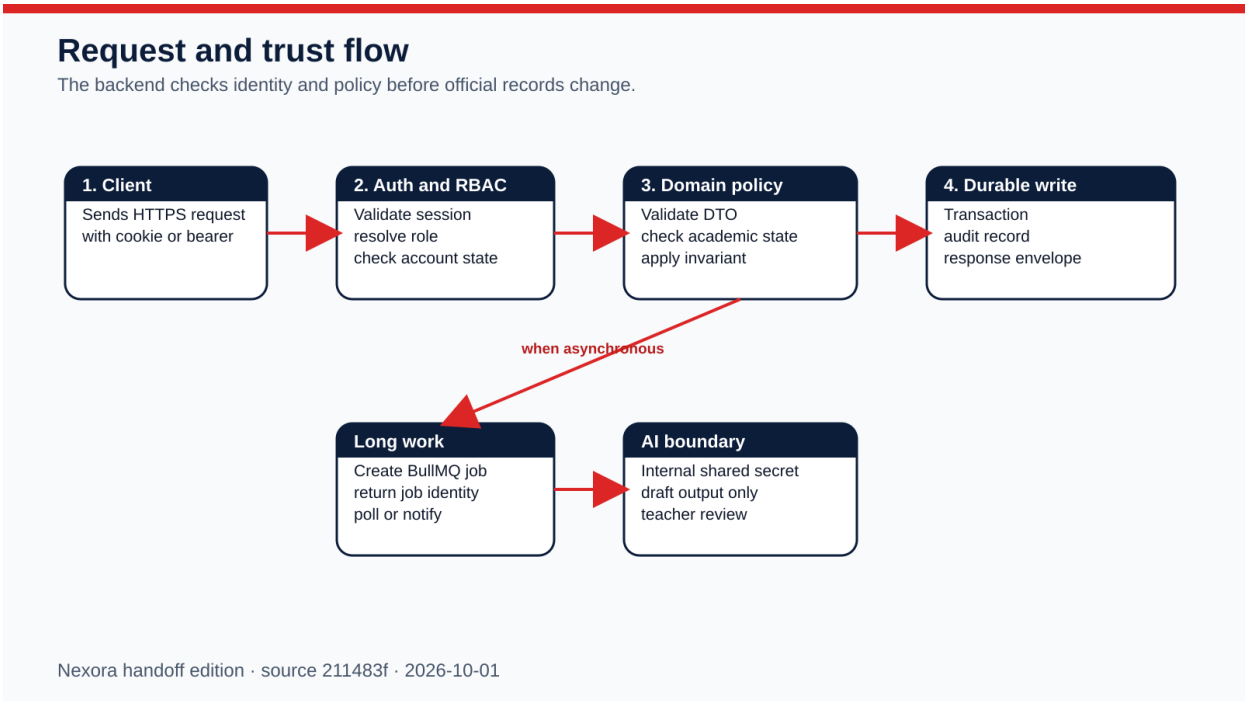

Safe operating rule

Treat a 403, academic-state blocker, maintenance gate, or impact-preview mismatch as a stop condition. Do not add force flags or bypass backend authority.

5. Deployment and release

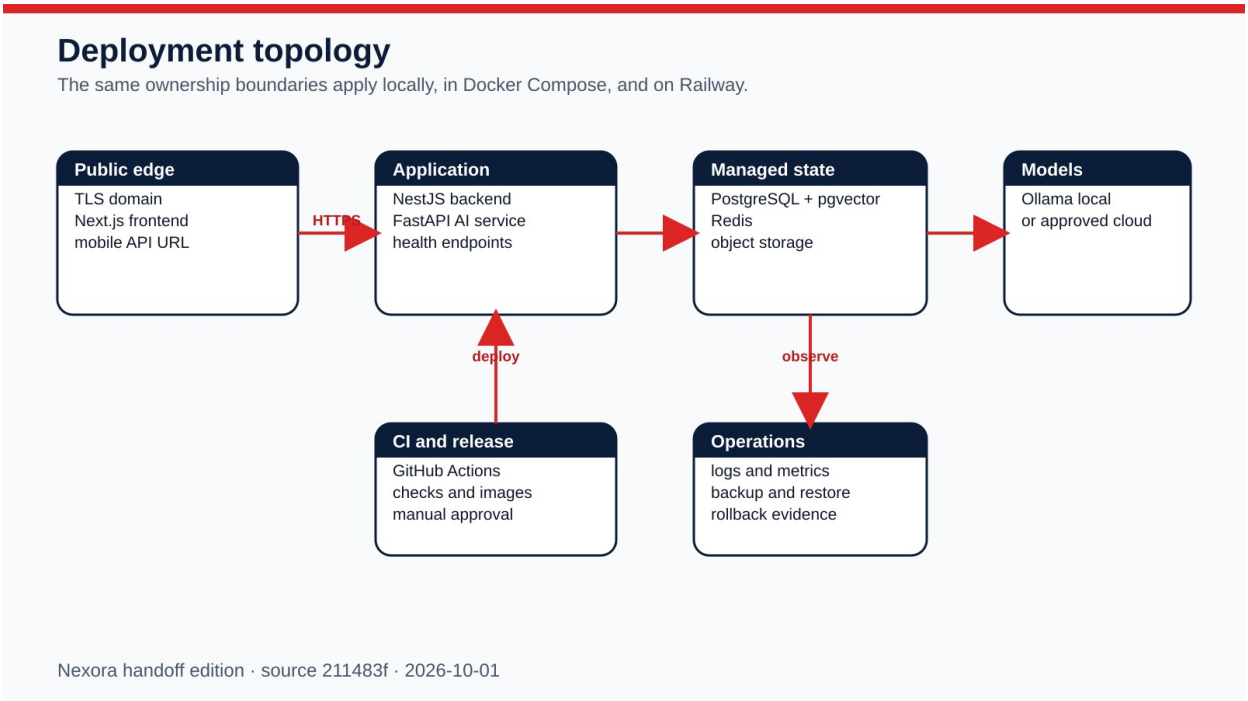

1. Choose the target environment and record its owner, domain, database, Redis, object storage, model runtime, and rollback target.

2. Configure secrets in Railway or the target secret store. Never reuse development credentials.

3. Deploy PostgreSQL/pgvector and Redis before backend workers. Keep the AI service private.

4. Deploy backend, run migrations once, verify health/readiness, then deploy the frontend with the public backend URL.


5. Build mobile with the production HTTPS API URL, publish the APK metadata and checksum, then verify the update policy endpoint.

6. Run role smoke tests and record the commit SHA, workflow run, deployed URLs, migration result, APK SHA-256, and rollback decision.

Railway definitions: backend/railway.json, next-frontend/railway.json, .github/workflows/railway-deploy.yml

Release workflows: .github/workflows/build-mobile-ios-sidestore.yml, .github/workflows/ci.yml, .github/workflows/docker-publish.yml, .github/workflows/railway-deploy.yml

6. Backup, restore, and disaster recovery

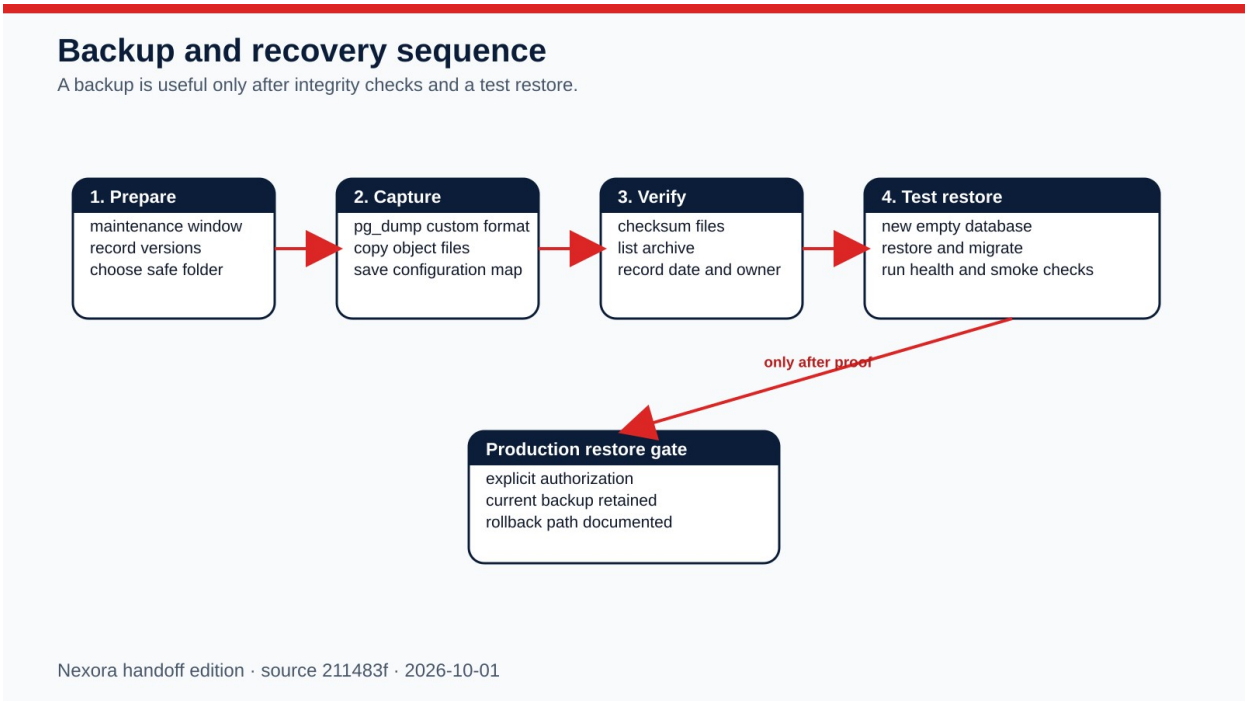

Recovery gate

Never overwrite production as a first restore attempt. Restore into a new empty target, run integrity checks and smoke tests, retain the current backup, and obtain explicit authorization before a production cutover.

Database: Use pg_dump custom format with the application quiesced or a documented consistency strategy. Record server version and checksum.

Files: Copy local uploads or object-storage objects with version and checksum evidence.

Configuration: Save a key-name map and ownership notes, not plaintext secrets in the handoff package.

Restore proof: Migrations, health, authentication, role access, one representative file, one queue job, and one audit read must pass.

7. Backend module catalog

Academic Grading

In plain English

Calculates and records official period and annual grading evidence, including revisions, remediation, and source selection.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/academic-state/academic-grading.module.ts

Surface count: 3 controller files in this folder · 28 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

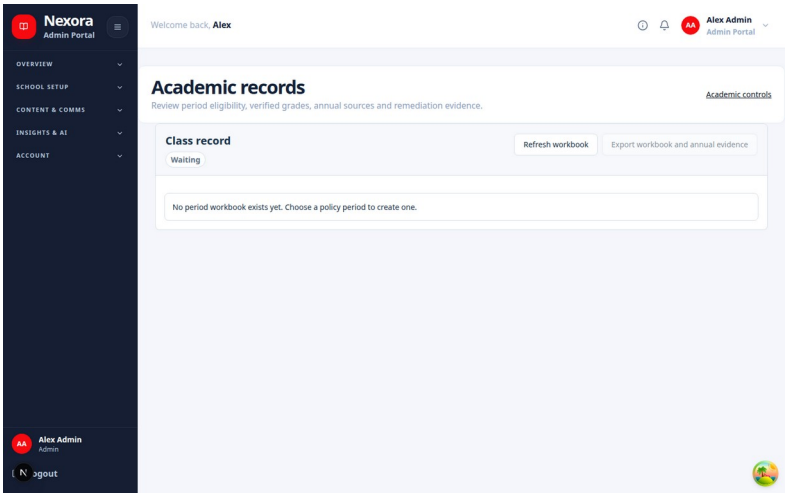

Related screen evidence: /dashboard/admin/academic-records/[classId]

Academic Policy

In plain English

Owns the school-year and grading-period rules that decide whether academic work may be prepared, edited, released, or finalized.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/academic-state/academic-policy.module.ts

Surface count: 3 controller files in this folder · 28 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

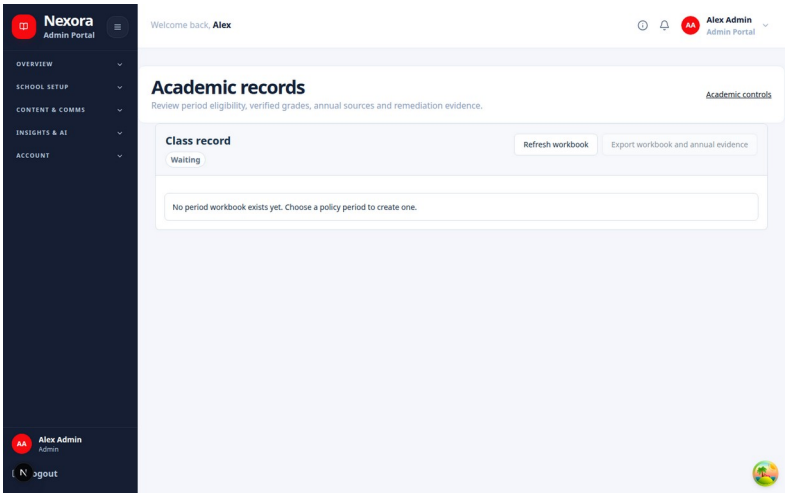

Related screen evidence: /dashboard/admin/academic-records/[classId]

Academic Readiness

In plain English

Evaluates learner and class evidence before release, completion, transition, or remediation decisions.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/academic-state/academic-readiness.module.ts

Surface count: 3 controller files in this folder · 28 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

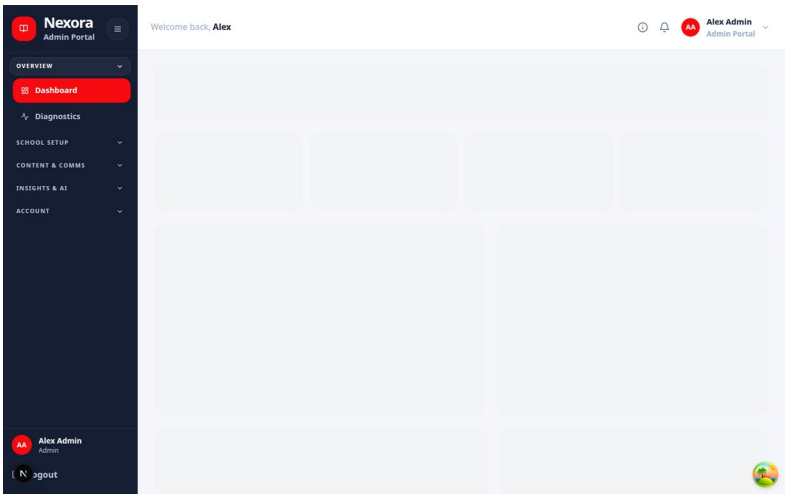

Related screen evidence: /dashboard/admin

Academic State

In plain English

Publishes the backend-authoritative current school year, period, lifecycle state, and related capability decisions.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/academic-state/academic-state.module.ts

Surface count: 3 controller files in this folder · 28 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

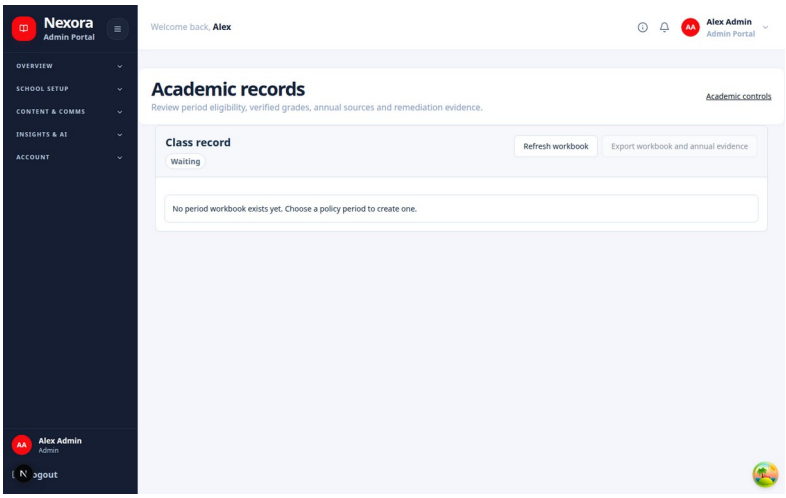

Related screen evidence: /dashboard/admin/academic-records/[classId]

Admin Demo Mode

In plain English

Provides a controlled demonstration state for administrators without turning demonstration behavior into production authority.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/admin-demo-mode/admin-demo-mode.module.ts

Surface count: 1 controller files in this folder · 3 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

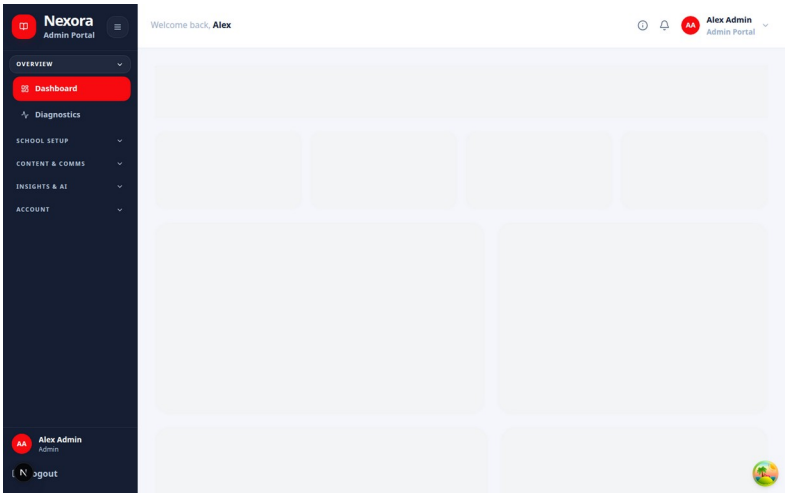

Related screen evidence: /dashboard/admin

Admin Lifecycle

In plain English

Previews and executes governed archive, cleanup, and lifecycle actions while preserving impact and audit evidence.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/admin-lifecycle/admin-lifecycle.module.ts

Surface count: 2 controller files in this folder · 21 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

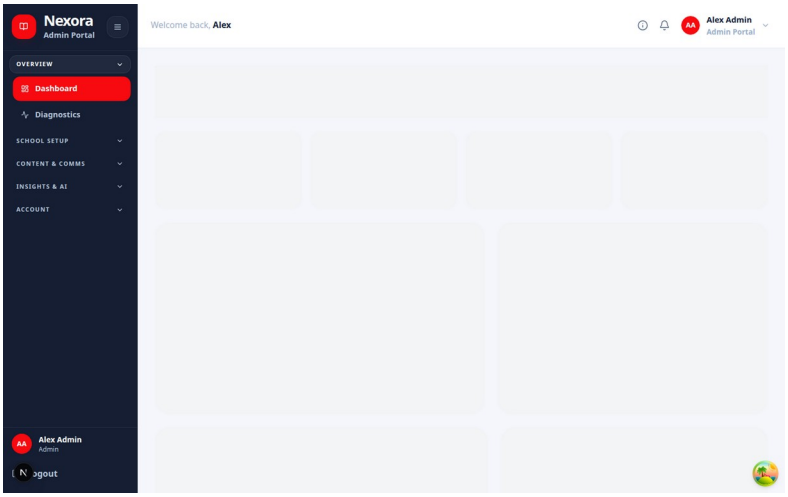

Related screen evidence: /dashboard/admin

Admin Maintenance

In plain English

Controls reauthenticated maintenance sessions and high-impact administrator operations.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/admin-maintenance/admin-maintenance.module.ts

Surface count: 1 controller files in this folder · 3 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

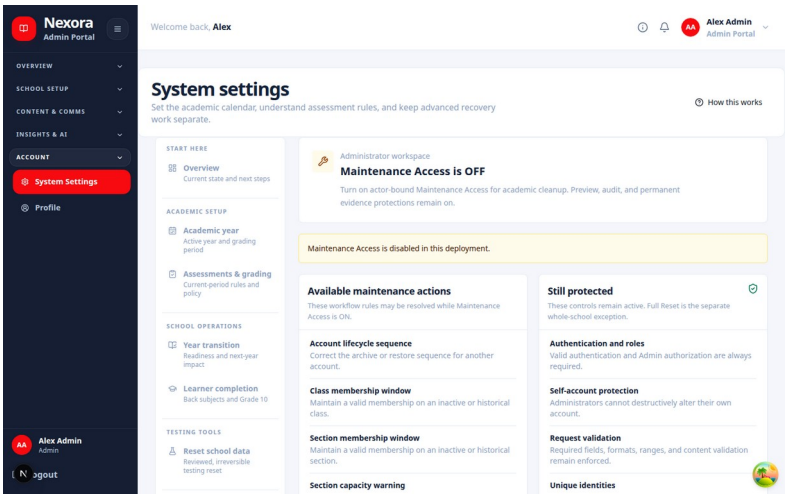

Related screen evidence: /dashboard/admin/system-settings/maintenance-access

Admin

In plain English

Aggregates administrator-facing capabilities, summaries, and management endpoints.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/admin/admin.module.ts

Surface count: 1 controller files in this folder · 5 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

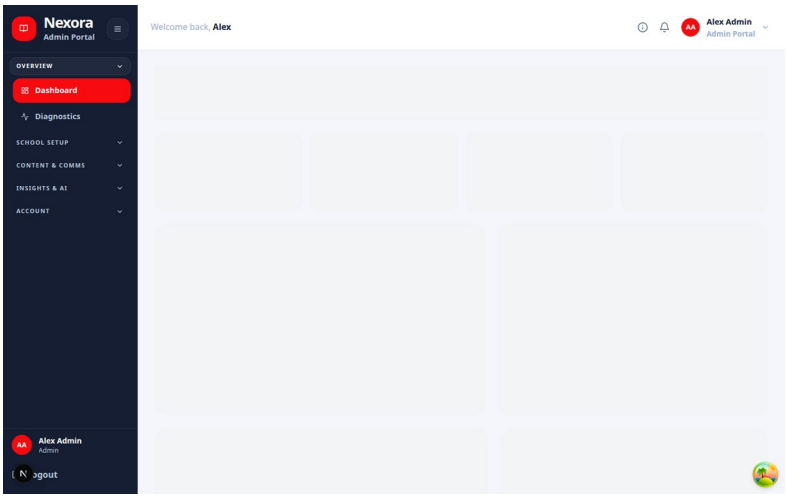

Related screen evidence: /dashboard/admin

Ai Mentor

In plain English

Accepts authenticated AI-assistance requests, creates durable jobs where needed, and proxies only to the internal AI service.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/ai-mentor/ai-mentor.module.ts

Surface count: 1 controller files in this folder · 46 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

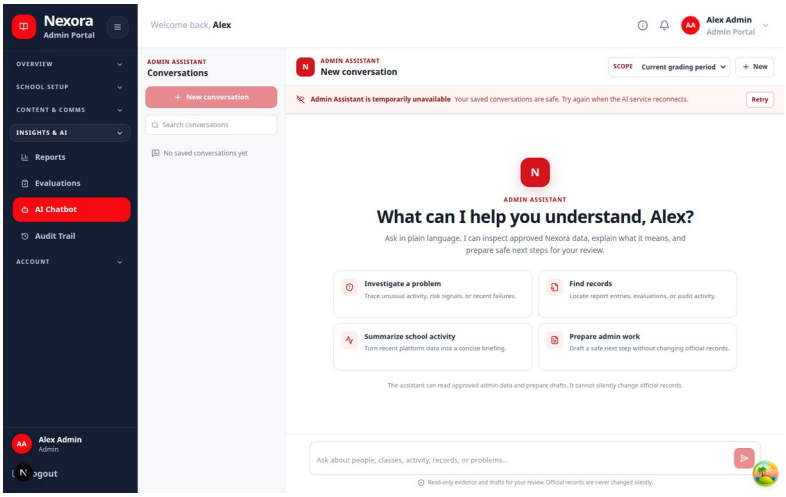

Related screen evidence: /dashboard/admin/chatbot

Analytics

In plain English

Builds role-scoped usage, learning, and operational summaries from authoritative backend data.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/analytics/analytics.module.ts

Surface count: 1 controller files in this folder · 4 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

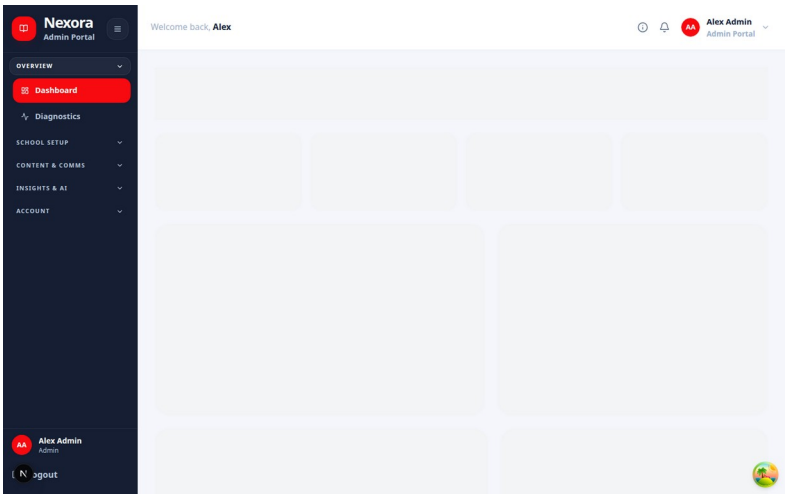

Related screen evidence: /dashboard/admin

Announcements

In plain English

Creates, targets, schedules, publishes, and tracks school or class announcements.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/announcements/announcements.module.ts

Surface count: 3 controller files in this folder · 8 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

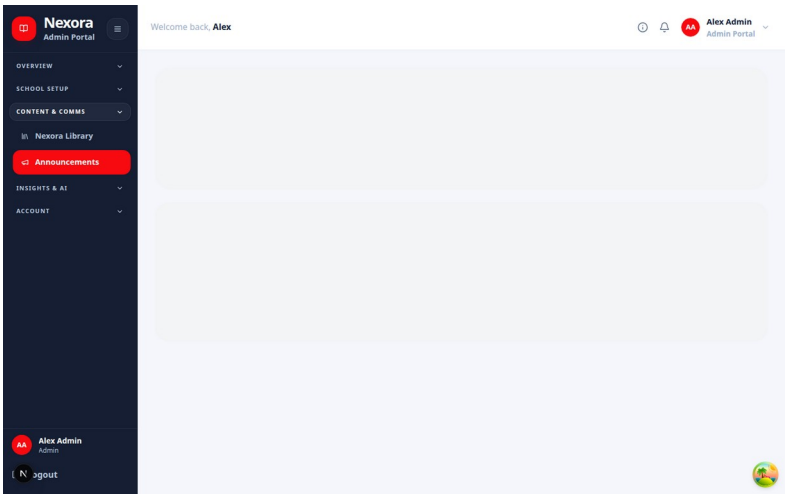

Related screen evidence: /dashboard/admin/announcements

App Version

In plain English

Publishes mobile build policy, update eligibility, download metadata, and integrity requirements.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/app-version/app-version.module.ts

Surface count: 1 controller files in this folder · 2 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

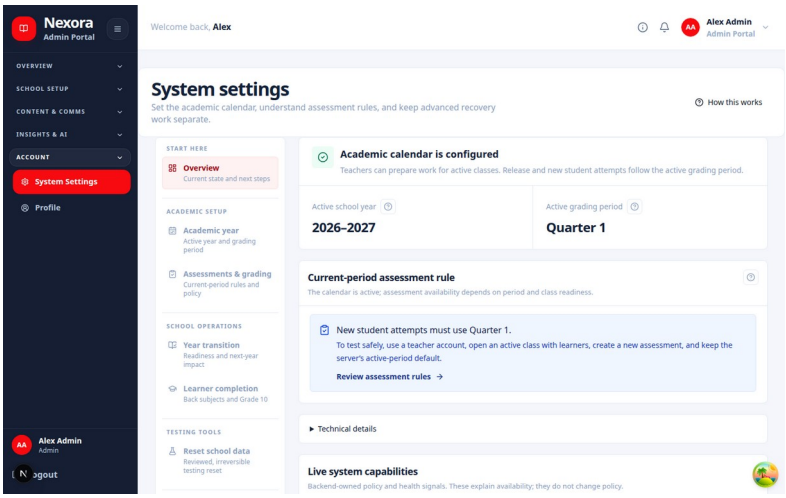

Related screen evidence: /dashboard/admin/system-settings

Assessments

In plain English

Owns assessment authoring, assignment, attempts, scoring, review, release, and result history.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/assessments/assessments.module.ts

Surface count: 2 controller files in this folder · 41 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

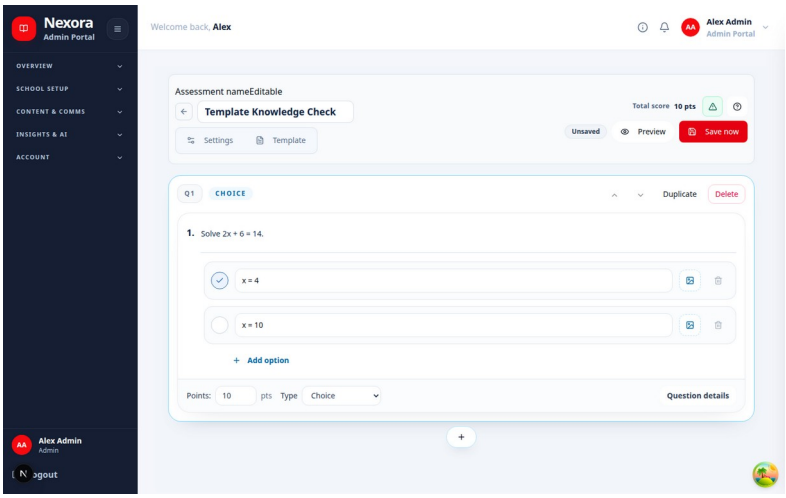

Related screen evidence: /dashboard/admin/class-templates/[id]/assessments/[assessmentKey]/edit

Audit

In plain English

Stores and retrieves immutable evidence of consequential actions and security-relevant events.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/audit/audit.module.ts

Surface count: 0 controller files in this folder · 0 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

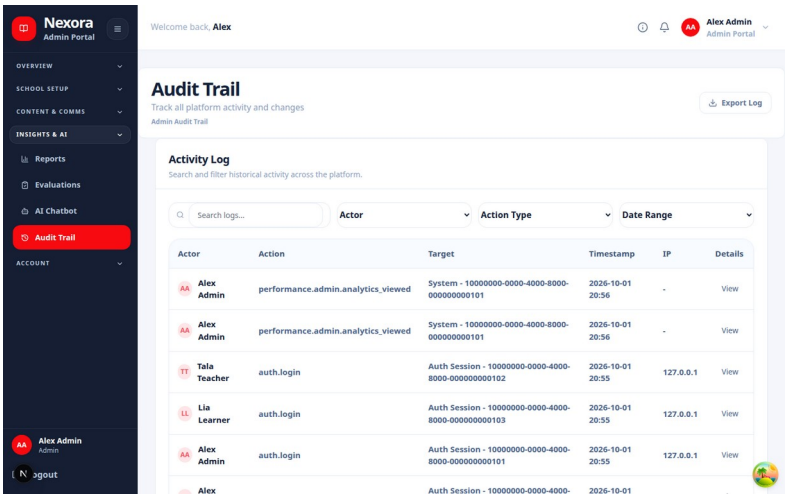

Related screen evidence: /dashboard/admin/audit

Auth

In plain English

Validates credentials, issues and rotates sessions, applies account-state rules, and supports secure recovery.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/auth/auth.module.ts

Surface count: 1 controller files in this folder · 15 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

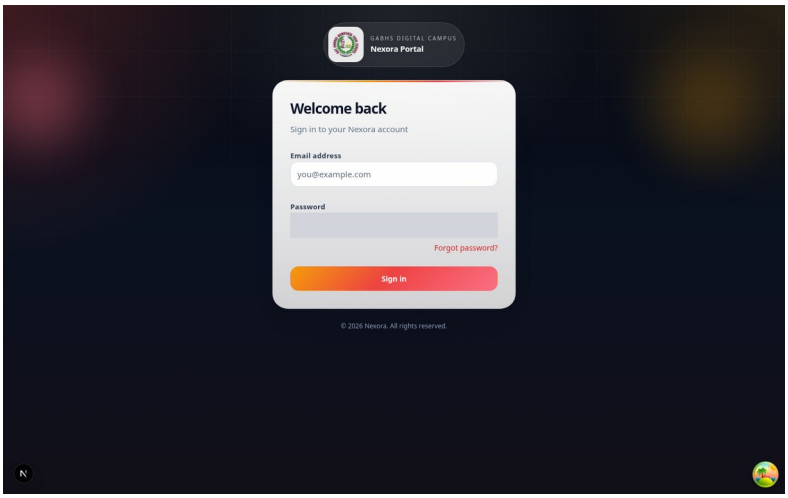

Related screen evidence: /login

Class Record

In plain English

Maintains the official class workbook, score evidence, exceptions, calculations, and release readiness.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/class-record/class-record.module.ts

Surface count: 1 controller files in this folder · 30 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

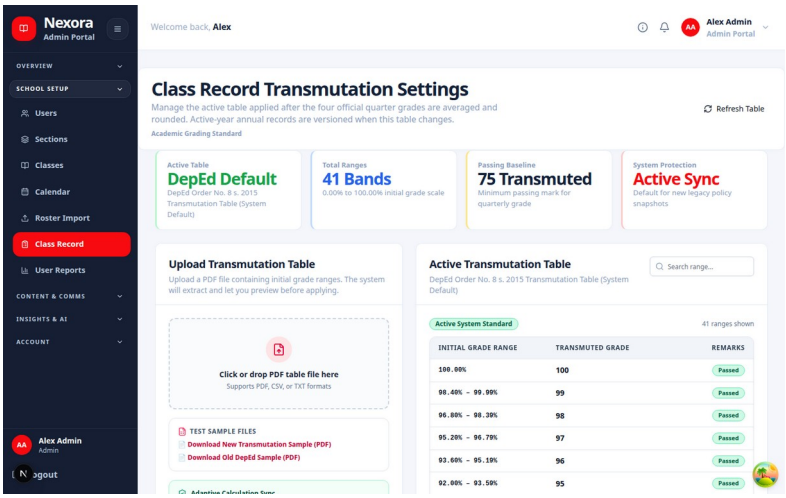

Related screen evidence: /dashboard/admin/class-record

Class Templates

In plain English

Lets authorized staff prepare reusable class structures and import or export template definitions.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/class-templates/class-templates.module.ts

Surface count: 1 controller files in this folder · 14 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

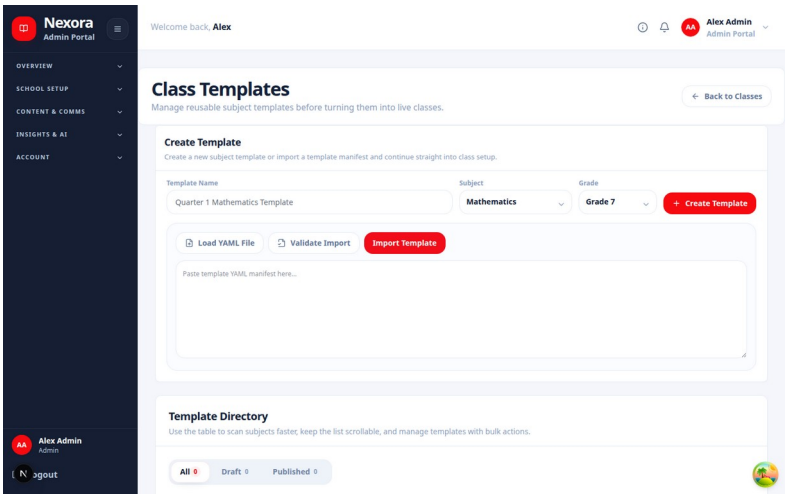

Related screen evidence: /dashboard/admin/class-templates

Classes

In plain English

Owns class identity, membership, teacher assignment, status, and class-level views.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/classes/classes.module.ts

Surface count: 1 controller files in this folder · 29 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

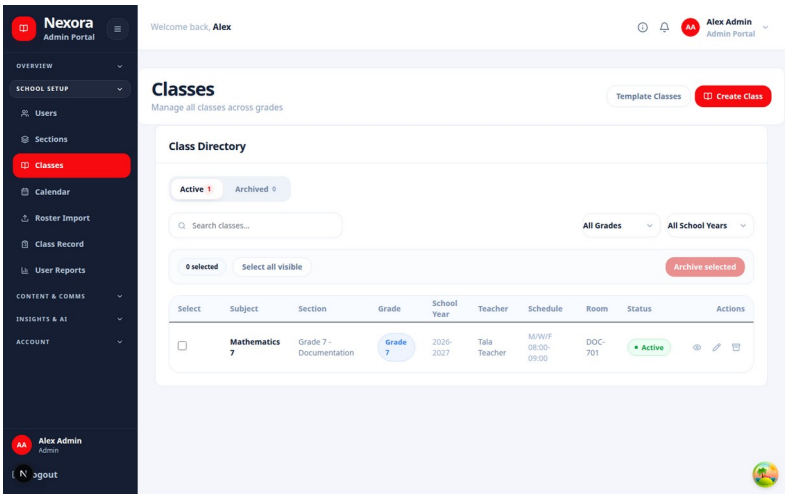

Related screen evidence: /dashboard/admin/classes

Content Modules

In plain English

Organizes course modules, ordering, publication state, and lesson relationships.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/content-modules/content-modules.module.ts

Surface count: 1 controller files in this folder · 20 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

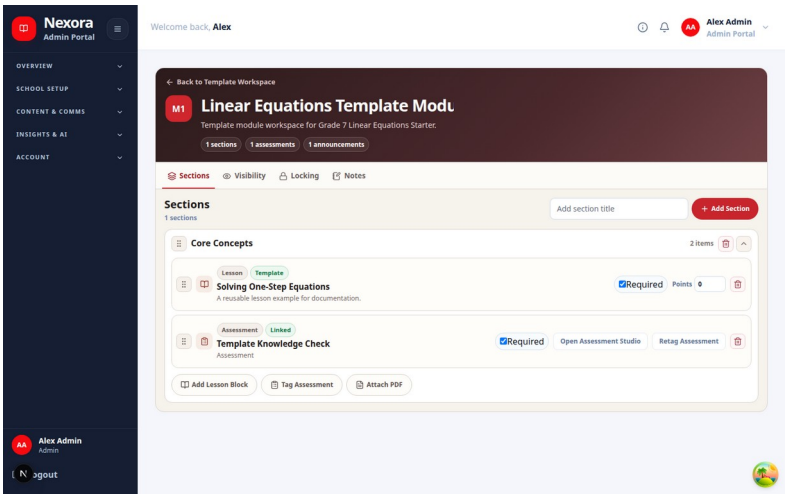

Related screen evidence: /dashboard/admin/class-templates/[id]/modules/[moduleKey]

Discussion Board

In plain English

Runs moderated class discussions, comments, attachments, reactions, reports, and publication state.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/discussion-board/discussion-board.module.ts

Surface count: 1 controller files in this folder · 19 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

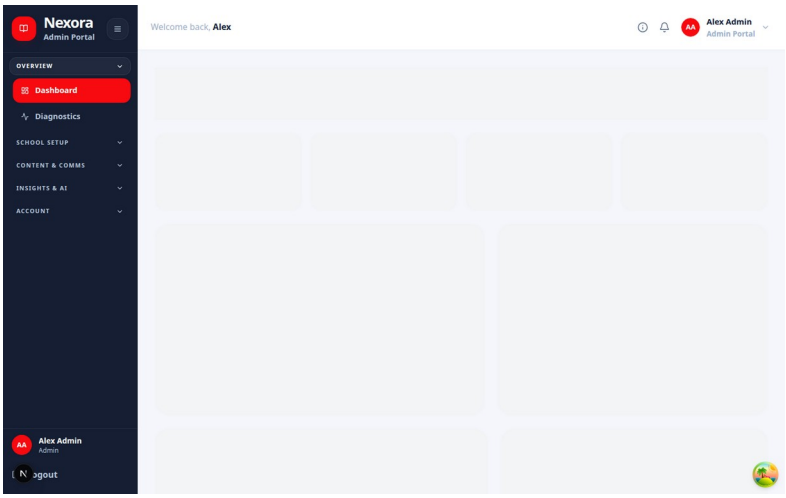

Related screen evidence: /dashboard/admin

File Upload

In plain English

Validates uploaded teaching files, records ownership, and schedules extraction or indexing work.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/file-upload/file-upload.module.ts

Surface count: 2 controller files in this folder · 14 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

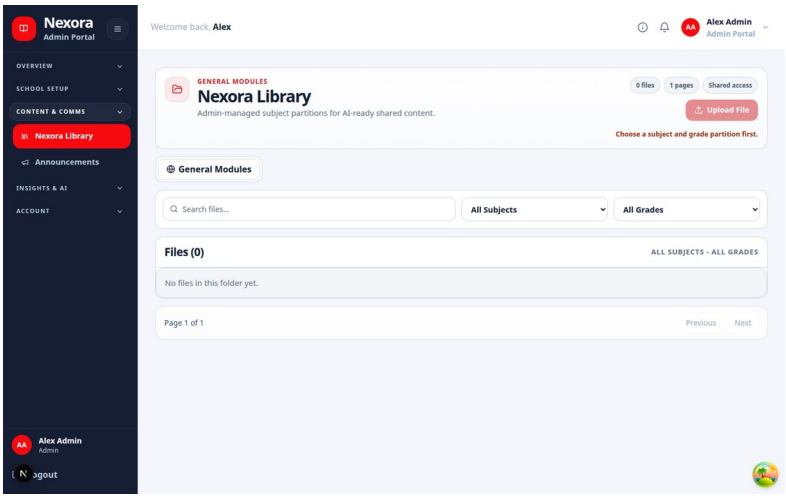

Related screen evidence: /dashboard/admin/library

Storage

In plain English

Provides the storage-driver boundary for local files or S3-compatible object storage.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/file-upload/storage/storage.module.ts

Surface count: 0 controller files in this folder · 0 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

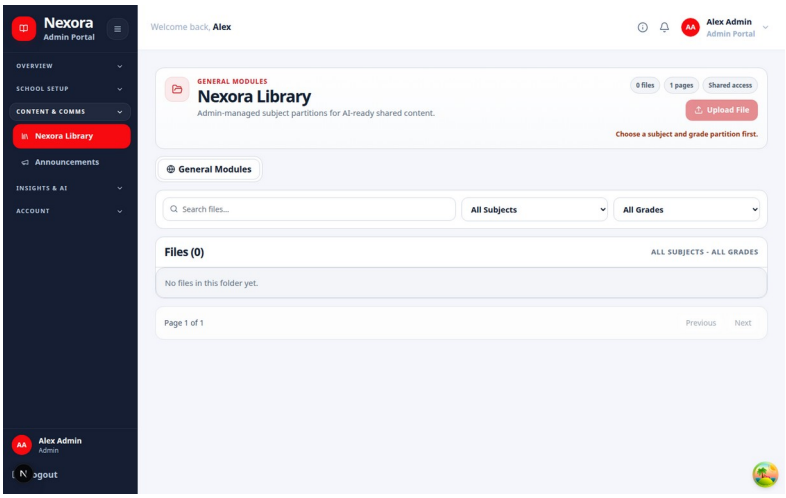

Related screen evidence: /dashboard/admin/library

Health

In plain English

Reports liveness, readiness, dependency status, and operational diagnostics.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/health/health.module.ts

Surface count: 2 controller files in this folder · 4 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

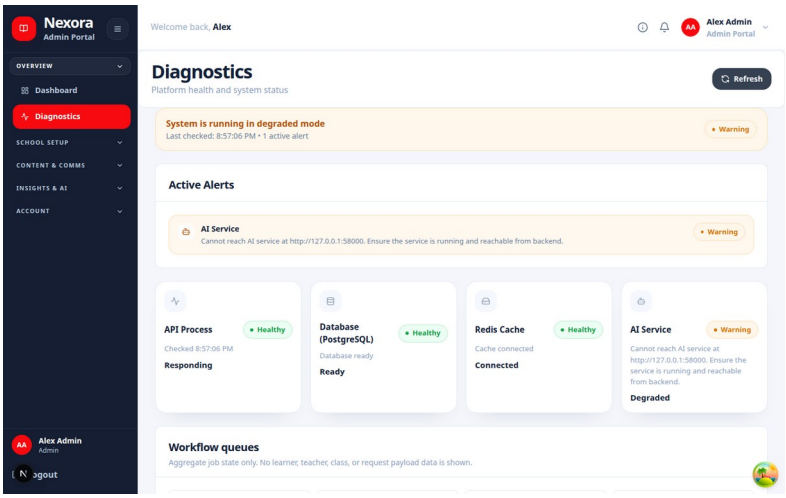

Related screen evidence: /dashboard/admin/diagnostics

Ja

In plain English

Coordinates JA guidance, review, learner support, and AI-assisted study interactions.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/ja/ja.module.ts

Surface count: 2 controller files in this folder · 19 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

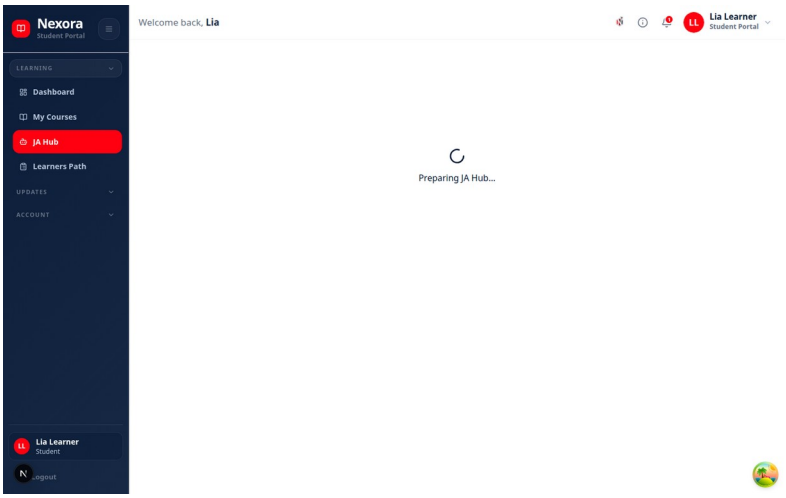

Related screen evidence: /dashboard/student/ja

Lessons

In plain English

Owns lesson content, publication, preview access, completion evidence, and delivery metadata.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/lessons/lessons.module.ts

Surface count: 1 controller files in this folder · 25 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

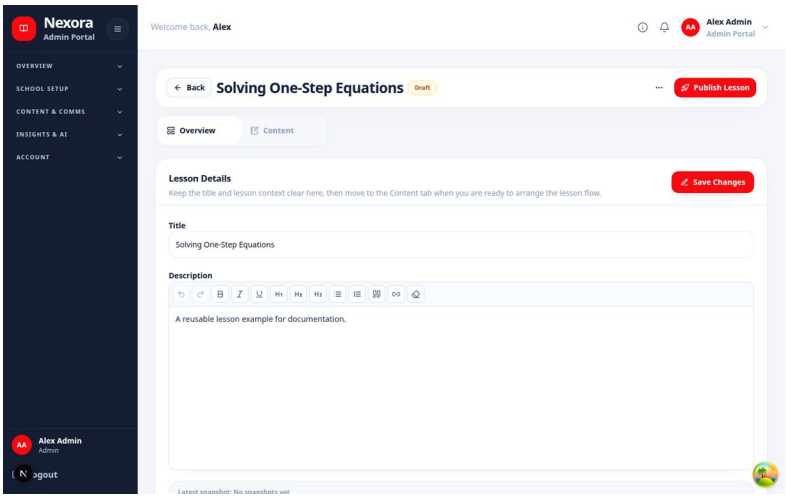

Related screen evidence: /dashboard/admin/class-templates/[id]/lessons/[lessonKey]/edit

Lxp

In plain English

Builds personalized learning paths and learner-facing experience data from approved content and evidence.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/lxp/lxp.module.ts

Surface count: 1 controller files in this folder · 32 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

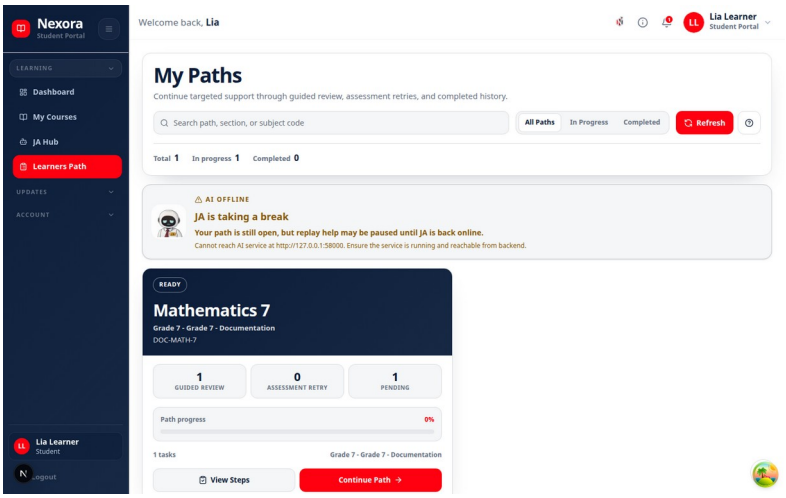

Related screen evidence: /dashboard/student/lxp

Mail

In plain English

Sends account, recovery, verification, and workflow email through the configured mail transport.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/mail/mail.module.ts

Surface count: 0 controller files in this folder · 0 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

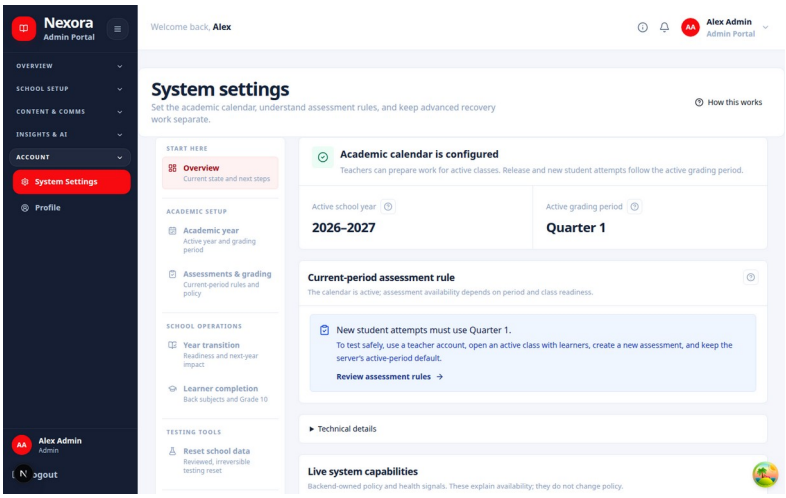

Related screen evidence: /dashboard/admin/system-settings

Mobile Workspace

In plain English

Returns compact, role-specific mobile dashboard, calendar, and library projections.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/mobile-workspace/mobile-workspace.module.ts

Surface count: 1 controller files in this folder · 5 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

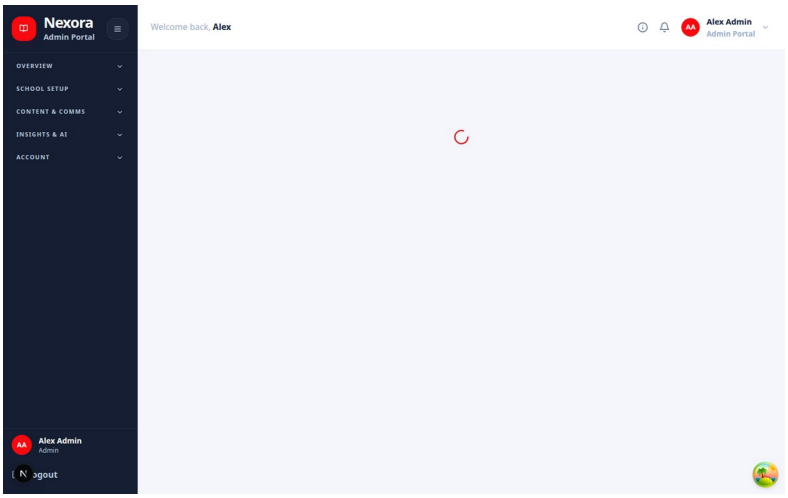

Related screen evidence: /dashboard

Notifications

In plain English

Creates in-app notifications and safely fans out push or workflow alerts.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/notifications/notifications.module.ts

Surface count: 1 controller files in this folder · 8 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

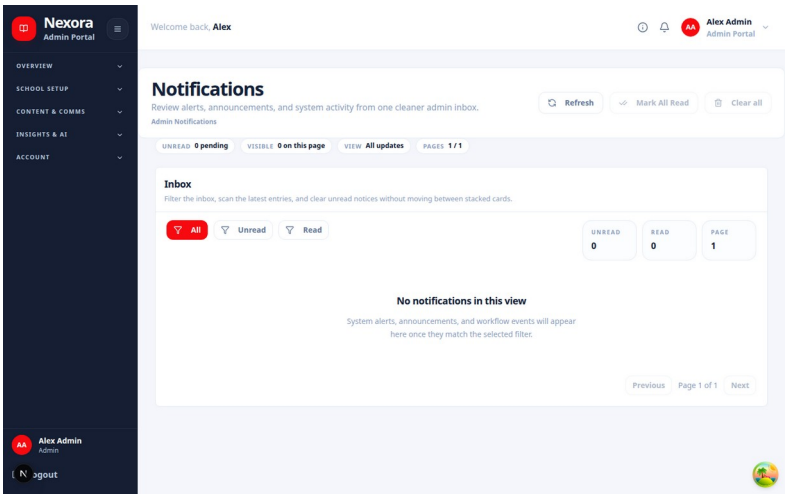

Related screen evidence: /dashboard/notifications

Otp

In plain English

Issues and validates short-lived verification codes with rate and expiry controls.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/otp/otp.module.ts

Surface count: 1 controller files in this folder · 2 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

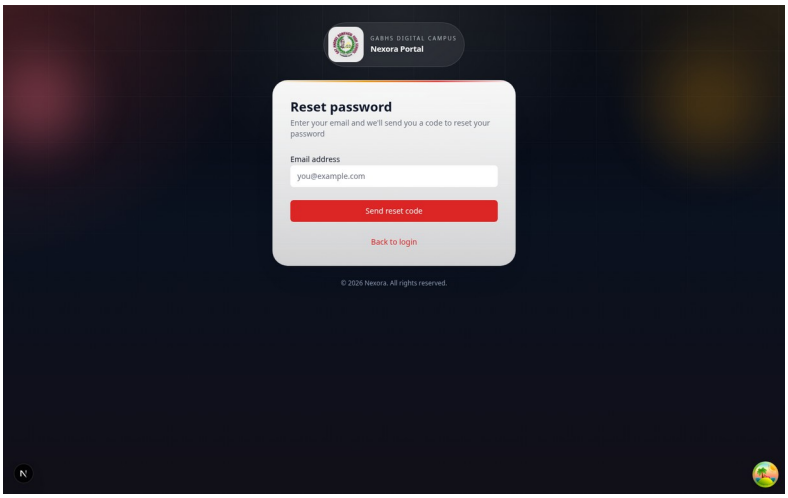

Related screen evidence: /forgot-password

Performance

In plain English

Computes learner performance signals, intervention candidates, and restart-safe recomputation jobs.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/performance/performance.module.ts

Surface count: 1 controller files in this folder · 11 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

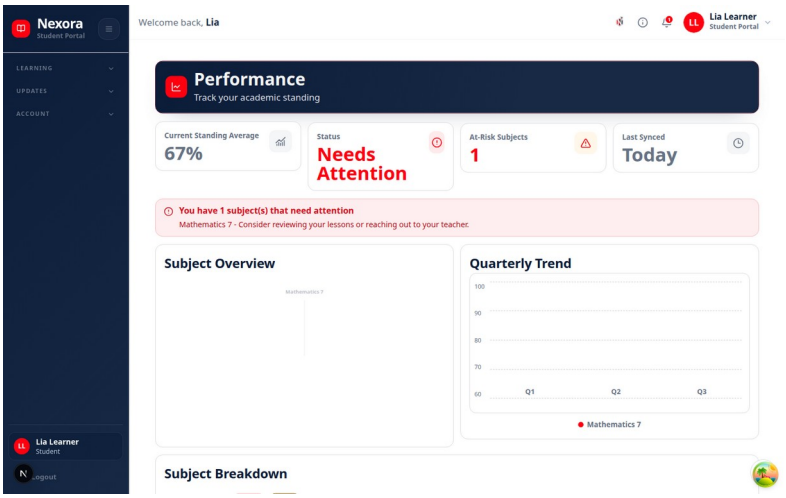

Related screen evidence: /dashboard/student/performance

Profiles

In plain English

Owns user profile completion, personal data, and role-safe self-service updates.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/profiles/profiles.module.ts

Surface count: 1 controller files in this folder · 9 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

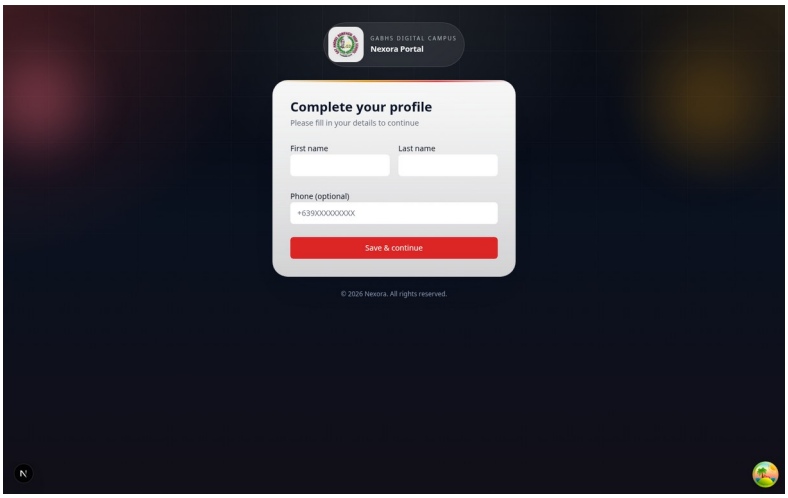

Related screen evidence: /complete-profile

Rag

In plain English

Coordinates retrieval indexing and source-grounded context used by assistive AI flows.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/rag/rag.module.ts

Surface count: 0 controller files in this folder · 0 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

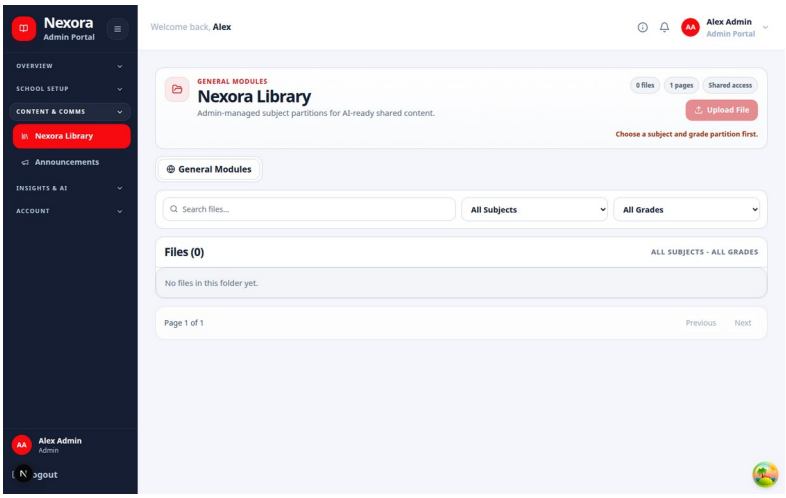

Related screen evidence: /dashboard/admin/library

Reports

In plain English

Builds authorized operational and academic reports for review or export.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/reports/reports.module.ts

Surface count: 1 controller files in this folder · 6 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

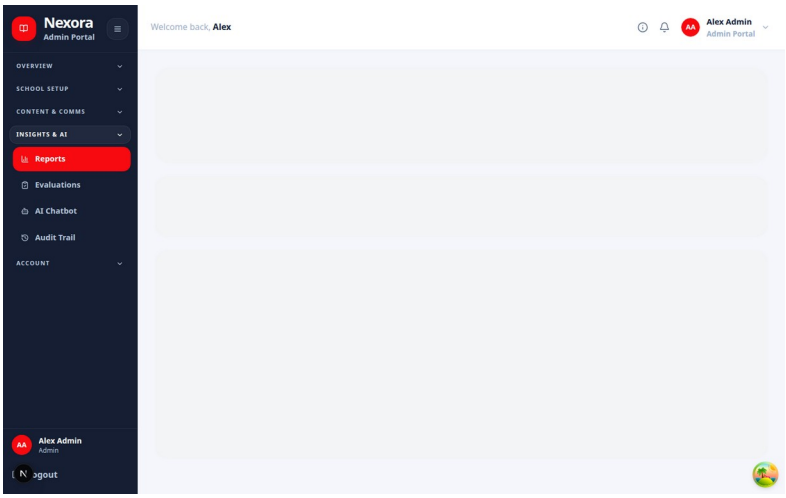

Related screen evidence: /dashboard/admin/reports

Roles

In plain English

Defines and resolves role records used by backend authorization.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/roles/roles.module.ts

Surface count: 0 controller files in this folder · 0 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

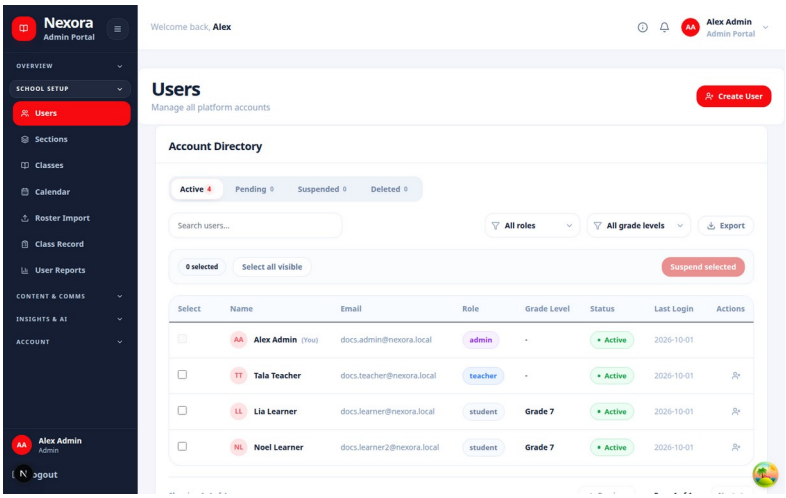

Related screen evidence: /dashboard/admin/users

Roster Import

In plain English

Validates roster files, previews impact, and performs controlled account or enrollment imports.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/roster-import/roster-import.module.ts

Surface count: 1 controller files in this folder · 4 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

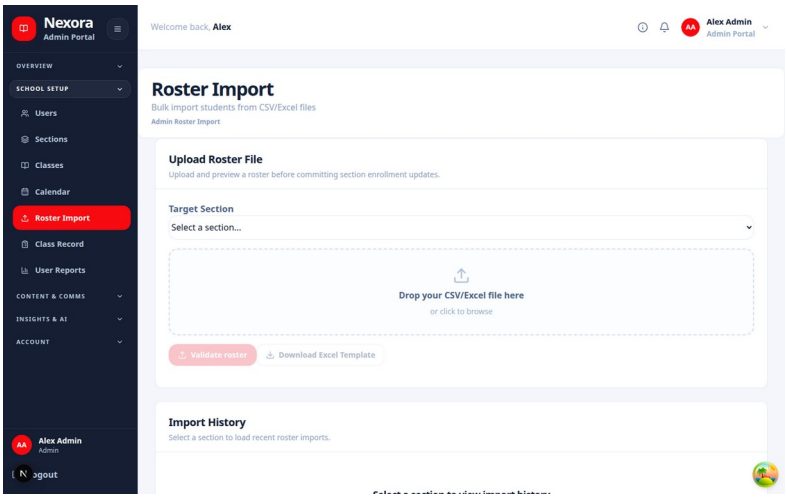

Related screen evidence: /dashboard/admin/roster-import

School Events

In plain English

Stores and delivers school calendar events and role-scoped schedules.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/school-events/school-events.module.ts

Surface count: 1 controller files in this folder · 4 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

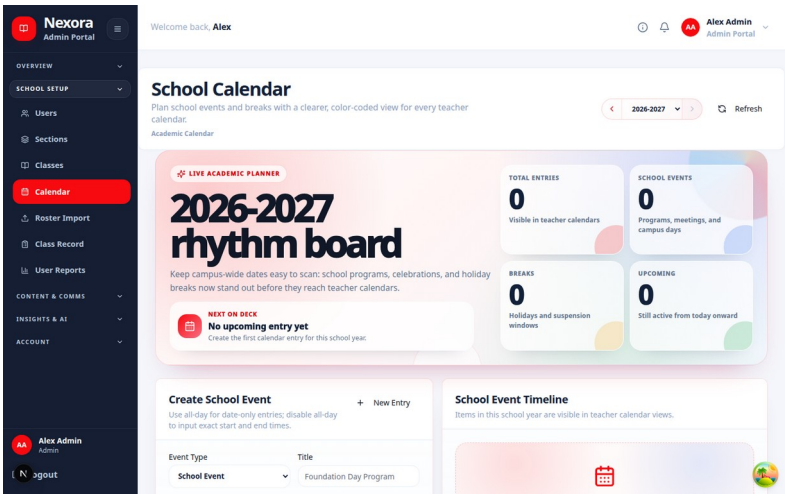

Related screen evidence: /dashboard/admin/calendar

Sections

In plain English

Owns section identity, membership, advisers, schedules, and class relationships.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/sections/sections.module.ts

Surface count: 1 controller files in this folder · 26 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

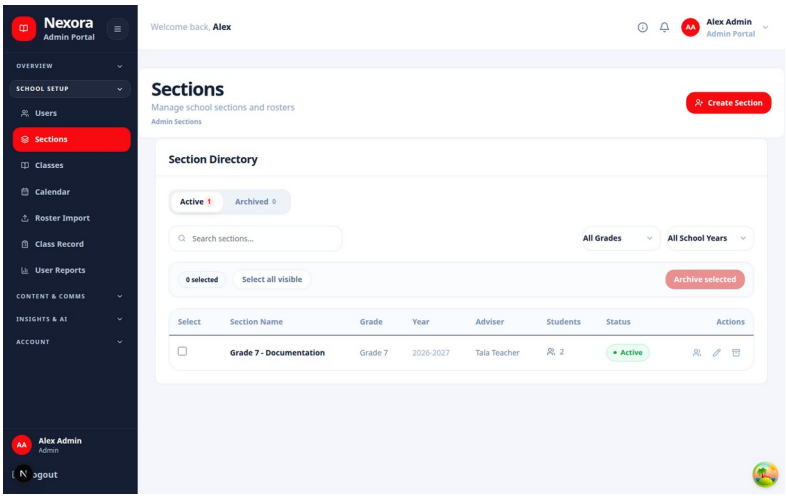

Related screen evidence: /dashboard/admin/sections

System Capabilities

In plain English

Consolidates backend-owned feature availability and dependency readiness for clients.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/system-capabilities/system-capabilities.module.ts

Surface count: 1 controller files in this folder · 1 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

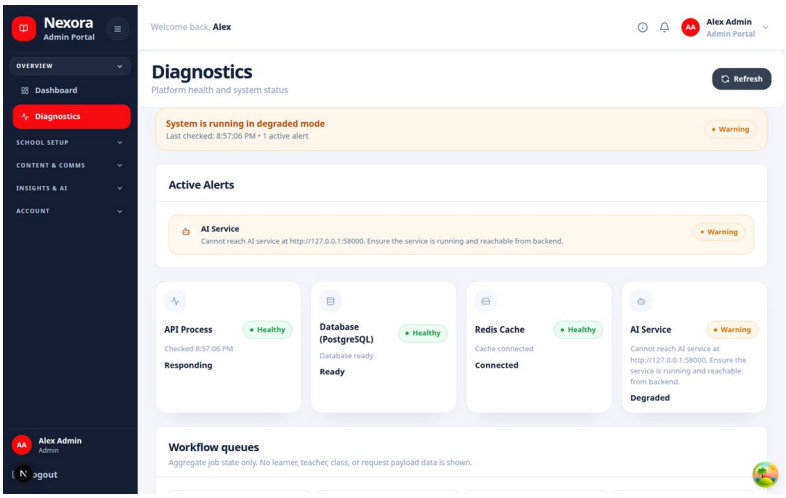

Related screen evidence: /dashboard/admin/diagnostics

System Reset

In plain English

Previews and coordinates protected reset workflows with allowlists, reauthentication, queues, and audit evidence.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/system-reset/system-reset.module.ts

Surface count: 1 controller files in this folder · 6 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

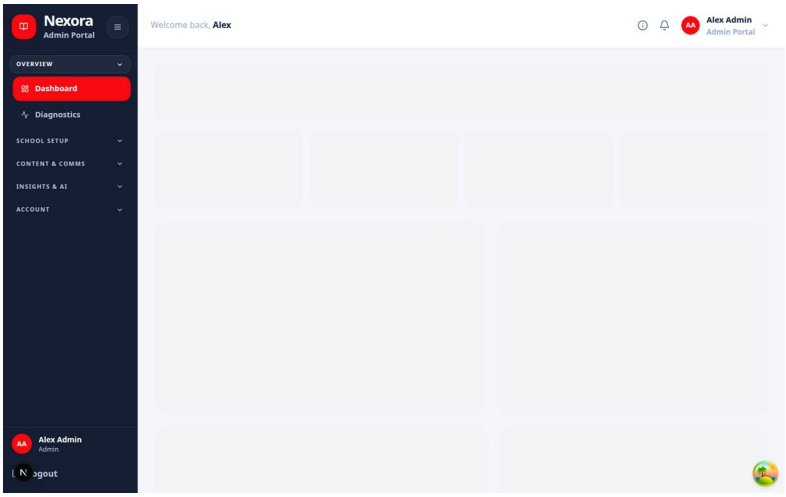

Related screen evidence: /dashboard/admin

Teacher Profiles

In plain English

Stores teacher-specific professional profile data and assignments.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/teacher-profiles/teacher-profiles.module.ts

Surface count: 1 controller files in this folder · 4 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

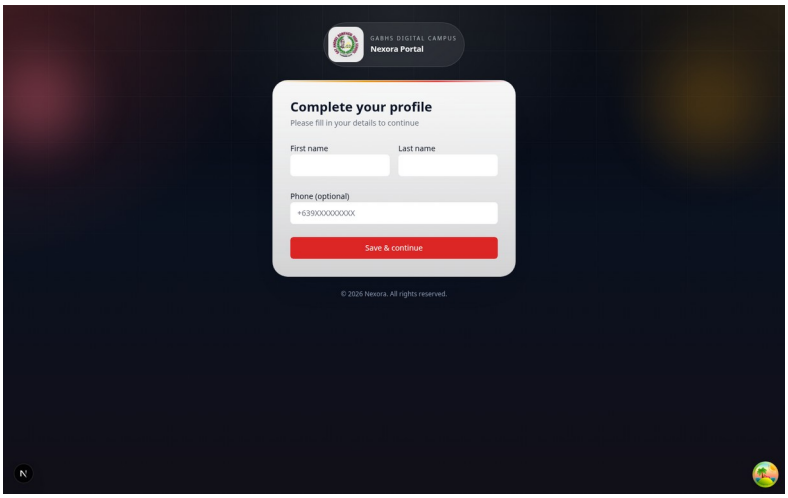

Related screen evidence: /complete-profile

Teacher

In plain English

Provides teacher dashboard, class, learner, and workflow projections.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/teacher/teacher.module.ts

Surface count: 1 controller files in this folder · 3 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

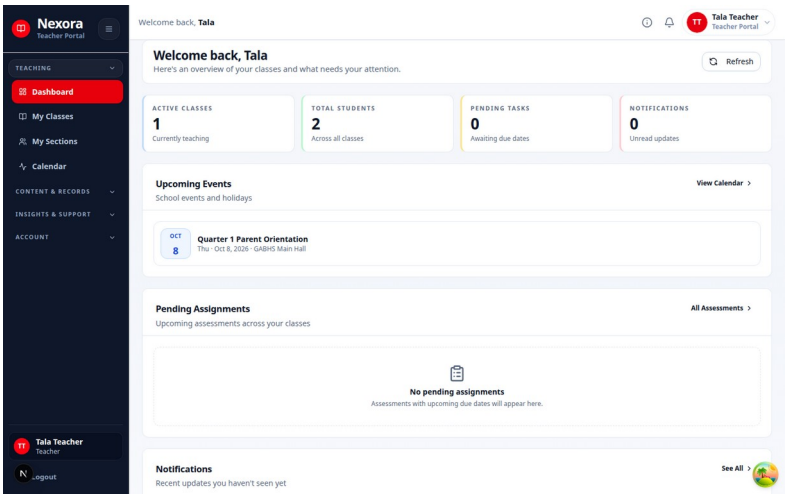

Related screen evidence: /dashboard/teacher

Users

In plain English

Creates, reads, updates, archives, and searches user accounts under role and lifecycle policy.

Authority: NestJS backend. Web and mobile consume its public /api contract; the database is never a client API.

Inputs: Authenticated request or internal event, validated data, role/account state, academic policy, and existing durable records.


Outputs: Role-scoped response, audited transaction, notification, or durable job identity.

Source owner: backend/src/modules/users/users.module.ts

Surface count: 1 controller files in this folder · 13 HTTP handlers

Failure path: Capture status code and request ID; check dependency health and backend log; inspect audit/job state; correct the cause before retrying.

Verification: Run a permitted read and a synthetic preview or write, confirm persistence, then repeat with a disallowed role to verify isolation.

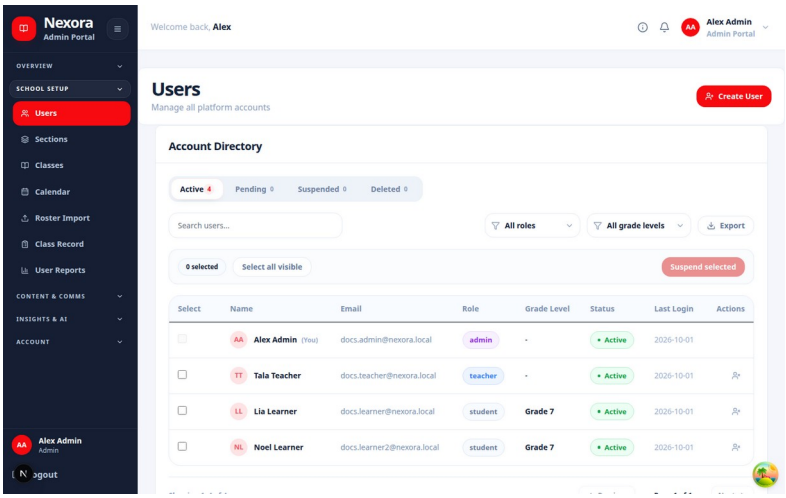

Related screen evidence: /dashboard/admin/users

8. Backend HTTP handler index

backend/src/modules/academic-state/academic-grading.controller.ts

Method	Source line
POST	32
POST	49
POST	66
GET	83
POST	91
GET	103
POST	119
POST	136

backend/src/modules/academic-state/academic-repair.controller.ts

Method	Source line
GET	38
POST	46
POST	61
POST	78
POST	90
POST	107
POST	124
POST	141
POST	158
POST	175
POST	184
POST	193

backend/src/modules/academic-state/academic-state.controller.ts

Method	Source line
GET	28
GET	38
GET	48
POST	64
GET	77
GET	87
POST	100
POST	113

backend/src/modules/admin-demo-mode/admin-demo-mode.controller.ts

Method	Source line
GET	42
POST	48
POST	56

backend/src/modules/admin-lifecycle/admin-lifecycle.controller.ts

Method	Source line
POST	38
POST	47
POST	59
POST	68
POST	80
POST	89
POST	101
POST	110
GET	122

backend/src/modules/admin-lifecycle/admin-maintenance-lifecycle.controller.ts

Method	Source line
POST	40
POST	52
POST	66
POST	75
POST	89
POST	101
POST	115
POST	124
POST	138
POST	150
POST	162
GET	174

backend/src/modules/admin-maintenance/admin-maintenance.controller.ts

Method	Source line
GET	21
POST	30
DELETE	42

backend/src/modules/admin/admin.controller.ts

Method	Source line
GET	18
GET	29
GET	40
GET	62
GET	76

backend/src/modules/ai-mentor/ai-mentor.controller.ts

Method	Source line
POST	963
POST	976
GET	997
PATCH	1012
GET	1091
POST	1163
GET	1231
POST	1298
POST	1352
GET	1409
POST	1435
POST	1587
GET	1671
GET	1734
GET	1802
PATCH	1873
POST	1925
POST	1972
POST	2079
POST	2127
DELETE	2208
GET	2252
POST	2273
GET	2285
GET	2295
PATCH	2309
DELETE	2324
POST	2338
POST	2367
POST	2414
POST	2446
POST	2491
PATCH	2536
PATCH	2562
GET	2586
PATCH	2595
POST	2616
POST	2640
POST	2676
POST	2712
GET	2747
GET	2763
GET	2844
DELETE	2986
GET	3028
POST	3041

backend/src/modules/analytics/analytics.controller.ts

Method	Source line
GET	15
GET	29
GET	43
GET	56

backend/src/modules/announcements/admin-announcements.controller.ts

Method	Source line
GET	18

backend/src/modules/announcements/announcements.controller.ts

Method	Source line
POST	43
GET	63
GET	83
PATCH	104
PATCH	125
DELETE	150

backend/src/modules/announcements/teacher-announcements.controller.ts

Method	Source line
GET	18

backend/src/modules/app-version/app-version.controller.ts

Method	Source line
GET	28
POST	47

backend/src/modules/assessments/assessments-public.controller.ts

Method	Source line
GET	18

backend/src/modules/assessments/assessments.controller.ts

Method	Source line
GET	102
POST	139
GET	152
PUT	165
GET	183
GET	230
POST	254
PUT	277
PATCH	297
DELETE	321
POST	337
PUT	360
DELETE	384
POST	400
POST	449
GET	502
POST	519
POST	569
DELETE	616
GET	639
GET	667
GET	692
POST	723
GET	742
GET	762
PATCH	777
POST	801
POST	820
PUT	875
POST	895
GET	918
GET	945
GET	969
GET	992
GET	1014
GET	1040
POST	1062
POST	1083
POST	1099
POST	1122

backend/src/modules/auth/auth.controller.ts

Method	Source line
POST	103
POST	137
POST	170
POST	209
POST	243
POST	268
POST	287
POST	316
POST	333
POST	348
GET	373
POST	390
POST	418
POST	442
PATCH	469

backend/src/modules/class-record/class-record.controller.ts

Method	Source line
GET	47
GET	54
POST	61
POST	76
POST	92
POST	107
GET	121
GET	135
GET	151
POST	167
POST	183
PATCH	203
POST	219
POST	235
GET	251
GET	268
POST	281
GET	295
POST	312
GET	329
POST	343
POST	357
GET	373
GET	392
GET	406
GET	423
GET	441
GET	457
GET	471
GET	485

backend/src/modules/class-templates/class-templates.controller.ts

Method	Source line
GET	68
GET	82
POST	95
GET	106
PATCH	113
DELETE	129
POST	140
GET	156
PUT	163
POST	179
GET	223
GET	236
POST	243
POST	256

backend/src/modules/classes/classes.controller.ts

Method	Source line
GET	85
GET	117
GET	160
GET	191
GET	208
GET	224
GET	251
PUT	271
GET	293
PUT	312
GET	336
POST	356
PUT	401
PATCH	422
POST	443
PUT	481
POST	497
DELETE	520
DELETE	535
PATCH	550
PATCH	567
GET	584
GET	601
GET	626
GET	651
GET	706
POST	724
DELETE	751
GET	777

backend/src/modules/content-modules/content-modules.controller.ts

Method	Source line
GET	82
GET	103
POST	125
PATCH	141
PATCH	162
DELETE	183
PUT	199
POST	221
PATCH	242
DELETE	263
PUT	282
POST	304
PATCH	325
PATCH	346
DELETE	367
GET	383
PUT	425
PUT	447
POST	469
GET	505

backend/src/modules/discussion-board/discussion-board.controller.ts

Method	Source line
POST	138
POST	165
POST	194
GET	216
GET	235
PATCH	256
POST	279
POST	300
POST	321
DELETE	342
POST	363
DELETE	387
POST	410
PUT	435
DELETE	460
GET	483
GET	503
GET	523
GET	545

backend/src/modules/file-upload/file-upload.controller.ts

Method	Source line
POST	107
GET	152
GET	172
POST	188
PATCH	206
DELETE	226
GET	241
GET	253
PATCH	271
GET	291
POST	328
POST	339
DELETE	357

backend/src/modules/file-upload/internal-uploads.controller.ts

Method	Source line
GET	37

backend/src/modules/health/health.controller.ts

Method	Source line
GET	12
GET	28
GET	37

backend/src/modules/health/workflow-diagnostics.controller.ts

Method	Source line
GET	14

backend/src/modules/ja/ja-hub.controller.ts

Method	Source line
GET	39
GET	54
GET	69
POST	84
GET	99
POST	115
GET	131
POST	146
GET	161
POST	176
POST	197
POST	213

backend/src/modules/ja/ja.controller.ts

Method	Source line
GET	34
POST	49
GET	64
POST	79
POST	100
POST	123
DELETE	143

backend/src/modules/lessons/lessons.controller.ts

Method	Source line
GET	62
GET	109
GET	122
GET	144
POST	161
PUT	184
PUT	208
GET	224
POST	244
GET	265
POST	285
GET	303
GET	315
POST	333
PUT	358
POST	386
PUT	411
DELETE	437
POST	453
PUT	477
DELETE	502
PUT	523
POST	547
GET	568
GET	588

backend/src/modules/lxp/lxp.controller.ts

Method	Source line
GET	37
GET	46
GET	57
GET	67
POST	77
GET	92
POST	107
PATCH	124
POST	141
GET	158
GET	173
POST	184
GET	194
GET	204
GET	217
POST	226
POST	237
POST	248
POST	258
GET	268
GET	278
GET	291
POST	301
GET	311
GET	321
POST	330
POST	345
GET	358
PATCH	371
POST	386
POST	401
GET	416

backend/src/modules/mobile-workspace/mobile-workspace.controller.ts

Method	Source line
GET	15
GET	25
GET	35
GET	45
GET	58

backend/src/modules/notifications/notifications.controller.ts

Method	Source line
PUT	41
DELETE	64
GET	86
GET	110
PATCH	124
PATCH	139
DELETE	152
DELETE	163

backend/src/modules/otp/otp.controller.ts

Method	Source line
POST	21
POST	38

backend/src/modules/performance/performance.controller.ts

Method	Source line
POST	23
GET	37
GET	51
GET	65
GET	79
POST	95
GET	111
GET	125
GET	139
GET	153
GET	165

backend/src/modules/profiles/profiles.controller.ts

Method	Source line
GET	49
GET	59
GET	69
GET	90
GET	112
GET	128
POST	148
PUT	169
POST	196

backend/src/modules/reports/reports.controller.ts

Method	Source line
GET	100
GET	126
GET	152
GET	178
GET	205
GET	231

backend/src/modules/roster-import/roster-import.controller.ts

Method	Source line
POST	88
POST	118
GET	142
PATCH	165

backend/src/modules/school-events/school-events.controller.ts

Method	Source line
GET	32
POST	40
PATCH	51
DELETE	63

backend/src/modules/sections/sections.controller.ts

Method	Source line
GET	84
GET	119
GET	136
GET	145
POST	155
POST	177
POST	190
POST	203
GET	220
POST	235
PUT	258
PATCH	279
POST	300
DELETE	338
POST	356
PATCH	375
PATCH	395
PUT	419
GET	441
GET	456
POST	525
DELETE	550
DELETE	571
GET	590
GET	616
GET	632

backend/src/modules/system-capabilities/system-capabilities.controller.ts

Method	Source line
GET	10

backend/src/modules/system-reset/system-reset.controller.ts

Method	Source line
GET	35
GET	42
POST	49
POST	60
GET	72
GET	87

backend/src/modules/teacher-profiles/teacher-profiles.controller.ts

Method	Source line
GET	51
GET	58
PUT	73
POST	98

backend/src/modules/teacher/teacher.controller.ts

Method	Source line
GET	18
GET	35
GET	52

backend/src/modules/users/users.controller.ts

Method	Source line
GET	35
GET	69
GET	93
POST	106
PUT	124
POST	144
DELETE	159
PATCH	177
PATCH	190
DELETE	204
GET	217
DELETE	239
POST	247

backend/src/monitoring/metrics.controller.ts

Method	Source line
GET	30

9. AI service handler index

ai-service/app/main.py

Method	Source line
POST	2418
POST	2542
POST	2668
GET	2694
POST	2708
GET	2730
POST	2744
GET	2773
POST	2787
GET	2814
POST	2828
GET	2848
POST	2862
POST	2886
GET	2915
GET	2949
GET	2954
GET	2968
POST	2985
GET	3135
GET	3171
GET	3216
POST	3247
POST	3273
POST	3291
DELETE	3309
POST	3323
POST	3340
GET	3936
GET	3989
GET	4054
PATCH	4099
POST	4304
POST	4344
POST	4841
POST	4872
DELETE	4923
GET	4964
GET	4985
GET	5013
PATCH	5046
DELETE	5080
POST	5114
POST	5172
POST	5244
POST	5304
POST	5372
POST	5497
POST	5619
PATCH	5725
PATCH	5767
POST	5809
POST	5828
POST	5845

Method	Source line
POST	5882
GET	5896
GET	5926
DELETE	5975
POST	6022
POST	6047

ai-service/app/routers/extractions.py

Method	Source line
POST	150
POST	183
POST	314

10. Queue processors

Admin Erasure Cleanup

Source: backend/src/modules/admin-lifecycle/admin-erasure-cleanup.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

Ai Generation

Source: backend/src/modules/ai-mentor/processors/ai-generation.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

Discussion Board

Source: backend/src/modules/discussion-board/discussion-board.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

Library Indexing

Source: backend/src/modules/file-upload/processors/library-indexing.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

Announcement Fan Out

Source: backend/src/modules/notifications/processors/announcement-fan-out.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

Assessment Notification

Source: backend/src/modules/notifications/processors/assessment-notification.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

Push Notification

Source: backend/src/modules/notifications/processors/push-notification.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

Performance Recompute

Source: backend/src/modules/performance/performance-recompute.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

Rag Indexing

Source: backend/src/modules/rag/processors/rag-indexing.processor.ts

Operating rule: Jobs are backend-owned, retryable where safe, observable, and must preserve their durable identity across restarts.

11. Database catalog

Tables 1-14

Table	Schema source
academic_legacy_grade_evidence	backend/src/drizzle/schema/academic-grading.schema.ts:42
academic_year_policies	backend/src/drizzle/schema/academic-grading.schema.ts:68
class_record_participants	backend/src/drizzle/schema/academic-grading.schema.ts:77
academic_period_grade_revisions	backend/src/drizzle/schema/academic-grading.schema.ts:116
academic_external_period_grades	backend/src/drizzle/schema/academic-grading.schema.ts:165
academic_annual_source_selections	backend/src/drizzle/schema/academic-grading.schema.ts:205
subject_annual_grades	backend/src/drizzle/schema/academic-grading.schema.ts:239
academic_remediation_results	backend/src/drizzle/schema/academic-grading.schema.ts:290
academic_back_subjects	backend/src/drizzle/schema/academic-grading.schema.ts:324
academic_back_subject_events	backend/src/drizzle/schema/academic-grading.schema.ts:380
academic_student_year_outcomes	backend/src/drizzle/schema/academic-grading.schema.ts:399
academic_reminder_runs	backend/src/drizzle/schema/academic-grading.schema.ts:426
academic_student_completions	backend/src/drizzle/schema/academic-grading.schema.ts:449
academic_system_states	backend/src/drizzle/schema/academic-state.schema.ts:11

Tables 15-28

Table	Schema source
admin_demo_mode_states	backend/src/drizzle/schema/admin-demo-mode.schema.ts:15
admin_lifecycle_operations	backend/src/drizzle/schema/admin-lifecycle.schema.ts:64
admin_erasure_operations	backend/src/drizzle/schema/admin-lifecycle.schema.ts:123
admin_erasure_items	backend/src/drizzle/schema/admin-lifecycle.schema.ts:188
enrollment_lifecycle_events	backend/src/drizzle/schema/admin-lifecycle.schema.ts:235
admin_maintenance_sessions	backend/src/drizzle/schema/admin-maintenance.schema.ts:28
ai_interaction_logs	backend/src/drizzle/schema/ai-mentor.schema.ts:44
extracted_modules	backend/src/drizzle/schema/ai-mentor.schema.ts:97
announcements	backend/src/drizzle/schema/announcements-notifications.schema.ts:38
notifications	backend/src/drizzle/schema/announcements-notifications.schema.ts:88
notification_devices	backend/src/drizzle/schema/announcements-notifications.schema.ts:133
app_versions	backend/src/drizzle/schema/app-version.schema.ts:11
assessment_editor_receipts	backend/src/drizzle/schema/assessment-editor.schema.ts:11
roles	backend/src/drizzle/schema/base.schema.ts:148

Tables 29-42

Table	Schema source
users	backend/src/drizzle/schema/base.schema.ts:157
user_roles	backend/src/drizzle/schema/base.schema.ts:184
audit_logs	backend/src/drizzle/schema/base.schema.ts:203
grade_score_repair_evidence	backend/src/drizzle/schema/base.schema.ts:224
sections	backend/src/drizzle/schema/base.schema.ts:251
classes	backend/src/drizzle/schema/base.schema.ts:285
class_schedules	backend/src/drizzle/schema/base.schema.ts:341
student_profiles	backend/src/drizzle/schema/base.schema.ts:360
teacher_profiles	backend/src/drizzle/schema/base.schema.ts:394
enrollments	backend/src/drizzle/schema/base.schema.ts:422
lessons	backend/src/drizzle/schema/base.schema.ts:453
lesson_content_blocks	backend/src/drizzle/schema/base.schema.ts:492
lesson_completions	backend/src/drizzle/schema/base.schema.ts:517
lesson_versions	backend/src/drizzle/schema/base.schema.ts:542

Tables 43-56

Table	Schema source
assessments	backend/src/drizzle/schema/base.schema.ts:567
assessment_questions	backend/src/drizzle/schema/base.schema.ts:621
assessment_question_options	backend/src/drizzle/schema/base.schema.ts:648
assessment_attempts	backend/src/drizzle/schema/base.schema.ts:669
assessment_responses	backend/src/drizzle/schema/base.schema.ts:753
archived_users	backend/src/drizzle/schema/base.schema.ts:790
class_modules	backend/src/drizzle/schema/base.schema.ts:812
module_sections	backend/src/drizzle/schema/base.schema.ts:852
module_items	backend/src/drizzle/schema/base.schema.ts:874
module_grading_scale_entries	backend/src/drizzle/schema/base.schema.ts:924
uploaded_files	backend/src/drizzle/schema/base.schema.ts:1237
class_visibility_preferences	backend/src/drizzle/schema/base.schema.ts:1302
student_class_presentation_preferences	backend/src/drizzle/schema/base.schema.ts:1325
student_course_view_preferences	backend/src/drizzle/schema/base.schema.ts:1355

Tables 57-70

Table	Schema source
section_visibility_preferences	backend/src/drizzle/schema/base.schema.ts:1374
library_folders	backend/src/drizzle/schema/base.schema.ts:1399
pending_roster	backend/src/drizzle/schema/base.schema.ts:1515
class_records	backend/src/drizzle/schema/class-record.schema.ts:44
class_record_categories	backend/src/drizzle/schema/class-record.schema.ts:85
class_record_items	backend/src/drizzle/schema/class-record.schema.ts:116
class_record_scores	backend/src/drizzle/schema/class-record.schema.ts:153
class_record_final_grades	backend/src/drizzle/schema/class-record.schema.ts:197
class_templates	backend/src/drizzle/schema/class-templates.schema.ts:32
class_template_modules	backend/src/drizzle/schema/class-templates.schema.ts:61
class_template_module_sections	backend/src/drizzle/schema/class-templates.schema.ts:91
class_template_assessments	backend/src/drizzle/schema/class-templates.schema.ts:112
class_template_lessons	backend/src/drizzle/schema/class-templates.schema.ts:137
class_template_lesson_blocks	backend/src/drizzle/schema/class-templates.schema.ts:158

Tables 71-84

Table	Schema source
class_template_assessment_questions	backend/src/drizzle/schema/class-templates.schema.ts:180
class_template_assessment_question_options	backend/src/drizzle/schema/class-templates.schema.ts:205
class_template_engine_chunks	backend/src/drizzle/schema/class-templates.schema.ts:228
class_template_module_items	backend/src/drizzle/schema/class-templates.schema.ts:255
class_template_announcements	backend/src/drizzle/schema/class-templates.schema.ts:290
discussion_threads	backend/src/drizzle/schema/discussion-board.schema.ts:34
discussion_thread_attachments	backend/src/drizzle/schema/discussion-board.schema.ts:69
discussion_comments	backend/src/drizzle/schema/discussion-board.schema.ts:92
discussion_comment_attachments	backend/src/drizzle/schema/discussion-board.schema.ts:119
discussion_comment_reactions	backend/src/drizzle/schema/discussion-board.schema.ts:142
ja_sessions	backend/src/drizzle/schema/ja.schema.ts:54
ja_session_items	backend/src/drizzle/schema/ja.schema.ts:90
ja_session_responses	backend/src/drizzle/schema/ja.schema.ts:117
ja_session_events	backend/src/drizzle/schema/ja.schema.ts:138

Tables 85-98

Table	Schema source
ja_progress	backend/src/drizzle/schema/ja.schema.ts:157
ja_xp_ledger	backend/src/drizzle/schema/ja.schema.ts:179
ja_threads	backend/src/drizzle/schema/ja.schema.ts:211
ja_thread_messages	backend/src/drizzle/schema/ja.schema.ts:239
ja_guardrail_events	backend/src/drizzle/schema/ja.schema.ts:261
intervention_cases	backend/src/drizzle/schema/lxp.schema.ts:92
intervention_assignments	backend/src/drizzle/schema/lxp.schema.ts:132
lxp_generated_remedial_lessons	backend/src/drizzle/schema/lxp.schema.ts:178
lxp_generated_guided_assessments	backend/src/drizzle/schema/lxp.schema.ts:222
lxp_generated_guided_assessment_attempts	backend/src/drizzle/schema/lxp.schema.ts:272
lxp_progress	backend/src/drizzle/schema/lxp.schema.ts:328
system_evaluations	backend/src/drizzle/schema/lxp.schema.ts:350
system_evaluation_campaigns	backend/src/drizzle/schema/lxp.schema.ts:382
system_evaluation_assignments	backend/src/drizzle/schema/lxp.schema.ts:417

Tables 99-112

Table	Schema source
class_ai_policies	backend/src/drizzle/schema/lxp.schema.ts:454
teacher_evaluation_windows	backend/src/drizzle/schema/lxp.schema.ts:480
teacher_evaluation_submissions	backend/src/drizzle/schema/lxp.schema.ts:522
otp_verifications	backend/src/drizzle/schema/otp.schema.ts:21
performance_snapshots	backend/src/drizzle/schema/performance.schema.ts:16
performance_logs	backend/src/drizzle/schema/performance.schema.ts:75
content_chunks	backend/src/drizzle/schema/rag.schema.ts:65
content_chunk_embeddings	backend/src/drizzle/schema/rag.schema.ts:122
student_concept_mastery	backend/src/drizzle/schema/rag.schema.ts:139
ai_generation_jobs	backend/src/drizzle/schema/rag.schema.ts:165
ai_generation_outputs	backend/src/drizzle/schema/rag.schema.ts:189
refresh_tokens	backend/src/drizzle/schema/refresh-tokens.schema.ts:12
school_events	backend/src/drizzle/schema/school-events.schema.ts:16
system_reset_state	backend/src/drizzle/schema/system-reset.schema.ts:12

Tables 113-116

Table	Schema source
system_reset_operations	backend/src/drizzle/schema/system-reset.schema.ts:23
system_reset_evidence	backend/src/drizzle/schema/system-reset.schema.ts:52
system_reset_instances	backend/src/drizzle/schema/system-reset.schema.ts:65
transmutation_tables	backend/src/drizzle/schema/transmutation.schema.ts:18

Enums 1-16

Enum	Schema source
ai_session_type	backend/src/drizzle/schema/ai-mentor.schema.ts:20
extraction_status	backend/src/drizzle/schema/ai-mentor.schema.ts:28
notification_type	backend/src/drizzle/schema/announcements-notifications.schema.ts:22
account_status	backend/src/drizzle/schema/base.schema.ts:24
content_type	backend/src/drizzle/schema/base.schema.ts:31
assessment_type	backend/src/drizzle/schema/base.schema.ts:38
rubric_parse_status	backend/src/drizzle/schema/base.schema.ts:45
class_record_category	backend/src/drizzle/schema/base.schema.ts:52
grading_period	backend/src/drizzle/schema/base.schema.ts:58
enrollment_status	backend/src/drizzle/schema/base.schema.ts:65
grade_level	backend/src/drizzle/schema/base.schema.ts:71
lesson_content_type	backend/src/drizzle/schema/base.schema.ts:73
lesson_version_type	backend/src/drizzle/schema/base.schema.ts:82
question_type	backend/src/drizzle/schema/base.schema.ts:88
feedback_level	backend/src/drizzle/schema/base.schema.ts:97
file_scope	backend/src/drizzle/schema/base.schema.ts:103

Enums 17-32

Enum	Schema source
library_subject_key	backend/src/drizzle/schema/base.schema.ts:104
library_index_status	backend/src/drizzle/schema/base.schema.ts:114
library_file_kind	backend/src/drizzle/schema/base.schema.ts:121
module_item_type	backend/src/drizzle/schema/base.schema.ts:129
student_presentation_mode	backend/src/drizzle/schema/base.schema.ts:134
student_course_view_mode	backend/src/drizzle/schema/base.schema.ts:139
class_record_status	backend/src/drizzle/schema/class-record.schema.ts:25
class_record_remarks	backend/src/drizzle/schema/class-record.schema.ts:31
class_template_status	backend/src/drizzle/schema/class-templates.schema.ts:21
class_template_item_type	backend/src/drizzle/schema/class-templates.schema.ts:26
discussion_thread_status	backend/src/drizzle/schema/discussion-board.schema.ts:16
discussion_reaction_type	backend/src/drizzle/schema/discussion-board.schema.ts:23
discussion_attachment_type	backend/src/drizzle/schema/discussion-board.schema.ts:29
ja_session_mode	backend/src/drizzle/schema/ja.schema.ts:17
ja_session_status	backend/src/drizzle/schema/ja.schema.ts:21
ja_reward_state	backend/src/drizzle/schema/ja.schema.ts:26

Enums 33-48

Enum	Schema source
ja_session_event_type	backend/src/drizzle/schema/ja.schema.ts:30
ja_xp_event_type	backend/src/drizzle/schema/ja.schema.ts:38
ja_thread_status	backend/src/drizzle/schema/ja.schema.ts:41
ja_thread_message_role	backend/src/drizzle/schema/ja.schema.ts:45
ja_guardrail_event_type	backend/src/drizzle/schema/ja.schema.ts:50
intervention_case_status	backend/src/drizzle/schema/lxp.schema.ts:24
lxp_assignment_type	backend/src/drizzle/schema/lxp.schema.ts:31
lxp_generated_artifact_status	backend/src/drizzle/schema/lxp.schema.ts:38
lxp_guided_attempt_status	backend/src/drizzle/schema/lxp.schema.ts:43
system_evaluation_target	backend/src/drizzle/schema/lxp.schema.ts:48
system_evaluation_form_type	backend/src/drizzle/schema/lxp.schema.ts:56
system_evaluation_audience_role	backend/src/drizzle/schema/lxp.schema.ts:61
system_evaluation_campaign_status	backend/src/drizzle/schema/lxp.schema.ts:66
system_evaluation_assignment_status	backend/src/drizzle/schema/lxp.schema.ts:71
teacher_evaluation_type	backend/src/drizzle/schema/lxp.schema.ts:76
teacher_evaluation_window_status	backend/src/drizzle/schema/lxp.schema.ts:82

Enums 49-55

Enum	Schema source
ai_policy_source_scope	backend/src/drizzle/schema/lxp.schema.ts:87
otp_purpose	backend/src/drizzle/schema/otp.schema.ts:15
content_source_type	backend/src/drizzle/schema/rag.schema.ts:32
ai_generation_job_type	backend/src/drizzle/schema/rag.schema.ts:39
ai_generation_output_type	backend/src/drizzle/schema/rag.schema.ts:48
ai_generation_status	backend/src/drizzle/schema/rag.schema.ts:55
school_event_type	backend/src/drizzle/schema/school-events.schema.ts:11

Migrations 1-18

0000_baseline_nexora.sql

0001_mixed_morgan_stark.sql

0002_small_photon.sql

0003_enable_pgvector.sql

0004_add_notification_metadata.sql

0005_add_transmutation_tables.sql

0006_clammy_micromacro.sql

0007_add_assessment_missing_columns.sql

0008_far_patch.sql

0009_add_student_graduation_status.sql

0010_repair_legacy_assessment_ai_columns.sql

0011_academic_period_lifecycle.sql

0012_academic_back_subject_evidence.sql

0013_academic_back_subject_term_limit.sql

0014_academic_legacy_evidence.sql

0015_academic_grade10_completion.sql

0016_assessment_editor.sql

0017_grade_score_invariants.sql

Migrations 19-36

0018_governed_admin_lifecycle.sql

0019_academic_lifecycle_notification.sql

0020_lifecycle_audit_link.sql

0021_admin_demo_mode.sql

0022_system_reset.sql

0023_system_reset_fences.sql

0024_system_reset_participants.sql

0025_system_reset_storage_generation.sql

0026_system_reset_participant_retirement.sql

0027_admin_maintenance_gateway.sql

0028_admin_authority_cascade_erasure.sql

0029_repair_legacy_class_record_teacher_constraint.sql

0030_admin_maintenance_switch_mode.sql

0031_retire_archived_teacher_notifications.sql

0032_user_notification_dismissal.sql

0033_class_record_excused_with_score.sql

0034_platform_neutral_app_artifacts.sql

0035_notification_devices.sql

Migrations 37-37

0036_mobile_release_reset_compatibility.sql

12. Configuration reference

Configuration keys 1-9

Key	Purpose and source
ADMIN_CASCADE_ERASE_ENABLED	High-impact administrator feature flag or safety control. Enable only with the documented preview and audit workflow. Sources: .env.compose.example, backend/.env.example
ADMIN_LIFECYCLE_ENABLED	High-impact administrator feature flag or safety control. Enable only with the documented preview and audit workflow. Sources: .env.compose.example, backend/.env.example
ADMIN_MAINTENANCE_ENABLED	High-impact administrator feature flag or safety control. Enable only with the documented preview and audit workflow. Sources: .env.compose.example, backend/.env.example
AI_CLOUD_FALLBACK_API_KEY	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: ai-service/.env.example
AI_CLOUD_FALLBACK_BASE_URL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
AI_CLOUD_FALLBACK_ENABLED	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
AI_CLOUD_FALLBACK_MODEL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
AI_CLOUD_FALLBACK_PROVIDER	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
AI_DATABASE_URL	Database connection or database setting. Keep backend and AI database targets aligned with the intended environment. Sources: .env.compose.example

Configuration keys 10-18

Key	Purpose and source
AI_DEGRADED_ALLOWED	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example, backend/.env.example
AI_EXTRACTION_BG_MAX_CONCURRENCY	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
AI_RUNTIME_MODE	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
AI_SERVICE_PORT	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: .env.compose.example
AI_SERVICE_SHARED_SECRET	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: .env.compose.example, ai-service/.env.example, backend/.env.example
AI_SERVICE_TIMEOUT_CHAT_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_SERVICE_TIMEOUT_EXTRACTION_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_SERVICE_TIMEOUT_INDEXING_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_SERVICE_TIMEOUT_INTERNAL_EXTRACTION_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example

Configuration keys 19-27

Key	Purpose and source
AI_SERVICE_TIMEOUT_INTERNAL_INTERVENTION_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_SERVICE_TIMEOUT_INTERNAL_QUIZ_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_SERVICE_TIMEOUT_LESSON_PLAN_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_SERVICE_TIMEOUT_QUIZ_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_SERVICE_TIMEOUT_TUTOR_START_MS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_SERVICE_URL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: backend/.env.example
AI_TEACHER_BG_MAX_CONCURRENCY	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
AI_TUTOR_MAX_INFLIGHT	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
AI_TUTOR_REJECT_STATUS	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example

Configuration keys 28-36

Key	Purpose and source
AI_TUTOR_RETRY_AFTER_S	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
BACKEND_DATABASE_URL	Database connection or database setting. Keep backend and AI database targets aligned with the intended environment. Sources: .env.compose.example
BACKEND_INTERNAL_URL	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: ai-service/.env.example
BACKEND_PUBLIC_URL	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: backend/.env.example
COOKIE_DOMAIN	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: backend/.env.example
CORS_ALLOWED_ORIGINS	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: backend/.env.example
DATABASE_URL	Database connection or database setting. Keep backend and AI database targets aligned with the intended environment. Sources: ai-service/.env.example, backend/.env.example
DB_CONNECT_TIMEOUT_MS	Database connection or database setting. Keep backend and AI database targets aligned with the intended environment. Sources: backend/.env.example
DB_IDLE_TIMEOUT_MS	Database connection or database setting. Keep backend and AI database targets aligned with the intended environment. Sources: backend/.env.example

Configuration keys 37-45

Key	Purpose and source
DB_POOL_MAX	Database connection or database setting. Keep backend and AI database targets aligned with the intended environment. Sources: backend/.env.example
EMAIL_FROM	Email or verification delivery setting. Test delivery before onboarding real users. Sources: backend/.env.example
EMAIL_PASSWORD	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: backend/.env.example
EMAIL_SERVICE	Email or verification delivery setting. Test delivery before onboarding real users. Sources: backend/.env.example
EMAIL_USER	Email or verification delivery setting. Test delivery before onboarding real users. Sources: backend/.env.example
EXPO_PUBLIC_API_URL	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: mobile/.env.example
FRONTEND_PORT	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: .env.compose.example
FRONTEND_URL	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: backend/.env.example
GF_SMTP_ENABLED	Email or verification delivery setting. Test delivery before onboarding real users. Sources: .env.compose.example

Configuration keys 46-54

Key	Purpose and source
GF_SMTP_FROM_ADDRESS	Email or verification delivery setting. Test delivery before onboarding real users. Sources: .env.compose.example
GF_SMTP_HOST	Email or verification delivery setting. Test delivery before onboarding real users. Sources: .env.compose.example
GF_SMTP_PASSWORD	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: .env.compose.example
GF_SMTP_USER	Email or verification delivery setting. Test delivery before onboarding real users. Sources: .env.compose.example
GRAFANA_ADMIN_PASSWORD	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: .env.compose.example
GRAFANA_ADMIN_USER	High-impact administrator feature flag or safety control. Enable only with the documented preview and audit workflow. Sources: .env.compose.example
GRAFANA_ALERT_EMAIL	Email or verification delivery setting. Test delivery before onboarding real users. Sources: .env.compose.example
GRAFANA_ALERTING_ENABLED	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: .env.compose.example
GRAFANA_PORT	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: .env.compose.example

Configuration keys 55-63

Key	Purpose and source
JWT_ACCESS_EXPIRY	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: backend/.env.example
JWT_REFRESH_EXPIRY	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: backend/.env.example
JWT_REFRESH_SECRET	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: .env.compose.example, backend/.env.example
JWT_SECRET	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: .env.compose.example, backend/.env.example
LESSON_PREVIEW_SECRET	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: .env.compose.example, backend/.env.example
LOG_LEVEL	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: ai-service/.env.example
LOKI_HOST	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: .env.compose.example, backend/.env.example
LOKI_PORT	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: .env.compose.example
MAX_RAW_TEXT	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: ai-service/.env.example

Configuration keys 64-72

Key	Purpose and source
MOBILE_URL	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: backend/.env.example
NEXT_FRONTEND_URL	Public URL, browser origin, or client build-time setting. Confirm HTTPS and allowed origins in production. Sources: backend/.env.example
NODE_ENV	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: backend/.env.example
OLLAMA_BASE_URL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example, backend/.env.example
OLLAMA_EMBED_MODEL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: .env.compose.example, ai-service/.env.example
OLLAMA_KEEP_ALIVE	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
OLLAMA_TEXT_MODEL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: .env.compose.example, ai-service/.env.example, backend/.env.example
OLLAMA_TIMEOUT_CHAT_S	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
OLLAMA_TIMEOUT_EXTRACTION_S	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example

Configuration keys 73-81

Key	Purpose and source
OLLAMA_VISION_MODEL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: .env.compose.example, ai-service/.env.example, backend/.env.example
OPENROUTER_EMBEDDING_MODEL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
OPENROUTER_HTTP_REFERER	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: ai-service/.env.example
OPENROUTER_VISION_MODEL	AI runtime, model, retrieval, or timeout setting. The backend remains the public boundary. Sources: ai-service/.env.example
OPENROUTER_X_TITLE	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: ai-service/.env.example
OTEL_EXPORTER_OTLP_ENDPOINT	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: .env.compose.example, backend/.env.example
OTP_PEPPER	Email or verification delivery setting. Test delivery before onboarding real users. Sources: .env.compose.example, backend/.env.example
PORT	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: backend/.env.example
POSTGRES_HOST_PORT	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: .env.compose.example

Configuration keys 82-90

Key	Purpose and source
POSTGRES_PASSWORD	Secret credential. Generate a unique value, store it outside source control, and rotate it after exposure. Sources: .env.compose.example
PROMETHEUS_PORT	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: .env.compose.example
REDIS_HOST_PORT	Redis or background-job setting. Required for restart-safe asynchronous work. Sources: .env.compose.example
REDIS_URL	Redis or background-job setting. Required for restart-safe asynchronous work. Sources: backend/.env.example
RETRIEVAL_AGGREGATE_TIMEOUT_SECONDS	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: ai-service/.env.example
RUN_DB_MIGRATIONS	Database connection or database setting. Keep backend and AI database targets aligned with the intended environment. Sources: .env.compose.example
RUN_DB_SEED	Database connection or database setting. Keep backend and AI database targets aligned with the intended environment. Sources: .env.compose.example
SYSTEM_RESET_BACKEND_TOPOLOGY	High-impact administrator feature flag or safety control. Enable only with the documented preview and audit workflow. Sources: .env.compose.example, backend/.env.example
SYSTEM_RESET_ENABLED	High-impact administrator feature flag or safety control. Enable only with the documented preview and audit workflow. Sources: .env.compose.example, backend/.env.example

Configuration keys 91-98

Key	Purpose and source
SYSTEM_RESET_ENVIRONMENT	High-impact administrator feature flag or safety control. Enable only with the documented preview and audit workflow. Sources: .env.compose.example, backend/.env.example
SYSTEM_RESET_REDIS_OWNERSHIP	Redis or background-job setting. Required for restart-safe asynchronous work. Sources: .env.compose.example, backend/.env.example
SYSTEM_RESET_STORAGE_ID	File/object-storage setting. Required when the selected storage driver uses S3-compatible storage. Sources: .env.compose.example, backend/.env.example
SYSTEM_RESET_STORAGE_OWNERSHIP	File/object-storage setting. Required when the selected storage driver uses S3-compatible storage. Sources: .env.compose.example, backend/.env.example
TEMPO_OTLP_HTTP_PORT	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: .env.compose.example
TEMPO_PORT	Observability setting for logs, metrics, or traces. It is optional for core Compose unless stated otherwise. Sources: .env.compose.example
TRUST_PROXY_HOPS	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: backend/.env.example
UPLOAD_DIR	Runtime configuration. Keep the value environment-specific and document who owns it. Sources: ai-service/.env.example

13. Client source catalogs

Web pages 1-14

Route	Source
/	next-frontend/app/page.tsx
/complete-profile	next-frontend/app/(auth)/complete-profile/page.tsx
/dashboard	next-frontend/app/(dashboard)/dashboard/page.tsx
/dashboard/admin	next-frontend/app/(dashboard)/dashboard/admin/page.tsx
/dashboard/admin/academic-records/[classId]	next-frontend/app/(dashboard)/dashboard/admin/academic-records/[classId]/page.tsx
/dashboard/admin/access-students	next-frontend/app/(dashboard)/dashboard/admin/access-students/page.tsx
/dashboard/admin/announcements	next-frontend/app/(dashboard)/dashboard/admin/announcements/page.tsx
/dashboard/admin/audit	next-frontend/app/(dashboard)/dashboard/admin/audit/page.tsx
/dashboard/admin/calendar	next-frontend/app/(dashboard)/dashboard/admin/calendar/page.tsx
/dashboard/admin/chatbot	next-frontend/app/(dashboard)/dashboard/admin/chatbot/page.tsx
/dashboard/admin/class-record	next-frontend/app/(dashboard)/dashboard/admin/class-record/page.tsx
/dashboard/admin/class-templates	next-frontend/app/(dashboard)/dashboard/admin/class-templates/page.tsx
/dashboard/admin/class-templates/[id]	next-frontend/app/(dashboard)/dashboard/admin/class-templates/[id]/page.tsx
/dashboard/admin/class-templates/[id]/announcements/[announcementKey]/edit	next-frontend/app/(dashboard)/dashboard/admin/class-templates/[id]/announcements/[announcementKey]/edit/page.tsx

Web pages 15-28

Route	Source
/dashboard/admin/class-templates/[id]/announcements/new	next-frontend/app/(dashboard)/dashboard/admin/class-templates/[id]/announcements/new/page.tsx
/dashboard/admin/class-templates/[id]/assessments/[assessmentKey]/edit	next-frontend/app/(dashboard)/dashboard/admin/class-templates/[id]/assessments/[assessmentKey]/edit/page.tsx
/dashboard/admin/class-templates/[id]/lessons/[lessonKey]/edit	next-frontend/app/(dashboard)/dashboard/admin/class-templates/[id]/lessons/[lessonKey]/edit/page.tsx
/dashboard/admin/class-templates/[id]/modules/[moduleKey]	next-frontend/app/(dashboard)/dashboard/admin/class-templates/[id]/modules/[moduleKey]/page.tsx
/dashboard/admin/classes	next-frontend/app/(dashboard)/dashboard/admin/classes/page.tsx
/dashboard/admin/classes/[id]	next-frontend/app/(dashboard)/dashboard/admin/classes/[id]/page.tsx
/dashboard/admin/classes/[id]/edit	next-frontend/app/(dashboard)/dashboard/admin/classes/[id]/edit/page.tsx
/dashboard/admin/classes/[id]/students/add	next-frontend/app/(dashboard)/dashboard/admin/classes/[id]/students/add/page.tsx
/dashboard/admin/classes/new	next-frontend/app/(dashboard)/dashboard/admin/classes/new/page.tsx
/dashboard/admin/diagnostics	next-frontend/app/(dashboard)/dashboard/admin/diagnostics/page.tsx
/dashboard/admin/evaluations	next-frontend/app/(dashboard)/dashboard/admin/evaluations/page.tsx
/dashboard/admin/library	next-frontend/app/(dashboard)/dashboard/admin/library/page.tsx
/dashboard/admin/profile	next-frontend/app/(dashboard)/dashboard/admin/profile/page.tsx
/dashboard/admin/reports	next-frontend/app/(dashboard)/dashboard/admin/reports/page.tsx

Web pages 29-42

Route	Source
/dashboard/admin/roster-import	next-frontend/app/(dashboard)/dashboard/admin/roster-import/page.tsx
/dashboard/admin/sections	next-frontend/app/(dashboard)/dashboard/admin/sections/page.tsx
/dashboard/admin/sections/[id]/edit	next-frontend/app/(dashboard)/dashboard/admin/sections/[id]/edit/page.tsx
/dashboard/admin/sections/[id]/roster	next-frontend/app/(dashboard)/dashboard/admin/sections/[id]/roster/page.tsx
/dashboard/admin/sections/[id]/students	next-frontend/app/(dashboard)/dashboard/admin/sections/[id]/students/page.tsx
/dashboard/admin/sections/[id]/students/add	next-frontend/app/(dashboard)/dashboard/admin/sections/[id]/students/add/page.tsx
/dashboard/admin/sections/new	next-frontend/app/(dashboard)/dashboard/admin/sections/new/page.tsx
/dashboard/admin/system-settings	next-frontend/app/(dashboard)/dashboard/admin/system-settings/page.tsx
/dashboard/admin/system-settings/academic-year	next-frontend/app/(dashboard)/dashboard/admin/system-settings/academic-year/page.tsx
/dashboard/admin/system-settings/assessments-grading	next-frontend/app/(dashboard)/dashboard/admin/system-settings/assessments-grading/page.tsx
/dashboard/admin/system-settings/audit-recovery	next-frontend/app/(dashboard)/dashboard/admin/system-settings/audit-recovery/page.tsx
/dashboard/admin/system-settings/demo-mode	next-frontend/app/(dashboard)/dashboard/admin/system-settings/demo-mode/page.tsx
/dashboard/admin/system-settings/learner-completion	next-frontend/app/(dashboard)/dashboard/admin/system-settings/learner-completion/page.tsx
/dashboard/admin/system-settings/maintenance-access	next-frontend/app/(dashboard)/dashboard/admin/system-settings/maintenance-access/page.tsx

Web pages 43-56

Route	Source
/dashboard/admin/system-settings/reset-school-data	next-frontend/app/(dashboard)/dashboard/admin/system-settings/reset-school-data/page.tsx
/dashboard/admin/system-settings/year-transition	next-frontend/app/(dashboard)/dashboard/admin/system-settings/year-transition/page.tsx
/dashboard/admin/user-reports	next-frontend/app/(dashboard)/dashboard/admin/user-reports/page.tsx
/dashboard/admin/users	next-frontend/app/(dashboard)/dashboard/admin/users/page.tsx
/dashboard/admin/users/[id]	next-frontend/app/(dashboard)/dashboard/admin/users/[id]/page.tsx
/dashboard/admin/users/create	next-frontend/app/(dashboard)/dashboard/admin/users/create/page.tsx
/dashboard/library	next-frontend/app/(dashboard)/dashboard/library/page.tsx
/dashboard/notifications	next-frontend/app/(dashboard)/dashboard/notifications/page.tsx
/dashboard/profile	next-frontend/app/(dashboard)/dashboard/profile/page.tsx
/dashboard/student	next-frontend/app/(dashboard)/dashboard/student/page.tsx
/dashboard/student/announcements	next-frontend/app/(dashboard)/dashboard/student/announcements/page.tsx
/dashboard/student/assessment-history	next-frontend/app/(dashboard)/dashboard/student/assessment-history/page.tsx
/dashboard/student/assessments	next-frontend/app/(dashboard)/dashboard/student/assessments/page.tsx
/dashboard/student/assessments/[id]	next-frontend/app/(dashboard)/dashboard/student/assessments/[id]/page.tsx

Web pages 57-70

Route	Source
/dashboard/student/assessments/[id]/results/[attemptId]	next-frontend/app/(dashboard)/dashboard/student/assessments/[id]/results/[attemptId]/page.tsx
/dashboard/student/assessments/[id]/take	next-frontend/app/(dashboard)/dashboard/student/assessments/[id]/take/page.tsx
/dashboard/student/calendar	next-frontend/app/(dashboard)/dashboard/student/calendar/page.tsx
/dashboard/student/chatbot	next-frontend/app/(dashboard)/dashboard/student/chatbot/page.tsx
/dashboard/student/classes	next-frontend/app/(dashboard)/dashboard/student/classes/page.tsx
/dashboard/student/classes/[id]	next-frontend/app/(dashboard)/dashboard/student/classes/[id]/page.tsx
/dashboard/student/classes/[id]/modules/[moduleId]	next-frontend/app/(dashboard)/dashboard/student/classes/[id]/modules/[moduleId]/page.tsx
/dashboard/student/courses	next-frontend/app/(dashboard)/dashboard/student/courses/page.tsx
/dashboard/student/evaluations	next-frontend/app/(dashboard)/dashboard/student/evaluations/page.tsx
/dashboard/student/ja	next-frontend/app/(dashboard)/dashboard/student/ja/page.tsx
/dashboard/student/lessons	next-frontend/app/(dashboard)/dashboard/student/lessons/page.tsx
/dashboard/student/lessons/[id]	next-frontend/app/(dashboard)/dashboard/student/lessons/[id]/page.tsx
/dashboard/student/lxp	next-frontend/app/(dashboard)/dashboard/student/lxp/page.tsx
/dashboard/student/lxp/[classId]	next-frontend/app/(dashboard)/dashboard/student/lxp/[classId]/page.tsx

Web pages 71-84

Route	Source
/dashboard/student/lxp/[classId]/generated-lessons/[assignmentId]	next-frontend/app/(dashboard)/dashboard/student/lxp/[classId]/generated-lessons/[assignmentId]/page.tsx
/dashboard/student/lxp/[classId]/guided-assessment/[assignmentId]	next-frontend/app/(dashboard)/dashboard/student/lxp/[classId]/guided-assessment/[assignmentId]/page.tsx
/dashboard/student/performance	next-frontend/app/(dashboard)/dashboard/student/performance/page.tsx
/dashboard/student/profile	next-frontend/app/(dashboard)/dashboard/student/profile/page.tsx
/dashboard/student/transcript	next-frontend/app/(dashboard)/dashboard/student/transcript/page.tsx
/dashboard/teacher	next-frontend/app/(dashboard)/dashboard/teacher/page.tsx
/dashboard/teacher/announcements	next-frontend/app/(dashboard)/dashboard/teacher/announcements/page.tsx
/dashboard/teacher/assessments	next-frontend/app/(dashboard)/dashboard/teacher/assessments/page.tsx
/dashboard/teacher/assessments/[id]	next-frontend/app/(dashboard)/dashboard/teacher/assessments/[id]/page.tsx
/dashboard/teacher/assessments/[id]/edit	next-frontend/app/(dashboard)/dashboard/teacher/assessments/[id]/edit/page.tsx
/dashboard/teacher/assessments/[id]/results/[attemptId]	next-frontend/app/(dashboard)/dashboard/teacher/assessments/[id]/results/[attemptId]/page.tsx
/dashboard/teacher/calendar	next-frontend/app/(dashboard)/dashboard/teacher/calendar/page.tsx
/dashboard/teacher/class-record	next-frontend/app/(dashboard)/dashboard/teacher/class-record/page.tsx
/dashboard/teacher/classes	next-frontend/app/(dashboard)/dashboard/teacher/classes/page.tsx

Web pages 85-98

Route	Source
/dashboard/teacher/classes/[id]	next-frontend/app/(dashboard)/dashboard/teacher/classes/[id]/page.tsx
/dashboard/teacher/classes/[id]/ai-draft	next-frontend/app/(dashboard)/dashboard/teacher/classes/[id]/ai-draft/page.tsx
/dashboard/teacher/classes/[id]/modules/[moduleId]	next-frontend/app/(dashboard)/dashboard/teacher/classes/[id]/modules/[moduleId]/page.tsx
/dashboard/teacher/classes/[id]/modules/[moduleId]/files/[fileId]	next-frontend/app/(dashboard)/dashboard/teacher/classes/[id]/modules/[moduleId]/files/[fileId]/page.tsx
/dashboard/teacher/classes/[id]/students/[studentId]	next-frontend/app/(dashboard)/dashboard/teacher/classes/[id]/students/[studentId]/page.tsx
/dashboard/teacher/classes/[id]/students/add	next-frontend/app/(dashboard)/dashboard/teacher/classes/[id]/students/add/page.tsx
/dashboard/teacher/dashboard	next-frontend/app/(dashboard)/dashboard/teacher/dashboard/page.tsx
/dashboard/teacher/evaluations	next-frontend/app/(dashboard)/dashboard/teacher/evaluations/page.tsx
/dashboard/teacher/extractions/[id]	next-frontend/app/(dashboard)/dashboard/teacher/extractions/[id]/page.tsx
/dashboard/teacher/interventions	next-frontend/app/(dashboard)/dashboard/teacher/interventions/page.tsx
/dashboard/teacher/interventions/[caseId]	next-frontend/app/(dashboard)/dashboard/teacher/interventions/[caseId]/page.tsx
/dashboard/teacher/lessons	next-frontend/app/(dashboard)/dashboard/teacher/lessons/page.tsx
/dashboard/teacher/lessons/[id]/edit	next-frontend/app/(dashboard)/dashboard/teacher/lessons/[id]/edit/page.tsx
/dashboard/teacher/lessons/[id]/view	next-frontend/app/(dashboard)/dashboard/teacher/lessons/[id]/view/page.tsx

Web pages 99-112

Route	Source
/dashboard/teacher/library	next-frontend/app/(dashboard)/dashboard/teacher/library/page.tsx
/dashboard/teacher/modules	next-frontend/app/(dashboard)/dashboard/teacher/modules/page.tsx
/dashboard/teacher/performance	next-frontend/app/(dashboard)/dashboard/teacher/performance/page.tsx
/dashboard/teacher/profile	next-frontend/app/(dashboard)/dashboard/teacher/profile/page.tsx
/dashboard/teacher/reports	next-frontend/app/(dashboard)/dashboard/teacher/reports/page.tsx
/dashboard/teacher/sections	next-frontend/app/(dashboard)/dashboard/teacher/sections/page.tsx
/dashboard/teacher/sections/[id]/roster	next-frontend/app/(dashboard)/dashboard/teacher/sections/[id]/roster/page.tsx
/dashboard/teacher/sections/[id]/students/[studentId]	next-frontend/app/(dashboard)/dashboard/teacher/sections/[id]/students/[studentId]/page.tsx
/dashboard/teacher/sections/[id]/students/add	next-frontend/app/(dashboard)/dashboard/teacher/sections/[id]/students/add/page.tsx
/forgot-password	next-frontend/app/(auth)/forgot-password/page.tsx
/lesson-preview/[token]	next-frontend/app/lesson-preview/[token]/page.tsx
/login	next-frontend/app/(auth)/login/page.tsx
/reset-password	next-frontend/app/(auth)/reset-password/page.tsx
/set-initial-password	next-frontend/app/(auth)/set-initial-password/page.tsx

Web pages 113-114

Route	Source
/system-maintenance	next-frontend/app/system-maintenance/page.tsx
/verify-email	next-frontend/app/(auth)/verify-email/page.tsx

Mobile screens 1-18

mobile/src/screens/AdminAcademicScreen.tsx

mobile/src/screens/AdminAcademicYearSettingsScreen.tsx

mobile/src/screens/AdminAnnouncementsScreen.tsx

mobile/src/screens/AdminAssessmentsGradingSettingsScreen.tsx

mobile/src/screens/AdminAssessmentsScreen.tsx

mobile/src/screens/AdminAuditRecoverySettingsScreen.tsx

mobile/src/screens/AdminAuditScreen.tsx

mobile/src/screens/AdminCalendarScreen.tsx

mobile/src/screens/AdminChatbotScreen.tsx

mobile/src/screens/AdminClassRecordScreen.tsx

mobile/src/screens/AdminClassesScreen.tsx

mobile/src/screens/AdminClassesWorkspaceScreen.tsx

mobile/src/screens/AdminCreateUserScreen.tsx

mobile/src/screens/AdminDiagnosticsScreen.tsx

mobile/src/screens/AdminEvaluationsScreen.tsx

mobile/src/screens/AdminHomeScreen.tsx

mobile/src/screens/AdminLearnerCompletionSettingsScreen.tsx

mobile/src/screens/AdminLibraryScreen.tsx

Mobile screens 19-36

mobile/src/screens/AdminLifecycleReviewScreen.tsx
mobile/src/screens/AdminMaintenanceSettingsScreen.tsx
mobile/src/screens/AdminProfileScreen.tsx
mobile/src/screens/AdminReportsScreen.tsx
mobile/src/screens/AdminRosterScreen.tsx
mobile/src/screens/AdminSectionDetailScreen.tsx
mobile/src/screens/AdminSectionsScreen.tsx
mobile/src/screens/AdminSettingsOverviewScreen.tsx
mobile/src/screens/AdminStudentReadinessScreen.tsx
mobile/src/screens/AdminSystemResetScreen.tsx
mobile/src/screens/AdminTemplateDetailScreen.tsx
mobile/src/screens/AdminTemplatesScreen.tsx
mobile/src/screens/AdminToolsScreen.tsx
mobile/src/screens/AdminUserDetailScreen.tsx
mobile/src/screens/AdminUserReportsScreen.tsx
mobile/src/screens/AdminUsersScreen.tsx
mobile/src/screens/AdminYearTransitionSettingsScreen.tsx
mobile/src/screens/AnnouncementsScreen.tsx

Mobile screens 37-54

mobile/src/screens/AssessmentDetailScreen.tsx
mobile/src/screens/AssessmentHistoryScreen.tsx
mobile/src/screens/AssessmentResultsScreen.tsx
mobile/src/screens/AssessmentTakeScreen.tsx
mobile/src/screens/AssessmentsScreen.tsx
mobile/src/screens/CalendarScreen.tsx
mobile/src/screens/ClassDetailScreen.tsx
mobile/src/screens/CompleteProfileScreen.tsx
mobile/src/screens/CoursesScreen.tsx
mobile/src/screens/DashboardScreen.tsx
mobile/src/screens/ForgotPasswordScreen.tsx
mobile/src/screens/JaScreen.tsx
mobile/src/screens/LessonDetailScreen.tsx
mobile/src/screens/LessonsScreen.tsx
mobile/src/screens/LoginScreen.tsx
mobile/src/screens/ModuleDetailScreen.tsx
mobile/src/screens/NotificationsInboxScreen.tsx
mobile/src/screens/PerformanceScreen.tsx

Mobile screens 55-72

mobile/src/screens/ProfileScreen.tsx

mobile/src/screens/ResetPasswordScreen.tsx

mobile/src/screens/SetInitialPasswordScreen.tsx

mobile/src/screens/StudentEvaluationsScreen.tsx

mobile/src/screens/StudentGeneratedLessonScreen.tsx

mobile/src/screens/StudentGuidedAssessmentScreen.tsx

mobile/src/screens/StudentJaReviewAssessmentScreen.tsx

mobile/src/screens/SubjectLessonsScreen.tsx

mobile/src/screens/SystemResetProgressGate.tsx

mobile/src/screens/TeacherAiDraftScreen.tsx

mobile/src/screens/TeacherAnnouncementsScreen.tsx

mobile/src/screens/TeacherAssessmentDetailScreen.tsx

mobile/src/screens/TeacherAssessmentEditorScreen.tsx

mobile/src/screens/TeacherAssessmentReviewScreen.tsx

mobile/src/screens/TeacherAssessmentsScreen.tsx

mobile/src/screens/TeacherCalendarScreen.tsx

mobile/src/screens/TeacherClassDetailScreen.tsx

mobile/src/screens/TeacherClassRecordScreen.tsx

Mobile screens 73-90

mobile/src/screens/TeacherClassesScreen.tsx
mobile/src/screens/TeacherCreateAssessmentScreen.tsx
mobile/src/screens/TeacherCreateModuleScreen.tsx
mobile/src/screens/TeacherDeepParityScreens.tsx
mobile/src/screens/TeacherEvaluationsScreen.tsx
mobile/src/screens/TeacherExtractionDetailScreen.tsx
mobile/src/screens/TeacherHomeScreen.tsx
mobile/src/screens/TeacherInterventionsScreen.tsx
mobile/src/screens/TeacherLessonDetailScreen.tsx
mobile/src/screens/TeacherLessonEditorScreen.tsx
mobile/src/screens/TeacherLessonsScreen.tsx
mobile/src/screens/TeacherLibraryScreen.tsx
mobile/src/screens/TeacherModuleDetailScreen.tsx
mobile/src/screens/TeacherMoreScreen.tsx
mobile/src/screens/TeacherPerformanceScreen.tsx
mobile/src/screens/TeacherProfileScreen.tsx
mobile/src/screens/TeacherReportsScreen.tsx
mobile/src/screens/TeacherSectionDetailScreen.tsx

Mobile screens 91-100

mobile/src/screens/TeacherSectionsScreen.tsx

mobile/src/screens/TranscriptScreen.tsx

mobile/src/screens/VerifyEmailScreen.tsx

mobile/src/screens/student-announcements/StudentAnnouncementsView.tsx

mobile/src/screens/student-assessments/StudentAssessmentsView.tsx

mobile/src/screens/student-classes/StudentClassCard.tsx

mobile/src/screens/student-classes/StudentClassesView.tsx

mobile/src/screens/student-home/StudentHomeView.tsx

mobile/src/screens/teacher-ai-draft/TeacherAiDraftReviewPanel.tsx

mobile/src/screens/teacher-assessments/TeacherAiJobsPanel.tsx

14. Incident checklist

1. Record time, environment, user role, route, visible message, request ID, and current commit/build.
2. Check frontend/mobile connectivity, backend health, PostgreSQL, Redis, AI readiness, and storage in that order.
3. Determine whether the failure is permission, policy, validation, dependency, data integrity, or code.
4. Preserve logs and audit/job identifiers. Do not delete evidence to make a retry pass.
5. Apply the smallest safe correction in a non-production target, run the relevant smoke path, then document rollback.

Stop condition

If data scope, authorization, backup integrity, or rollback safety is uncertain, stop and escalate. Do not improvise a production mutation.