


CLM-ml-jax: gradient-based vs gradient-free calibration — $p = 10$ parameters (all active)

Loss: normalized MSE over GPP+H+LE · $T_{\text{ratio}} = 2.5 \times$ · CHATS7, May 1 2007

(a) Convergence — $p = 10$ parameters (all active)

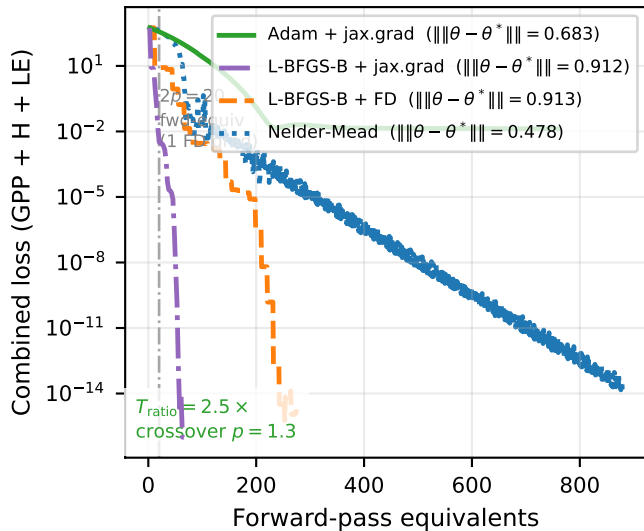

(b) Gradient cost scaling

