

EXAMEN APLICACIONES DISTRIBUIDAS
NOMBRE: JHONSON BENIGNO MENDOZA JARAMILLO

LINK REPOSITORIO GITHUB:

https://github.com/JhonsonMendoza/EXAMENU2_MENDOZAJHONSON_AD.git

CAPTURAS:

POST REGISTER:

The screenshot displays a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:5000/api/auth/register
- Body Tab:** Selected, showing the request payload in JSON format:

```
1 {
2   "name": "Jhonson",
3   "email": "jhonson@mail.com",
4   "password": "123456"
5 }
```
- Response Tab:** Selected, showing the response payload in JSON format:

```
1 {
2   "message": "User created",
3   "user": {
4     "name": "Jhonson",
5     "email": "jhonson@mail.com",
6     "password": "$2b$10$juLfbnxZZZ4gB4yBIAphluR/Adhb8fRtw9ztKQXtyqqFZouNWKmFy",
7     "_id": "686e6d62eac02212dd813882",
8     "__v": 0
9   }
10 }
```

POST LOGIN:

The screenshot shows a REST client interface for a POST request to `http://localhost:5000/api/auth/login`. The request body is a JSON object with email and password. The response body is a JSON object containing a token.

Request:

```
POST http://localhost:5000/api/auth/login
```

Body (raw):

```
{
  "email": "jhonson@mail.com",
  "password": "123456"
}
```

Response:

```
{
  "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZCI6IjY4NmU2ZDYyZWZjMDIyMTJkZDgxMzg4MiIsIm1hdCI6IjE5OTk1MjM0In0"
}
```

POST TASK SIN TOKEN EN LOS HEADERS:

The screenshot shows a REST client interface for a POST request to `http://localhost:5000/api/tasks`. The request body is a JSON object with title and description. The response body is a JSON object with an error message.

Request:

```
POST http://localhost:5000/api/tasks
```



Body (raw):

```
{
  "title": "Estudiar para el examen",
  "description": "Revisar arquitectura limpia"
}
```

Response:


```
{
  "message": "Access denied. No token provided."
}
```

CON TOKEN:

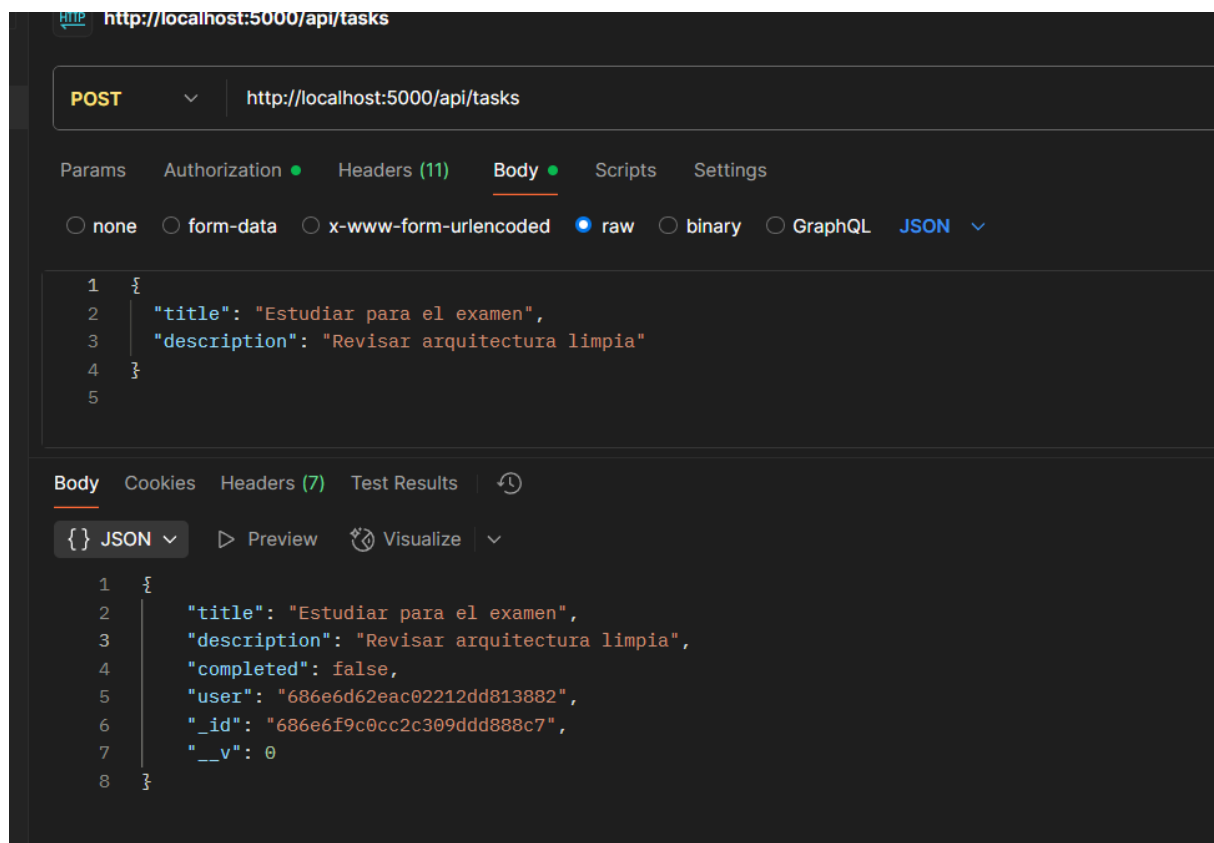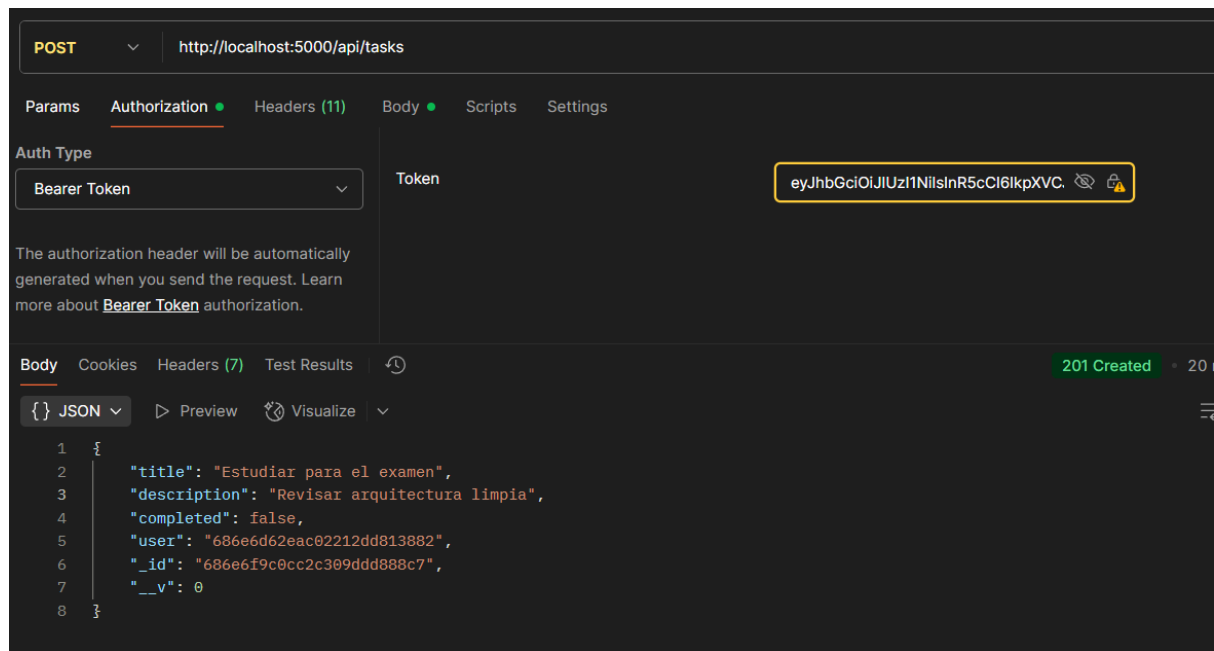


GET TASK:

SIN TOKEN:

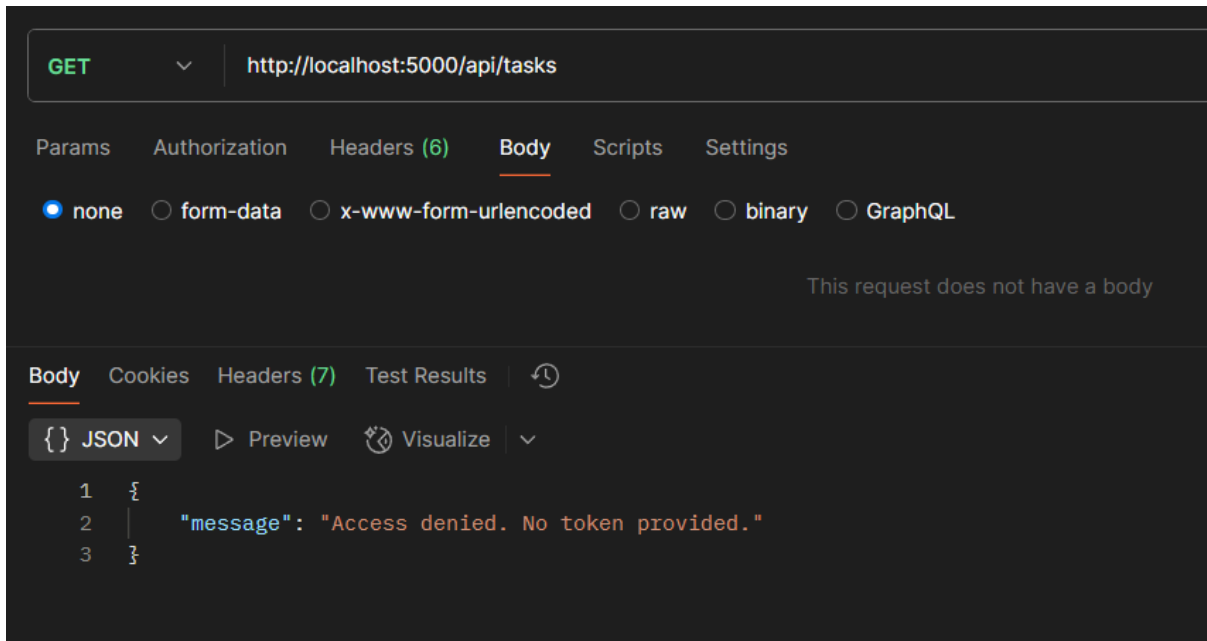

CON TOKEN:

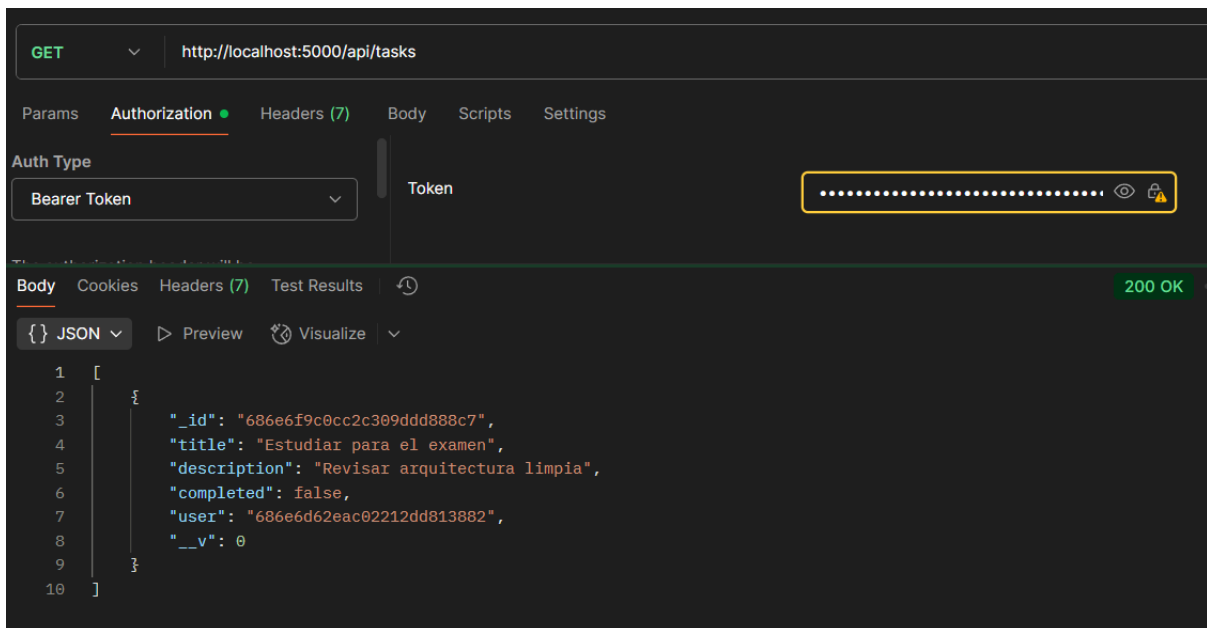

PUT TASK:

SIN TOKEN:

PUT ▼ http://localhost:5000/api/tasks/686e6f9c0cc2c309ddd888c7

Params Authorization Headers (8) **Body** ● Scripts Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL **JSON** ▼

```
1 {
2   "title": "Estudiar para el examen ACTUALIZADO",
3   "description": "Revisar arquitectura limpia ACTUALIZADO"
4 }
5
```

Body Cookies Headers (7) Test Results ↺

{} JSON ▼ ▶ Preview 🔗 Visualize ▼

```
1 {
2   "message": "Access denied. No token provided."
3 }
```

CON TOKEN:

PUT ▼ http://localhost:5000/api/tasks/686e6f9c0cc2c309ddd888c7

Params **Authorization** ● Headers (9) Body ● Scripts Settings

Auth Type

Bearer Token ▼

Token 👁 🔒

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Body Cookies Headers (7) Test Results ↺ 200 OK

{} JSON ▼ ▶ Preview 🔗 Visualize ▼

```
1 {
2   "_id": "686e6f9c0cc2c309ddd888c7",
3   "title": "Estudiar para el examen ACTUALIZADO",
4   "description": "Revisar arquitectura limpia ACTUALIZADO",
5   "completed": false,
6   "user": "686e6d62eac02212dd813882",
7   "__v": 0
8 }
```

PUT ▼ http://localhost:5000/api/tasks/686e6f9c0cc2c309ddd888c7

Params Authorization ● Headers (9) **Body ●** Scripts Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL **JSON ▼**

```
1 {
2   "title": "Estudiar para el examen ACTUALIZADO",
3   "description": "Revisar arquitectura limpia ACTUALIZADO"
4 }
5
```

Body Cookies Headers (7) Test Results ↺

{ } JSON ▼ ▶ Preview 🔗 Visualize ▼

```
1 {
2   "_id": "686e6f9c0cc2c309ddd888c7",
3   "title": "Estudiar para el examen ACTUALIZADO",
4   "description": "Revisar arquitectura limpia ACTUALIZADO",
5   "completed": false,
6   "user": "686e6d62eac02212dd813882",
7   "__v": 0
8 }
```

DELETE TASK:
SIN TOKEN:

DELETE ▼ http://localhost:5000/api/tasks/686e6f9c0cc2c309ddd888c7

Params **Authorization** Headers (6) Body Scripts Settings

Auth Type

No Auth ▼

No

This request does not have an authorization header.

Body Cookies Headers (7) Test Results ↺

{ } JSON ▼ ▶ Preview 🔗 Visualize ▼

```
1 {
2   "message": "Access denied. No token provided."
3 }
```

CON TOKEN:

DELETE

http://localhost:5000/api/tasks/686e6f9c0cc2c309ddd888c7

Params

Authorization

Headers (7)

Body

Scripts

Settings

Auth Type

Bearer Token

Token

.....

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Body

Cookies

Headers (7)

Test Results

200 OK

{ } JSON

Preview

Visualize

1 {

2 |

3 }

"message": "Task deleted"