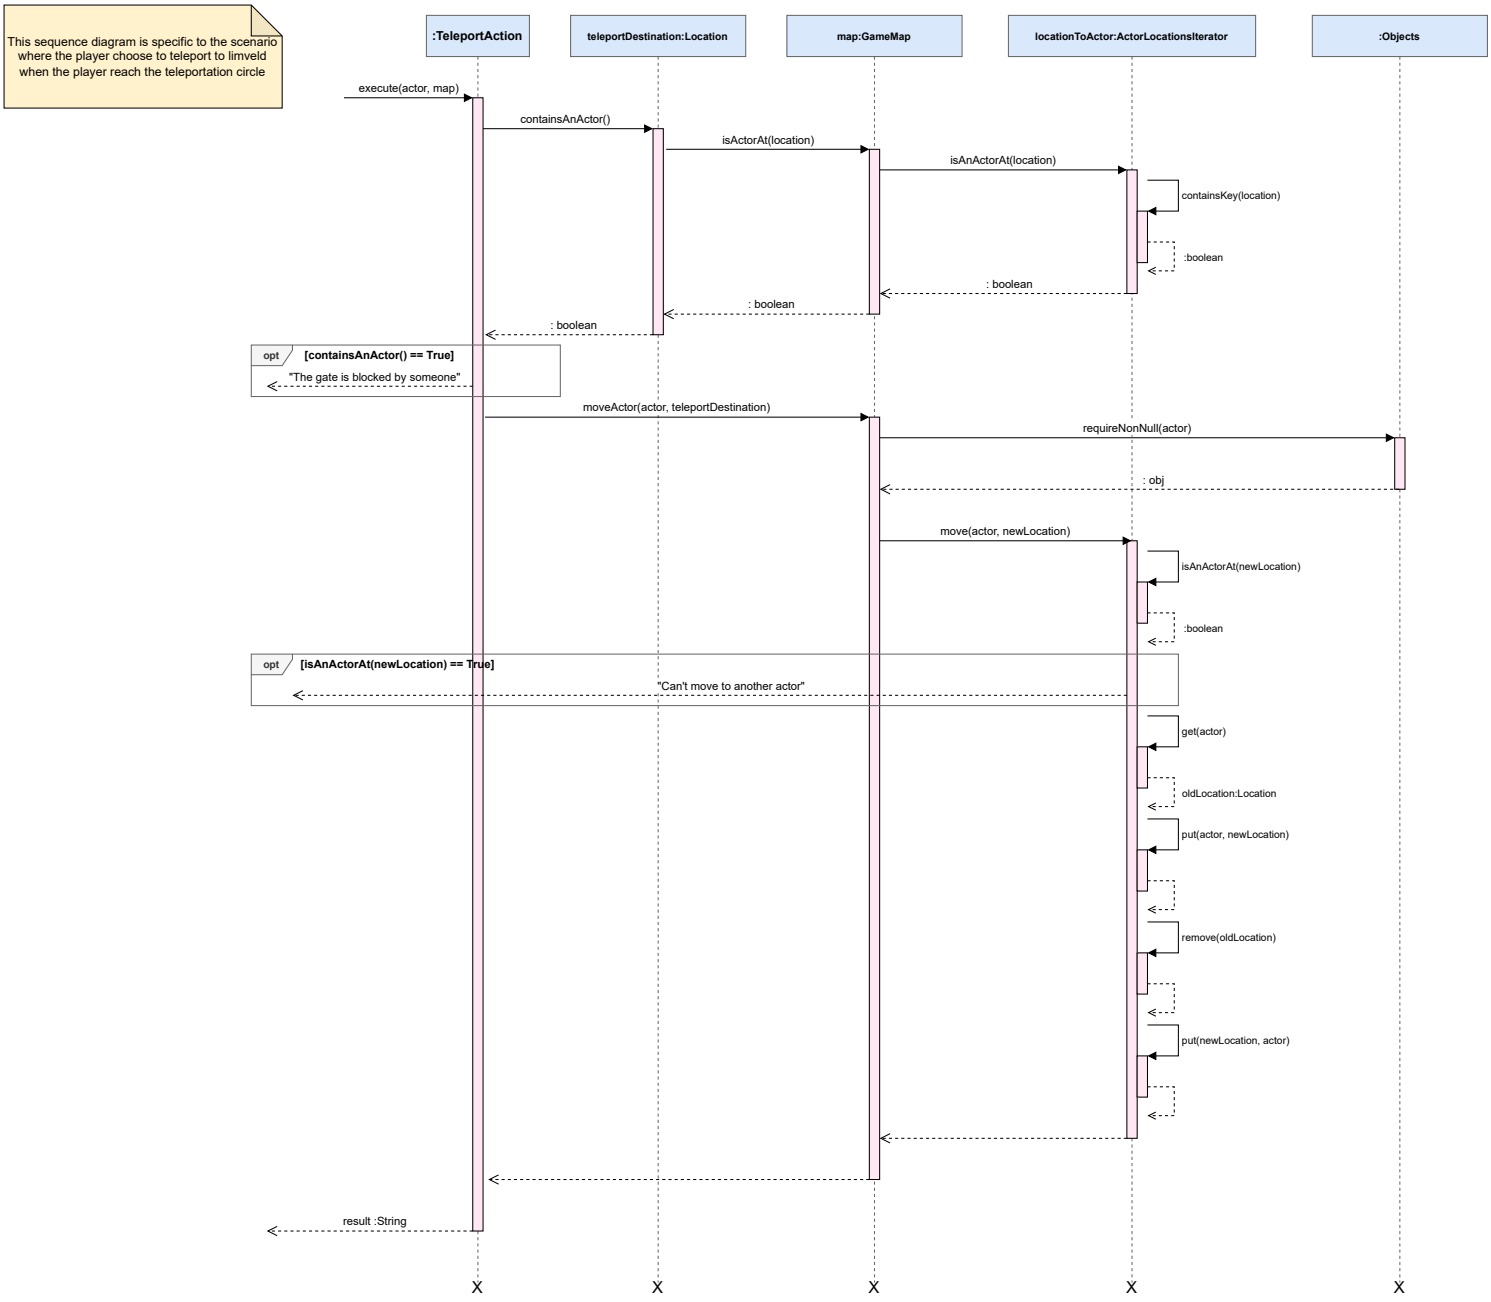

This sequence diagram is specific to the scenario where the player choose to teleport to limveld when the player reach the teleportation circle
:TeleportAction
teleportDestination:Location
map:GameMap
locationToActor:ActorLocationsIterator
:Objects
execute(actor, map)
containsAnActor()
isActorAt(location)
isAnActorAt(location)
containsKey(location)
:boolean
: boolean
: boolean
: boolean
opt
[containsAnActor() == True]
"The gate is blocked by someone"
moveActor(actor, teleportDestination)
requireNonNull(actor)
: obj
move(actor, newLocation)
isAnActorAt(newLocation)
:boolean
opt
[isAnActorAt(newLocation) == True]
"Can't move to another actor"
get(actor)
oldLocation:Location
put(actor, newLocation)
remove(oldLocation)
put(newLocation, actor)
result :String