

設計師 × AI Agent · Git Cheat Sheet

Designer's quick reference for talking to AI

Based on 「GitHub for UI Designers」 W1—W3 · 2026

about Git

① 三個狀態，先學會看 The Three States — learn to spot which one you're in

卡關時，先問 Agent：「我現在處於 A / B / C 哪個狀態？」

When stuck, first ask the agent: "Am I in state A, B or C right now?"

A

改了，還沒 commit

Edited, not committed

檔案在你電腦的工作區，VS Code 檔名右側出現 **M** (modified)。

Files sit in your working directory. VS Code shows an M badge next to filename.

同事看得到嗎？❌ 看不到 / Teammates can see? No

B

commit 了，還沒 push

Committed, not pushed

已存進本機歷史。VS Code 左下角狀態列出現 **↑1** (要上傳的 commit 數)。

Stored in local history. The status bar shows ↑1 — commits waiting to push.

同事看得到嗎？❌ 看不到 / Teammates can see? No

C

push 了

Pushed

已上 GitHub。狀態列只剩 branch 名稱，沒有上下箭頭。

Synced to GitHub. The status bar shows only the branch name — no arrows.

同事看得到嗎？✅ 看得到 / Teammates can see? Yes

VS Code 哪裡看？ Where to look in VS Code

A 左側 **Source Control** 面板 (🔗 圖示) 展開「Changes」，列出所有未 commit 的檔案。


Open Source Control panel (🔗 icon) → expand "Changes" to see uncommitted files.

B 檔案不在 Changes 區了，但左下角狀態列出現 **↑1** 之類的數字。

Files leave the Changes area, but the status bar (bottom-left) shows ↑1.

C 狀態列只剩 🔗 branch-name，沒有 **↑** 或 **↓**。

Status bar shows only 🔗 branch-name — no ↑ or ↓ arrows.

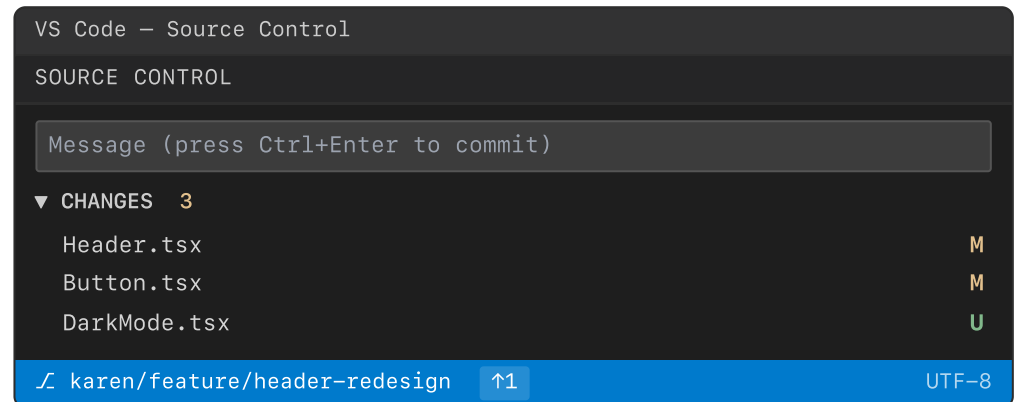

← 紅框看 **Changes** 列表 (狀態 A) + 狀態列 **↑1** (狀態 B) + **branch** 名稱

Watch the Changes list (state A), the ↑1 in status bar (state B), and the branch name


開始工作 Starting work

你想做的事 What you want	該對 Agent 說 What to say
開新的工作分支 <i>Open a new working branch</i>	「開一條 branch 叫 karen/feature/header-redesign」 <i>"Open branch karen/feature/header-redesign"</i>
確認自己在哪 <i>Check current branch</i>	「我現在在哪个 branch？」 <i>"Which branch am I on?"</i>
切換到別條 branch <i>Switch branches</i>	「切到 main」 <i>"Switch to main"</i>
把遠端最新的拉下來 <i>Get latest from remote</i>	「先 pull 一下再開始」 <i>"Pull the latest before I start"</i>


想實驗，不影響別人 Experiment without affecting others

你想做的事 What you want	該對 Agent 說 What to say
試新方向 <i>Try a new direction</i>	「開一條實驗 branch 叫 karen/exp/dark-mode，我想試 dark mode」 <i>"Open an experiment branch karen/exp/dark-mode for dark mode"</i>
試完不要了 <i>Discard the experiment</i>	「這條 branch 不要了，幫我刪掉」 <i>"Delete this branch, I'm done with it"</i>
試到一半要先處理別的事 <i>Pause work, switch context</i>	「先把現在的工作 stash 起來，等等再回來」 <i>"Stash current work, I'll come back later"</i>

VS Code 哪裡操作？ Where in VS Code

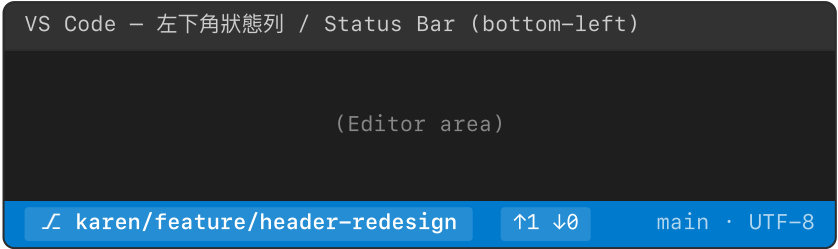

← 點 branch 名稱 → 跳出 branch 切換選單 (建議仍用對話請 Agent 處理)
Click the branch name → pops up branch picker (still preferred to ask the agent)

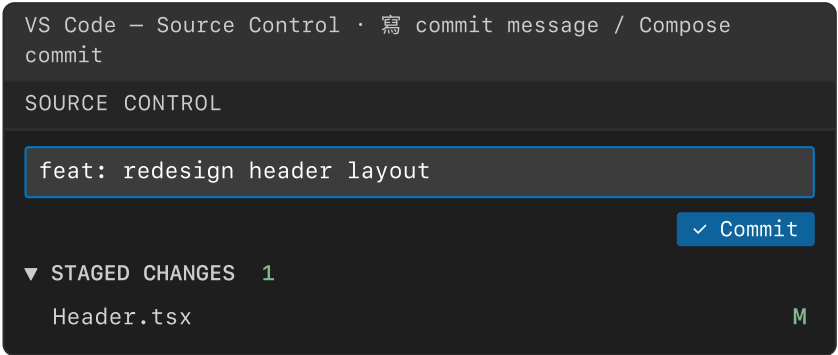

← Commit 訊息輸入框在 Source Control 面板頂端 / Commit message box at the top of Source Control


改完了，要交出去 Hand off your changes

你想做的事 What you want	該對 Agent 說 What to say
存檔 + 寫紀錄 Save with a message	「commit 一下，訊息寫 feat: redesign header layout」 "Commit with message: feat: redesign header layout"
上傳到 GitHub Upload to GitHub	「push 上去」 "Push it up"
請工程師 review Ask engineer to review	「開 Pull Request 合併到 main，標題寫 ...」 "Open a PR to main, title ..."


出狀況 When things go wrong

症狀 Symptom	該對 Agent 說 What to say
push 被擋 (rejected / non-fast-forward) Push rejected (non-fast-forward)	「push 被擋了，幫我處理」 "Push was rejected, please handle it"
不知道哪裡壞了 No idea what broke	「告訴我為什麼被擋」 "Tell me why it was rejected"
改錯檔案想退回 Made wrong edit, want to undo	「把 Header.tsx 還沒 commit 的改動丟掉」 "Discard uncommitted changes in Header.tsx"
同事改壞了想回到舊版 A teammate broke something, roll back	「找到上一次正常的 commit，revert 回那個版本」 "Find the last working commit, revert to it"
切 branch 但工作做一半 Switch branch but work unfinished	「先 stash，切到 main，等等回來」 "Stash first, switch to main, I'll come back"

VS Code 哪裡操作？ Where in VS Code

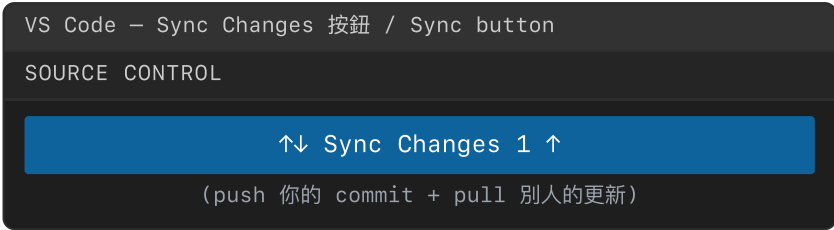

← Source Control 面板會出現 Sync Changes 按鈕；對 Agent 說「push 上去」最不會出錯
"Sync Changes" button appears in Source Control; saying "push it up" to the agent is safest

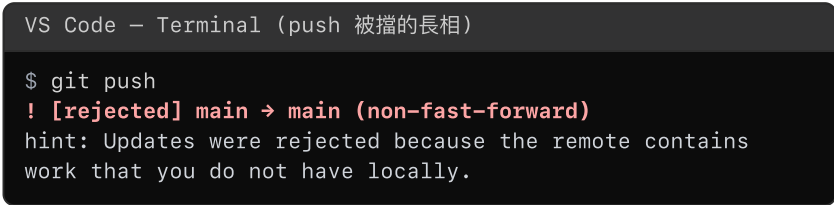

← 看到 [rejected] 或 non-fast-forward 別緊張，這是保護機制
Seeing [rejected] or non-fast-forward is normal — it's a safety net

✗ 不要說的話 Phrases to avoid

這些字會讓 Agent 觸發破壞性指令，或語意模糊讓 Agent 猜錯動作。

These trigger destructive commands or are too vague — the agent may guess wrong.

不要說 Avoid	為什麼 Why	改說 Say instead
「強推」「force」「硬上」 "force", "push hard"	觸發 <code>--force</code> ，會蓋掉遠端別人的工作 Triggers <code>--force</code> , overwrites teammates' work	「push 被擋了，幫我處理」 "Push rejected, please handle it"
「蓋過去」「直接覆蓋」 "overwrite it", "just replace"	同上，可能 silent overwrite May silently overwrite remote	「整合進去」「合併」 "integrate it", "merge it"
「全部清掉」「重置」 "clear everything", "reset"	觸發 <code>reset --hard</code> ，本機未 commit 改動會消失 Triggers <code>reset --hard</code> , uncommitted edits lost	「丟掉 X 檔的改動」（指定範圍） "Discard changes in X file" (specify scope)
「拉下來」 "pull it down" (vague)	分不清 pull / fetch / clone / checkout，Agent 可能猜錯 Ambiguous between pull / fetch / clone / checkout	「pull 遠端最新的」或「clone 這個 repo」 "Pull latest from remote" or "Clone this repo"
「推上去」 "push it up" (vague)	分不清 push / force push / merge / PR Ambiguous between push / force / merge / PR	「push 到目前 branch」或「開 PR 合到 main」 "Push to current branch" or "Open PR to main"
「連結」「接起來」 "link it", "connect them"	分不清 merge / rebase / submodule / remote add Ambiguous between merge / rebase / submodule / remote	「把 X branch merge 到 Y」 "Merge branch X into Y"

📖 基本操作建議用語 Recommended base vocabulary

固定用這些字，Agent 就不會誤解。

Use these consistently and the agent won't misread you.

clone 第一次複製整個 repo First-time copy a repo	pull 把遠端更新拉進本機 Bring remote updates local	push 把本機 commit 推到遠端 Send local commits to remote	commit 在本機建一個版本紀錄 Record a local version
branch 開一條平行工作線 Open a parallel work line	switch / checkout 切到別條 branch Switch to another branch	merge 把兩條 branch 合起來 Combine two branches	PR (Pull Request) 請別人 review 並合併 Ask for review & merge
stash 暫存未 commit 的改動 Park uncommitted edits	revert 用新 commit 取消舊 commit Undo a commit with a new commit	discard 丟掉還沒 commit 的改動 Drop uncommitted changes	conflict 同檔同行兩邊都改了 Same line edited on both sides

救援三步驟 When in doubt — three questions

- 「我現在的狀態是什麼？」 — 確認在哪條 branch、有沒有未存的改動
"What state am I in?" — current branch, unsaved edits
- 「這個操作會影響到誰？」 — 只動本機，還是會推到遠端
"Who does this affect?" — local only, or pushed to remote
- 「有沒有更安全的做法？」 — 永遠先問再做
"Is there a safer way?" — ask before acting

~~「不管衝突直接合」~~
~~"just merge, ignore conflicts"~~

可能 silent overwrite，丟失改動
May overwrite silently, losing changes

「把衝突列出來給我看」
"Show me the conflicts"

📦 Repo 三種關係 + 通用 Prompt 模板 Three repo relationships + universal prompt template



貢獻者 · Contributor

團隊 repo，你有 write 權限。
Team repo, you have write access.

走完整流程：branch → commit → push → PR。
Full flow: branch → commit → push → PR.



讀者 · Reader

Reference repo（如 Design System），你幾乎不改。
Reference repo (e.g. Design System), rarely edit.

動之前先問 Agent「這 repo 我有權限動嗎？」
Ask the agent "Do I have write access here?" first.



自己的 Repo · Your Own

規則自己定。
Your repo, your rules.

仍建議走 branch + PR，養肌肉記憶。
Still use branch + PR — build the muscle memory.

我想 [做什麼]，
目前在 [哪條 branch]，
請告訴我接下來的步驟，並在動 remote 之前先讓我確認。

範例：我想把 Header.tsx 改成新的 layout，目前在 main，請告訴我接下來的步驟，並在動 remote 之前先讓我確認。

Example: I want to redesign Header.tsx layout, currently on main. Tell me the next steps and confirm with me before touching remote.