


Baseline: gpt-6-sol P(A)



<= marks an upper bound when the API omitted exact P(A); not a zero or an estimated exact score. No score cutoff applied.
* Assisted USB crop. M8 and square pins excluded. Raw P(A) is not calibrated correctness; all four models use identical crop files and prompts.

Scene 101: gpt-6-sol P(A)

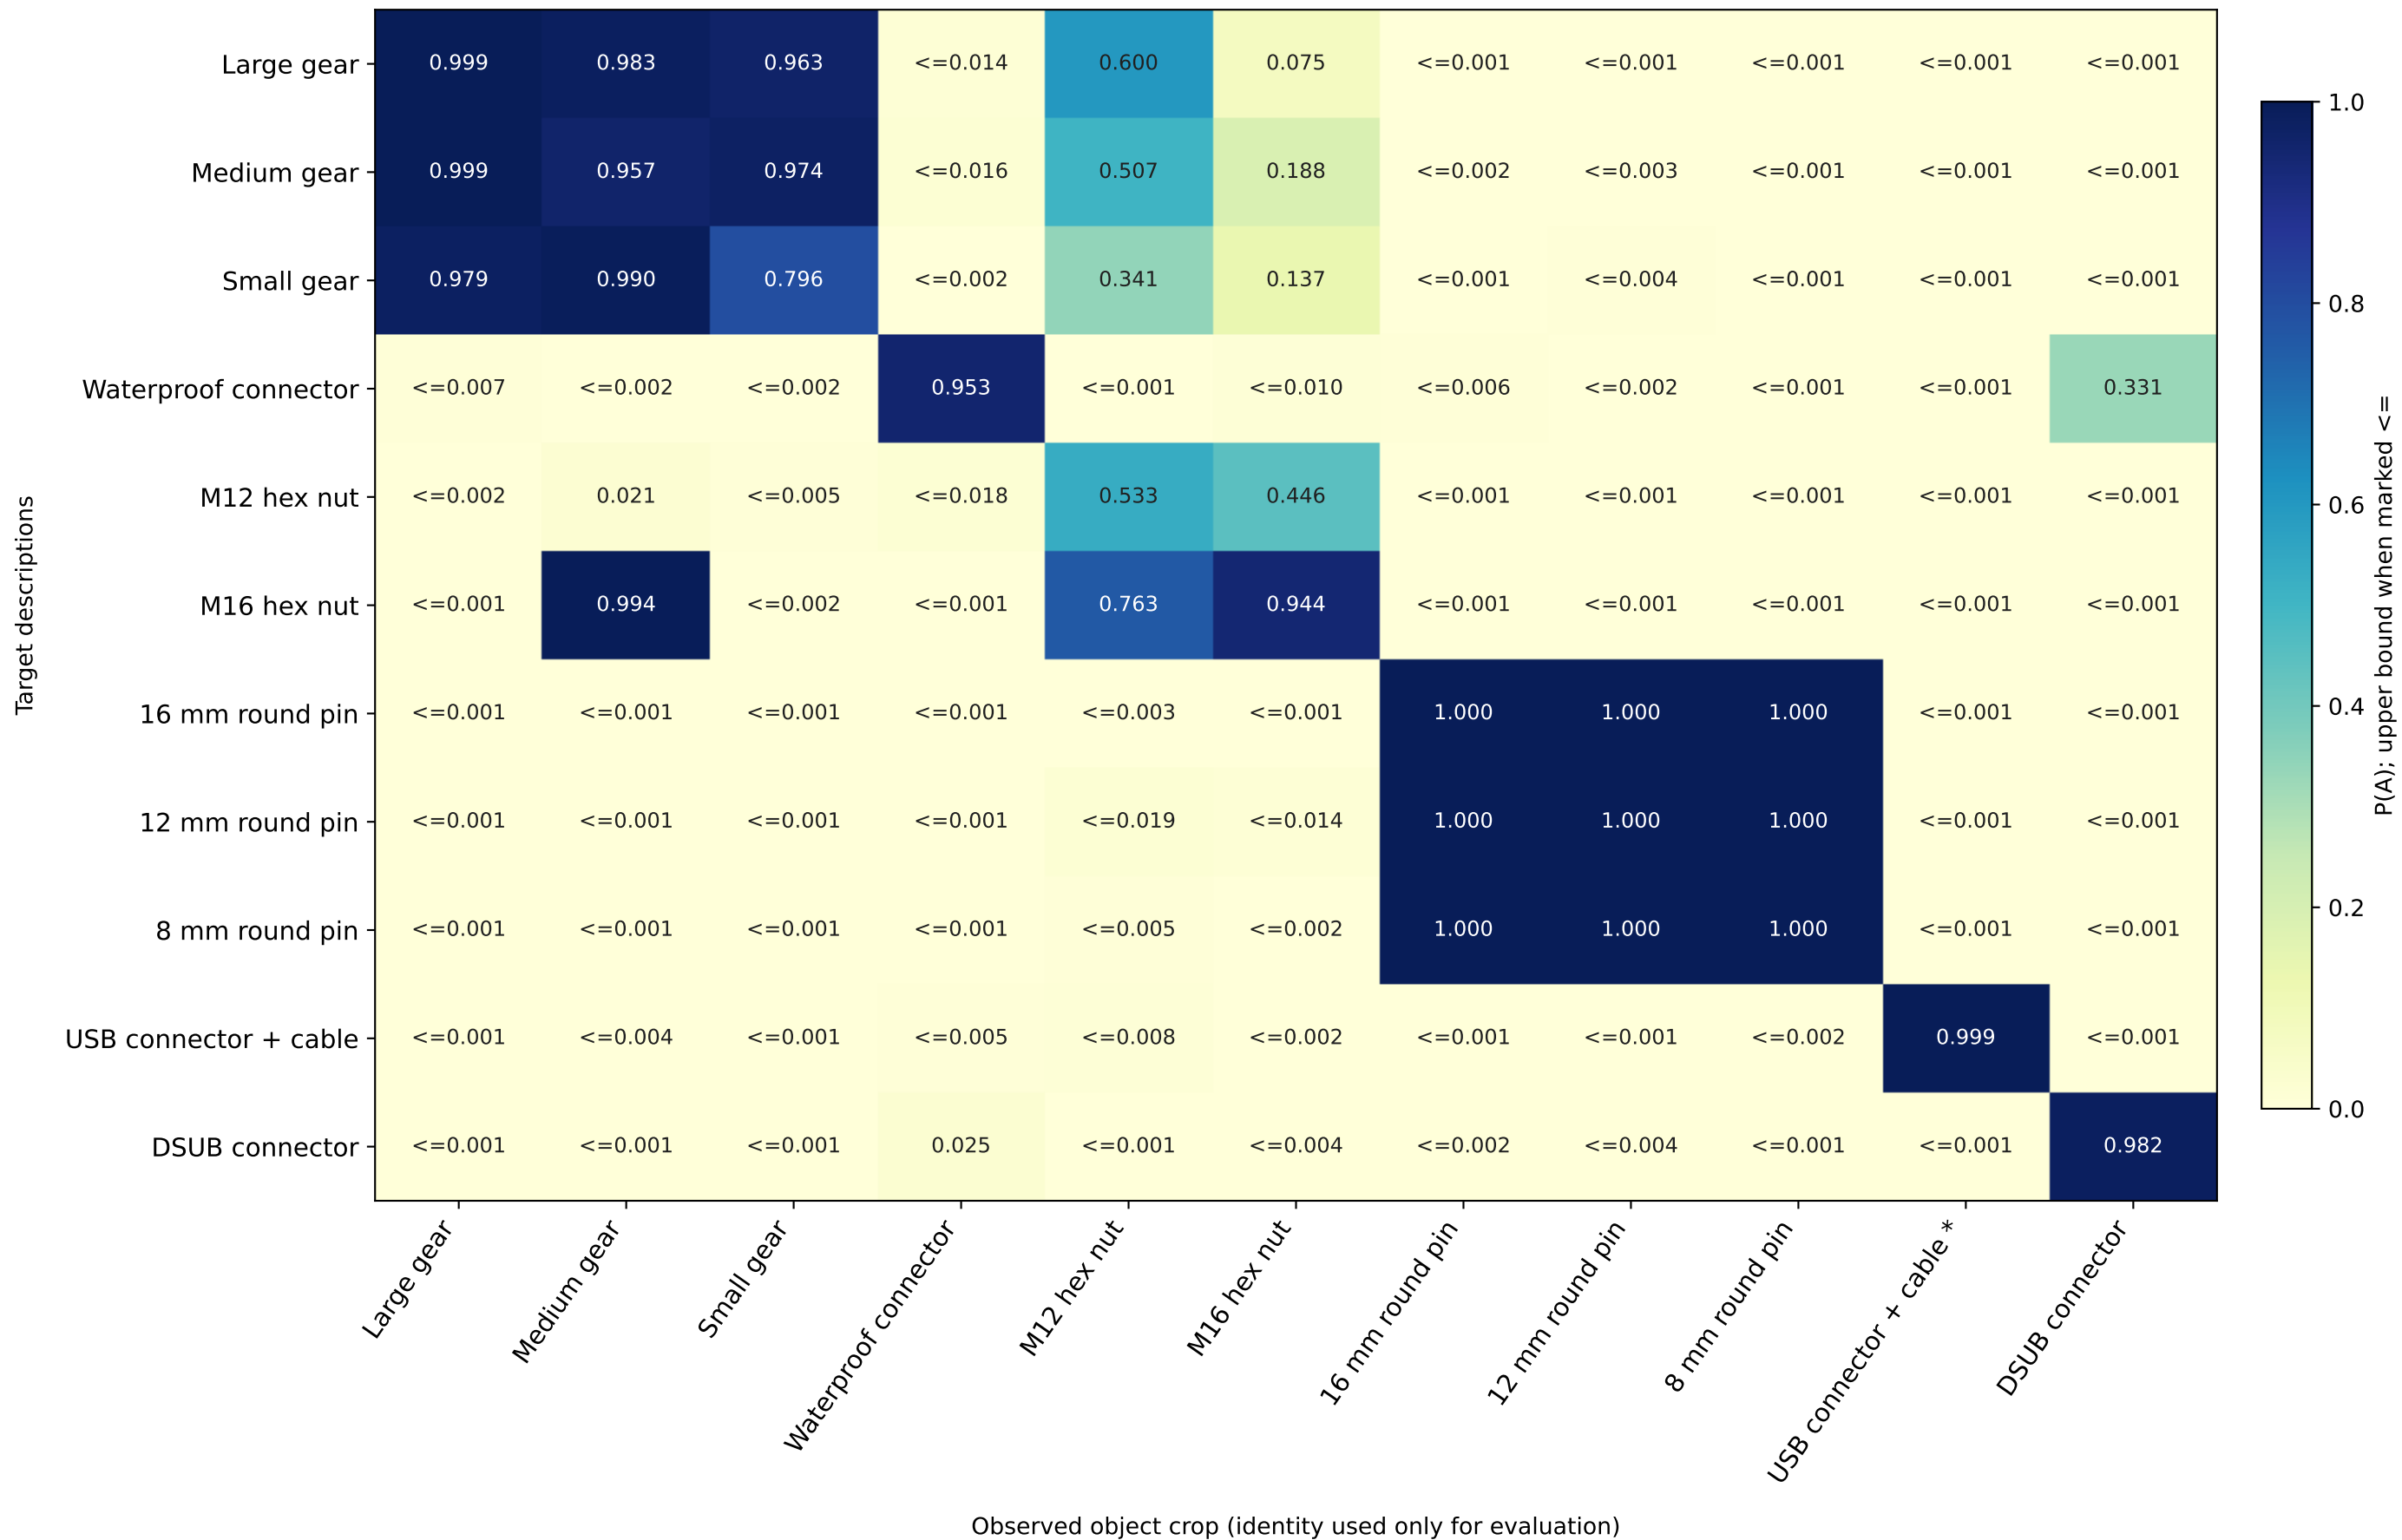

<= marks an upper bound when the API omitted exact P(A); not a zero or an estimated exact score. No score cutoff applied.
* Assisted USB crop. M8 and square pins excluded. Raw P(A) is not calibrated correctness; all four models use identical crop files and prompts.

Scene 202: gpt-6-sol P(A)



<= marks an upper bound when the API omitted exact P(A); not a zero or an estimated exact score. No score cutoff applied.
* Assisted USB crop. M8 and square pins excluded. Raw P(A) is not calibrated correctness; all four models use identical crop files and prompts.

Scene 303: gpt-6-sol P(A)



<= marks an upper bound when the API omitted exact P(A); not a zero or an estimated exact score. No score cutoff applied.
* Assisted USB crop. M8 and square pins excluded. Raw P(A) is not calibrated correctness; all four models use identical crop files and prompts.