


AD

AS

TGFb | AD | CD4_Naive

TGFB1 – (TGFB1+TGFB2)

p-value
● p < 0.01



CD4_Naive -> pDCs (AD_32_e1)

CD4_Naive -> pDCs (AD_32_e2)


TI

TS

TGFb | TS | CD4_Naive

TGFB1 – (TGFB1+TGFB2)

TGFb | TI | CD4_Naive

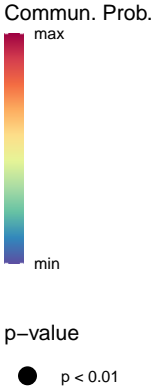

CD4_Naive -> pDCs (TI_23_e1)

CD4_Naive -> pDCs (TI_23_e2)

CD4_Naive -> pDCs (TS_20_e1)

CD4_Naive -> pDCs (TS_20_e2)

CD4_Naive -> ydT_NK (TS_20_e2)

