

3. Data Extraction from Images and videos, creating occupancy & secr input

Juergen Niedballa (camtrapr@gmail.com)

2021-12-12

```
library(camtrapR)
library(secr)
```

Tabulating species and individual records: the recordTable functions

There are 2 function to tabulate species records after identification of species from images and videos.

- **recordTable** tabulates records of all images after species-level identification and
- **recordTableIndividual** tabulates individuals of one species.

Nevertheless, the underlying idea is the same. For each image, the date and time it was taken are read from the image's Exif metadata using ExifTool. Species or individual ID are read from the directory structure or image metadata (see vignette "Species and Individual Identification"). Video data are extracted analogously.

recordTable: tabulating species records

recordTable is typically run after identifying species from images. It reads species IDs from the directory structure the images are placed in or from image metadata tags.

First we define the directory containing our renamed, identified images

```
# find the directory with sample images contained in the package
wd_images_ID <- system.file("pictures/sample_images_species_dir", package = "camtrapR", lib.loc = .libPaths()[1])
```

and see how many JPG images we have (this is not necessary, but informative here).

```
length(list.files(wd_images_ID, pattern = "JPG", recursive = TRUE))
```

```
## [1] 68
```

Now we can run **recordTable**. Here is a minimal example:

```
rec.db.species0 <- recordTable(inDir = wd_images_ID,
                              IDfrom = "directory")
```

```
## timeZone is not specified. Assuming UTC
```

```
## StationA:      8 images    0 duplicates removed    |=====|    33%
```

```
## StationB:     23 images    6 duplicates removed    |=====|    67%
```

```
## StationC:     37 images    6 duplicates removed    |=====|   100%
```

```
head(rec.db.species0)
```

```

##      Station Species      DateTimeOriginal      Date      Time delta.time.secs
## 1 StationA      PBE 2009-04-21 00:40:00 2009-04-21 00:40:00          0
## 2 StationA      PBE 2009-04-22 20:19:00 2009-04-22 20:19:00      157140
## 3 StationA      PBE 2009-04-22 20:21:00 2009-04-22 20:21:00        120
## 4 StationA      PBE 2009-04-23 00:07:00 2009-04-23 00:07:00      13560
## 5 StationA      PBE 2009-04-23 00:09:00 2009-04-23 00:09:00        120
## 6 StationA      PBE 2009-05-07 17:11:00 2009-05-07 17:11:00     1270920
##      delta.time.mins delta.time.hours delta.time.days
## 1              0              0.0              0.0
## 2             2619             43.6              1.8
## 3              2              0.0              0.0
## 4             226              3.8              0.2
## 5              2              0.0              0.0
## 6            21182            353.0             14.7
##
##                                     Direct
## 1 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/I
## 2 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/I
## 3 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/I
## 4 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/I
## 5 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/I
## 6 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/I
##
##                               FileName n_images
## 1 StationA__2009-04-21__00-40-00(1).JPG      1
## 2 StationA__2009-04-22__20-19-00(1).JPG      1
## 3 StationA__2009-04-22__20-21-00(1).JPG      1
## 4 StationA__2009-04-23__00-07-00(1).JPG      1
## 5 StationA__2009-04-23__00-09-00(1).JPG      1
## 6 StationA__2009-05-07__17-11-00(1).JPG      1

```

Argument `IDfrom` tells the function to look for species directories within the station directories and to take species IDs from these. `IDfrom` must be set to “metadata” if metadata tagging was used for species identification.

By default, the function returns all records. Nevertheless, we get a data frame containing 56 records, less than the number of images in the image directory (68). This is because a number of images were taken at the same time (measured with 1 minute precision by these cameras) and the function removes duplicate records.

It may suffice to illustrate this with the Pig-tailed macaque images from stationB:

```
list.files(file.path(wd_images_ID, "StationB", "MNE"))
```

```

## [1] "StationB__2009-04-15__07-21-00(1).JPG"
## [2] "StationB__2009-04-15__07-23-00(1).JPG"
## [3] "StationB__2009-04-28__17-47-00(1).JPG"
## [4] "StationB__2009-04-28__17-47-00(2).JPG"
## [5] "StationB__2009-04-28__17-48-00(1).JPG"
## [6] "StationB__2009-04-28__17-48-00(2).JPG"
## [7] "StationB__2009-04-28__17-48-00(3).JPG"
## [8] "StationB__2009-04-28__17-49-00(1).JPG"
## [9] "StationB__2009-04-28__17-49-00(2).JPG"
## [10] "StationB__2009-04-28__17-49-00(3).JPG"

```

There are, amongst others, 3 images taken at 17:48:00 on the 28th of April 2009. Of these, only 1 will be returned.

Here is what the columns of the record table contain:

column	content
Station	the station the image is from
Species	species name
DateTimeOriginal	date and time of record in R-readable format
Date	record date
Time	record time of day
delta.time.seconds	time difference between record and last (independent) record of same species at same station / camera* (in seconds)
delta.time.minutes	time difference between record and last (independent) record of same species at same station / camera* (in minutes)
delta.time.hours	time difference between record and last (independent) record of same species at same station / camera* (in hours)
delta.time.days	time difference between record and last (independent) record of same species at same station / camera* (in days)
Directory	directory the image is in
FileName	image file name

*see below: Independence between cameras within stations

Temporal independence between records

Imagine a species that loves to hang out in front of your cameras. You will end up with hundreds of shots of the same species, maybe even the same animal. Therefore, images can be filtered using an adjustable criterion for temporal independence between subsequent records of the same species in an attempt to remove non-independent records. This is achieved via argument `minDeltaTime`. It is the minimum time difference (in minutes) between two records of the same species at the same station which are to be considered independent. The default is 0, causing the function to return all records. Setting it to a higher number, e.g. 60 (i.e., 1 hour), is commonly done to thin the number of records. Note that you will not lose records of different species, even if they fall within the specified time interval from a record.

The argument `deltaTimeComparedTo` further controls how independence between records is assessed. Setting it to “lastRecord” returns only records taken `minDeltaTime` minutes after the last record. Setting it to “lastIndependentRecord” returns only records taken `minDeltaTime` minutes after the last *independent* record.

Let’s now apply an 1-hour independence criterion and define a time zone.

```
rec.db.species60 <- recordTable(inDir          = wd_images_ID,
                                IDfrom         = "directory",
                                minDeltaTime   = 60,
                                deltaTimeComparedTo = "lastRecord",
                                timeZone       = "Asia/Kuala_Lumpur")

## StationA:      8 images    0 duplicates removed    |=====|    33%
## StationB:     23 images    6 duplicates removed    |=====|    67%
## StationC:     37 images    6 duplicates removed    |=====|   100%

nrow(rec.db.species60)

## [1] 40
```

Now 40 records were returned instead of 56. The missing records were taken less than 1 hour after the prior record of the same species at the same station and therefore omitted.

Time zones and daylight saving time

Note the warning about the missing time zone in the minimal example above. By default, `camtrapR` will assume UTC time zone. This should work well in most situations (even though the time zone may not be correct, strictly speaking), because UTC does not use daylight saving time (DST, aka ‘summer time’), and camera traps normally don’t use time zones (hence, camera traps will normally not respect DST of the area you work in and will not adjust image timestamps accordingly).

Now, if you work in an area that uses DST, and your camera does not know about DST, things can go wrong in various ways and you may end up with a systematic 1-hour offset. If you set your cameras up during DST (in summer) and set the internal clock accordingly, all records taken in winter (non-DST period) will be recorded as 1 hour later than according to actual clock time. If you set your cameras up during winter (not DST) and set the internal clock accordingly, all records taken in summer (DST period) will be recorded as 1 hour earlier than according to actual clock time.

In addition if you specify a time zone with DST and your cameras don’t respect it, records may fall into the non-existing hour when clocks are advanced in spring, leading to an error in interpreting the date/time.

So, the question whether or not your cameras record the time zone becomes very important. Here is some recommendations on how to use the argument `timeZone`.

If your cameras don’t save the time zone, and your time zone does not have DST, set argument `timeZone` to your study area time zone. If your cameras don’t save the time zone, and your time zone has DST, leave argument `timeZone` at the default UTC. If your cameras save the time zone and adjust image timestamps accordingly, set argument `timeZone` to your study area time zone (both if your area has DST or not).

In other words, it is advised to set argument `timeZone` to your study area’s time zone (one of `OlsonNames()`), *unless* the time zone of your study area has DST, but your cameras don’t record it.

Independence between cameras within stations

The issue of temporal independence between records becomes slightly more complex if more than one camera was operated at stations. That information can and should be included in the output of `recordTable` (and `recordTableIndividual`). Users can then decide whether temporal independence is to be assessed within stations or within cameras at each station. In the first case, argument `camerasIndependent` must be set to `FALSE`. 2 images taken at different 2 cameras at the same station within `minDeltaTime` minutes will be reported as 1 record in the record table (suitable if cameras were placed in pairs). In the second case `camerasIndependent` must be set to `TRUE` and 2 images taken at different 2 cameras at the same station within `minDeltaTime` minutes will be reported as 2 record in the record table (suitable e.g., if cameras were located at some distance to one another and faced different trails).

The `cameraID` argument controls where `camtrapR` will look for camera IDs: in the file names (after renaming using `imageRename`, e.g. “renamedImages/StationA/StationA__**Camera1**__2015-12-31__23-59-59(1).JPG”) or in the directory structure (e.g. renamedImages/StationA/**Camera1**/StationA__Camera1__2015-12-31__23-59-59(1).JPG”). If missing, it will be assumed there was only 1 camera per station.

Ignoring species

Argument `exclude` can be used to ignore certain species. This is useful for omitting images in directories like “team” or “unidentified”. Here is an example:

```
# see what species we recorded
table(rec.db.species60$Species)
```

```
##
##  EGY  MNE  PBE  TRA UNID  VTA
##    6    2   18    8    1    5
```

```
# remove "UNID" by setting argument exclude = "UNID"
rec.db.species60.exclude <- recordTable(inDir          = wd_images_ID,
                                       IDfrom          = "directory",
                                       minDeltaTime     = 60,
                                       deltaTimeComparedTo = "lastIndependentRecord",
                                       timeZone         = "Asia/Kuala_Lumpur",
                                       exclude          = "UNID")
```

```
## StationA:      8 images    0 duplicates removed    |=====|    33%
## StationB:     22 images    6 duplicates removed    |=====|    67%
## StationC:     37 images    6 duplicates removed    |=====|   100%
```

```
# note that "UNID" is gone now
table(rec.db.species60.exclude$Species)
```

```
##
## EGY MNE PBE TRA VTA
##   6   2  18   8   5
```

Extracting image metadata

`recordTable` and `recordTableIndividual` can both extract additional metadata from images (apart from date and time). For example, some camera models record ambient temperature or moon phase, which may be of interest. Metadata tags are stored in the images at the time they are taken and can be accessed and extracted if their tag names are known. Some tag names are standardised (e.g. “DateTimeOriginal”) while others are manufacturer-specific. Therefore, function `exifTagNames` returns all Exif metadata it finds in a sample image. Users can then choose which to extract with `recordTable` and `recordTableIndividual`.

```
wd_images_ID <- system.file("pictures/sample_images_species_dir", package = "camtrapR")
exifTagNames(inDir = wd_images_ID)
```

```
## Metadata of:
```

```
## C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/PB1
```

```
##   tag_group      tag_name
## 1  ExifTool      ExifToolVersion
## 2  ExifTool      Warning
## 3   File         FileName
## 4   File         Directory
## 5   File         FileSize
## 6   File         FileModifyDate
## 7   File         FileAccessDate
## 8   File         FileCreateDate
## 9   File         FilePermissions
## 10  File         FileType
## 11  File         FileTypeExtension
## 12  File         MIMEType
## 13  File         ExifByteOrder
## 14  File         ImageWidth
## 15  File         ImageHeight
## 16  File         EncodingProcess
## 17  File         BitsPerSample
## 18  File         ColorComponents
## 19  File         YCbCrSubSampling
## 20  EXIF         Make
```

```

## 21      EXIF          Model
## 22      EXIF          XResolution
## 23      EXIF          YResolution
## 24      EXIF          ModifyDate
## 25      EXIF          ResolutionUnit
## 26      EXIF          YCbCrPositioning
## 27      EXIF          ExifVersion
## 28      EXIF ComponentsConfiguration
## 29      EXIF          FlashpixVersion
## 30      EXIF          ColorSpace
## 31      EXIF          ExifImageWidth
## 32      EXIF          ExifImageHeight
## 33      EXIF          DateTimeOriginal
## 34      EXIF          CreateDate
## 35      EXIF          UserComment
## 36      EXIF          ShutterSpeedValue
## 37      EXIF          Compression
## 38      EXIF          ThumbnailOffset
## 39      EXIF          ThumbnailLength
## 40      EXIF          ThumbnailImage
## 41 Composite          ImageSize
## 42 Composite          Megapixels
## 43 Composite          ShutterSpeed
##
## 1
## 2
## 3
## 4 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA
## 5
## 6
## 7
## 8
## 9
## 10
## 11
## 12
## 13
## 14
## 15
## 16
## 17
## 18
## 19
## 20
## 21
## 22
## 23
## 24
## 25
## 26
## 27
## 28
## 29
## 30

```

Invalid EXIF text encoding for UserComment

StationA__2009-04-21__00-40-00(1)

2021:12:12 22:12:22+00:00

2021:12:12 22:22:31+00:00

2021:12:12 22:12:22+00:00

rw-rw-r--

image/

Little-endian (Intel, x86)

Baseline DCT, Huffman coding

YCbCr4:2:2 (4:2:0)

CUDDER

2009:04:21 00:40:00

in

Co-s

Y, Cb, Cr

```
## 31
## 32
## 33 2009:04:21 00:40:00
## 34 2009:04:21 00:40:00
## 35 1 ATTEMPT
## 36
## 37 JPEG (old-style)
## 38
## 39 2
## 40 (Binary data 25353 bytes, use -b option to extract)
## 41 100
## 42 0
## 43
```

The output table contains tag groups, tag descriptions, tag names and tag values. The values in `tag_group` help to unambiguously identify specific metadata tags.

Use the entries in `tag_name` (not `tag_description`) when providing values to the argument `additionalMetadataTags` in `recordTable` functions.

Of the tags shown here, “DateTimeOriginal” contains the date and time that `camtrapR` reads out. Apart from that, there is little information of ecological interest in the example data. However, for demonstration purposes, let’s extract information about the camera model and make. To be as precise as possible, we provide tags in the format: `tag_group:tag_name` (e.g. `EXIF:Model`)

```
rec.db.species.metadata1 <- recordTable(inDir = wd_images_ID,
                                         IDfrom = "directory",
                                         timeZone = "Asia/Kuala_Lumpur",
                                         additionalMetadataTags = c("EXIF:Model", "EXIF:Make"))
```

```
## StationA:      8 images    0 duplicates removed    |=====|    33%
## StationB:     23 images    6 duplicates removed    |=====|    67%
## StationC:     37 images    6 duplicates removed    |=====|   100%
```

```
head(rec.db.species.metadata1)
```

```
##   Station Species   DateTimeOriginal      Date      Time delta.time.secs
## 1 StationA      PBE 2009-04-21 00:40:00 2009-04-21 00:40:00           0
## 2 StationA      PBE 2009-04-22 20:19:00 2009-04-22 20:19:00       157140
## 3 StationA      PBE 2009-04-22 20:21:00 2009-04-22 20:21:00        120
## 4 StationA      PBE 2009-04-23 00:07:00 2009-04-23 00:07:00       13560
## 5 StationA      PBE 2009-04-23 00:09:00 2009-04-23 00:09:00        120
## 6 StationA      PBE 2009-05-07 17:11:00 2009-05-07 17:11:00      1270920
##   delta.time.mins delta.time.hours delta.time.days
## 1              0              0.0             0.0
## 2             2619             43.6             1.8
## 3              2              0.0             0.0
## 4             226              3.8             0.2
## 5              2              0.0             0.0
## 6            21182            353.0            14.7
```

```
##
## 1 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/1
## 2 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/1
## 3 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/1
## 4 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/1
## 5 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/1
```

```
## 6 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_species_dir/StationA/
##           FileName EXIF.Model EXIF.Make n_images
## 1 StationA__2009-04-21__00-40-00(1).JPG CUDDEBACK      G4      1
## 2 StationA__2009-04-22__20-19-00(1).JPG CUDDEBACK      G4      1
## 3 StationA__2009-04-22__20-21-00(1).JPG CUDDEBACK      G4      1
## 4 StationA__2009-04-23__00-07-00(1).JPG CUDDEBACK      G4      1
## 5 StationA__2009-04-23__00-09-00(1).JPG CUDDEBACK      G4      1
## 6 StationA__2009-05-07__17-11-00(1).JPG CUDDEBACK      G4      1
```

There are 2 additional columns containing the information from the metadata we requested.

recordTableIndividual: tabulating individuals of a species

Individual identification of species is a prerequisite for running (spatial) capture-recapture models. `recordTableIndividual` and the subsequent `spatialDetectionHistory` function prepare data for these models.

```
# find the directory with tagged sample images contained in the package
wd_images_individual_ID <- system.file("pictures/sample_images_indiv_tag/LeopardCat", package = "camtrapR")
# missing space in species = "LeopardCat" is because of CRAN package policies

rec.db.pbe <- recordTableIndividual(indDir          = wd_images_individual_ID,
                                   IDfrom           = "metadata",
                                   minDeltaTime      = 60,
                                   deltaTimeComparedTo = "lastIndependentRecord",
                                   hasStationFolders  = FALSE, # images are not in station directories
                                   metadataIDTag      = "individual", # the name of the metadata tag
                                   timeZone           = "Asia/Kuala_Lumpur"
                                   )
```

```
## StationA, StationB, StationC:      26 images      3 duplicates removed      |=====| 100%
```

Extracting custom image metadata

In addition to the metadata that were saved when the image was taken (see above), custom metadata tags assigned in image management software can also be extracted. These may contain species ID tags if species were identified using metadata tags (instead of moving images into species directories), but also individual IDs, animal counts, sex of animals recorded, etc..

```
head(rec.db.pbe)
```

```
##      Station  Species Individual   DateTimeOriginal      Date      Time
## 1 StationA LeopardCat          1 2009-05-07 17:11:00 2009-05-07 17:11:00
## 2 StationA LeopardCat          2 2009-04-21 00:40:00 2009-04-21 00:40:00
## 3 StationA LeopardCat          2 2009-04-22 20:19:00 2009-04-22 20:19:00
## 4 StationA LeopardCat          2 2009-04-23 00:07:00 2009-04-23 00:07:00
## 5 StationB LeopardCat          1 2009-04-07 00:23:00 2009-04-07 00:23:00
## 6 StationB LeopardCat          1 2009-04-14 06:13:00 2009-04-14 06:13:00
##      delta.time.secs delta.time.mins delta.time.hours delta.time.days
## 1              0              0              0.0              0.0
## 2              0              0              0.0              0.0
## 3          157140          2619              43.6              1.8
## 4          13680           228              3.8              0.2
## 5              0              0              0.0              0.0
## 6          625800         10430             173.8              7.2
##
```

```
##                                     Directory
## 1 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_indiv_tag/LeopardCat
```



```
## 2 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_indiv_tag/LeopardCat
## 3 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_indiv_tag/LeopardCat
## 4 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_indiv_tag/LeopardCat
## 5 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_indiv_tag/LeopardCat
## 6 C:/Users/Juergen/Documents/R/win-library/4.1/camtrapR/pictures/sample_images_indiv_tag/LeopardCat
##
##      FileName metadata_Species metadata_individual
## 1 StationA__2009-05-07__17-11-00(1).JPG      Leopard Cat      1
## 2 StationA__2009-04-21__00-40-00(1).JPG      Leopard Cat      2
## 3 StationA__2009-04-22__20-19-00(1).JPG      Leopard Cat      2
## 4 StationA__2009-04-23__00-07-00(1).JPG      Leopard Cat      2
## 5 StationB__2009-04-07__00-23-00(1).JPG      Leopard Cat      1
## 6 StationB__2009-04-14__06-13-00(1).JPG      Leopard Cat      1
##      n_images      HierarchicalSubject
## 1      1 Species|Leopard Cat, individual|1
## 2      1 Species|Leopard Cat, individual|2
## 3      2 Species|Leopard Cat, individual|2
## 4      2 Species|Leopard Cat, individual|2
## 5      1 Species|Leopard Cat, individual|1
## 6      1 Species|Leopard Cat, individual|1
```

Camera Operation

The camera operation matrix is a day-by-station matrix that states how many cameras were active at a station on a given day. Rows represent stations and columns days, beginning with the day the first camera was set up and ending the day the last camera was retrieved. It is calculated from the camera trap table mention in vignette 1 (see ?camtraps for an example). Users can give the setup / retrieval / problem columns in the input table as dates or date-times (since version 2.1.0).

Important: Prior to version 2.1.0, the values were integer numbers, with 1 indicating the camera was active on a day (or possibly higher values if multiple cameras at a station are combined).

From version 2.1.0, the values are the fraction of the day a camera was active. If only dates are provided in the camera trap table, the function will assume 12 noon as setup/retrieval time Problem periods will be assumed to last the entire day.

If input is provided as date-times, output will be the exact fraction of day a station or camera was active (taking into account setup / retrieval time as well as time of Problem periods).

Dates as input

```
# first load the camera trap station table
data(camtraps)

dateFormat <- "dmy"      # requires lubridate package
# alternatively, use "%d/%m/%Y" (from base R)

camop_problem <- cameraOperation(CTtable      = camtraps,
                                stationCol    = "Station",
                                setupCol      = "Setup_date",
                                retrievalCol   = "Retrieval_date",
                                writecsv      = FALSE,
                                hasProblems    = TRUE,
                                dateFormat     = dateFormat
)
```

```

# as a reminder, these are the dates in our station information table
camtraps[,which(colnames(camtraps) %in% c("utm_y", "utm_x"))]

##      Station Setup_date Retrieval_date Problem1_from Problem1_to
## 1 StationA 02/04/2009      14/05/2009
## 2 StationB 03/04/2009      16/05/2009
## 3 StationC 04/04/2009      17/05/2009      12/05/2009      17/05/2009

# now let's have a look at the first few columns of the camera operation matrix
camop_problem[, 1:5]

##      2009-04-02 2009-04-03 2009-04-04 2009-04-05 2009-04-06
## StationA      0.5      1.0      1.0      1      1
## StationB      NA      0.5      1.0      1      1
## StationC      NA      NA      0.5      1      1

# and the last few
camop_problem[, (ncol(camop_problem)-6):ncol(camop_problem)]

##      2009-05-11 2009-05-12 2009-05-13 2009-05-14 2009-05-15 2009-05-16
## StationA      1      1      1      0.5      NA      NA
## StationB      1      1      1      1.0      1      0.5
## StationC      1      0      0      0.0      0      0.0
##      2009-05-17
## StationA      NA
## StationB      NA
## StationC      0

```

If stations were not set up, values are NA. Operational stations get value 1. If cameras were set up but malfunctioning, it is 0 (if hasProblems = TRUE).

Date-times as input

```

camtraps_hrs <- camtraps

# assign hours for setup and retrieval
camtraps_hrs$Setup_date      <- paste(camtraps_hrs$Setup_date, c("12", "15", "18"))
camtraps_hrs$Retrieval_date  <- paste(camtraps_hrs$Retrieval_date, c("18", "15", "12"))

# assign a random hours for begin of Problem at station 3
camtraps_hrs$Problem1_from[3] <- paste(camtraps_hrs$Problem1_from[3], "20")
# Problem ends with retrieval (i.e., malfunction until camera retrieved)
camtraps_hrs$Problem1_to[3]  <- camtraps_hrs$Retrieval_date[3]

# create camera operation matrix
camop_hours <- cameraOperation(CTtable = camtraps_hrs,
                                stationCol   = "Station",
                                setupCol     = "Setup_date",
                                retrievalCol  = "Retrieval_date",
                                hasProblems   = TRUE,
                                dateFormat    = "dmy H"
)

```

```
# as a reminder, these are the date-times in our station information table
camtraps_hrs
```

```
##      Station utm_y utm_x   Setup_date Retrieval_date Problem1_from
## 1 StationA 604000 526000 02/04/2009 12 14/05/2009 18
## 2 StationB 606000 523000 03/04/2009 15 16/05/2009 15
## 3 StationC 607050 525000 04/04/2009 18 17/05/2009 12 12/05/2009 20
##      Problem1_to
## 1
## 2
## 3 17/05/2009 12
```

```
# now let's have a look at the first few columns of the camera operation matrix
camop_hours[, 1:5]
```

```
##      2009-04-02 2009-04-03 2009-04-04 2009-04-05 2009-04-06
## StationA      0.5      1.000      1.00      1      1
## StationB      NA      0.375      1.00      1      1
## StationC      NA      NA      0.25      1      1
```

```
# and the last few
```

```
camop_hours[, (ncol(camop_hours)-6):ncol(camop_hours)]
```

```
##      2009-05-11 2009-05-12 2009-05-13 2009-05-14 2009-05-15 2009-05-16
## StationA      1      1.0000      1      0.75      NA      NA
## StationB      1      1.0000      1      1.00      1      0.625
## StationC      1      0.8333      0      0.00      0      0.000
##      2009-05-17
## StationA      NA
## StationB      NA
## StationC      0
```

Differences between version 2.1 and previous versions

Version 2.1 introduced support of cameraOperation() for date-times in the setup / retrieval / problem columns. By giving the setup / retrieval / problem columns as date-times (and adjusting argument dateFormat accordingly), one can calculate precise daily effort.

If the times are unknown and users provide dates only to argument dateFormat, camtrapR will assume that setup and retrieval were at 12 noon. Malfunction periods (indicated by the problem columns) will be interpreted as the cameras having malfunctioned the whole day.

This is how the handling of setup/retrieval days differs between dates and date-times in dateFormat:

version	dateFormat is date	dateFormat is date-time
prior to 2.1	1	not implemented
2.1 and later	0.5	calculated precisely

This is how the handling of problems / malfunction periods differs between dates and date-times in dateFormat:

version	dateFormat is date	dateFormat is date-time
prior to 2.1	0	not implemented
2.1 and later	0	calculated precisely

Camera days vs. camera nights

By default, the camera operation matrix refers to days, centered on noon and lasting from midnight to midnight the next day. In some situations it can make sense to shift the time frame for analyses, so the camera operation matrix describes trap nights (centered on midnight, lasting from noon to noon the next day).

To that end, the argument `occasionStartTime` can be set. Prior to version 2.1.0, it was an argument of `detectionHistory` and `spatialDetectionHistory`, but was moved to `cameraOperation` in v2.1.0. It can be set to an hour between 0 and 23, describing the hour the occasions begin.

```
# create camera operation matrix with occasions / trap days starting on noon (until noon the next day)
camop_hours_12 <- cameraOperation(CTable = camtraps_hrs,
                                stationCol = "Station",
                                setupCol   = "Setup_date",
                                retrievalCol = "Retrieval_date",
                                hasProblems = TRUE,
                                dateFormat  = "dmy H",
                                occasionStartTime = 12
)

# now let's have a look at the first few columns of the camera operation matrix
camop_hours_12[, 1:5]
```

```
##           2009-04-02+12h 2009-04-03+12h 2009-04-04+12h 2009-04-05+12h
## StationA                1           1.000           1.00           1
## StationB                NA           0.875           1.00           1
## StationC                NA           NA           0.75           1
##           2009-04-06+12h
## StationA                1
## StationB                1
## StationC                1
```

```
# and the last few
camop_hours_12[, (ncol(camop_hours_12)-6):ncol(camop_hours_12)]
```

```
##           2009-05-11+12h 2009-05-12+12h 2009-05-13+12h 2009-05-14+12h
## StationA                1           1.0000           1           0.25
## StationB                1           1.0000           1           1.00
## StationC                1           0.3333           0           0.00
##           2009-05-15+12h 2009-05-16+12h 2009-05-17+12h
## StationA                NA           NA           NA
## StationB                1           0.125           NA
## StationC                0           0.000           NA
```

The column names now indicate the shift, “+12h” in the example above. That means that the first column shows the effort from 12 noon on 2009-04-02 until 12 noon 2009-04-03.

When using this camera operation matrix in `detectionHistory` or `spatialDetectionHistory`, the shift will be extracted and trapping effort will be calculated accordingly. Therefore, the argument `occasionStartTime` in these two functions is deprecated from version 2.1.0.

Combining multiple cameras per station

Often multiple cameras are set at a station, but data are to be analysed on a station-level, not at the level of individual cameras. `cameraOperation` can combine these effort of individual cameras according to how they were set up.

First, let's create a simple artificial data set. Note how the columns contain an hour (e.g. 12 noon in this case: "2020-01-01 12"). Other formats for date-time are possible and can be specified with argument `dateFormat` in `cameraOperation`.

```
camtraps_by_camera <- data.frame(Station = c("A", "A"),
  camera = c("cam1", "cam2"),
  setup = c("2020-01-01 12"),
  retrieval = c("2020-01-08 18", "2020-01-07 18"),
  Problem1_from = c("2020-01-03 12", NA),
  Problem1_to = c("2020-01-05 18", NA),
  Problem2_from = c("2020-01-06 12", NA),
  Problem2_to = c("2020-01-07 12", NA))
```

```
camtraps_by_camera
```

```
##   Station camera      setup      retrieval Problem1_from Problem1_to
## 1      A   cam1 2020-01-01 12 2020-01-08 18 2020-01-03 12 2020-01-05 18
## 2      A   cam2 2020-01-01 12 2020-01-07 18          <NA>          <NA>
##   Problem2_from Problem2_to
## 1 2020-01-06 12 2020-01-07 12
## 2          <NA>          <NA>
```

To aggregate data from cameras to station, you need a camera column ("camera" in the example above). Furthermore, set argument `byCamera = FALSE`. Then, the combinations of the arguments `camerasIndependent` and `allCamsOn` define how effort from individual cameras is combined. `allCamsOn` means all cameras need to be active for a station to be considered active. `camerasIndependent` specifies whether the cameras accumulate effort independently or now. See `?cameraOperation` for details.

Below we'll run `cameraOperation` of the little sample table `camtraps_by_camera`, for all possible combinations of `allCamsOn`, `cameraOperation` and `hasProblems`.

```
# list of common arguments for the different function runs
args.common <- list(CTtable = camtraps_by_camera,
  stationCol = "Station",
  cameraCol = "camera",
  setupCol = "setup",
  retrievalCol = "retrieval",
  dateFormat = "ymd H",
  byCamera = FALSE,
  writecsv = FALSE
)

# combinations of the arguments of interest
fun.args0 <- expand.grid(allCamsOn = c(T,F),
  camerasIndependent = c(T,F),
  hasProblems = c(T,F))

# create a list of function arguments with the varying arguments
fun.args1 <- apply(fun.args0, MARGIN = 1, FUN = function(x) modifyList(args.common, as.list(x)))

# run cameraOperation on each combination of arguments, and combine into an output table with the fu
camOp_station_aggregation <- cbind(fun.args0, do.call(rbind, lapply(fun.args1, FUN = function(x)
  do.call(cameraOperation, x))), row.names = NULL)
```

Now let's see how the daily effort was combined for the different combinations of `allCamsOn` and `camerasIndependent` when `hasProblems` is `FALSE`.

```
camOp_station_aggregation [camOp_station_aggregation$hasProblems == FALSE, -3]
```

```
##   allCamsOn camerasIndependent 2020-01-01 2020-01-02 2020-01-03 2020-01-04
## 5      TRUE                TRUE      1.0      2      2      2
## 6     FALSE                TRUE      1.0      2      2      2
## 7      TRUE                FALSE     0.5      1      1      1
## 8     FALSE                FALSE     0.5      1      1      1
##   2020-01-05 2020-01-06 2020-01-07 2020-01-08
## 5          2          2      1.500      NA
## 6          2          2      1.750     0.75
## 7          1          1      0.750      NA
## 8          1          1      0.875     0.75
```

sS you can see, allCamsOn has no effect if all cameras were active (due to hasProblems = FALSE). The differences on the setup/retrieval day are due to camerasIndependent.

Now with hasProblems = TRUE:

```
camOp_station_aggregation [camOp_station_aggregation$hasProblems == TRUE, -3]
```

```
##   allCamsOn camerasIndependent 2020-01-01 2020-01-02 2020-01-03 2020-01-04
## 1      TRUE                TRUE      1.0      2      1.00     0.0
## 2     FALSE                TRUE      1.0      2      1.50     1.0
## 3      TRUE                FALSE     0.5      1      0.50     0.0
## 4     FALSE                FALSE     0.5      1      0.75     0.5
##   2020-01-05 2020-01-06 2020-01-07 2020-01-08
## 1      0.500      1.00      1.000      NA
## 2      1.250      1.50      1.250     0.75
## 3      0.250      0.50      0.500      NA
## 4      0.625      0.75      0.625     0.75
```

Here's how the daily aggregates are calculate for the different combinations of allCamsOn and camerasIndependent, and depending on whether input columns are date or date-time (from v2.1.0). In the table below, x is a vector of values at individual cameras for one day (e.g. c(1,0.5) when one camera was active the whole day, the other cameras half a day).


camerasIndependent	allCamsOn	input columns	aggregate with	example c(1, 0.5)	example c(1, 1)
TRUE	TRUE	date-time	ifelse(all(x == 1), sum(x), min(x) * length(x))	1	2
TRUE	TRUE	date	ifelse(all(x == 1), sum(x), 0)	0	2
TRUE	FALSE	date-time	sum	1.5	2
TRUE	FALSE	date	sum	1.5	2
FALSE	TRUE	date-time	min	0.5	1
FALSE	TRUE	date	ifelse(all(x == 1), 1, 0)	0	1
FALSE	FALSE	date-time	mean	0.75	2
FALSE	FALSE	date	ifelse(sum(x, na.rm = TRUE) >= 1, sum(x, na.rm = TRUE))	1	1

Plotting camera operation matrices

There is a little function for plotting the camera operation matrix included in the package, but not exported in the Namespace. It is accessible with `camtrapR:::camopPlot()`. Imagine there is a typo in one of your date fields and the setup or retrieval year is wrong. You will easily be able to spot it this way.


Here is the camera operation matrix calculated above (in two different color palettes, the default being the viridis palette - requires R 3.6.0 or higher).

```
par(mfrow = c(1,2))
camtrapR:::camopPlot(camOp = camop_problem)
camtrapR:::camopPlot(camOp = camop_problem, palette = "Heat")
```

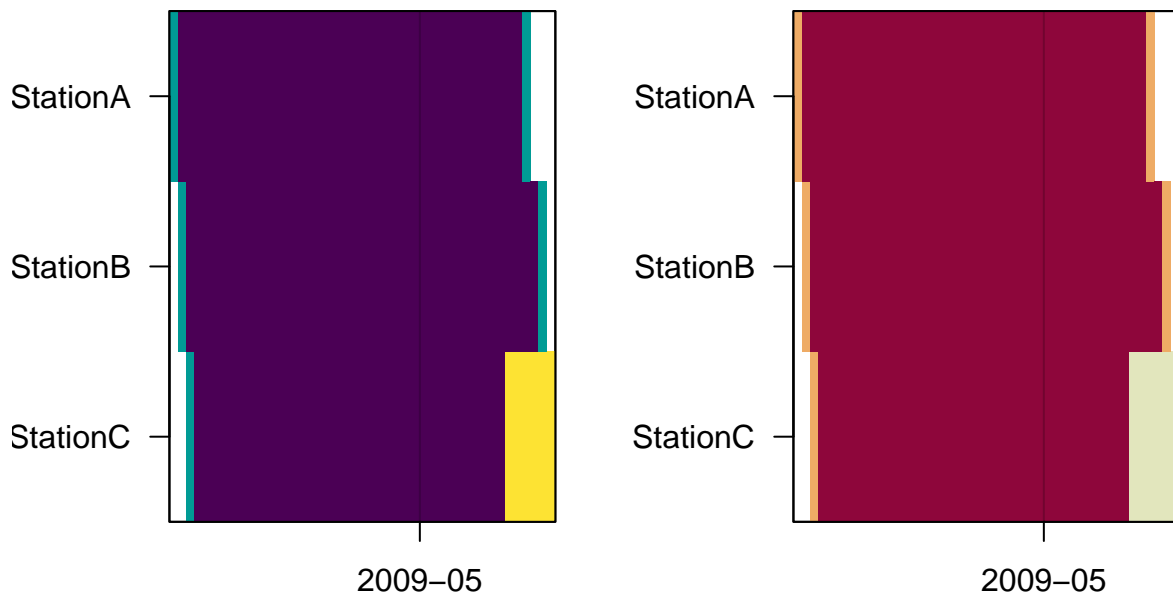


One can also plot with the `levelplot` function from the `lattice` package:

```
camtrapR:::camopPlot(camOp = camop_problem, lattice = TRUE)
```

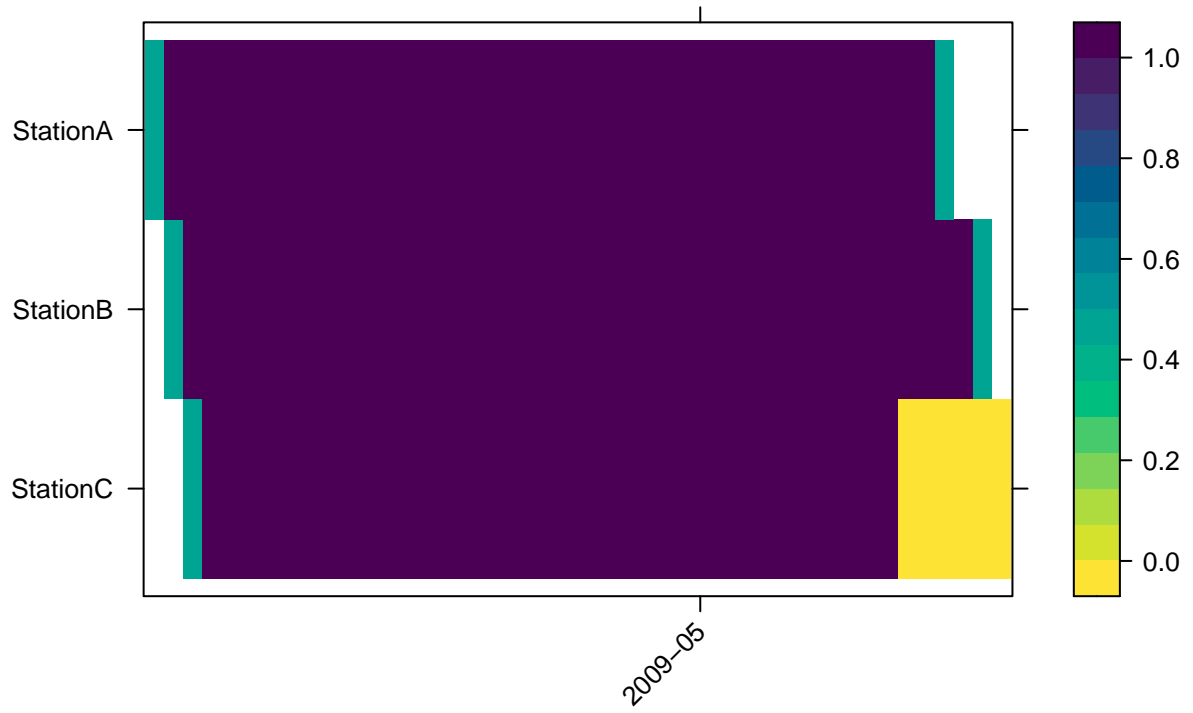


```
camtrapR::camopPlot(camOp = camop_problem, palette = "Heat", lattice = TRUE)
```

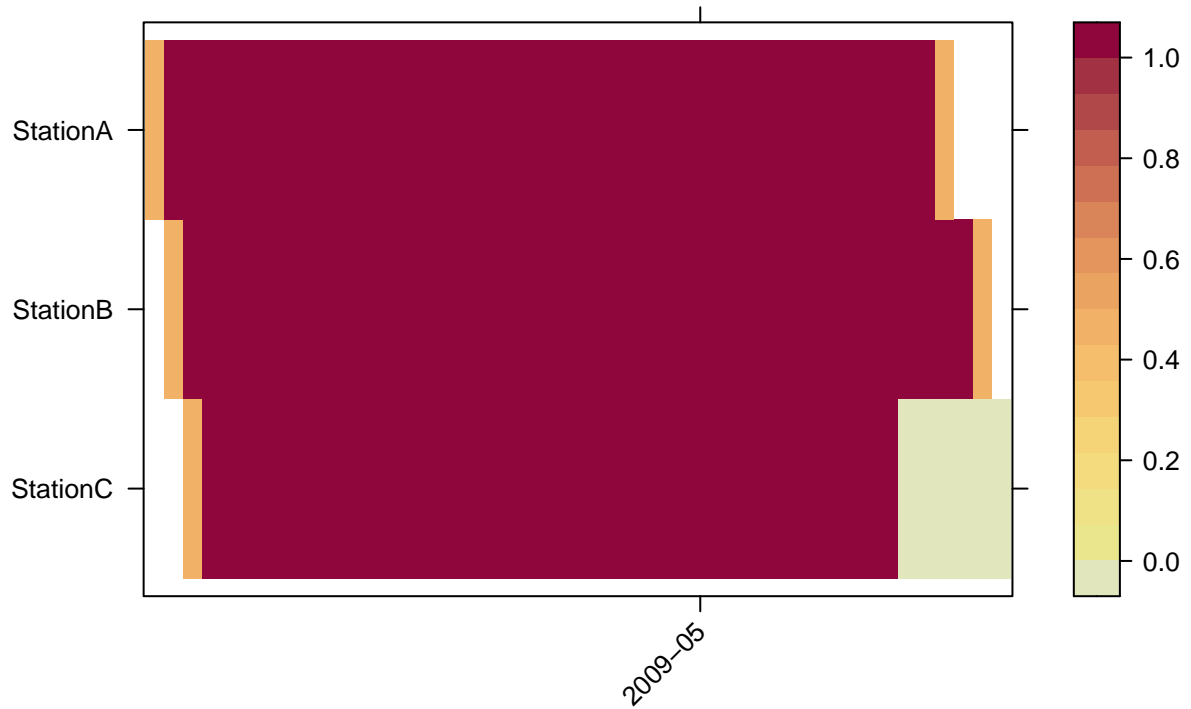Here is what it would look like if the year is wrong for one station.

```
camtraps_typo <- camtraps
# replace 2009 with 2008 in setup date of station A
camtraps_typo$Setup_date[1] <- gsub("2009", "2008", camtraps_typo$Setup_date[1])

camop_typo <- cameraOperation(CTtable      = camtraps_typo,
                             stationCol   = "Station",
                             setupCol     = "Setup_date",
                             retrievalCol = "Retrieval_date",
                             writecsv    = FALSE,
                             hasProblems  = TRUE,
                             dateFormat   = dateFormat
)
camtrapR:::camopPlot(camop_typo)
```

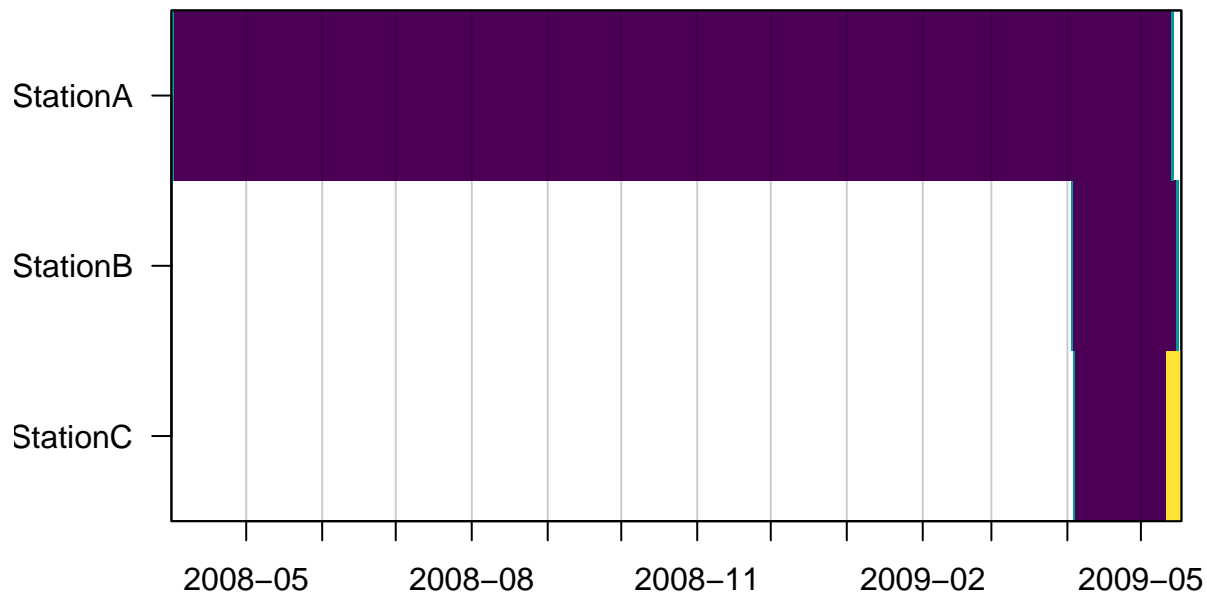

Note that the colors are stretched between the lowest and highest value. There is no dedicated color for 0, designating non-operational cameras.

For a list of color palettes, see [here](#).

Saving and loading camera operation matrices

The camera operation matrix can easily be saved as a csv file (by setting argument `writcsv = TRUE`, `check.names = FALSE` and defining `outdir`). In order to load the csv into R again, it is necessary to tell R to use the station IDs (the first column) as row names:

```
camOp <- read.csv(file = ..., row.names = 1, check.names = FALSE)
```

`check.names = FALSE` ensures that column names (the dates) are read back into R as they are (e.g. “2015-12-01”). Otherwise one may end up with unreadable column names (at least for `camtrapR`) such as “X2015.12.01”.

Input for subsequent analyses (single-season)

It is very easy to prepare input for single-season occupancy and spatial capture-recapture (SCR) analyses in `camtrapR`. All one needs is a record table and the camera operation matrix. Making input for SCR analyses further requires the camera trap station table.

Occupancy analyses

Occupancy models use detection/non-detection matrices in which for every station and every occasion “1” signifies a detection of a given species, “0” signifies non-detection, and NA missing data.

Here is how to obtain a detection/non-detection matrix using function `detectionHistory`. Because the function builds on prior functions (`recordTable` and `cameraOperation`) we also show these function here to provide the context.

```
# create camera operation matrix
camop_no_problem <- cameraOperation(CTable      = camtraps,
                                   stationCol    = "Station",
                                   setupCol      = "Setup_date",
                                   retrievalCol   = "Retrieval_date",
                                   hasProblems    = FALSE,
                                   dateFormat     = dateFormat
)

# define image directory
wd_images_ID <- system.file("pictures/sample_images_species_dir", package = "camtrapR")

# make record table
recordTableSample <- recordTable(inDir          = wd_images_ID,
                                 IDfrom          = "directory",
                                 minDeltaTime     = 60,
                                 deltaTimeComparedTo = "lastIndependentRecord",
                                 timeZone         = "Asia/Kuala_Lumpur"
)
```

```
## StationA:      8 images    0 duplicates removed    |=====|    33%
## StationB:     23 images    6 duplicates removed    |=====|    67%
## StationC:     37 images    6 duplicates removed    |=====|   100%
```

```
# make detection history (without trapping effort)
DetHist1 <- detectionHistory(recordTable      = recordTableSample,
                             camOp           = camop_no_problem,
                             stationCol       = "Station",
                             speciesCol       = "Species",
                             recordDateTimeCol = "DateTimeOriginal",
                             species          = "VTA",
                             occasionLength    = 7,
                             day1              = "station",
                             includeEffort     = FALSE
)
```

```
## Warning: timeZone is not specified. Assuming UTC
```

```
DetHist1
```

```
## $detection_history
##      o1 o2 o3 o4 o5 o6 o7
## StationA 0 1 0 0 1 0 NA
## StationB 0 1 0 1 0 0 NA
## StationC 0 0 1 0 0 0 NA
```

Note the warning about the missing time zone (as in the functions `recordTable` and `recordTable`). Normally, it should be fine, but to be on the safe side, better set it to your study area's time zone.

If trapping effort is thought to influence detection probability, it can be returned by setting `includeEffort = TRUE`. This way the number of active trapping days per occasion and station is returned.

```
# make detection history (with trapping effort)
DetHist2 <- detectionHistory(recordTableSample,
                             camOp           = camop_no_problem,
                             stationCol      = "Station",
                             speciesCol     = "Species",
                             recordDateTimeCol = "DateTimeOriginal",
                             species        = "VTA",
                             timeZone       = "Asia/Kuala_Lumpur",
                             occasionLength = 7,
                             day1          = "station",
                             includeEffort  = TRUE,
                             scaleEffort   = FALSE
)
```

```
DetHist2[[1]] # detection history
```

```
##           o1 o2 o3 o4 o5 o6 o7
## StationA  0  1  0  0  1  0  0
## StationB  0  1  0  1  0  0  0
## StationC  0  0  1  0  0  0  0
```

```
DetHist2[[2]] # effort (in days per occasion)
```

```
##           o1 o2 o3 o4 o5 o6 o7
## StationA 6.5  7  7  7  7  7 0.5
## StationB 6.5  7  7  7  7  7 1.5
## StationC 6.5  7  7  7  7  7 1.5
```

To help with convergence of models, the effort matrix can be scaled to mean = 0 and sd = 1 by setting `scaleEffort = TRUE`. If `writescv = TRUE`, the scaling parameters will also be saved in a separate csv file.

```
DetHist3 <- detectionHistory(recordTableSample,
                             camOp           = camop_no_problem,
                             stationCol      = "Station",
                             speciesCol     = "Species",
                             recordDateTimeCol = "DateTimeOriginal",
                             species        = "VTA",
                             timeZone       = "Asia/Kuala_Lumpur",
                             occasionLength = 7,
                             day1          = "station",
                             includeEffort  = TRUE,
                             scaleEffort   = TRUE
)
```

```
DetHist3[[1]] # detection history (same as above)
```

```
##           o1 o2 o3 o4 o5 o6 o7
## StationA  0  1  0  0  1  0  0
## StationB  0  1  0  1  0  0  0
## StationC  0  0  1  0  0  0  0
```

```
DetHist3[[2]] # effort (scaled)
```

```
##           o1           o2           o3           o4           o5           o6           o7
## StationA 0.1948432 0.4355319 0.4355319 0.4355319 0.4355319 0.4355319 -2.693421
## StationB 0.1948432 0.4355319 0.4355319 0.4355319 0.4355319 0.4355319 -2.212043
```

```
## StationC 0.1948432 0.4355319 0.4355319 0.4355319 0.4355319 0.4355319 -2.212043
DetHist3[[3]] # scaling parameters for back-transformation

## effort.scaled.center effort.scaled.scale
## 1 6.095238 2.077372
# backtransform scaled effort like this if needed
(DetHist3[[2]] * DetHist3[[3]]$effort.scaled.scale) + DetHist3[[3]]$effort.scaled.center

## o1 o2 o3 o4 o5 o6 o7
## StationA 6.5 7 7 7 7 7 0.5
## StationB 6.5 7 7 7 7 7 1.5
## StationC 6.5 7 7 7 7 7 1.5
```

Handling of incomplete occasions

The following table shows the behaviour of the `detectionHistory` function for different combinations of the function arguments `includeEffort` and `minActiveDaysPerOccasion` and different occasion-level camera operation values (table head, column 3-7). Depending on these arguments, incomplete occasions will either NA or have values of 0/1 (depending on whether there was a detection) in the output detection matrix .

includeEffort	minActiveDaysPerOccasion	camera operation at least				
		not defined	defined	all 0	0 and NA	all NA
TRUE	not defined	0/1	0/1	NA	NA	NA
TRUE	defined	0/1	0/1/NA*	NA	NA	NA
FALSE	not defined	0/1	NA	NA	NA	NA
FALSE	defined	0/1	0/1/NA*	NA	NA	NA

*: NA if there were less active days in an occasion than `minActiveDaysPerOccasion`

The same applies to generation of input for spatial capture-recapture analyses using `spatialDetectionHistory` as described below.

Saving and loading detection histories

The detection history and effort matrices can easily be saved as csv files (by setting argument `writescsv = TRUE` and defining `outdir`). In order to load the csv into R again, it is necessary to tell R to use the station IDs as row names:

```
detHist <- read.csv(file = ..., row.names = 1)
effort <- read.csv(file = ..., row.names = 1)
```

Spatial Capture-Recapture analyses

Input for spatial capture-recapture analyses can be generated in the form of `capthist`-objects as defined in the `secr` package with the function `spatialDetectionHistory`. Output can be in the form of counts (number of individual detections per occasion, argument `output = "count"`) or binary (was an individual detected during an occasion, argument `output = "binary"`). note that the detector type will change accordingly: “proximity” if `output = "binary"` and “count” if `output = "count"`.

```
data(recordTableIndividualSample)
```

```

# create camera operation matrix (with problems/malfunction)
camop_problem <- cameraOperation(CTtable      = camtraps,
                                stationCol    = "Station",
                                setupCol      = "Setup_date",
                                retrievalCol   = "Retrieval_date",
                                writecsv      = FALSE,
                                hasProblems   = TRUE,
                                dateFormat     = dateFormat
)

sdh <- spatialDetectionHistory(recordTableIndividual = recordTableIndividualSample,
                              species              = "LeopardCat",
                              output               = "binary",
                              camOp               = camop_problem,
                              CTtable             = camtraps,
                              stationCol          = "Station",
                              speciesCol          = "Species",
                              Xcol                = "utm_x",
                              Ycol                = "utm_y",
                              individualCol       = "Individual",
                              recordDateTimeCol   = "DateTimeOriginal",
                              recordDateTimeFormat = "%Y-%m-%d %H:%M:%S",
                              occasionLength      = 10,
                              day1                = "survey",
                              includeEffort       = TRUE,
                              timeZone            = "Asia/Kuala_Lumpur"
)

# missing space in species = "LeopardCat" was introduced by recordTableIndividual
# (because of CRAN package policies).
# In your own data you can have spaces in your directory names.

summary(sdh)

```

```


## Object class      capthist
## Detector type     proximity
## Detector number   3
## Average spacing   2258.871 m
## x-range           523000 526000 m
## y-range           604000 607050 m
##
## Usage range by occasion
##      1  2  3  4  5
## min 7.5 10 10 10 0.0
## max 9.5 10 10 10 4.5
##
## Counts by occasion
##      1  2  3  4  5 Total
## n      2  2  3  2  1    10
## u      2  0  1  0  0     3
## f      0  1  0  2  0     3
## M(t+1)  2  2  3  3  3     3
## losses  0  0  0  0  0     0
## detections  3  4  4  3  1    15

```

```
## detectors visited 2 3 3 2 1    11
## detectors used    3 3 3 3 2    14
```

```
plot(sdh, tracks = TRUE)
```

```
## Warning in plot.caphist(sdh, tracks = TRUE): track for repeat detections on
## same occasion joins points in arbitrary sequence
```

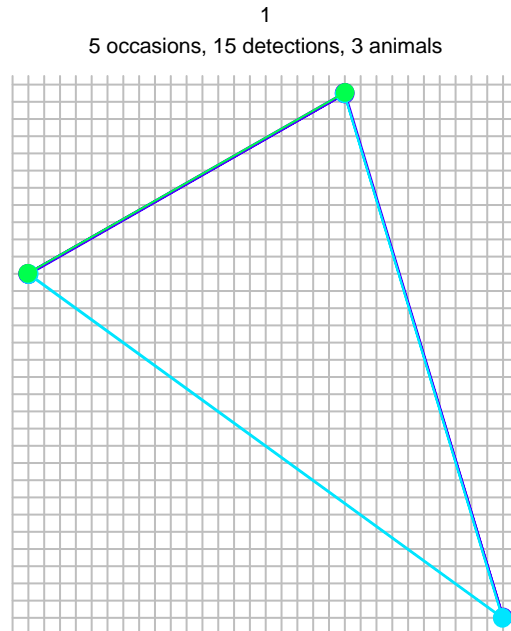

Input for subsequent analyses (multi-season)

Since version 1.2, `camtrapR` can prepare input for multi-season occupancy and spatial capture-recapture analyses (in unmarked and secr). The process is very similar to the one for single-season models.

Multi-season occupancy analyses

`camtrapR` prepares detection histories that can be used as input for argument `y` in function `unmarkedMultFrame`. `unmarkedMultFrame` creates the input for function `colext` which fits multi-season occupancy models.

For multi-season occupancy, we need a session column in the camera trap table. Records will be assigned to session automatically based on their dates.

First we simulate data for 2 seasons by duplicating the existing sample data and adjusting the dates (add 1 year)

```
# load multi-season data
data(camtrapsMultiSeason)
data(recordTableSampleMultiSeason)
```


```

# also, for clarity, lets remove all unnecessary columns from the record table
recordTableSampleMultiSeason <- recordTableSampleMultiSeason[, c("Station", "Species", "DateTimeOriginal")]

# create camera operation matrix
camop_season <- cameraOperation(CTtable = camtrapsMultiSeason,
                                stationCol = "Station",
                                setupCol = "Setup_date",
                                sessionCol = "session",
                                retrievalCol = "Retrieval_date",
                                hasProblems = TRUE,
                                dateFormat = dateFormat
)

# plot camera operation matrix
par(oma = c(0,7,0,0))
camtrapR::camopPlot(camop_season)

```

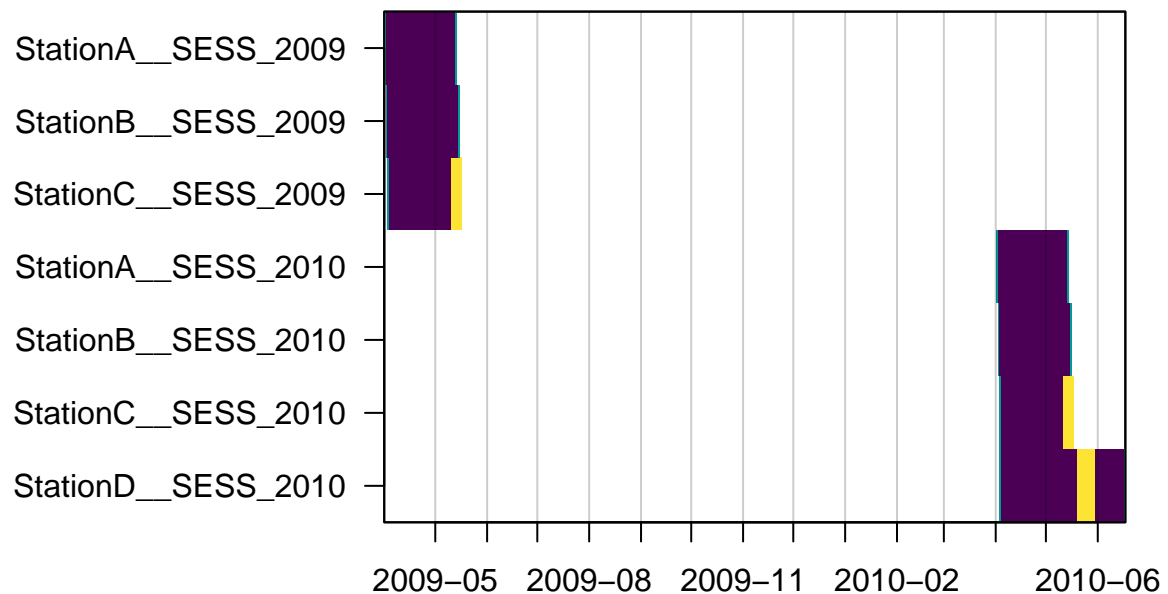

```

# make multi-season detection history
DetHist_multi <- detectionHistory(recordTable = recordTableSampleMultiSeason,
                                   camOp = camop_season,
                                   stationCol = "Station",
                                   speciesCol = "Species",
                                   species = "VTA",
                                   occasionLength = 10,
                                   day1 = "station",
                                   recordDateTimeCol = "DateTimeOriginal",

```



```

      includeEffort      = TRUE,
      scaleEffort        = FALSE,
      timeZone           = "UTC",
      unmarkedMultFrameInput = TRUE
)

```

```
DetHist_multi
```

```

## $detection_history
##           o1 o2 o3 o4 o5 o6 o7 o8 o1 o2 o3 o4 o5 o6 o7 o8
## StationA  1  0  0  1  0 NA NA NA  1  0  0  1  0 NA NA NA
## StationB  0  1  1  0  0 NA NA NA  0  1  1  0  0 NA NA NA
## StationC  0  0  1  0 NA NA NA NA  0  0  1  0 NA NA NA NA
## StationD NA NA NA NA NA NA NA NA  0  0  0  0  0  0  0  0
##
## $effort
##           o1 o2 o3 o4  o5 o6 o7 o8  o1 o2 o3 o4  o5 o6 o7  o8
## StationA 9.5 10 10 10 2.5 NA NA NA 9.5 10 10 10 2.5 NA NA  NA
## StationB 9.5 10 10 10 3.5 NA NA NA 9.5 10 10 10 3.5 NA NA  NA
## StationC 9.5 10 10  8  NA NA NA NA 9.5 10 10  8  NA NA NA  NA
## StationD  NA NA NA NA  NA NA NA NA 9.5 10 10 10 6.0  3 10 4.5

```

Note that the function makes sure that all seasons have identical number of occasions, and that all stations are represented, even if they were not sampled in all seasons.

From here, the resulting object can be used in unmarked.

```

year_matrix <- matrix(unique(as.character(camtrapsMultiSeason$session)),
  ncol = length(unique(as.character(camtrapsMultiSeason$session))),
  nrow = length(unique(camtrapsMultiSeason$Station)),
  byrow = TRUE)

# this is a made up example table with station covariates for demonstration
site_covariates <- data.frame(Station = rownames(DetHist_multi$detection_history),
  elevation = c(100, 200, 500, 300),
  treecover = c(80, 100, 50, 10))

umf <- unmarked::unmarkedMultFrame(y = DetHist_multi$detection_history,
  siteCovs = site_covariates,
  yearlySiteCovs = list(year = year_matrix),
  obsCovs = list(effort = DetHist_multi$effort),
  numPrimary = 2)

```

```
## Warning: siteCovs contains characters. Converting them to factors.
```

```
## Warning: yearlySiteCovs contains characters. Converting them to factors.
```

```

colext_example <- unmarked::colext(psiformula = ~ treecover,      # First-year occupancy
  gammaformula = ~ 1,      # Colonization
  epsilonformula = ~ 1,    # Extinction
  pformula = ~ effort,     # Detection
  data = umf,
  method="BFGS")

summary(colext_example)

```

```
##
```

```
## Call:
```

```
## unmarked::colext(psiformula = ~treecover, gammaformula = ~1,
##   epsilonformula = ~1, pformula = ~effort, data = umf, method = "BFGS")
##
## Initial (logit-scale):
##           Estimate      SE      z P(>|z|)
## (Intercept)  -9.504 28.60 -0.332   0.74
## treecover     0.342  1.23  0.279   0.78
##
## Colonization (logit-scale):
## Estimate      SE      z P(>|z|)
##    -6.6 27.3 -0.242   0.809
##
## Extinction (logit-scale):
## Estimate      SE      z P(>|z|)
##   -7.89 29.4 -0.269   0.788
##
## Detection (logit-scale):
##           Estimate      SE      z P(>|z|)
## (Intercept) -17.46 14.73 -1.19   0.236
## effort           1.75  1.49  1.17   0.241
##
## AIC: 42.03042
## Number of sites: 4
## optim convergence code: 0
## optim iterations: 45
## Bootstrap iterations: 0
```

Multi-season spatial capture-recapture

For secr, session IDs must be a gapless sequence of numbers beginning with 1. So 2009 becomes season 1 and 2010 season 2

```
camtrapsMultiSeason$session[camtrapsMultiSeason$session == 2009] <- 1
camtrapsMultiSeason$session[camtrapsMultiSeason$session == 2010] <- 2
```

```
# we also want a few records in season 2
```

```
recordTableIndividualSample_season2 <- recordTableIndividualSample[1:10,]
recordTableIndividualSample_season2$DateTimeOriginal <- gsub("2009", "2010", recordTableIndividualSample$DateTimeOriginal)
recordTableIndividualSample_season <- rbind(recordTableIndividualSample, recordTableIndividualSample_season2)
```

```
# for clarity, lets remove all unnecessary columns
```

```
recordTableIndividualSample_season <- recordTableIndividualSample_season[, c("Station", "Species", "Individual", "Session")]
```

```
# create camera operation matrix (with problems/malfunction), same as above for multi-season occupancy
```

```
camop_season <- cameraOperation(CTtable = camtrapsMultiSeason,
                                stationCol = "Station",
                                setupCol = "Setup_date",
                                sessionCol = "session",
                                retrievalCol = "Retrieval_date",
                                hasProblems = TRUE,
                                dateFormat = dateFormat
)
```

```

# create capthist object
sdh_multi <- spatialDetectionHistory(recordTableIndividual = recordTableIndividualSample_season,
                                     species              = "LeopardCat",
                                     output                = "binary",
                                     camOp                = camop_season,
                                     CTtable              = camtrapsMultiSeason,
                                     stationCol            = "Station",
                                     speciesCol            = "Species",
                                     sessionCol            = "session",
                                     Xcol                  = "utm_x",
                                     Ycol                  = "utm_y",
                                     individualCol         = "Individual",
                                     recordDateTimeCol     = "DateTimeOriginal",
                                     recordDateTimeFormat  = "%Y-%m-%d %H:%M:%S",
                                     occasionLength        = 10,
                                     day1                  = "survey",
                                     includeEffort         = TRUE,
                                     timeZone              = "Asia/Kuala_Lumpur",
                                     stationCovariateCols   = "utm_y",      # made up, a potential site covariate
                                     individualCovariateCols = "Individual" # made up, a potential individual covariate
                                   )

summary(sdh_multi)

```

```

## $`1`
## Object class      capthist
## Detector type     proximity
## Detector number    3
## Average spacing    2258.871 m
## x-range            523000 526000 m
## y-range            604000 607050 m
##
## Usage range by occasion
##      1 2 3 4 5
## min 7.5 10 10 10 0.0
## max 9.5 10 10 10 4.5
##
## Counts by occasion
##      1 2 3 4 5 Total
## n      2 2 3 2 1    10
## u      2 0 1 0 0     3
## f      0 1 0 2 0     3
## M(t+1) 2 2 3 3 3     3
## losses  0 0 0 0 0     0
## detections 3 4 4 3 1    15
## detectors visited 2 3 3 2 1    11
## detectors used  3 3 3 3 2    14
##
## Individual covariates
## Individual
## 1:1
## 2:1

```

```

## 3:1
##
##
## $`2`
## Object class      capthist
## Detector type     proximity
## Detector number    4
## Average spacing    2258.871 m
## x-range            523000 526000 m
## y-range            604000 607050 m
##
## Usage range by occasion
##      1  2  3  4  5  6  7  8  9
## min 2.5 10 10 10  5  0  0  0  0.0
## max 4.5 10 10 10 10  3  6 10  1.5
##
## Counts by occasion
##      1  2  3  4  5  6  7  8  9 Total
## n      1  2  2  0  1  0  0  0  0     6
## u      1  1  0  0  0  0  0  0  0     2
## f      0  0  2  0  0  0  0  0  0     2
## M(t+1)  1  2  2  2  2  2  2  2  2     2
## losses  0  0  0  0  0  0  0  0  0     0
## detections  1  2  2  0  1  0  0  0  0     6
## detectors visited 1  1  2  0  1  0  0  0  0     5
## detectors used   4  4  4  4  4  1  1  1  1    24
##
## Individual covariates
## Individual
## 1:1
## 2:1


```

```


par(mfrow = c(1,2))
plot(sdh_multi)

```

1
5 occasions, 15 detections, 3 animals

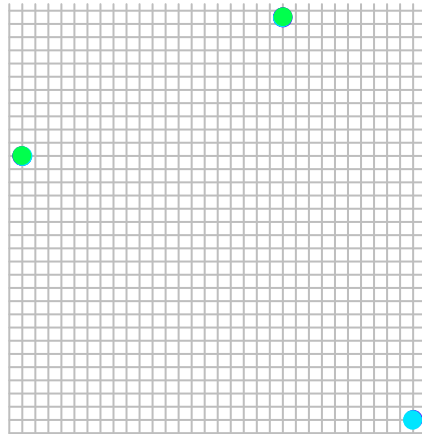

2
9 occasions, 6 detections, 2 animals

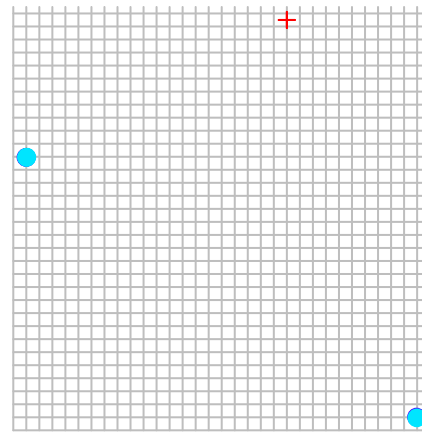

```
## 1 2
## 15 6
```

```
secr.fit.example <- secr.fit(capthist = sdh_multi,
                             start = c(-1, -2, 10)) # with starting values, since its only very lit
```

```
## Checking data
```

```
## Warning in verify.capthist(capthist, report = 1): Levels of factor covariate(s)
## differ between sessions - use shareFactorLevels()
```

```
## Warning in secr.fit(capthist = sdh_multi, start = c(-1, -2, 10)): using default
## buffer width 100 m
```

```
## Preparing detection design matrices
```

```
## Preparing density design matrix
```

```
## Maximizing likelihood...
```

## Eval	Loglik	D	g0	sigma
## 1	-66.379	-1.0000	-2.0000	10.0000
## 2	-66.379	-1.0000	-2.0000	10.0000
## 3	-66.379	-1.0000	-2.0000	10.0000
## 4	-66.379	-1.0000	-2.0000	10.0000
## 5	-66.379	-1.0000	-2.0000	10.0000
## 6	-178.146	-1.2452	-11.9960	9.8556
## 7	-60.131	-1.1049	-6.2755	9.9382
## 8	-60.131	-1.1049	-6.2755	9.9382
## 9	-60.131	-1.1049	-6.2755	9.9382
## 10	-60.131	-1.1049	-6.2755	9.9383

##	11	-44.097	-0.9607	-5.3508	9.9516
##	12	-44.097	-0.9607	-5.3508	9.9516
##	13	-44.097	-0.9607	-5.3508	9.9516
##	14	-44.097	-0.9607	-5.3508	9.9516
##	15	-175.943	-0.6781	-1.0374	10.0124
##	16	-34.376	-0.9136	-4.6318	9.9617
##	17	-34.376	-0.9136	-4.6318	9.9617
##	18	-34.376	-0.9136	-4.6318	9.9617
##	19	-34.376	-0.9136	-4.6318	9.9617
##	20	-52.174	-1.0826	-2.2461	9.9950
##	21	-27.836	-0.9650	-3.9057	9.9718
##	22	-27.836	-0.9650	-3.9057	9.9718
##	23	-27.836	-0.9650	-3.9057	9.9718
##	24	-27.836	-0.9650	-3.9057	9.9718
##	25	-27.780	-1.1234	-3.2046	9.9816
##	26	-27.780	-1.1234	-3.2046	9.9816
##	27	-27.780	-1.1234	-3.2046	9.9816
##	28	-27.780	-1.1234	-3.2046	9.9816
##	29	-26.634	-1.0891	-3.5998	9.9762
##	30	-26.634	-1.0891	-3.5998	9.9762
##	31	-26.634	-1.0891	-3.5998	9.9762
##	32	-26.634	-1.0891	-3.5998	9.9762
##	33	-26.565	-1.1362	-3.5480	9.9770
##	34	-26.565	-1.1362	-3.5480	9.9770
##	35	-26.565	-1.1362	-3.5479	9.9770
##	36	-26.565	-1.1362	-3.5480	9.9770
##	37	-26.535	-1.1989	-3.5225	9.9775
##	38	-26.535	-1.1989	-3.5225	9.9775
##	39	-26.535	-1.1989	-3.5225	9.9775
##	40	-26.535	-1.1989	-3.5225	9.9775
##	41	-26.525	-1.2417	-3.5255	9.9776
##	42	-26.525	-1.2417	-3.5255	9.9776
##	43	-26.525	-1.2417	-3.5255	9.9776
##	44	-26.525	-1.2417	-3.5255	9.9776
##	45	-26.523	-1.2628	-3.5352	9.9777
##	46	-26.523	-1.2628	-3.5352	9.9777
##	47	-26.523	-1.2628	-3.5352	9.9777
##	48	-26.523	-1.2628	-3.5352	9.9777
##	49	-26.522	-1.2631	-3.5374	9.9777
##	50	-26.522	-1.2631	-3.5374	9.9777
##	51	-26.522	-1.2631	-3.5374	9.9777
##	52	-26.522	-1.2631	-3.5374	9.9777
##	53	-26.522	-1.2627	-3.5377	9.9778
##	54	-26.522	-1.2627	-3.5377	9.9778
##	55	-26.522	-1.2627	-3.5377	9.9778
##	56	-26.522	-1.2627	-3.5377	9.9778
##	57	-26.522	-1.2627	-3.5377	9.9779
##	58	-26.522	-1.2627	-3.5377	9.9779
##	59	-26.522	-1.2627	-3.5377	9.9779
##	60	-26.522	-1.2627	-3.5377	9.9779
##	61	-26.522	-1.2624	-3.5378	9.9787
##	62	-26.522	-1.2624	-3.5378	9.9787
##	63	-26.522	-1.2624	-3.5378	9.9787
##	64	-26.522	-1.2624	-3.5378	9.9787

##	65	-26.522	-1.2620	-3.5379	9.9805
##	66	-26.522	-1.2620	-3.5379	9.9805
##	67	-26.522	-1.2620	-3.5379	9.9805
##	68	-26.522	-1.2620	-3.5379	9.9806
##	69	-26.522	-1.2614	-3.5381	9.9864
##	70	-26.522	-1.2614	-3.5381	9.9864
##	71	-26.522	-1.2614	-3.5381	9.9864
##	72	-26.522	-1.2614	-3.5381	9.9864
##	73	-26.522	-1.2604	-3.5386	10.0016
##	74	-26.522	-1.2604	-3.5386	10.0016
##	75	-26.522	-1.2604	-3.5386	10.0016
##	76	-26.522	-1.2604	-3.5386	10.0016
##	77	-26.522	-1.2590	-3.5394	10.0407
##	78	-26.522	-1.2590	-3.5394	10.0407
##	79	-26.522	-1.2590	-3.5394	10.0407
##	80	-26.522	-1.2590	-3.5394	10.0407
##	81	-26.522	-1.2574	-3.5409	10.1281
##	82	-26.522	-1.2574	-3.5409	10.1281
##	83	-26.522	-1.2574	-3.5409	10.1281
##	84	-26.522	-1.2574	-3.5409	10.1281
##	85	-26.522	-1.2565	-3.5429	10.2897
##	86	-26.522	-1.2565	-3.5429	10.2897
##	87	-26.522	-1.2565	-3.5429	10.2897
##	88	-26.522	-1.2565	-3.5429	10.2897
##	89	-26.522	-1.2572	-3.5445	10.5337
##	90	-26.522	-1.2572	-3.5445	10.5337
##	91	-26.522	-1.2572	-3.5445	10.5337
##	92	-26.522	-1.2572	-3.5445	10.5338
##	93	-26.522	-1.2602	-3.5446	10.8393
##	94	-26.522	-1.2602	-3.5446	10.8393
##	95	-26.522	-1.2602	-3.5446	10.8393
##	96	-26.522	-1.2602	-3.5446	10.8393
##	97	-26.522	-1.2627	-3.5442	11.1149
##	98	-26.522	-1.2627	-3.5442	11.1149
##	99	-26.522	-1.2627	-3.5442	11.1149
##	100	-26.522	-1.2627	-3.5442	11.1149
##	101	-26.522	-1.2637	-3.5442	11.3617
##	102	-26.522	-1.2637	-3.5442	11.3617
##	103	-26.522	-1.2637	-3.5442	11.3617
##	104	-26.522	-1.2637	-3.5442	11.3617
##	105	-26.522	-1.2638	-3.5443	11.6604
##	106	-26.522	-1.2638	-3.5443	11.6604
##	107	-26.522	-1.2638	-3.5443	11.6604
##	108	-26.522	-1.2638	-3.5443	11.6604
##	109	-26.522	-1.2632	-3.5444	12.0166
##	110	-26.522	-1.2632	-3.5444	12.0166
##	111	-26.522	-1.2632	-3.5444	12.0166
##	112	-26.522	-1.2632	-3.5444	12.0166
##	113	-26.522	-1.2627	-3.5445	12.3560
##	114	-26.522	-1.2627	-3.5445	12.3560
##	115	-26.522	-1.2627	-3.5445	12.3560
##	116	-26.522	-1.2627	-3.5445	12.3560
##	117	-26.522	-1.2625	-3.5445	12.6624
##	118	-26.522	-1.2625	-3.5445	12.6624

##	119	-26.522	-1.2625	-3.5445	12.6624
##	120	-26.522	-1.2625	-3.5445	12.6624
##	121	-26.522	-1.2625	-3.5445	12.9888
##	122	-26.522	-1.2625	-3.5445	12.9888
##	123	-26.522	-1.2625	-3.5445	12.9888
##	124	-26.522	-1.2625	-3.5445	12.9888
##	125	-26.522	-1.2626	-3.5445	13.3420
##	126	-26.522	-1.2626	-3.5445	13.3420
##	127	-26.522	-1.2626	-3.5445	13.3420
##	128	-26.522	-1.2626	-3.5445	13.3420
##	129	-26.522	-1.2627	-3.5445	13.6813
##	130	-26.522	-1.2627	-3.5445	13.6813
##	131	-26.522	-1.2627	-3.5445	13.6813
##	132	-26.522	-1.2627	-3.5445	13.6813
##	133	-26.522	-1.2627	-3.5445	14.0032
##	134	-26.522	-1.2627	-3.5445	14.0032
##	135	-26.522	-1.2627	-3.5445	14.0032
##	136	-26.522	-1.2627	-3.5445	14.0032
##	137	-26.522	-1.2627	-3.5445	14.3399
##	138	-26.522	-1.2627	-3.5445	14.3399
##	139	-26.522	-1.2627	-3.5445	14.3399
##	140	-26.522	-1.2627	-3.5445	14.3399
##	141	-26.522	-1.2627	-3.5445	14.6934
##	142	-26.522	-1.2627	-3.5445	14.6934
##	143	-26.522	-1.2627	-3.5445	14.6934
##	144	-26.522	-1.2627	-3.5445	14.6934
##	145	-26.522	-1.2627	-3.5445	15.0340
##	146	-26.522	-1.2627	-3.5445	15.0340
##	147	-26.522	-1.2627	-3.5445	15.0340
##	148	-26.522	-1.2627	-3.5445	15.0340
##	149	-26.522	-1.2627	-3.5445	15.3642
##	150	-26.522	-1.2627	-3.5445	15.3642
##	151	-26.522	-1.2627	-3.5445	15.3642
##	152	-26.522	-1.2627	-3.5445	15.3642
##	153	-26.522	-1.2627	-3.5445	15.7057
##	154	-26.522	-1.2627	-3.5445	15.7057
##	155	-26.522	-1.2627	-3.5445	15.7057
##	156	-26.522	-1.2627	-3.5445	15.7058
##	157	-26.522	-1.2627	-3.5445	16.0717
##	158	-26.522	-1.2627	-3.5445	16.0717
##	159	-26.522	-1.2627	-3.5445	16.0717
##	160	-26.522	-1.2627	-3.5445	16.0718
##	161	-26.522	-1.2627	-3.5445	16.4098
##	162	-26.522	-1.2627	-3.5445	16.4098
##	163	-26.522	-1.2627	-3.5445	16.4098
##	164	-26.522	-1.2627	-3.5445	16.4098
##	165	-26.522	-1.2626	-3.5445	16.4098
##	166	-26.522	-1.2627	-3.5444	16.4098
##	167	-26.522	-1.2627	-3.5445	16.4114
##	168	-26.522	-1.2625	-3.5445	16.4098
##	169	-26.522	-1.2626	-3.5444	16.4098
##	170	-26.522	-1.2626	-3.5445	16.4114
##	171	-26.522	-1.2627	-3.5443	16.4098
##	172	-26.522	-1.2627	-3.5444	16.4114


```
## 173 -26.522 -1.2627 -3.5445 16.4131
## Completed in 0.28 seconds at 22:22:59 12 Dez 2021
```

```
summary(secr.fit.example)
```

```
## $versiontime
## [1] "4.4.5, run 22:22:58 12 Dez 2021, elapsed 0.28 s"
##
## $scapthist
##           1 2
## Occasions 1 1
## Detections 15 6
## Animals   3 2
## Detectors  3 4
## Moves      5 2
##
## $trapsummary
## $trapsummary$`1`
## Object class      traps
## Detector type      count
## Detector number     3
## Average spacing    2258.871 m
## x-range            523000 526000 m
## y-range            604000 607050 m
##
## Usage range by occasion
##           1
## min 37.5
## max 43.0
##
## $trapsummary$`2`
## Object class      traps
## Detector type      count
## Detector number     4
## Average spacing    2258.871 m
## x-range            523000 526000 m
## y-range            604000 607050 m
##
## Usage range by occasion
##           1
## min 37.5
## max 63.0
##
##
## $detector
##           1      2
## "count" "count"
##
## $countmodel
## [1] "Binomial, size from usage"
##
## $mask
##   Cells Spacing Area
## 1    36      50    9
## 2    36      50    9
```

```

##
## $modeldetails
##      CL fixed distribution hcov
## FALSE none      poisson
##
## $AICtable
##      model  detectfn npar    logLik    AIC    AICc
## D~1 g0~1 sigma~1 halfnormal    3 -26.52162 59.043 83.043
##
## $coef
##      beta      SE.beta      lcl      ucl
## D      -1.262694 4.474595e-01 -2.139699 -0.3856896
## g0      -3.544483 2.287552e-01 -3.992835 -3.0961309
## sigma 16.409776 8.289306e-09 16.409776 16.4097758
##
## $predicted
## $predicted$`session = 1`
##      link      estimate SE.estimate      lcl      ucl
## D      log 2.828909e-01 0.133190688 1.176903e-01 6.799816e-01
## g0     logit 2.807271e-02 0.006241503 1.811320e-02 4.326713e-02
## sigma   log 1.338675e+07 0.000000000 1.338675e+07 1.338675e+07
##
## $predicted$`session = 2`
##      link      estimate SE.estimate      lcl      ucl
## D      log 2.828909e-01 0.133190688 1.176903e-01 6.799816e-01
## g0     logit 2.807271e-02 0.006241503 1.811320e-02 4.326713e-02
## sigma   log 1.338675e+07 0.000000000 1.338675e+07 1.338675e+07

```