

Parallel Massive Dataset Cleaning

Jianmeng Yu

Supervised by: Bob Fisher

1 Introduction

- Motivation
- Background
- Main Problems

2 Details of Problems and Solution

- Parallel Distribution
- Data Extraction from SQL dump file
- Frame Edge Indicator Function
- Ground Truthing Dataset
- Code Translation
- Classifiers
- Voting Strategy

3 Results

- Project Result
- Future Work

Project Motivation

- What is Motivation of the Project?
 - 1.6 TB dataset, 839 million detections.
 - About 60% are False Positives.
 - Pugh[1]'s prototype cleaning algorithm.
 - Not applied due to cost (800,000 hours)[2].
- The Goal of this project?
 - Apply the cleaning algorithm.
 - Need a parallel framework to reduce time.
 - Need to translate the code.

100

- Fish4Knowledge (F4K)[3] collected 5 years of fish video.
- They reduce the recording to 1.6 TB size.
- 500 GB .sql dump, 1.1 TB video and summary csv files.




Figure: Sample frames of the videos

Background - Cleaning Algorithm

- Developed by Matthew Pugh[1].
- Use Python script to extract info from video/summary.
- FEIF to remove some partial-fish before classify.
- Feature extraction, transformation for SVM.
- Transformation and normalize image for CNN.
- Use Top-N algorithm to obtain decision vector.

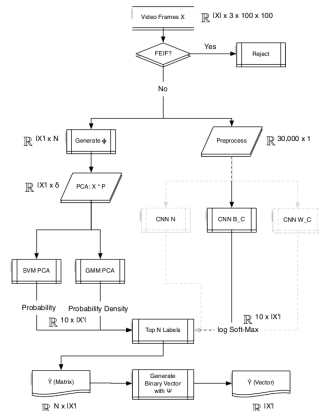


Figure: Pipeline Classifier

Project Problems

The project has encountered several problems on the algorithm:

- The pipeline is only tested without parallelization.
- Dump file too large for school PostgreSQL service.
- Ambiguous classification schema.
- Training data wasn't representative.
- Extreme runtime cost - even for 200 DICE machines.
- Translation needed, for more portability.
- CNN trained is broken, over-fits on badly transformed dataset.
- Prototype stage - The best Top-N strategy is not found.

Details - Parallel Distribution

The first challenge is the distribution of the task.

- 220 student lab DICE machines.
- 800 cores reduces runtime significantly.
- A Python script is used to “scan” for idle machines.
- University provides a shared file system (AFS).
- MPI is used for the communication between process.

```
[binda]sl413557: mpiexec -n 4 -host binda,bertoglio,berzin,adorni python ~/Desktop/ms/example1.py
I am adorni.inf.ed.ac.uk rank 3 (total 4)
I am berzin.inf.ed.ac.uk rank 2 (total 4)
I am bertoglio.inf.ed.ac.uk rank 1 (total 4)
I am binda.inf.ed.ac.uk rank 0 (total 4)
Slave berzin.inf.ed.ac.uk rank 2 executing "Do task" task_id "1"
Slave bertoglio.inf.ed.ac.uk rank 1 executing "Do task" task_id "0"
Master: slave finished is task and says "I completed my task (0)"
Slave adorni.inf.ed.ac.uk rank 3 executing "Do task" task_id "2"
Master: slave finished is task and says "I completed my task (1)"
```

Figure: Framework Example Run

Details - Standard I/O Stream Extraction

Another problem of the project is the lack of a SQL server.

- 500 GB .sql dump file too large for PostgreSQL service.
- Independent records, SQL query may not be best choice.
- Alternatively, parse relevant information to csv file.
- Saves time and cost for maintaining a server.
- Reduces dump file to 2/3 size, also makes loading faster.

Details - Frame Edge Indicator Function

FEIF removes all of fish touching frame edge.

- Reduces dataset by 10%.
- Fast, but reject good fish sometimes.

Another similar method is used to reject planktons.

- Reject all the videos recorded at night.
- These videos have over 99% of False Positive.
- Reduces dataset by 8%.




Figure: Sample Frame Touching Edge

Details - Ground Truth

- Pugh created a 10-class classification schema.
- He marked 60,000 detections for training.
- Class 6 and 8 are acceptable fishes.

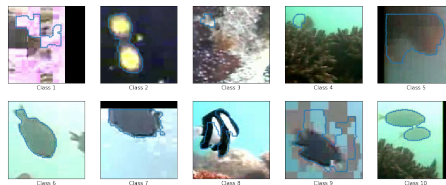


Figure: Sample fish from each class

- This project marked another 20,000 detections for validation.

Details - Translating MATLAB code into Python

- Most of the pipeline parts are translated into Python.
- Except Feature Extraction in MATLAB and CNN in Lua.
- After benchmarking, a full translation does not seem optimal.
- PyMatlab and Lutorpy are used instead.




Figure: Performance of different convolution algorithms

Details - Classifiers

- The SVM performed the as expected.
- CNNs trained does not work as intended.
- This is caused by color space issues in OpenCV.
- Retraining the CNN too costly and not used.



Figure: Normal Image in RGB space





Figure: OpenCV output, in BGR space

Details - Voting Strategy

- Uses voting instead of the original Top-N decision.
- Use ROC curve to pick strategy.
- For keeping most True Positive, use SVM only is the best strategy.



Result - Outcome

Project Result:

- 28% of the 1.6 TB dataset is removed.
- 40% of the False Positive rejected.
- Finished the task in 11 days of computational time.

It does not achieve Pugh's predicted 90% FP removal. This is caused by:

- CNN over-fit, accuracy drops 20% on validation set.
- Poor coverage on training-set.
- Over-estimation due to Pugh's 2-Fold Training/Testing split.

Result - Samples

- The SVM appears to learn the shape of detections well.
- High probability detections are usually good fish.
- FP are mixed with TP with erratic contour.




Figure: Positives with High Probability




Figure: Positives with Low Probability

Result - Achievements

- Finishes the 800,000 hour task.
- Took about 10 days of computational day.
- Estimated 90% reduction on single-core time cost.
- Potentially reduces dataset by 500 GB.
- Removes 40% of FP at lost of 10% TP.
- Most kept FP have low SVM score.
- Most reject TP have very erratic boundary.

Future Works

- More Ground Truth dataset.
- Fix the True Negatives caused by FEIF.
- Re-train the CNN used with correct data.

Questions?

Bibliography

- [1] Matthew Pugh.
Removing false detections from a large fish image data-set.
Msc dissertation, The University of Edinburgh, 2015.
- [2] Qiqi Yu.
Adding temporal constraints to a large data cleaning problem.
Msc dissertation, The University of Edinburgh, 2016.
- [3] Robert B Fisher, Yun-Heh Chen-Burger, Daniela Giordano,
Lynda Hardman, Fang-Pang Lin.
*Fish4Knowledge: collecting and analyzing massive coral reef
fish video data.*
Springer, 2016.